


PHARE 3203

PROJECT PROJÉT

SPEC TYPE

NOTES

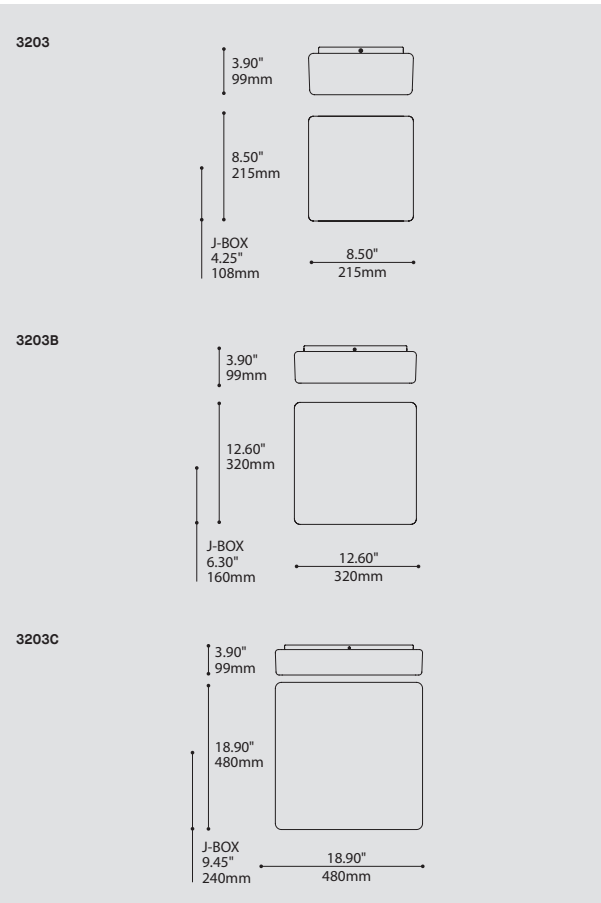

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
MODEL	MODÈLE		
3203	PHARE SMALL		
3203B	PHARE MEDIUM		
3203C	PHARE LARGE		
LIGHT SOURCE		SOURCE LUMINEUSE	
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)			
3203			
CF.D.13		13W, CFL, DOUBLE TWIN TUBE, G24Q1 BASE	
CF.SP.13		13W, CFL, SPIRAL TUBE, GU24 BASE (120V ONLY)	
G9.60		60W, HAL, T4, G9 BASE (120V ONLY)	
3203B			
CF.D.26		26W, CFL, DOUBLE / TRIPLE TWIN TUBE, G24Q3 BASE	
2XCF.SP.13		13W X 2, CFL, SPIRAL TUBE, GU24 BASE (120V ONLY)	
F.T5.C.22		22W, FLUO, CIRCULAR T5, 2GX13 BASE	
LED.10.30		10W, LED 3000K (WARM)	
LED.10.40		10W, LED 4000K (NEUTRAL)	
3203C			
2XCF.D.26		26W X 2, CFL, DOUBLE / TRIPLE TWIN TUBE, G24Q3 BASE	
3XCF.SP.13		13W X 3, CFL, SPIRAL TUBE, GU24 BASE (120V ONLY)	
F.T5.C.2240		22&40W, FLUO, CIRCULAR T5, 2GX13 BASE (1 CIRCUIT)	
F.T5.C.2240-2C		22&40W, FLUO, CIRCULAR T5, 2GX13 BASE (2 CIRCUITS)	
F.T5.C.40		40W, FLUO, CIRCULAR T5, 2GX13 BASE	
LED.24.30		24W, LED 3000K (WARM)	
LED.24.40		24W, LED 4000K (NEUTRAL)	
VOLTAGE		VOLTAGE	
120V		120 VOLT	
277V		277 VOLT	
347V*		347 VOLT	
*ONLY AVAILABLE WITH CF.D.13, CF.D.26, 2XCF.D.26, F.T5.C.22, F.T5.C.2240, F.T5.C.2240-2C AND F.T5.C.40 (NON-DIMMING BALLAST)			
DIMMING OPTION		OPTION DE GRADATION	
AVAILABLE WITH CF.D.26 AND 2XCF.D.26 ONLY			
DM1		ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST*	
DM7		ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST*	
DED		LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)*	
DE3		LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)*	
AVAILABLE WITH LED ONLY			
DV		0-10V DIMMING (120-277V)	
DP		PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THESE PRODUCTS, PLEASE SPECIFY YOUR DIMMING TYPE.			
DIFFUSER FINISH		FINI DIFFUSEUR	
WH		WHITE	WH

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM


DIM

IES


LED

2
CIRCUITS


DESIGN:	The architectural luminous square shade is available in three formats.
LIGHT SOURCE:	Wide range of energy saving compact fluorescent light sources available.
STRUCTURE:	Die-stamped steel structure with highly reflective and diffused white paint finish.
DIFFUSER:	Hand blown white triplex glass.
CERTIFIED:	c-CSA-us, c-UL-us
CONCEPTION:	Le verre carré lumineux et architectural est disponible en trois formats.
SOURCE LUMINEUSE:	Plusieurs sources fluorescentes à faible consommation disponibles.
STRUCTURE:	Structure d'acier embouti avec fini blanc très réfléchissant et diffusant.
DIFFUSEUR:	Verre triplex blanc soufflé à la main.
CERTIFIÉ:	c-CSA-us, c-UL-us

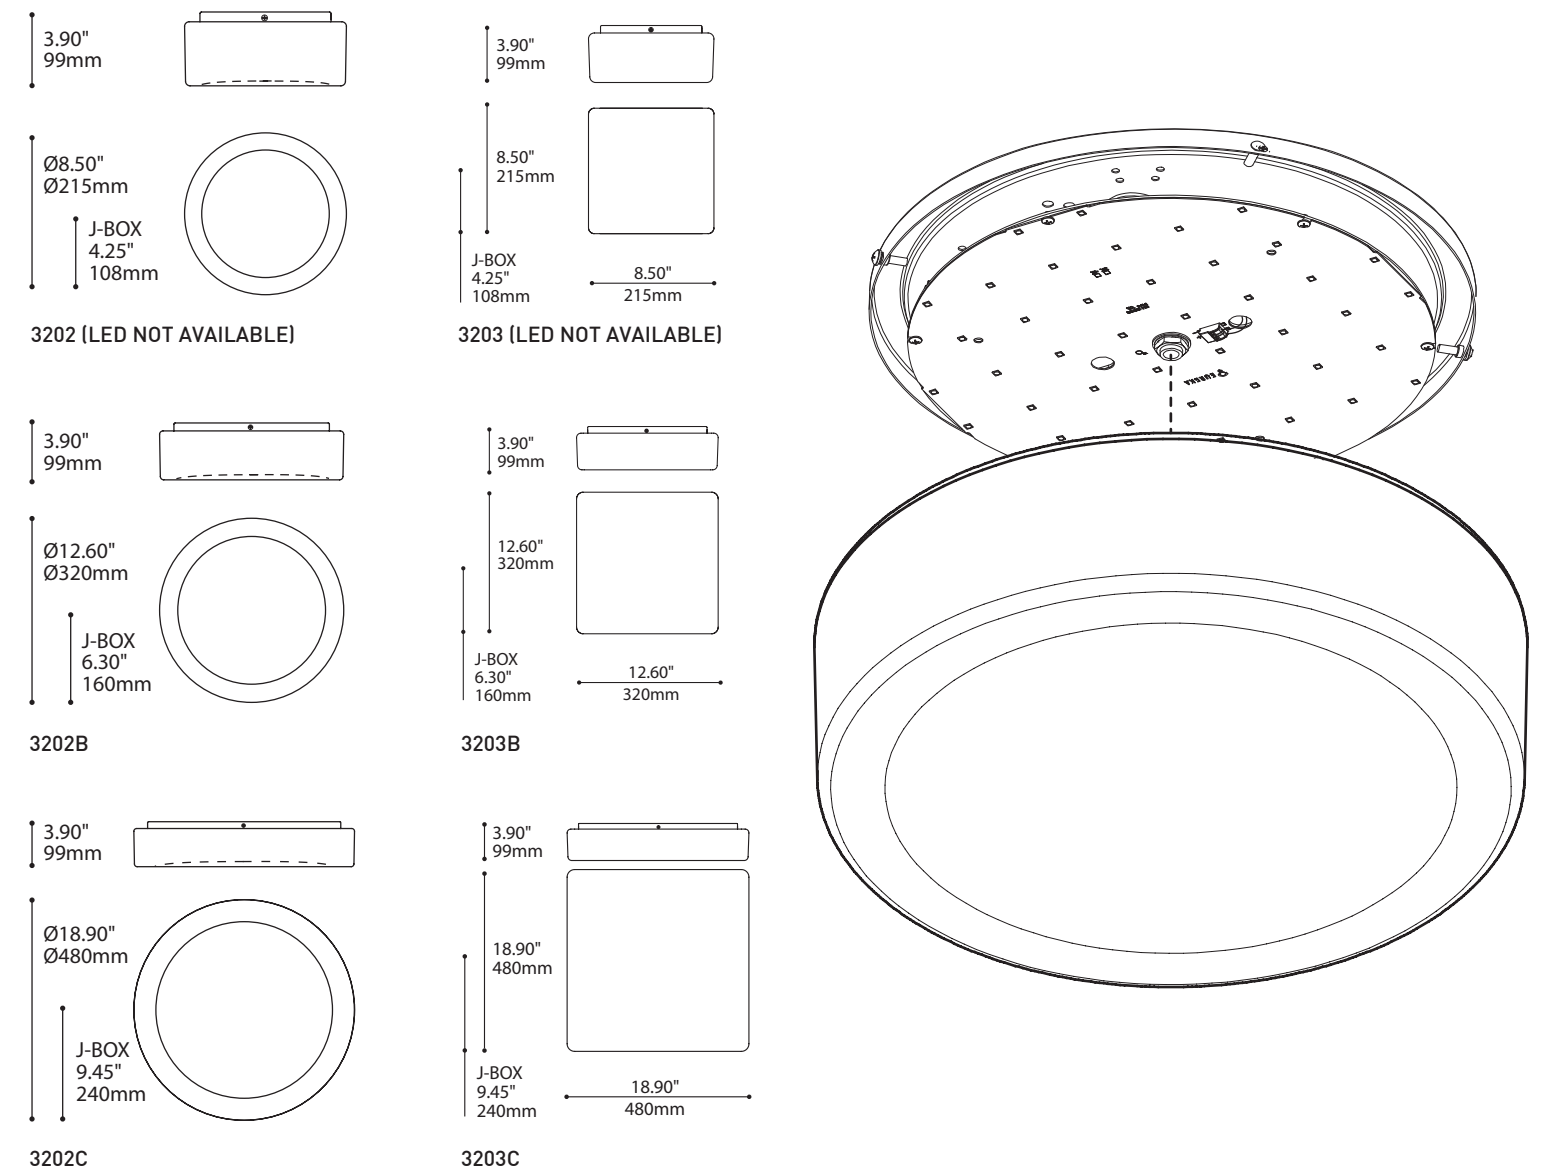


SPECIFICATIONS	3202 3203	3202B 3203B	3202C 3203C
LIGHT SOURCES	CF.D.13 CF.SP.13 G9.60	CF.D.26 2XCF.SP.13 F.T5.C.22 LED.10.30 LED.10.40	2CF.D.26 3XCF.SP.13 F.T5.C.2240 F.T5.C.2240-2C F.T5.C.40 LED.10.30 LED.10.40
DIMMING OPTIONS	DV 0-10V (120-277V), DP PHASE DIMMING (120V), DM1, DM7, DED, DE3		
VOLTAGE	120V, 277V, 347V (347 only with CF.D.13, CF.D.26, F.T5.C.22, F.T5.C.2240, F.T5.C.2240-2C & F.T5.C.40 [non dimming ballast])		
STRUCTURE	Die-stamped steel structure with highly reflective and diffused white paint finish.		
DIFFUSER	Hand blown white triplex glass		
CERTIFICATION	c-CSA-us		
WARRANTY	5 year warranty on LED fixtures, 1 year warranty on fluorescent fixtures		





3202 (NON DISPONIBLE EN DEL)




3203 (NON DISPONIBLE EN DEL)





3202B




3203B



3202C



3203C

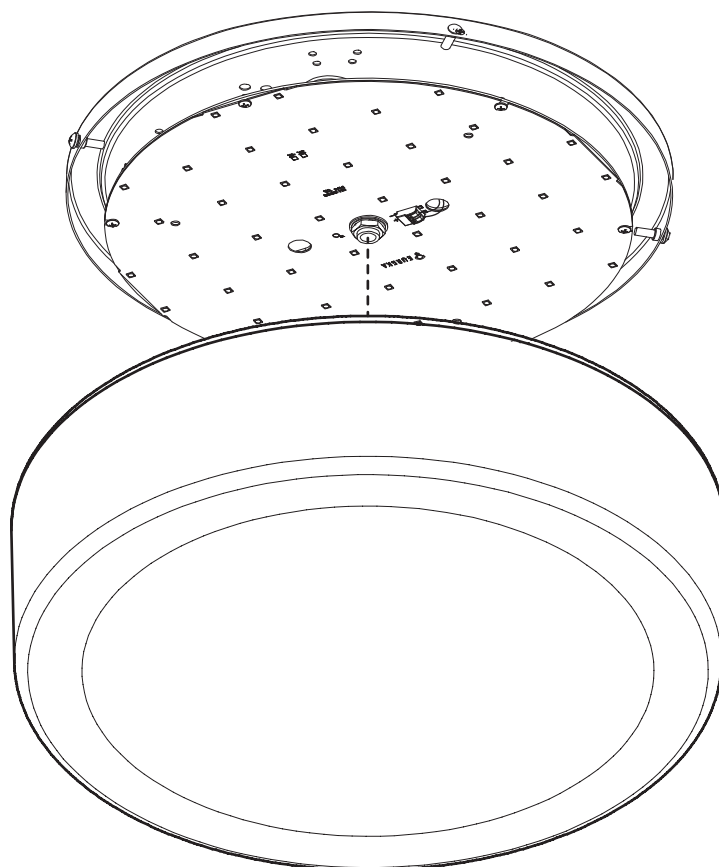

SPECIFICATIONS

SOURCE LUMINEUSE

3202 | 3203

CF.D.13
CF.SP.13
G9.60

3202B | 3203B

CF.D.26
2XCF.SP.13
F.T5.C.22
LED.10.30
LED.10.40

3202C | 3203C

2CF.D.26
3XCF.SP.13
F.T5.C.2240
F.T5.C.2240-2C
F.T5.C.40
LED.10.30
LED.10.40

OPTIONS DE GRADATION

DV 0-10V (120-277V), GRADATION DP PHASE (120V), DM1, DM7, DED, DE3

VOLTAGE

120V, 277V, 347V (347 seulement avec CF.D.13, CF.D.26, F.T5.C.22, F.T5.C.2240, F.T5.C.2240-2C & F.T5.C.40 [sans gradation])

STRUCTURE

Structure en acier formé, fini à la peinture électrostatique blanc hautement réfléchissant.

DIFFUSEUR

Verre soufflé triplex blanc

CERTIFICATION

c-CSA-us

GARANTIE

Garantie de 5 ans sur le luminaire en DEL, Garantie de 1 an sur les luminaires en fluorescent