

TRI 4213-UKI

PROJECT PROJÉT

SPEC TYPE

NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT


LIGHT SOURCE	INC-LED	LED DIM -8W 277V	CFL	CFL DIM
MOUNTING	2401E	2403G	2402G	2402J
CABLE	70.50"	71.00"	71.25"	47.75"

MOUNTING OPTIONS OPTIONS DE MONTAGE

2401E Ø4.50" x 1.00" Ø114 x 25mm	2403G Ø4.50" x 1.50" Ø114 x 38mm	2402G Ø5.25" x 1.75" Ø133 x 44mm	2402J Ø5.25" x 2.25" Ø133 x 57mm

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

AC CABLE STD 60" 1523mm	
-------------------------------	--

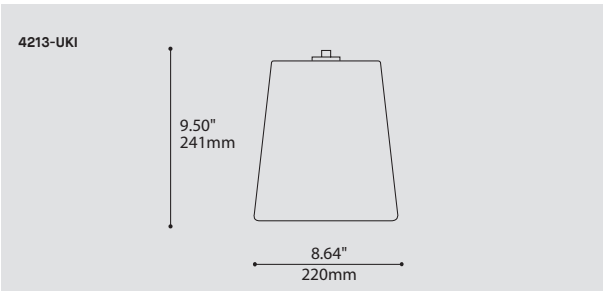



ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	4213-UKI TRI	4213-UKI
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO) CF.D.13 13W, CFL, DOUBLE TWIN TUBE, G24Q1 BASE CF.T.32 26/32W, CFL, DOUBLE / TRIPLE TWIN TUBE, G24Q3 BASE CF.SP.26 26W, CFL, SPIRAL TUBE, GU24 BASE (120V ONLY) INC.100 100W, INC, A19 / HAL T10, MEDIUM BASE (120V ONLY) LED.8.30 8W, LED 3000K (WARM) LED.8.40 8W, LED 4000K (NEUTRAL)	
VOLTAGE VOLTAGE	120V 120 VOLT 277V 277 VOLT 347V* 347 VOLT *ONLY AVAILABLE WITH CF.D.13 AND CF.T.32 (NON-DIMMING BALLAST)	
DIMMING OPTION OPTION DE GRADATION	AVAILABLE WITH CF.T.32 ONLY MAXIMUM 36" AIRCRAFT CABLE LENGTH DED LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING) DE3 LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING) FOR LED ONLY DV 0-10V DIMMING (120-277V) DP PHASE DIMMING (120V ONLY)	
CABLE CABLE	AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	AC
CABLE LENGTH LONGUEUR DE CABLE	60 60" AIRCRAFT CABLE (STD LENGTH) ** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING MONTAGE	RC ROUND CANOPY / PAVILLON ROND FOR INC & LED: 1" CANOPY (2401E) FOR CFL: 1.75" CANOPY (2402G) FOR DIMMING CFL: 2.25" CANOPY (2402J) FOR DIMMING LED & 8W 277V: 1.50" CANOPY (2403G)	RC
STRUCTURE FINISH FINI STRUCTURE	CHR CHROME	CHR
DIFFUSER FINISH FINI DIFFUSEUR	ECR ECRU	ECR

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- IES
- LED

DESIGN:	The soft pyramidal shape can be specified individually or grouped together in combinations.
INSTALLATION:	Easy to install and adjust aircraft cable mounting.
LIGHT SOURCE:	8W LED in 3000K (Warm white) or 4000K (Neutral white); other light sources also available.
STRUCTURE:	Die-formed steel canopy with machined fittings. Available in chrome finish.
SHADE:	Ceramic shade with glossy ecru glazing.
CERTIFIED:	c-CSA-us
CONCEPTION:	Forme pyramidale douce s'installant individuellement ou en grappe.
INSTALLATION:	Facile à installer et à ajuster sur câble d'acier.
SOURCE LUMINEUSE:	DEL 8W disponible en 3000K (blanc chaud) ou 4000K (blanc neutre); autres sources disponibles.
STRUCTURE:	Pavillon d'acier embouti et quincaillerie usinée. Disponible en fini chromé.
ABAT-JOUR:	Céramique avec glaçure lustrée écreu.
CERTIFIÉ:	c-CSA-us

SUSPENSION 4213

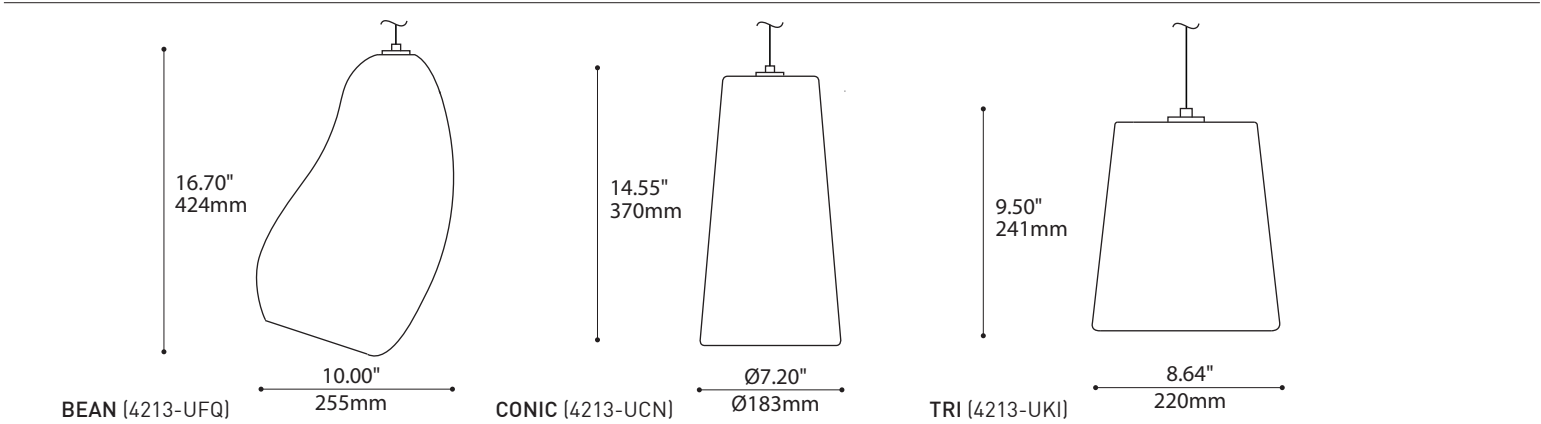
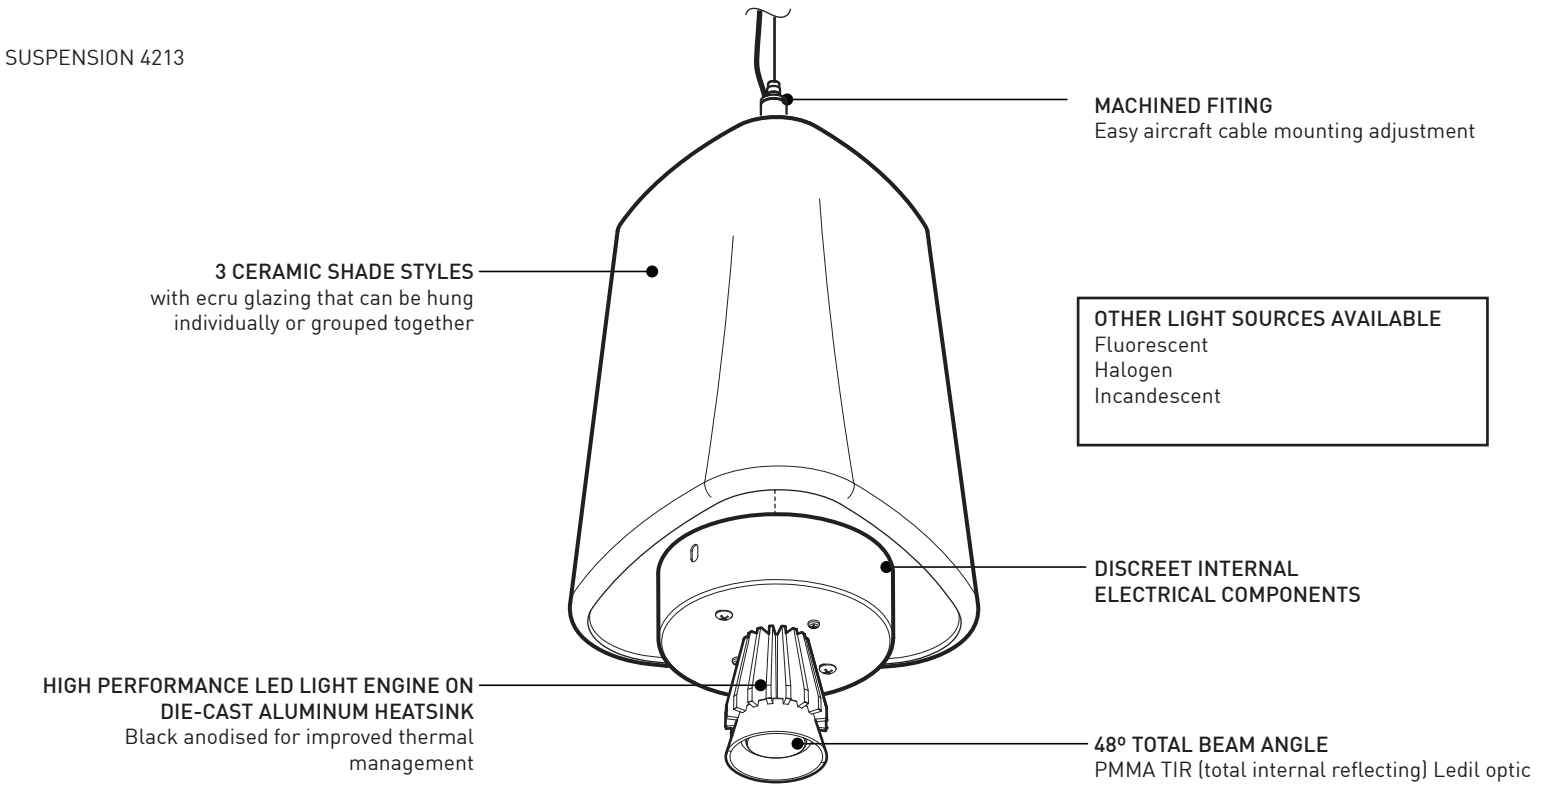


SPECIFICATIONS

LIGHT SOURCE
MODULE
LUMENS (ESTIMATED)
CRI
ROHS
OPTICS
VOLTAGE
DRIVER
LM-79
WARRANTY
CERTIFICATION

LED	Fluorescent	Incandescent
4 x Luxeon Rebel ES on MCPCB - total ±8 w	CFL 13/26/32 w	A19/T10 100 w
UL recognized - made in USA	N/A	N/A
560 lm (3000K) - 720 lm (4000K) initial	900 à 1800 lm	N/A
95 CRI (3000K) - 85 CRI (4000K)	N/A	N/A
Compliant		
LEDIL TIR - 48° total beam angle	N/A	N/A
120V - 240V	120V - 277V - 347V (non-dimming)	120V -277V
Hatch 700 mA	Smartmate Advance or equivalent	N/A
In process		
5 years (on electronic components)	3-5 years (on ballast, depending of the ballast)	
CSA recognized		

SUSPENSION 4213

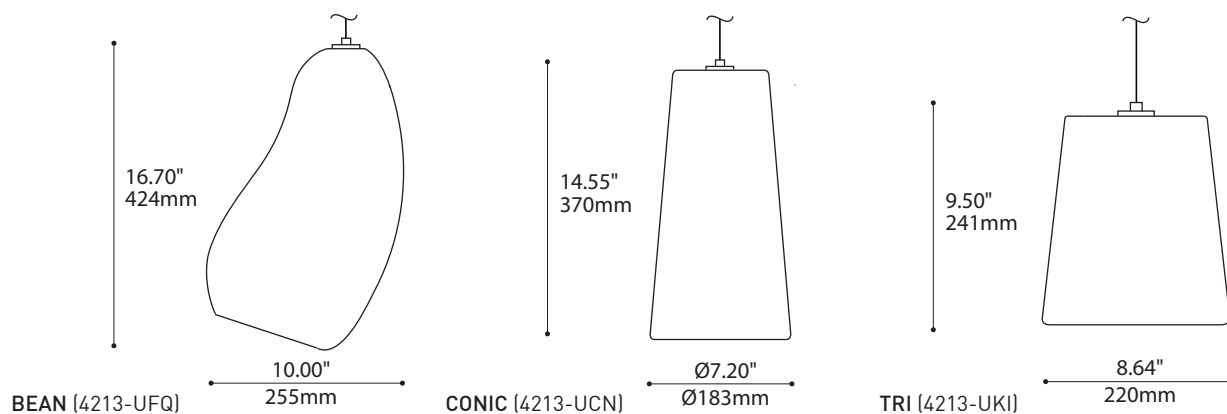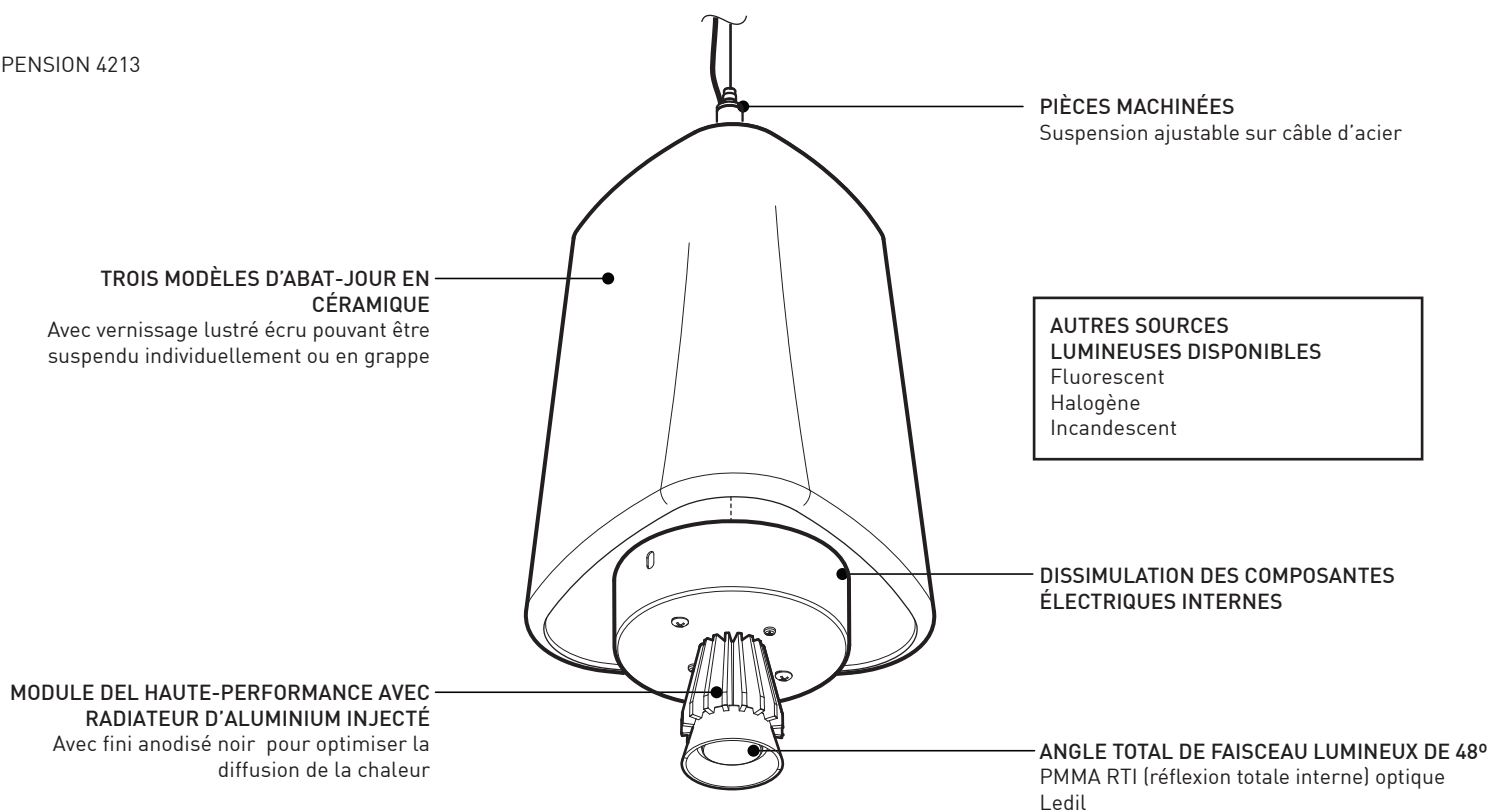

SPÉCIFICATIONS

SOURCE LUMINEUSE
MODULE
LUMENS (ESTIMÉ)
IRC
ROHS
OPTIQUE
VOLTAGE
PILOTE
LM-79
GARANTIE
CERTIFICATION

DEL

4 x Luxeon Rebel ES sur MCPCB - total ± 8 w
Reconnu par UL - Fabriqué aux États-Unis
560 lm (3000K) - 720 lm (4000K) initial
95 IRC (3000K) - 85 IRC (4000K)
Conforme
LEDIL RTI - angle total de faisceau lumineux de 48°
120V - 240V
Hatch 700 mA
En cours
5 ans (sur les composants électroniques)
Reconnu par CSA

Fluorescent

CFL 13/26/32 w
N/A
900 à 1800 lm
N/A
N/A
120V - 277V - 347V (sans gradation)
Smartmate Advance ou équivalent

Incandescent

A19/T10 100 w
N/A
N/A
N/A
N/A
120V - 277V
N/A