

MAKAM 4412-LR

PROJECT PROJÉT
SPEC TYPE
NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT


LIGHT SOURCE	INC	CFL	CFL DIM
MOUNTING	2401E	2402G	2402J
STEM	43.00"	43.75"	44.25"

MOUNTING OPTIONS OPTIONS DE MONTAGE

2401E	2402G	2402J
Ø4.50" x 1.00" Ø114 x 25mm	Ø5.25" x 1.75" Ø133 x 44mm	Ø5.25" x 2.25" Ø133 x 57mm

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

STEM
STD 36" 914mm

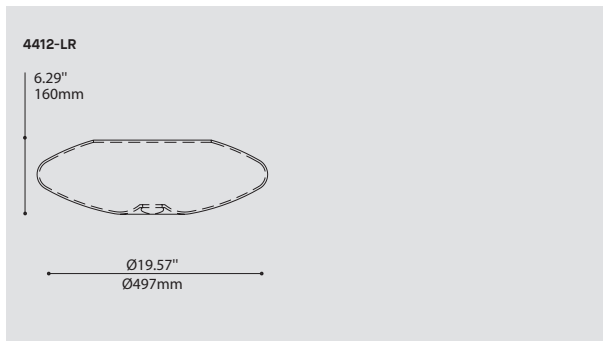

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	4412-LR MAKAM	4412-LR
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO) 2XCF.D.26 26W X 2, CFL, DOUBLE TWIN TUBE, G24Q3 BASE 2XCF.S.13 13W X 2, CFL, TWIN TUBE, GX23 BASE (MAGNETIC) (120V ONLY) 3XINC.60 60W X 3, INC, A19 / B10 / HAL T10, MEDIUM BASE (120V ONLY)	
VOLTAGE VOLTAGE	120V 120 VOLT 277V* 277 VOLT 347V* 347 VOLT *ONLY AVAILABLE WITH 2XCF.D.26 ONLY (NON-DIMMING BALLAST)	
DIMMING OPTION OPTION DE GRADATION	AVAILABLE WITH 2XCF.D.26 ONLY MAXIMUM 36" STEM LENGTH DED LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING) DE3 LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)	
STEM TIGE	S10 3/8" (10MM) STEM, NOT FIELD ADJUSTABLE	S10
STEM LENGTH LONGUEUR DE TIGE	36 36" STEM (STD LENGTH) ** CUSTOM STEM LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING MONTAGE	RC ROUND CANOPY / PAVILLON ROND FOR INC: 1" CANOPY (2401E) FOR CFL: 1.75" CANOPY (2402G) FOR DIMMING CFL: 2.25" CANOPY (2402J)	RC
MOUNTING OPTION OPTION DE MONTAGE	SCA* SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°) *NOT AVAILABLE WITH 2XCF.D.26	
STRUCTURE FINISH FINI STRUCTURE	SC SATIN CHROME	SC
DIFFUSER FINISH FINI DIFFUSEUR	WH WHITE	WH

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES**

DESIGN: Soft curved design provides indirect up light while diffusing light downward.
INSTALLATION: May be mounted on canopy or sloped ceiling adaptor.
LIGHT SOURCE: A wide range of compact fluorescent and dimmable incandescent light sources are available.

STRUCTURE: Die-stamped steel structure with satin chrome plated.
DIFFUSER: Hand blown white triplex glass.
CERTIFIED: c-CSA-us

CONCEPTION: Forme douce et courbée créant un éclairage indirect tout en diffusant vers le bas.
INSTALLATION: Sur pavillon ou avec adaptateur pour plafond en pente.
SOURCE LUMINEUSE: Plusieurs fluorescents à faible consommation et incandescents à intensité variable.
STRUCTURE: Acier embouti avec fini chrome satiné.
DIFFUSEUR: Verre triplex blanc soufflé à la main.
CERTIFIÉ: c-CSA-us