




CLOUD 4700

PROJECT PROJÉT
SPEC TYPE
NOTES

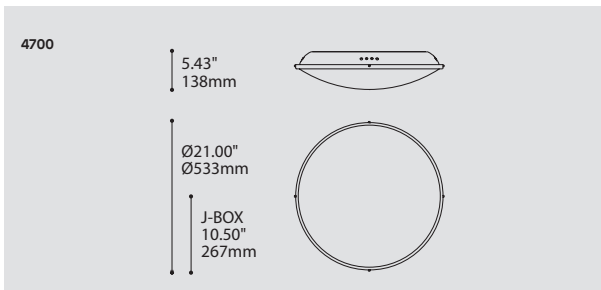

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	4700 CLOUD	4700
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO) 2XCF.D.26  26W X 2, CFL, DOUBLE TWIN TUBE, G24Q3 BASE (DIMMABLE ONLY) 2XCF.T.32  26/32W X 2, CFL, DOUBLE / TRIPLE TWIN TUBE, G24Q3 BASE	
VOLTAGE VOLTAGE	120V 120 VOLT 277V 277 VOLT 347V* 347 VOLT <small>*ONLY AVAILABLE WITH 2XCF.T.32</small>	
DIMMING OPTION OPTION DE GRADATION	AVAILABLE WITH 2XCF.D.26 ONLY DM1 ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST DM7 ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST DED LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING) DE3 LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)	
EMERGENCY BATTERY BATTERIE D'URGENCE	AVAILABLE WITH 2XCF.T.32, 120V OR 277V ONLY NOT AVAILABLE WITH A DIMMING BALLAST REM ⁽¹⁾ REMOTE EMERGENCY BATTERY <small>⁽¹⁾ 3981 ACCESSORY IS REQUIRED FOR THIS OPTION</small>	
DIFFUSER FINISH FINI DIFFUSEUR	WH WHITE	WH
ACCESSORY ACCESSOIRE	3981 JUNCTION BOX FOR CFL REMOTE EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **REM**

DESIGN:	Billowing direct /indirect illumination, accented by a delicate white ring around its perimeter.
LIGHT SOURCE:	Energy saving and dimmable fluorescent light sources. EM option is available.
STRUCTURE:	Die-formed steel with polyester powder coat paint finish.
DIFFUSER:	Vacuum formed white translucent acrylic.
CERTIFIED:	c-CSA-us
CONCEPTION:	Nuée lumineuse direct /indirect accentué par un délicat anneau blanc en bordure.
SOURCE LUMINEUSE:	Fluorescents à faible consommation; ballasts à gradation et d'urgence disponibles.
STRUCTURE:	Acier embouti avec peinture électrostatique à base de polyester.
DIFFUSEUR:	Acrylique translucide blanc thermoformé.
CERTIFIÉ:	c-CSA-us