


LED MODULE LED-X-XX-XX-TL



PROJECT PROJÉT
SPEC TYPE
NOTES

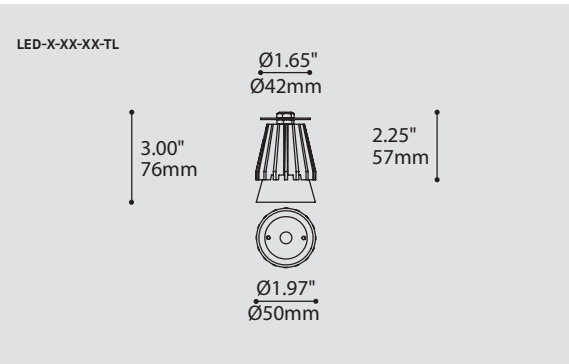


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		LED
LED		
WATTAGE PUISSANCE		
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
4	4W	
8	8W	
CCT CHROMATICITÉ		
30	3000K (ANSI BINNED WARM WHITE)	
40	4000K (ANSI BINNED NEUTRAL WHITE)	
BEAM FAISCEAU		
17	17 DEGREE TOTAL BEAM ANGLE - NARROW SPOT - TIR MULTILENS	
48	48 DEGREE TOTAL BEAM ANGLE - WIDE FLOOD - TIR MULTILENS	
TWIST LOCK VERROUILLAGE PAR ROTATION		
TL*	TWIST LOCK MOUNTING	
*FOR USE WITH GLASS TRIMS (1Ø11, 1Ø13, 1Ø13ØD)		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Simple, elegant custom designed module that fits most Eureka trims in 4W, 8W or 11W. Available for use with remodeling, new construction and insulated ceiling housings.
THERMAL MANAGEMENT:	Custom designed passive heat sink designed to attain L70 of 60000hrs.
DIMMING:	Available with dimming driver.
WARRANTY:	5 years
CERTIFICATION:	c-UL-us (for use with Eureka housings and trims only)
CONCEPTION:	Module simple et élégant conçu sur-mesure pour convenir à une variété d'encastres Eureka. 4W, 8W et 11W disponible pour la majorité des encastres. Utilisation possible avec boîtier de type rénovation, nouvelle construction ou plafond hermétique isolé.
GESTION THERMIQUE:	Radiateur passif conçu sur-mesure pour atteindre un facteur L70 de 60 000 heures.
VARIATION D'INTENSITÉ:	Disponible avec l'option pilote à intensité variable.
GARANTIE:	5 ans
CERTIFIÉ:	c-UL-us (pour usage avec boîtiers et encastres Eureka seulement)

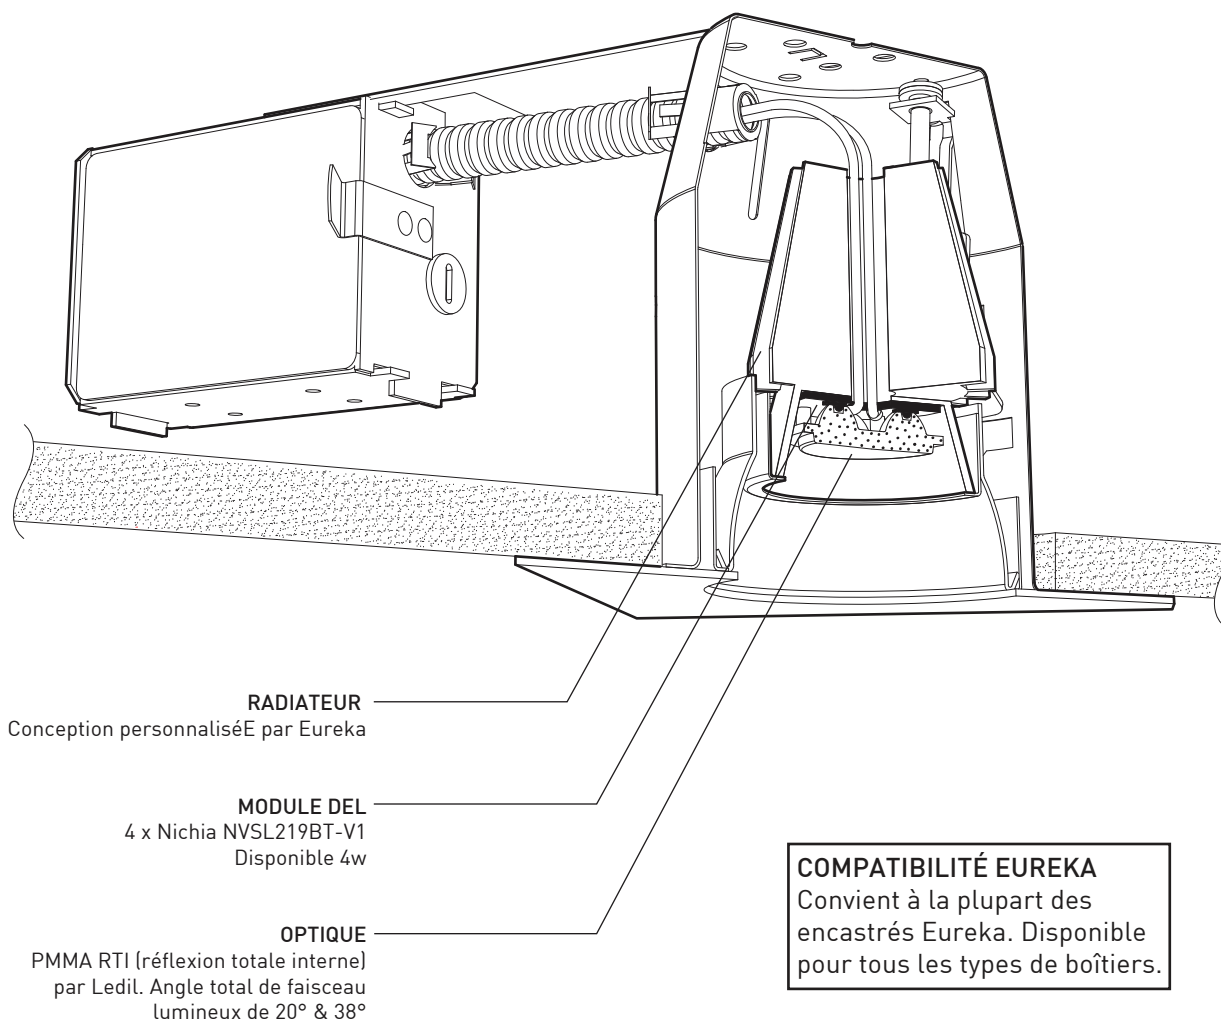

RÉNOVATION



NOUVELLE CONSTRUCTION

NOUVELLE CONSTRUCTION
(CHAMBRE À AIR &
ÉTANCHÉITÉ - PLAFOND NON-ISOLÉ)NOUVELLE CONSTRUCTION
(ÉTANCHÉITÉ - PLAFOND ISOLÉ)

SPÉCIFICATIONS

4w

ÉMETTEUR DEL	4 x Nichia NVSL219BT-V1 (5w totale système puissance)
OPTIQUE	LEDIL TIR - angle total de faisceau de 20° ou 38°
MODULE	Reconnu par UL - Fabriqué aux États-Unis
LUMENS (LIVRÉ)	400 lm (3000K & 4000K)
EFFICACITÉ	100 lm/w (3000K & 4000K)
CCT	ANSI 3000K / 4000K 3-Step MacAdam Ellipse Binning
IRC	84 IRC (3000K & 4000K)
PILOTE (SANS GRADATION)	350 mA Courant Constant
PILOTE (GRADATION)	Gradation 0-10V / Gradation phase
VOLTAGE	120V ou 277V
L70 / LM-79	Plus que 60 000 hrs / Disponible
CERTIFICATION / GARANTIE	c-UL-us / 5 ans



*Pour d'autres options de gradation, veuillez consulter l'usine.




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com





LED.4.XX.XX
LED.4.XX.XX.TL

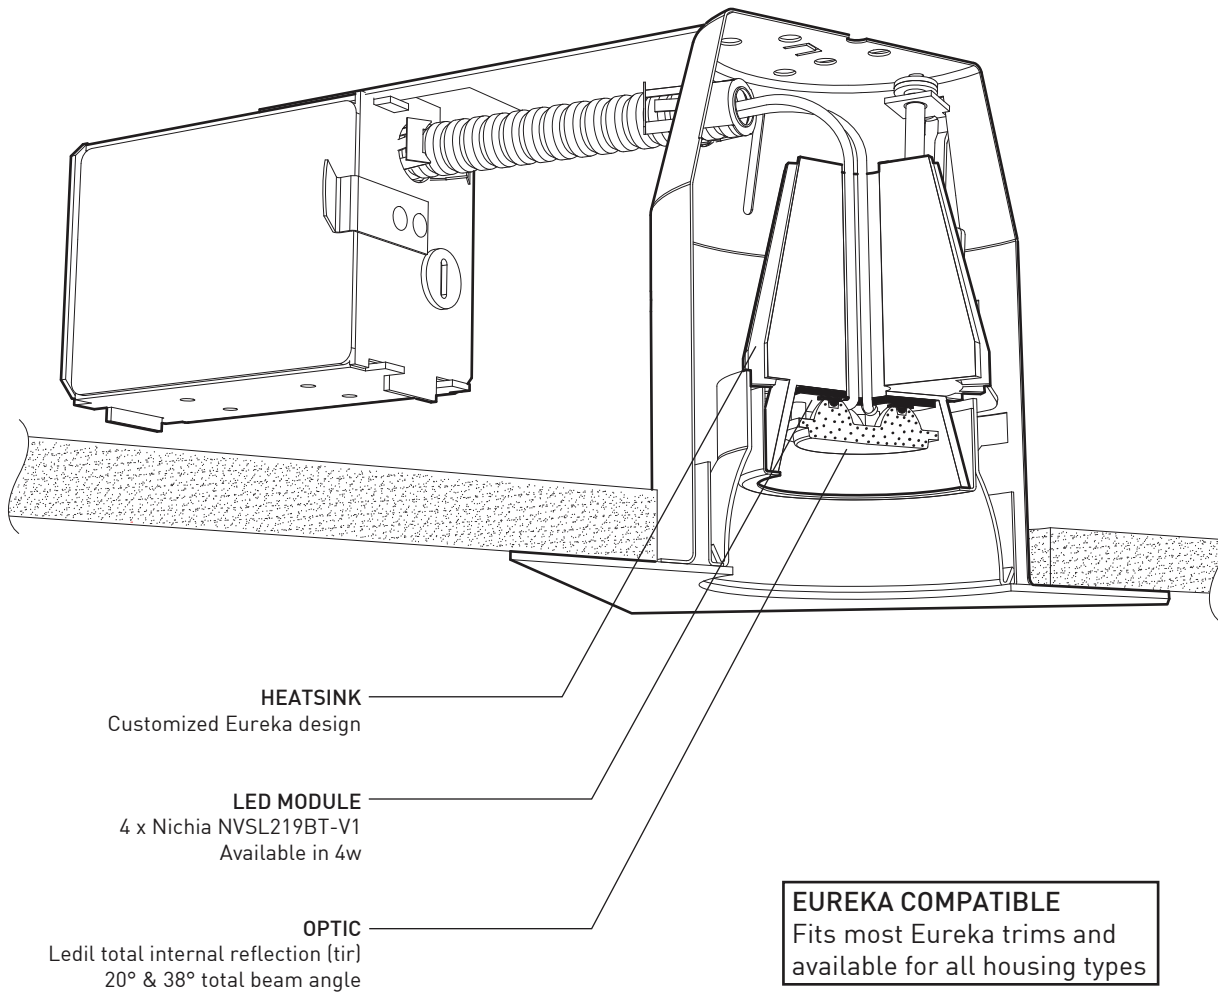

REMODELING



NEW CONSTRUCTION

NEW CONSTRUCTION
(AIR RETURN PLENUMS &
AIRTIGHT-NON IC)NEW CONSTRUCTION
(AIRTIGHT-IC)

SPECIFICATIONS

4w

LED EMITTER	4 x Nichia NVSL219BT-V1 (5w total system wattage)
OPTIC	LEDIL TIR - 20° & 38° total beam angle
MODULE	UL recognized - made in USA
LUMENS (DELIVERED)	400 lm (3000K & 4000K)
EFFICIENCY	100 lm/w (3000K & 4000K)
CCT	ANSI 3000K / 4000K 3-Step MacAdam Ellipse Binning
CRI	84 CRI (3000K & 4000K)
DRIVER (NON-DIMMING)	350 mA Constant Current
DRIVER (DIMMING)	0-10V Dimming / Phase Dimming
VOLTAGE	120V or 277V
L70 / LM-79	More than 60 000 hrs / Available
CERTIFICATION / WARRANTY	c-UL-us / 5 year



*Please consult factory for dimming & controller options.




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com





LED.4.XX.XX
LED.4.XX.XX.TL

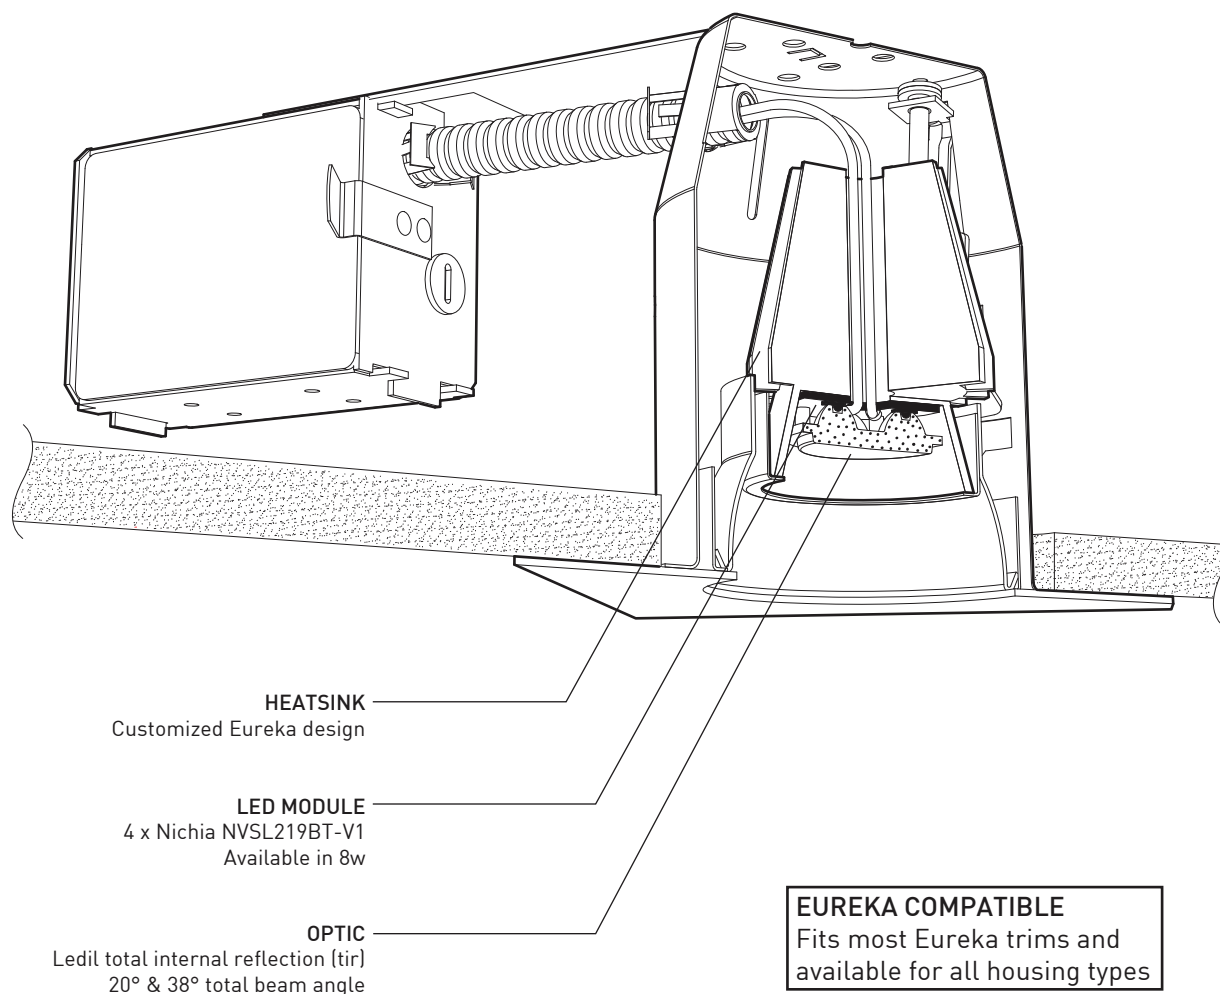

REMODELING



NEW CONSTRUCTION

NEW CONSTRUCTION
(AIR RETURN PLENUMS &
AIRTIGHT-NON IC)NEW CONSTRUCTION
(AIRTIGHT-IC)

SPECIFICATIONS

8w

LED EMITTER	4 x Nichia NVSL219BT-V1 (10w total system wattage)
OPTIC	LEDIL TIR - 20° & 38° total beam angle
MODULE	UL recognized - made in USA
LUMENS (DELIVERED)	715 lm (3000K & 4000K)
EFFICIENCY	90 lm/w (3000K & 4000K)
CCT	ANSI 3000K / 4000K 3-Step MacAdam Ellipse Binning
CRI	84 CRI (3000K & 4000K)
DRIVER (NON-DIMMING)	700mA Constant Current
DRIVER (DIMMING)	0-10V Dimming / Phase Dimming
VOLTAGE	120V or 277V
L70 / LM-79	More than 60 000 hrs / Available
CERTIFICATION / WARRANTY	c-UL-us / 5 year



*Please consult factory for dimming & controller options.




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com





LED.8.XX.XX
LED.8.XX.XX.TL

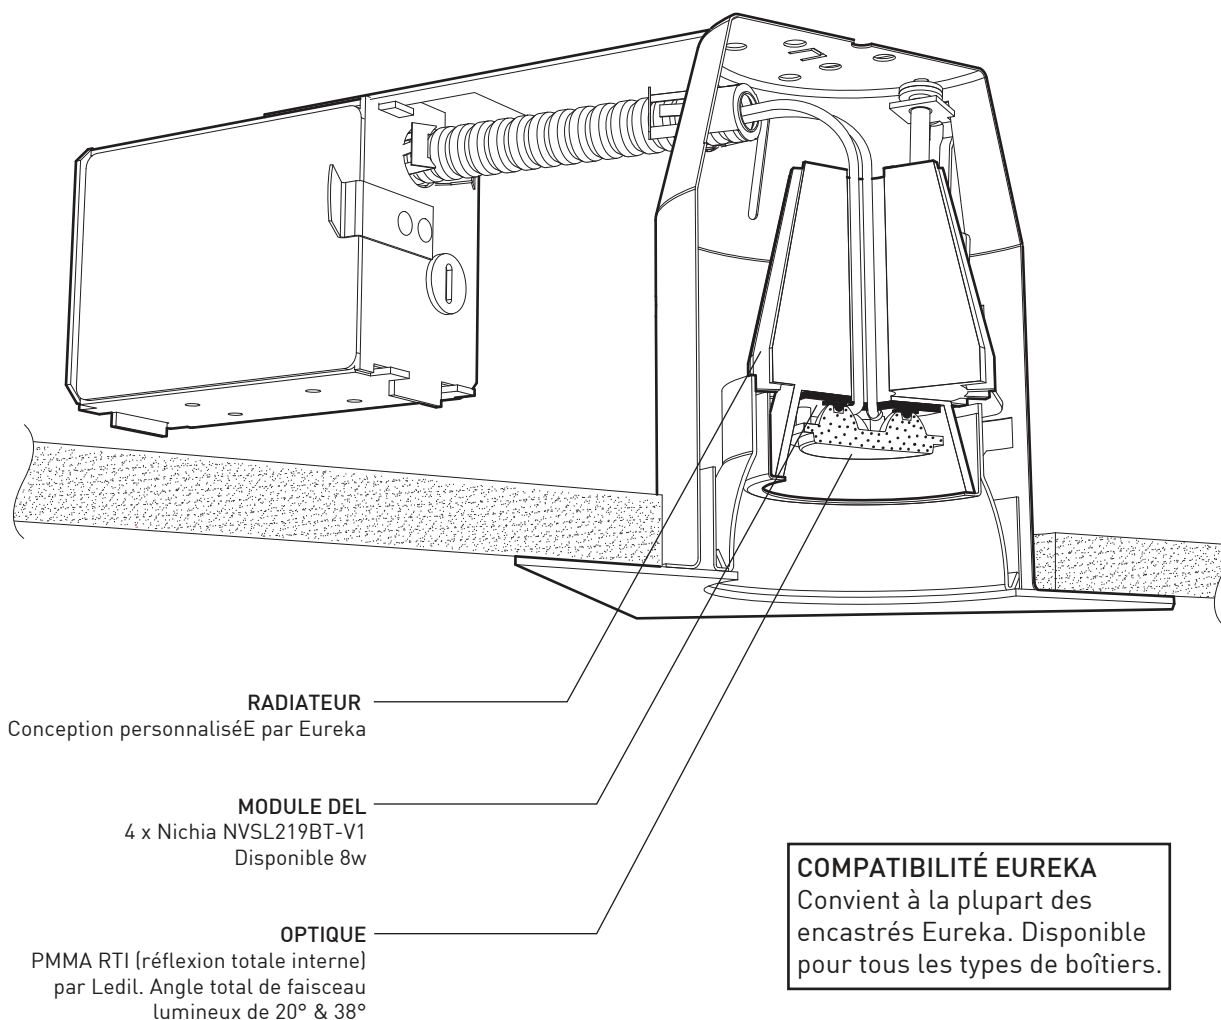

RÉNOVATION



NOUVELLE CONSTRUCTION

NOUVELLE CONSTRUCTION
(CHAMBRE À AIR &
ÉTANCHÉITÉ - PLAFOND NON-ISOLÉ)NOUVELLE CONSTRUCTION
(ÉTANCHÉITÉ - PLAFOND ISOLÉ)

SPÉCIFICATIONS

8w

ÉMETTEUR DEL	4 x Nichia NVSL219BT-V1 (10w totale système puissance)
OPTIQUE	LEDIL TIR - angle total de faisceau de 20° ou 38°
MODULE	Reconnu par UL - Fabriqué aux États-Unis
LUMENS (LIVRÉ)	715 lm (3000K & 4000K)
EFFICACITÉ	90 lm/w (3000K & 4000K)
CCT	ANSI 3000K / 4000K 3-Step MacAdam Ellipse Binning
IRC	84 IRC (3000K & 4000K)
PILOTE (SANS GRADATION)	700mA Courant Constant
PILOTE (GRADATION)	Gradation 0-10V / Gradation phase
VOLTAGE	120V ou 277V
L70 / LM-79	Plus que 60 000 hrs / Disponible
CERTIFICATION / GARANTIE	c-UL-us / 5 ans

*Pour d'autres options de gradation, veuillez consulter l'usine.



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



LED.8.XX.XX
LED.8.XX.XX.TL