# PLANK & TILE

## LAY-IN LEVELS

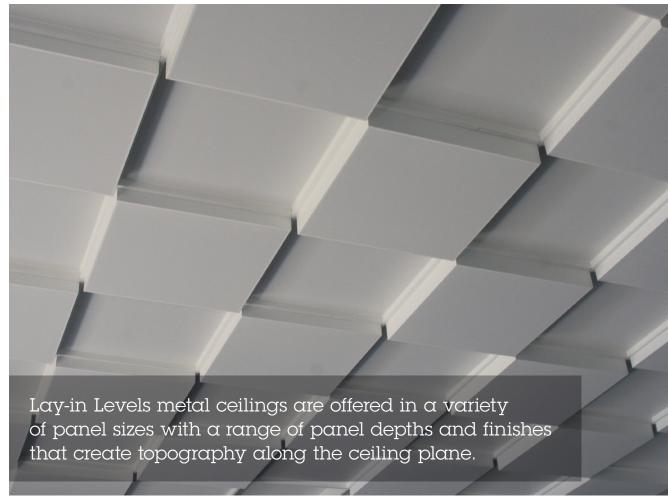


Photo: Lay-in Levels Concept

## **KEY FEATURES**

- Four panel size options:
- 12" wide up to 72" long
- 20" wide up to 60" long
- 24" wide up to 72" long
- 30" wide up to 60" long
- Square-edge design
- Various panel depths from 4" above grid face to 4" below grid face
- Waste reduction with factory fabricated dimensional material
- Downweight: reduce dead load with lightweight aluminum
- Easy plenum access
- Compatible with industry standard lighting, HVAC, speaker, fire safety, and security services

## **COLORS & FINISHES**

Standard colors Natural and Cotton White shown. Client-specific colors available. Minimum quantities may apply. Colors are for illustrative purposes. See page 178 for all colors and finishes.

Custom colors

## Standard colors







Cotton White

Woodwright<sup>™</sup> finishes use our painted wood-look finish. See page 180 for all finishes.




Maple





# **TYPICAL ISOMETRICS**

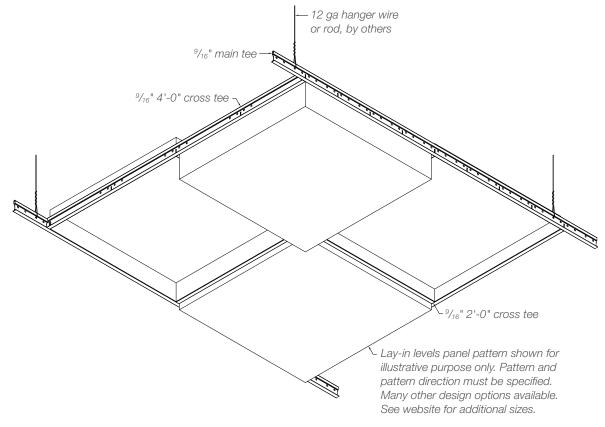

## **PERFORATION PATTERNS**

Standard patterns shown. See page 186 to see all perforation patterns. Scale shown: 1:1, unless otherwise noted.















PHYSICAL DATA

Substrate: Aluminum Warranty: 1 year

Seismic rating: Zones A,B,C,D,E,F

Fire rating: Class A Fire Rated per ASTM E84

- Painted or anodized metal: Flame spread: ≤ 25, Smoke ≤ 50

Weight: Varies 0.75 - 1.0 lbs./sq.ft.

Wind load: N/A

Recycled content: Up to 85%

Light reflectance (LR) Coefficient per ASTM E1264 & ASTM E1477:

- Cotton White: LR = 0.81

Acoustical ratings – NRC: See page 190

REVIT files available for BIM contributions, see website for details.

## **LEED V4 CREDITS**

**EA:** Optimize Energy Performance MR: Building Product Disclosure **EQ:** Low-Emitting Materials

**EQ:** Indoor Air Quality Assessment

**EQ:** Daylight

**EQ:** Acoustic Performance

### CERTIFICATIONS

GREENGUARD Gold Certified HPDs & EPDs – available upon request

24 HunterDouglasCeilings.com | 800.366.4327