

# MEDINTONE™ | MEDINTECH® | MEDLEY™

## Homogeneous Sheet



The Armstrong line of Homogeneous sheet flooring provides many different color and visual options. Medintone features CONTINUUM™, a simple, organized tonal step system that cross-coordinates with MARMORETTE™ linoleum and Stonetex® VCT. It has a sophisticated, natural appearance with a complete range of colors and neutrals. Medintech provides a jaspered visual in neutrals and soft colors. Medley presents a contrasting chip visuals designed for superior hiding power from dirt and subfloor imperfections. All three products have a UV-cured urethane coating that protects the floor's appearance and allows for low maintenance options. Perfect for aseptic areas, Medintone, Medintech, and Medley can all be heat welded and flash-coved for spaces demanding superior infection control.


PRODUCT INFORMATION				
Construction	Homogeneous			
Product Line	Medintone   Medintech   Medley			
International Product Specifications	ASTM F 1913, ISO 10581, Type II			
Overall Thickness	0.080 in. (2.0 mm)			
Wear Layer Thickness	0.080 in. (2.0 mm)			
Finish	UV-cured Polyurethane			
Installation	Full Spread Adhesives – S-599 Premium, S-543 High-Moisture, S-240 Epoxy			
Seaming Options	Heat Weld with patterned (Medintone, Medintech) or solid weld rods or S-761 Seam Adhesive			
Maintenance Options	Polish No Polish – Spray/Dry/No Buff			
PACKAGING				
Roll Length	Up to 82 ft. (25 m)			
Width	6 ft. (1.83 m)			
Shipping Weight	6.1 lbs./sq. yd. (3.3 kg/m <sup>2</sup> ) – Medintone & Medintech 5.7 lbs./sq. yd. (3.1 kg/m <sup>2</sup> ) – Medley			
PERFORMANCE	TEST METHOD	MINIMUM REQUIREMENT	PERFORMANCE VS. REQUIREMENT	
ASTM F 1913	Thickness	ASTM F 386	≥ 0.075 in.	Exceeds
	Residual Indentation	ASTM F 1914	≤ 0.007 in.	Exceeds
	Static Load Resistance (250 psi)	ASTM F 970	≤ 0.005 in.	Exceeds
	Flexibility	ASTM F 137	1 1/2 in.	Exceeds
	Chemical Resistance	ASTM F 925	No more than slight change in surface dulling, attack or staining	Meets or Exceeds
	Resistance to Heat	ASTM F 1514	ΔE ≤ 8	Exceeds
	Resistance to Light	ASTM F 1515	ΔE ≤ 8	Exceeds
Supplementary	Fire Test Data – Flame Spread	ASTM E 648	0.45 W/cm <sup>2</sup> or more, Class I	Meets
	Fire Test Data – Smoke Evolution	ASTM E 662	450 or less	Meets
	Fire Test Data – Canada	CAN/ULC S102.2	Use dependent	Flame Spread – 100 Smoke Developed – 280
	Static Load Limit – Subjective Visual	ASTM F 970	No visually apparent indentation	750 psi
	Certified Low Emitting Product	LEED® EQ4.3	Meets Guidelines	Meets
	Certified Low Emitting Adhesive	LEED EQ4.1	Meets Guidelines	Meets
	Plant Certification	ISO 14001	Meets Certification Guidelines	Certified
	Indoor Air Quality	FloorScore™	Meets Certification Guidelines	Certified
Indoor Air Quality	CHPS 01350	Meets Certification Guidelines	Certified	
WARRANTY				
5-Year Commercial Warranty when installed in accordance with Armstrong's Guaranteed Installation Systems manual, F-5061.				
LINKS				
Installation Instructions – <a href="http://www.armstrong.com/pdbupimages/194608.pdf">www.armstrong.com/pdbupimages/194608.pdf</a>				
Maintenance Information – <a href="http://www.armstrong.com/pdbupimages/197961.pdf">www.armstrong.com/pdbupimages/197961.pdf</a>				
View the full line – <a href="http://www.armstrong.com/commflooringna/products/sheet">www.armstrong.com/commflooringna/products/sheet</a>				
Email Techline – <a href="http://www.armstrong.com/commflooringna/contact_techline.jsp">www.armstrong.com/commflooringna/contact_techline.jsp</a>				

**MEDINTONE™ | MEDINTECH® | MEDLEY®**  
Homogeneous Sheet




**Sustainability Facts**


Serving Medintone   Medintech   Medley	As Served
Certified to meet LEED® EQ Credit: Low Emitting Interiors	✓
Adhesives	
Certified to meet LEED EQ Credit: Low Emitting Interiors	✓
FloorScore™ Certified to CDPH Standard Method V1.1-2010	✓
Collaborative for High Performance Schools	
CHPS-IEQ2.2 & LABS-21 IEQ4.3	✓
ISO 14001 Plant Certification	✓
U.S. Green Building Council Member	✓
Canada Green Building Council Member	✓
Low Maintenance Option	✓

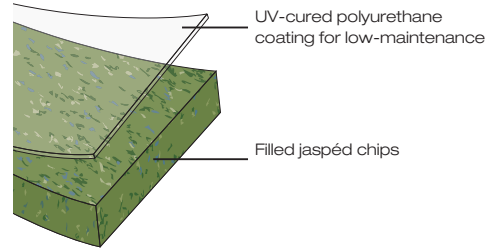

**Medintone**

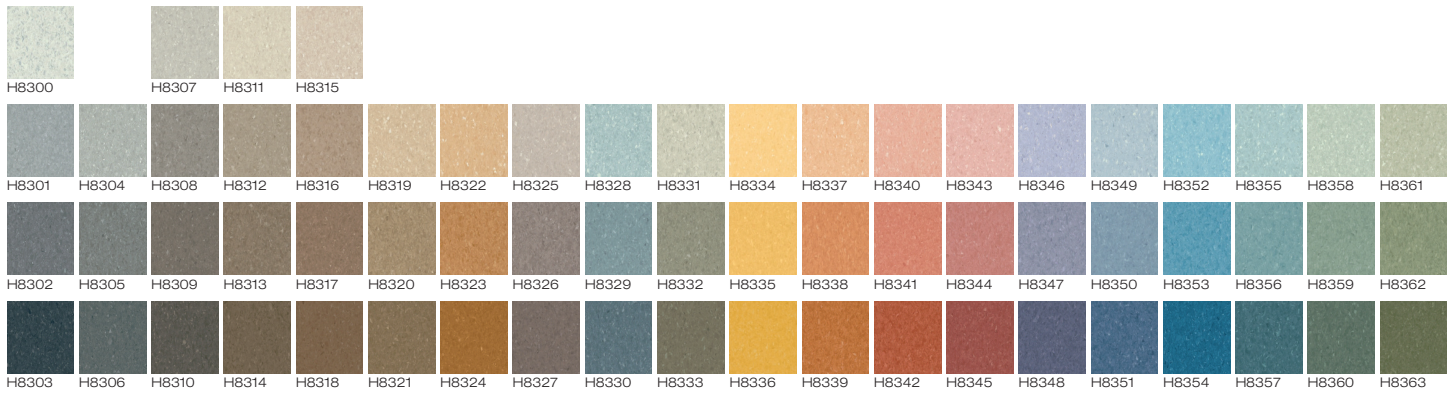

**Medley**

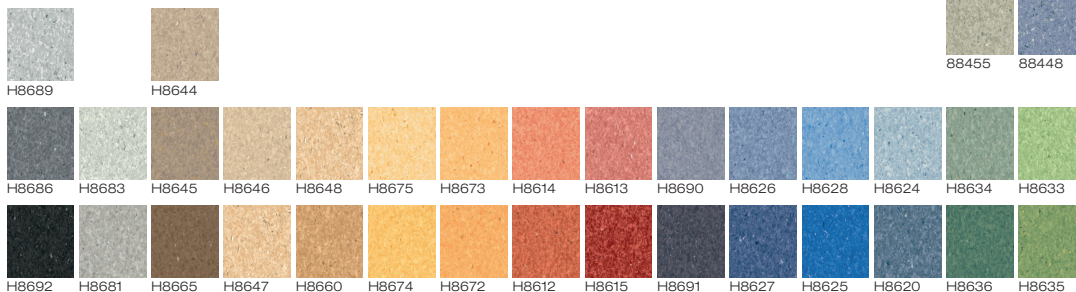

**Medintech**

