


PRODUCT SPECIFICATIONS

# 2x2 Luminaire Flatlight™ Fixture

Replaces existing fluorescent 2x2 Luminaires

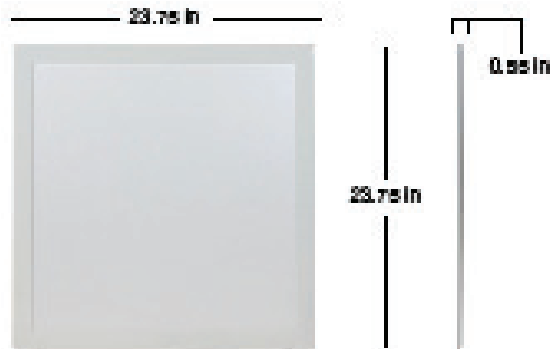

SPECIFICATIONS	
Model Number	FLT22C40MDUP44
Power	59 W
AC Power	110-300V 50/60 Hz
Color Temp (nom.)	4000K
Operation Temp	- 20°C ~ 50°C
CRI	≥80
Lumen Output (nom.)	4900 lm
Dimming	No
Lifetime Rating	50,000 Hrs

PACKAGING	
Weight (±0.5 lb)	11.5 lbs
Size (L x W x H) (±0.1 in)	23.75 x 23.75 x 0.55 in
Box Dimensions	28.1 x 29.3 x 2.6 in
Gross Weight	15.4 lbs
UPC	8 55158 00312 6


**ADVANTAGES**

- Internal driver allows for TruFlat™ Mounting
- Edge-lit LED provides a thin energy efficient light source
- 90° bezel edge
- Lasts 60%\* longer than standard troffer lighting
- Bright uniform light
- Low heat dissipation - reduce HVAC costs
- Low energy consumption
- Replaces fluorescent fixture and tube
- Environmentally positive - RoHS compliant
- Type IC Rated
- 5 year limited warranty



**APPLICATIONS**


Suitable for dry locations

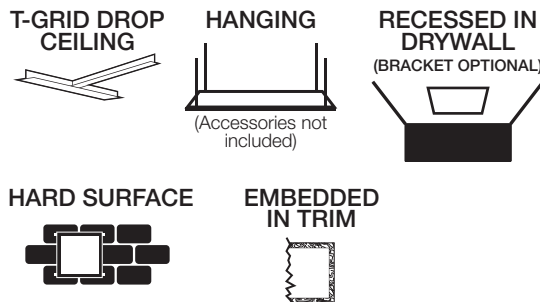

**INCLUDED IN BOX**

- Installation guide
- Wire nuts (3)

### Polar Candela Distribution

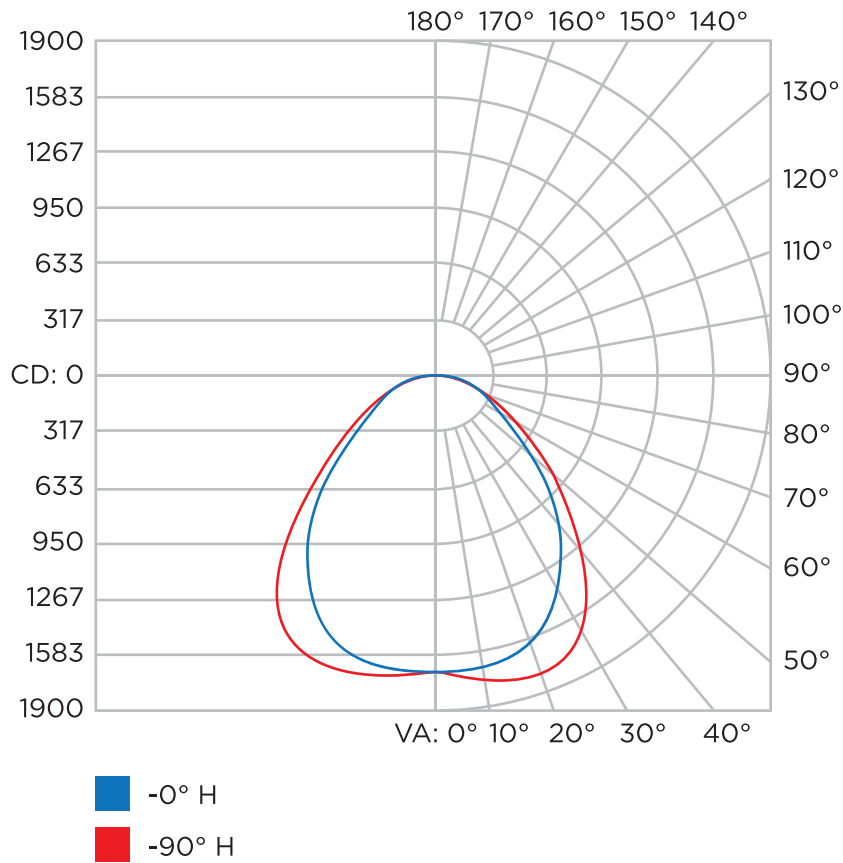

### Illuminance at a Distance

	Center Beam LUX	Beam Width	
0.5M	6,632.00 LUX	0.9M	1.1M
1.0M	1,658.00 LUX	1.8M	2.2M
1.5M	736.89 LUX	2.7M	3.4M
2.0M	414.50 LUX	3.6M	4.5M
2.5M	265.28 LUX	4.5M	5.6M
3.0M	184.22 LUX	5.4M	6.7M

■ Vert. Spread: 84.1°    ■ Horiz. Spread: 96.6°