
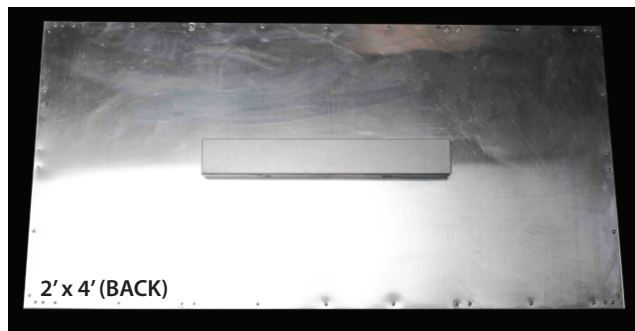


HOLLYWOOD EDGE LIT PANELS

SERIES 1501



RETAIL / HOSPITALITY / OFFICE

FIXTURE:

- New construction or Retrofit (fixture replacement)
- 4 sizes
- Energy savings up to 50% and long life sustainability
- 7 year warranty

HIGH PERFORMANCE LEDs:

- Tightly binned mid-powered LumenMax LEDs for improved lumens/watt and proprietary PCB system for even illumination with superior thermal management
- 50,000 hours at 70% lumen maintenance (L70)
- 3000°K, 3500°K or 4000°K options
- Up to 99 Lumens/watt @ 4000K based on independent photometric LM79 test reporting
- Uniform 110° beam spread for visual comfort

DRIVER:

- Universal M voltage 120 - 277v (50 - 60Hz)
- Operating Temperature: -20°C to +45°C range
- Instant-start, with no humming
- Dimmable constant current, full cut off 1 - 10 volt driver, .99 Power Factor
- <10% THD, MTBF 450,000 hours
- Isolated, vibration resistant compartment for 1/2" or 3/4" KO, inherent protection for thermal, over-current, over-voltage, and short circuit
- EMI - No Flicker, 1mA - Sink Current

HOUSING:

- Architectural grade 6063 recycled aluminum, low profile frame
- Low profile 2.5" depth, IC, UL Damp location rated, reinforced aluminum
- 98% reflectivity Dupont speciality film, 92% light transmission light guide plate, high transmission scratch resistant diffuser lens

SUSTAINABILITY:

- LEDs save energy, LEDs require less relamp materials and reduces lamp disposal needs, low profile fixtures use less packing materials, low profile fixtures save space during transportation

WEIGHT:

- .5' x 4' - 5.8 lbs
- 1' x 4' - 11 lbs
- 2' x 2' - 11 lbs
- 2' x 4' - 20 lbs

SPECIFICATION / ORDERING CODE: Example 1501-R-44-3-22-LED-30-EM-FRMK22

| PRODUCT | WATTS | VOLTAGE | SIZE | LED-CCT |
|------------------|-------|-----------------------|-------------|--------------|
| 1501-R LED PANEL | 44 | 3 UNIV. 120 - 277V | 64 .5' x 4' | LED-30 3000K |
| | | | 14 1' x 4' | LED-35 3500K |
| | | | 22 2' x 2' | LED-40 4000K |
| 1501-R | 44 | 3 | | |

| PRODUCT | WATTS | VOLTAGE | SIZE | LED-CCT |
|------------------|-------|-----------------------|------------|--------------|
| 1501-R LED PANEL | 58 | 3 UNIV. 120 - 277V | 24 2' x 4' | LED-30 3000K |
| | | | | LED-35 3500K |
| | | | | LED-40 4000K |
| 1501-R | 58 | 3 | 24 | |

OPTIONS: FRMK Size Framing Kit / EM Emergency Backup- IOTA / GL Grip Lock Suspension Kit

SUBMITTAL:

Date: _____
 Project: _____
 Fixture Type: _____
 Location: _____
 Comments: _____




TYC LIGHTING. 2800 Saturn Street Brea, CA 92821 Phone: 714.522.6688 x7 www.tyclighting.com

HOLLYWOOD EDGE LIT PANELS


SERIES 1501




PHOTOMETRICS

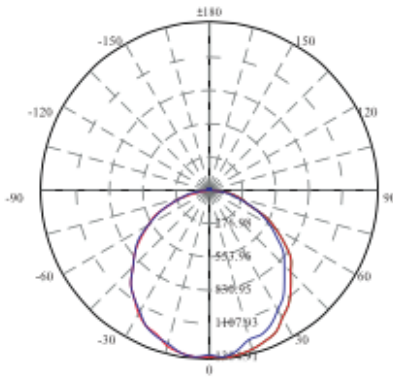

1' x 4'

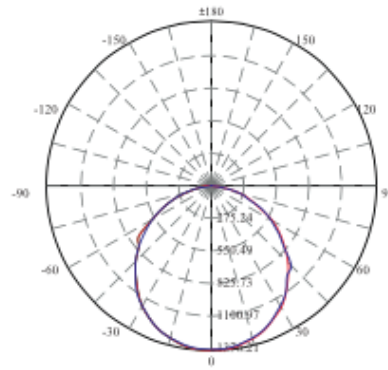


2' x 4'

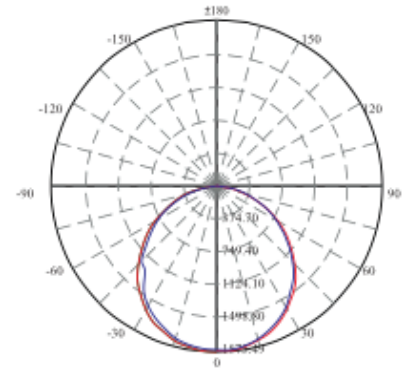


4' x 4'

| SIZE 1501 LED Panel | Lumen Output @ 3K, 83 CRI, R9>8 | EFFICACY @ 3K | LUMEN Output @ 4K 84 CRI, R9>8 | EFFICACY @ 4K |
|------------------------------|---------------------------------------|------------------|--------------------------------------|------------------|
| .5' x 4' | 3427 | 80 LPW | 3603 | 84 LPW |
| 1' x 4' | 3971 | 96 LPW | 4089 | 99 LPW |
| 2' x 2' | 3838 | 94 LPW | 3927 | 96 LPW |
| 2' x 4' | 5218 | 87 LPW | 5587 | 91 LPW |


DIMENSIONS

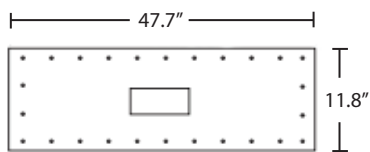


1' x 4'



2' x 2'

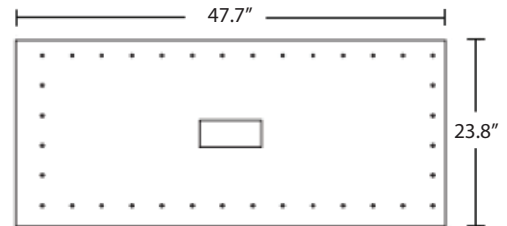

2' x 4'



.5' x 4'



With optional IOTA EM Backup

MOUNTING: For NEMA Type G lay-in acoustical grid ceiling, 1" or 9/16" T-bar, Suspension or Seismic by contractor per local codes

RELATED PRODUCT FOR 2' x 2':

- Nest² 1599 Direct, Direct/Indirect Pendant

