

Notes:


Job:

Type:

BOLLARD

BRM822/BRM826 SCHOOL BOLLARDS

GENERAL DESCRIPTION: Gardco's BRM822 dome top and BRM826 beveled top louvered School Bollards provide uniform illumination and superior spacings. A high-strength galvanized steel tenon throughout the length of the luminaire provides solid vandal resistance. Rugged extruded and cast construction with silicone seals and gasketing assure years of trouble-free service.



ORDERING

PREFIX	HEIGHT	WATTAGE	VOLTAGE	FINISH	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Enter the order code into the appropriate box above. Note: Gardco reserves the right to refuse a configuration. Not all combinations and configurations are valid. Refer to notes below for exclusions and limitations. For questions or concerns, please consult the factory.					<input type="text"/>

PREFIX

BRM822	Dome Top School Bollard
BRM826	Bevel Top School Bollard

HEIGHT

42"
36"
30"

WATTAGE

50MH¹	35HPS²	26QF³
70MH	50HPS¹	32TRF³
100MH	70HPS	42TRF³
	100HPS	
	<i>MH</i>	<i>Metal Halide</i>
	<i>HPS</i>	<i>High Pressure Sodium</i>
	<i>INC</i>	<i>Incandescent</i>

1. 120/277V Primary only.
2. 120V Primary only.
3. Features an electronic fluorescent ballast that accepts 120V through 277V, 50hz or 60hz input. 0°F/18°C starting temperature.

VOLTAGE

120
208
240
277

FINISH

BRP	Bronze Paint	OC	Optional Color Paint <i>Specify RAL designation as ex: OC-RAL7024.</i>
BLP	Black Paint		
WP	White Paint		
NP	Natural Aluminum Paint	SC	Special Color Paint <i>Specify. Must supply color chip.</i>
VP	Verde Green Paint		

OPTIONS

F	Fusing
SHD	Internal 180° Shield

Gardco Lighting reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

© Copyright Gardco Lighting 2001-2007. All Rights Reserved. International Copyright Secured.

Genlyte Group

Gardco Lighting
1611 Clovis Barker Road
San Marcos, TX 78666

(800) 227-0758
(512) 753-1000
FAX: (512) 753-7855
www.sitelighting.com



79115-84/0807

BOLLARD

BRM822/BRM826 SCHOOL BOLLARDS

SPECIFICATIONS

GENERAL: Each Gardco louvered School Bollard is a luminaire designed for use with 35w - 100w high intensity discharge and 26w, 32w and 42w compact fluorescent lamps. A die cast louvered head assembly provides low-glare, high performance lighting and superior vandal resistance. A concealed high strength steel tenon mounting system is designed to address the challenges of school environments.

UPPER HOUSING: A diecast aluminum dome top secures to a one-piece diecast zinc louver assembly with three (3) concealed tamper resistant screws.

LOWER HOUSING: .125" (.318 cm) wall 6063-T5 extruded aluminum which connects to the top flange of the mounting tenon with four (4) internal hex bolts, inaccessible after installation.

LENS & OPTICAL SYSTEM: A fully gasketed Pyrex vessel enshrouds the lamp envelope and is secured in position with a stainless steel spring. High angled louvers provide maximum spacings while shielding the source to 90°. The upper louver conceals hammertoned Alzak® aluminum reflectors to increase luminaire efficiency and generate unstriated beam patterns.

ANCHORAGE: A high strength steel mounting tenon, hot-dip galvanized after fabrication, is secured and double-nut leveled to the concrete footing with (4) 3/8" x 8" x 1 1/2" (.953 cm x 20.32 cm x 3.81 cm) anchor bolts on a 4 3/4" - 5" (12.07 cm - 12.70 cm) bolt circle. A prewired ballast assembly resides within the mounting tenon, with easy access for field wire connections.

ELECTRICAL: The medium base pulse-rated lampholder is glazed porcelain with a nickel plated reinforced screw shell and spring loaded contact. Each high power factor ballast is the separate component type, capable of providing reliable lamp starting down to -20°F/-29°C. Component-to-component wiring within the luminaire will carry no more than 80% of rated current and is listed by UL for use at 600 VAC at 150°C or higher. Plug disconnects are listed by UL for use at 600 VAC, 15A or higher.


All fluorescent luminaires utilize electronic ballasts that are high power factor and designed for reliable lamp starting to 0°F/18°C. Smart fluorescent ballasts accept 26w, 32w and 42w in all voltages from 120 to 277, 50/60Hz. Sockets are high temperature PBT with brass contacts.

FINISH: Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured textured polyester powdercoat finish. The painted finish is bonded to the exterior surfaces utilizing chromate conversion as a pretreatment.

LABELS: All luminaires bear UL or CUL (where applicable) Wet Location labels.

DIMENSIONS

Galvanized Steel Mounting System

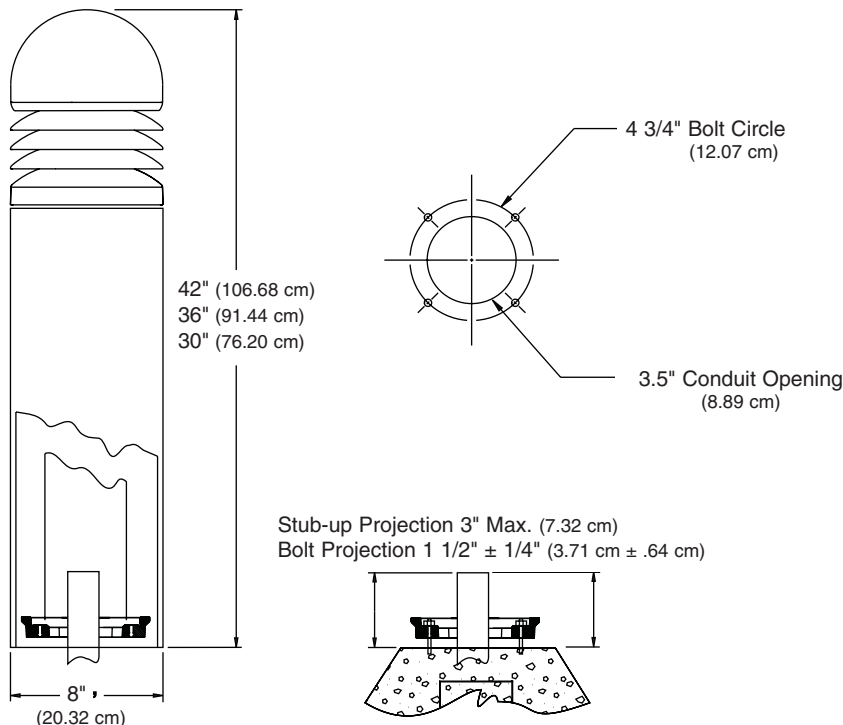

NOTE: Factory supplied template must be used when setting anchor bolts. Gardco Lighting will not honor any claim for incorrect anchorage placement from failure to use factory supplied templates.

Gardco Lighting reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

© Copyright Gardco Lighting 2001-2007. All Rights Reserved. International Copyright Secured.

Genlyte Group

Gardco Lighting
1611 Clovis Barker Road
San Marcos, TX 78666

(800) 227-0758
(512) 753-1000
FAX: (512) 753-7855
www.sitelighting.com



79115-84/0807