

Notes:

Job:

Type:

THE GASKINS SERIES

GS01A SQUARE LUMINAIRE FOR MOUNTING TO STANDARD ROUND OR SQUARE POLES

GENERAL DESCRIPTION: The Gaskins Series is a variety of pedestrian scale luminaires for area illumination. The GS01A is an arm-mounted version of the GS01 model of The Gaskins Series for use with a standard style round or square pole with a minimum 3" diameter.

CUTOFF PERFORMANCE: GS01A luminaires provide full cutoff performance.

ORDERING

PREFIX	CONFIGURATION	DISTRIBUTION	WATTAGE	VOLTAGE	FINISH	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the order code into the appropriate box above. Note: Gardco reserves the right to refuse a configuration. Not all combinations and configurations are valid. Refer to notes below for exclusions and limitations. For questions or concerns, please consult the factory.

PREFIX

GS01A

CONFIGURATION

- | | |
|--------------|--------------------------|
| 1 | Single Pole Mount |
| 2 | Twin Pole Mount at 180° |
| 2@90 | Twin Pole Mount at 90° |
| 3 | 3-way Pole Mount at 90° |
| 3@120 | 3-way Pole Mount at 120° |
| 4 | 4-way Pole Mount at 90° |

DISTRIBUTION

HID

- | | |
|------------|-----------------------|
| 2XL | Type II |
| 3XL | Type III |
| 4XL | Type IV Forward Throw |

Fluorescent

- | | |
|------------|---|
| MTS | Medium Throw with Solite Lens
<i>Only available with (2)60CF and (2)42TRF.</i> |
| MWD | Marker Optic with White Diffuse Glass
<i>Only available with C40T5.</i> |

WATTAGE

- | | |
|---------------|--------------|
| 35HPS | 50MH |
| 50HPS | 70MH |
| 70HPS | 100MH |
| 100HPS | 150MH |
| 150HPS | |

MH - Metal Halide
HPS - High Pressure Sodium

- | | |
|-----------------------------|---|
| (2)60CF¹ | (2) 60w Compact Fluorescent
<i>Only available with MTS Distribution, UNIV voltage.</i> |
| (2)42TRF¹ | (2) 42w Triple Tube Compact Fluorescent
<i>Only available with MTS Distribution, UNIV or 347V.</i> |
| C40T5¹ | 40w Circular T5 Fluorescent
<i>Only available with MWD Distribution, UNIV voltage.</i> |

1. Fluorescent ballasts supplied accept 120V through 277V input. Specify "UNIV" for 120V through 277V. 347V, where available, must be specified separately.

VOLTAGE

- | | |
|------------|-------------------------|
| 120 | UNIV¹ |
| 208 | |
| 240 | |
| 277 | |
| 347 | |
| 480 | |

PAINTED FINISH

- | | | | |
|------------|--|------------|-----------------|
| BRP | Bronze | LSP | Light Sandstone |
| BLP | Black | DSP | Dark Sandstone |
| WP | White | RBP | Red Brick |
| NP | Natural Aluminum | LGP | Light Granite |
| BGP | Beige | DGP | Dark Granite |
| OC | Optional Color Paint
<i>Specify RAL designation ex: OC-RAL7024.</i> | | |
| SC | Special Color Paint <i>Specify. Must supply color chip.</i> | | |

OPTIONS

- | | |
|------------|---|
| SG | Solite® Glass
<i>Solite is a Registered Trademark of AFG Industries.</i> |
| TWG | Translucent White Glass |
| PCB | Button Type Photocontrol |
| QS | Quartz Standby, DC Bayonet Socket |
| QST | Quartz Standby, Timed, Bayonet Socket |



© Copyright Gardco Lighting 2004-2007. All Rights Reserved. International Copyright Secured. Gardco Lighting reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

A Genlyte Company

Gardco Lighting
1611 Clovis Barker Road
San Marcos, TX 78666

(800) 227-0758
(512) 753-1000
FAX: (512) 753-7855
www.sitelighting.com



79115-134/0507

THE GASKINS SERIES

GS01A SQUARE LUMINAIRE FOR MOUNTING TO STANDARD ROUND OR SQUARE POLES

SPECIFICATIONS

GENERAL DESCRIPTION: The Gaskins Series is a variety of pedestrian scale luminaires for area illumination. The GS01A is an arm-mounted version of the GS01 model of The Gaskins Series for use when a standard style round or square pole with a minimum 3" (7.62cm) diameter.

HOUSING/LENS ASSEMBLY: The housing is one-piece die cast aluminum. A tempered flat glass lens assembly is mechanically retained and hinged within the housing. The hinge is die cast aluminum. A one-piece molded silicone gasket seals the lens assembly to the housing to prevent intrusion by moisture, dust and insects. A decorative die cast ribbed element is attached to the back of the housing. This decorative element acts as an attachment point between the luminaire and the mounting arm. The mounting arm consists of two aluminum extrusions and a die cast pole adapter. 3/8" (.95cm) tie rods run through an integral channel within the extrusions for maintaining housing to pole alignment. Luminaires are pre-wired and suitable for installation without accessing housing.

HID SOURCE OPTICAL SYSTEMS: The segmented optical systems are manufactured from homogenous sheet aluminum, which has been electrochemically brightened, anodized and sealed. The multifaceted arc image duplicating systems are designed to produce IES Types II (2XL), III (3XL), and IV (4XL). The reflector facets form a conical fan around the arc tube with each facet positioned to be precisely tangent to the top of the arc tube.

The lampholder is glazed porcelain with a nickel plated screw shell.

FLUORESCENT SOURCE OPTICAL SYSTEMS: Fluorescent luminaires use either a medium throw reflector with a Solite® glass lens or a marker reflector with a translucent white glass lens.

ELECTRICAL: Each HID high power factor ballast is the separate component type, capable of providing reliable lamp starting down to -20°F/-29C. Component to component wiring within the luminaire will carry no more than 80 percent of rated current and is listed by U.L. for use at 600 VAC at 150°C/302°F or higher. Plug disconnects are listed by U.L. for use at 600 VAC, 15 Amp or higher.

Fluorescent units have a starting temperature of 0°F/-18°C.) Fluorescent ballasts are solid state.


FINISH: Each standard color luminaire receives a fade and abrasion resistant electrostatically applied thermally cured triglycidal isocyanurate (TGIC) textured semi-glos polyester powdercoat finish. Standard colors include Bronze (BRP), Black (BLP), White (WP), Natural Aluminum (NP), Beige (BGP), Light Sandstone (LSP), Dark Sandstone (DSP), Red Brick (RBP), Light Granite (LGP) and Dark Granite (DGP). Consult factory for specifications on custom colors.

LABELS: All luminaires bear U.L. or C.U.L. (where applicable) Wet Location labels.

FULL CUTOFF PERFORMANCE: Full cutoff performance means a luminaire distribution where zero candela intensity occurs at an angle of 90° above nadir. Additionally, the candela per 1000 lamp lumens does not numerically exceed 100 (10 percent) at a vertical angle of 80° above nadir. This applies to all lateral angles around the luminaire.

CUTOFF PERFORMANCE: Cutoff performance means a luminaire distribution where the candela per 1000 lamp lumens does not numerically exceed 25 (2.5 percent) at an angle at or above 90° above nadir, and 100 (10 percent) at a vertical angle of 80° above nadir. This applies to all lateral angles around the luminaire.

DIMENSIONS

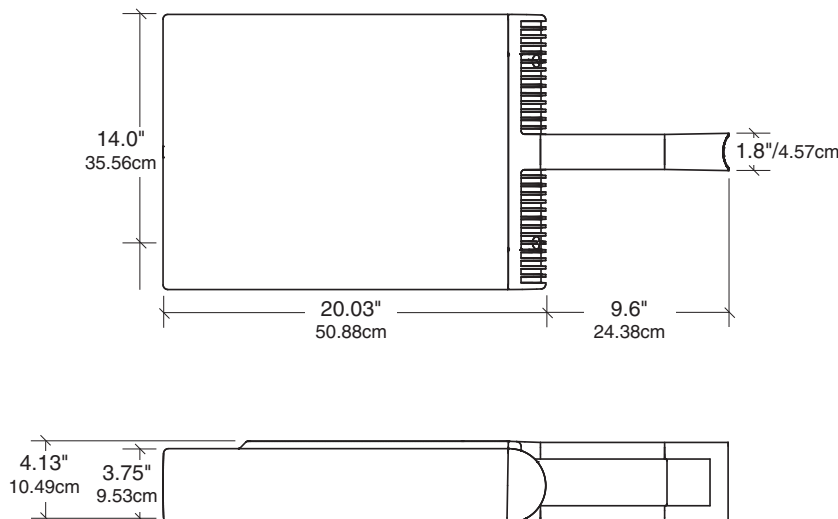

Effective Projected Area (EPA)

Single	1.1 sq. ft./ .10m ²
2 @ 180°	2.2 sq.ft./ .20m ²
3/4 way	2.7 sq. ft./ .25m ²

© Copyright Gardco Lighting 2004-2007. All Rights Reserved. International Copyright Secured. Gardco Lighting reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program. Solite is a Registered Trademark of AFG Industries.

A Genlyte Company

Gardco Lighting
1611 Clovis Barker Road
San Marcos, TX 78666

(800) 227-0758
(512) 753-1000
FAX: (512) 753-7855
www.sitelighting.com



79115-134/0507