

95 LINE

S T E P L I G H T I N G



GARDCO
LIGHTING

THE 95 LINE – ONE INCREDIBLE

Gardco Lighting introduces a remarkable advance in architectural lighting elegantly built around the latest advances in LED (Light Emitting Diodes) technology – the 95 Line. With an integrated lamp and optical system package that relies on a single watt of energy, this minimally scaled luminaire achieves a remarkable level of illumination. In pedestrian thoroughfares, along stairways, in emergency lighting situations, the new 95 Line is an exciting new design option.

Pure shapes. Soft corners. Uniform distribution. Concealed mounting hardware. Consistent visual styling cues. The 95 Line is scaled to make a tasteful and discreet design statement. That it so elegantly meets code requirements for minimum light levels makes it a very smart, if inconspicuous choice for step and aisle lighting.

The diecast brass base and LED optical system are an integrated component package. To replace the LED, simply remove the faceplate, and snap in a new module. Plug and play. Fast, simple, easy does it.



The minimally scaled faceplate is available in four different designs, two Round and two Square. A black finish is integral to the injection molded faceplate. All other finishes are applied using a liquid polyurethane, UV resistant, paint.

An integrated LED, driver and optic allows the 95 Line to accomplish the paradox of maximum performance from minimal power. The LED is available in six colors: white, amber, blue, green, orange, and red. Naturally, light output is maximized using the white LED. Color LEDs can be used to add accent and interest to a project.

The 95 Line presents superior illumination from the power of only 1 watt (input watts = 2.4) or 3 watts (input watts = 5). The mounting base is constructed of diecast brass and the cover is molded, high impact resistant, polycarbonate. The all-weather steplights are listed for Wet Locations.

WATT OF ILLUMINATION



Round (951)




Round (950)



Square (953)



Square (952)

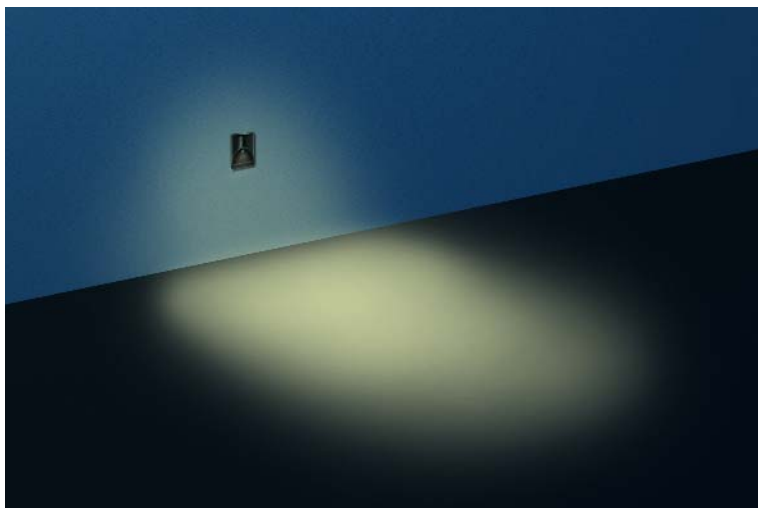

Subtle wall washing is an ancillary benefit of the luminaires.

The 95 Line was designed to take advantage of LEDs as its source. Designing around the miniature LED source results in not only a small, ADA compliant luminaire, but one that provides the necessary light levels required from a step and aisle product.

The patent-pending optic uniquely distributes light forward and away from the luminaire, placing the light on the walkway or interior floor. The 1 watt 95 Line is optimally placed at only 18" above grade, making it ideal for both interior and exterior applications.

The graphic to the left illustrates the pattern of light achieved at the 18" mounting height.





The 3 watt 95 Line may be mounted as high as 36" with excellent results.

95 LINE ORDERING


	PREFIX	MOUNTING	WATTAGE	VOLTAGE	LED COLOR	FINISH
Example	950	S	1	120V	LEA	BLP
	950	S = Surface	1 = 1 watt	120	'LEA Amber	BLP Black Paint
	951	Mount for	3 = 3 watt	12	LEB Blue	Standard material color
	952	Wall or			LEG Green	BRP Bronze Paint
	953	Ceiling			'LEO Orange	WP White Paint
					'LER Red	OC Optional Color Paint
					LEW White	Specify RAL designation ex: OC-RAL7024
						SC Special Color Paint
						(Must supply color chip)

1. Available in 1 watt only.


95 LINE DIMENSIONS

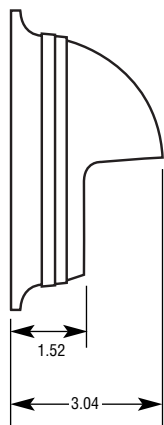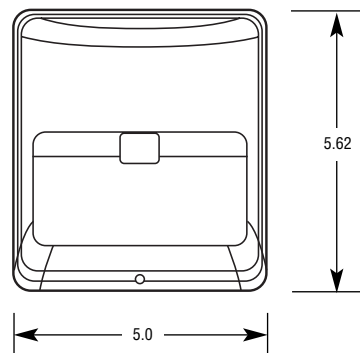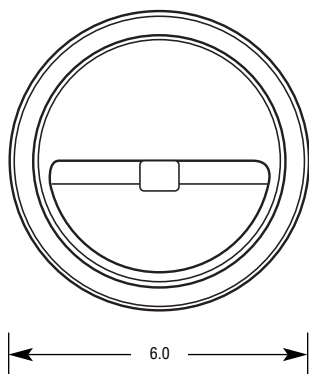

950 & 951
WITH ADAPTER



950 & 951



952 & 953

Note: Adapter is used when mounting over a 4-Square Junction Box.
Product mounts directly over a 3-1/2-0 or 4-0 Junction Box without adapter.

2661 Alvarado Street
San Leandro, CA 94577
800/227-0758
510/357-6900 in California
Fax: 510/357-3088
www.sitelighting.com

