


Featuring exclusive GreenAir™ technology that significantly reduces VOC emission, LONECO® MESA provides an eco-friendly environment with superior indoor air quality and lower volatile organic emissions than other floors. The exclusive coloration provides excellent camouflage for scuffing and soil.

STANDARD SIZES (nominal)

- Overall thickness:** 0.100" (2.5 mm)
- Wear layer thickness:** 0.031" (0.8 mm)
- Roll size:** 6' (1.83 m) wide x 60' (18.3 m)
- Weight:** 0.8 lbs./sq. ft., 295 lbs./roll
- Colors:** One available

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 50% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: IEQ Credit 4.1
 - Flooring Systems: IEQ Credit 4.3

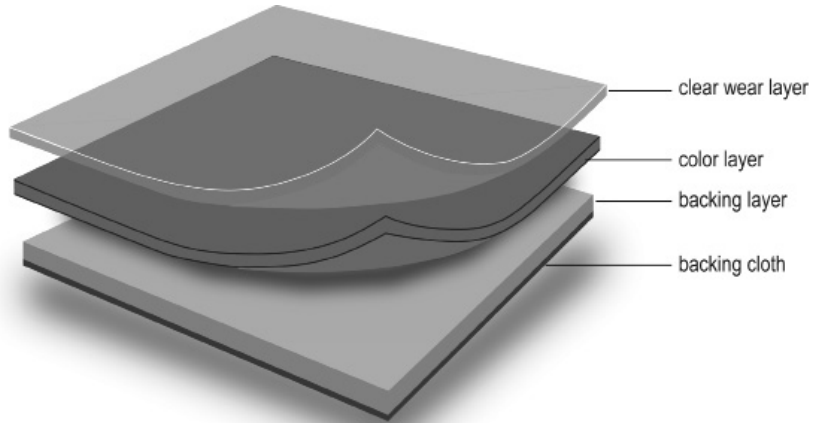

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303	Type 1, Grade1, Class B
Flexibility, ASTM F137	Pass
Hardness, ASTM D2240	85
James Machine, SCOF, ASTM D2047	Neolite: 0.81, Neolite w/Finish: 0.85
Abrasion Resistance, ASTM D3884	0.1%, 1,000 cycles
Static Load (max 0.005") , ASTM F970.....	500 psi
Short-term Indentation, ASTM F1914	0.013" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918	25,000 cycles - Wear: 4.3, Color: 4.5, Change: 4.5
Dimensional Stability, ASTM F2199	0.32% loss
Heat Stability, ASTM F1514	Pass
Light Stability, ASTM F1515	Pass
Critical Radiant Flux, ASTM E648	Class 1 ≥0.45 watts/cm ²
Chemical Resistance, ASTM F925	No Change

For detailed installation information, please refer to Lonseal's Technical Manual for Interior Flooring Products at www.lonseal.com.



LONSEAL, INC.
 928 E. 238th Street, Carson, CA 90745 USA
 800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 06.24.15