
Look for the labels — you need them to install your job correctly.

Fixture Type and Run Length



Hang fixtures in ID order. Hang prior to joining. Hang, Level, Join, repeat to the end of the run.

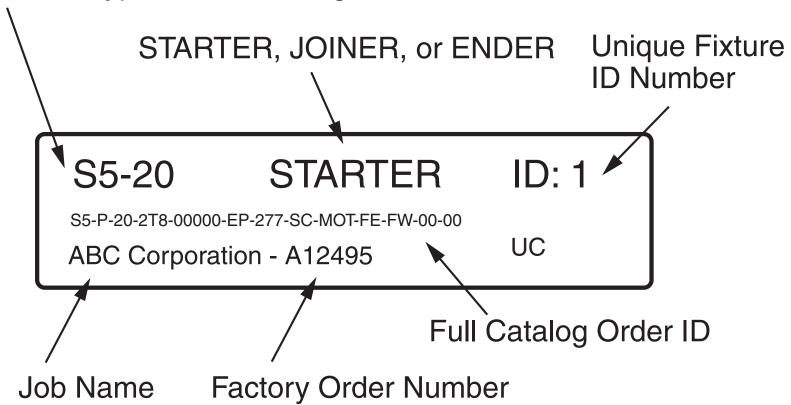

HANG PRIOR TO JOINING

- 1. Identify all fixtures. Look for labels located:
 - 2 labels 1 at each end of box (or bag)
 - 1 label box top (or bag top)
 - 1 on fixture (permanent)
- 2. Keep plastic bags ON for protection. T8 lamps may be turned on with the bags on. T5 and T5-HO lamps get too hot remove bags before turning lamps on.
- 3. Lay out fixtures starting with ID: 1, then ID: 2, etc.
- 4. Hang STARTER fixture ID: 1. Secure both ends to mounting aircraft cable and level.
- 5. Hang far end of JOINER ID: 2 while supporting both ends.
- 6. Join ID: 1 and ID: 2 by attaching plug together wiring, screwing fixtures together.

NOTE: See additional mounting and joining instructions for each Finelite Series.