



FINELITE

Series 11 Installation Instructions


PREPARE ARCHITECTURAL COVE

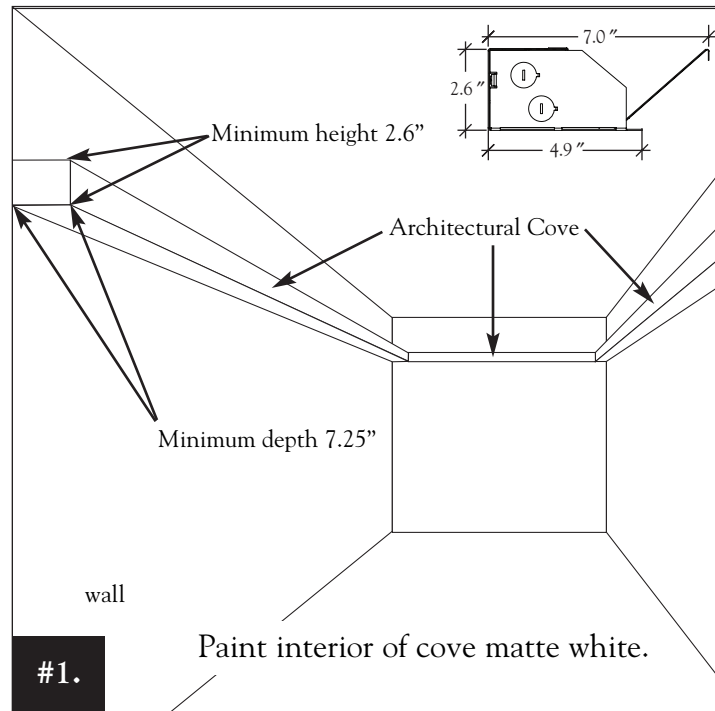

J-BOX AND FEED POSITION

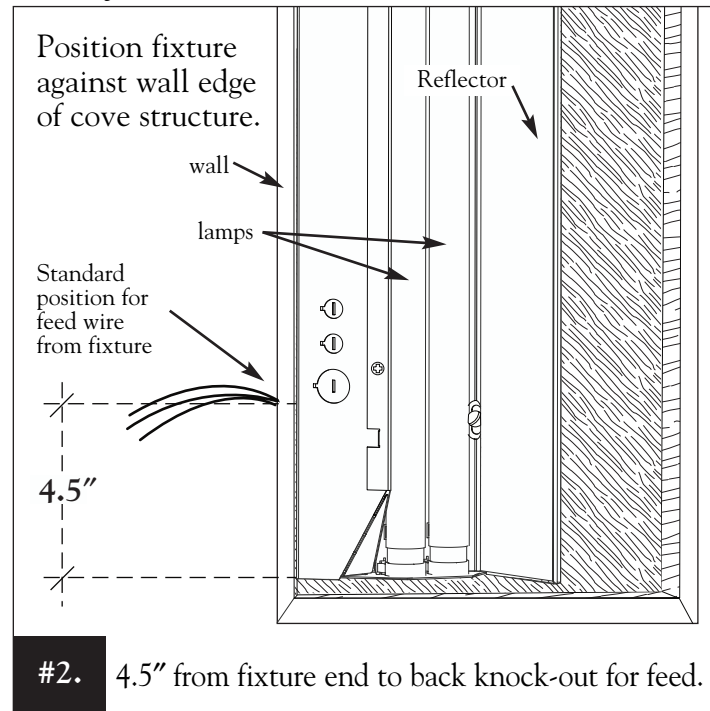


JOIN FIXTURES

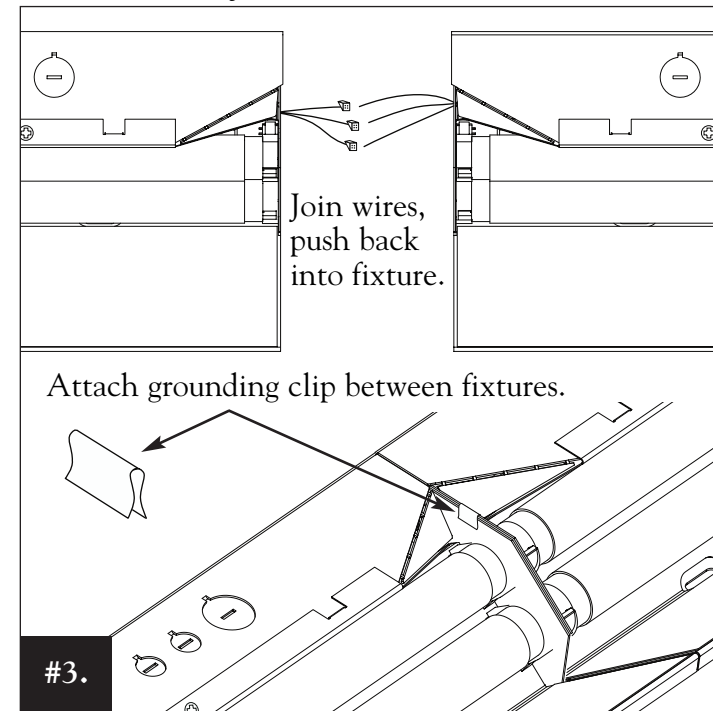


INSTALLATION DIRECTIONS S11

1. Prepare architectural cove that is at least 7.25" wide and 2.6" deep. Paint interior of cove matte white.
2. Lay fixtures in cove with flat edge of fixture against the wall of cove. Standard feed is on back, 4.5" from end of fixture.
3. **JOINING** - to join, pull wiring out of Starter and Joiner fixture and make electrical connections. Push wires back into either Starter or Joiner fixture and attach grounding clip (included) to hold fixtures so the endcaps are tightly together. Repeat for remaining Joiner fixtures.
4. **JOINING WITH CORNER HARNESS** - attach corner harness to one knockout hole in fixture end. Make electrical connections. Extend corner harness around corner and repeat on opposite end.
5. **MOUNTING** - Drive 2 screws securely for each 4' cove section. (Screws and backing as appropriate by contractor.)
6. **ELECTRICAL** - Use additional knockouts on top or ends and reposition feed wire as needed. Make electrical connection.


JOINING WITH HARNESS

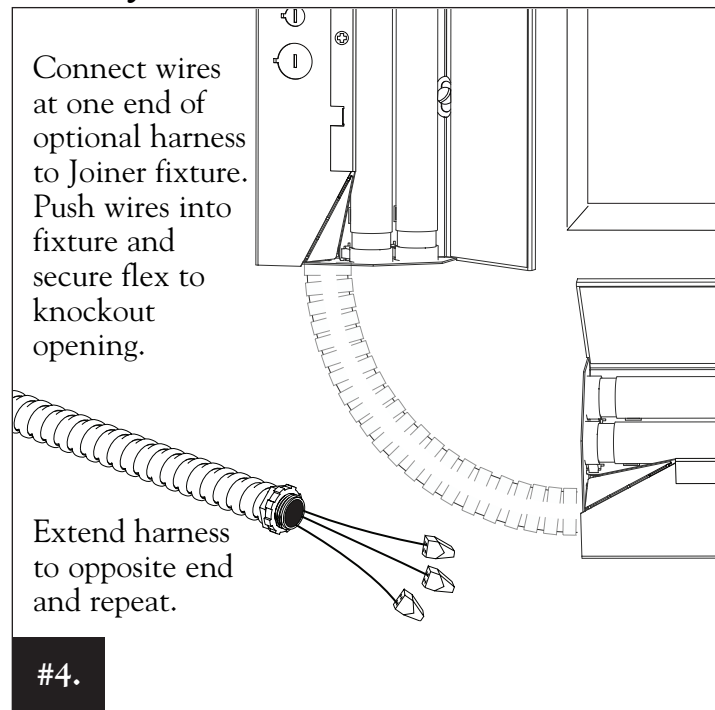

MOUNT TO COVE

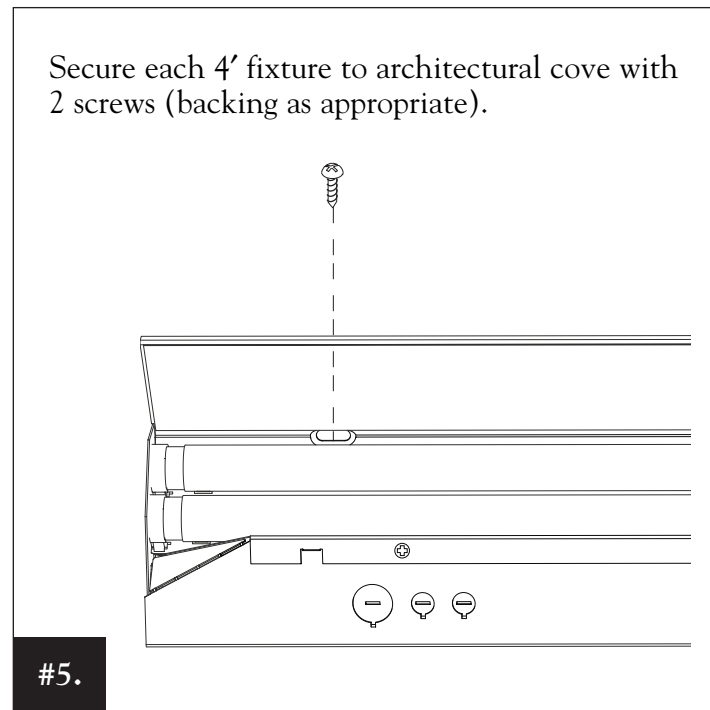

MAKE ELECTRICAL CONNECTION

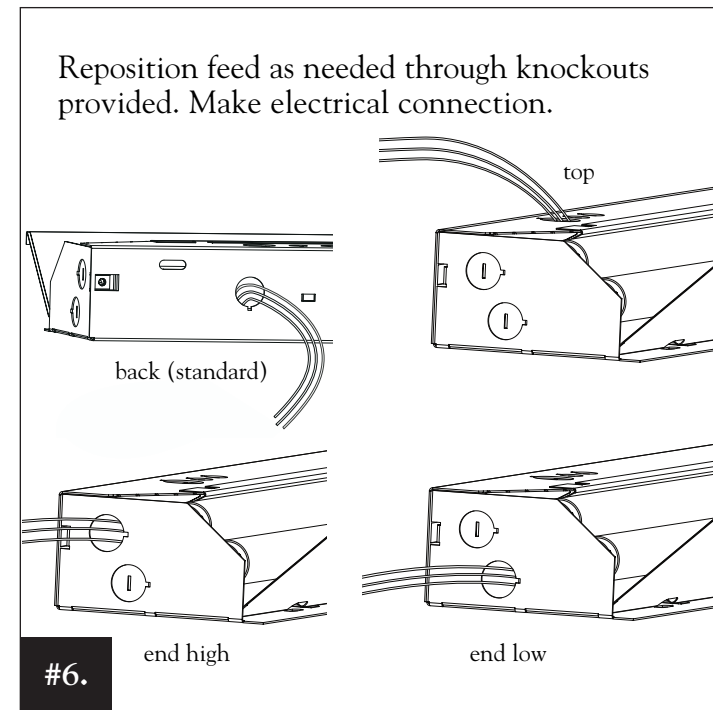

NOTE — All power connections to be installed to local/national codes by a Certified Electrician.

S11 Installation Instructions - Form 98035