

**ACTIVE
SAFETY**

SAFER • LESS EXPENSIVE • SUSTAINABLE

USA 800.657.6324

www.activesafety.com

Project:

Arch:

Catalog #:

Date:

Series 520

DOOR HANDLE MARKER



520 - 4" x 4"

PUSH TO OPEN

520 - 1" x 16"

Features

Viewing Distance: 25 feet
Color: Green Illuminating
Mounting: Flush Door Mount
Activation: 1 foot candle ambient lighting
Construction: Self-illuminating polystyrene laminate
Life Expectancy: Twenty-five years+
Attributes: Non-electrical, non-radioactive, explosion proof, low maintenance
Listing Reports: Compliant to UL 1994

Ordering Format (example: 520 – BL – 4 – PVC)


SERIES	MODEL	DIMENSIONS	BACKING
<u>520</u>	BL - Block	4 - 4" x 4"	PVC – Plastic with adhesive backing
<u>520</u>	ST - Strip	1 - 1" x 16" 2 - 2" x 16"	PVC – Plastic with adhesive backing

Features

Viewing Distance: 25 feet
Operating Life: 25+ years
Activation: 1 footcandle of fluorescent illumination
Marker Composition: Durable aluminum
Marker Color: Yellow-green illuminating
Mounting: Factory applied adhesive backing or client applied construction adhesive
Dimensions: Width: 1" - 2", length: 20 or 27 ft.
Features: Non-electric. Non-radioactive. No hazardous materials. Automatic operation. Easy installation onto a variety of substrates. Durable. Explosion-proof.
Warranty: Limited lifetime
Listings and Codes: UL 1994 listed. IBC, IFC & NFPA compliant

Series 530

Door and Handle Marker Kit

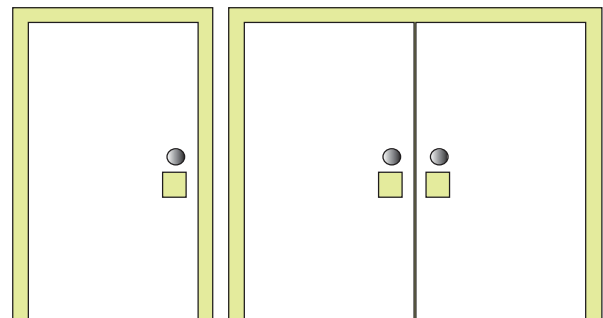

Ordering Format (example: 530 – AL – 1 – S)

SERIES	BACKING	WIDTH	LENGTH
<u>530</u>	PVC – Plastic with adhesive backing	1/2 – 1/2" 1 – 1.0"	S – single door 20ft D – double door 27ft