






ITEM	SPECIFICATION					
LIGHT SOURCE	5/FT					
COLOR TEMPERATURES	RGB (TRI-CHROMATIC)					
COLOR TOLERANCE	± 200					
CRI	80					
LUMEN MAINTENANCE	75,000 hrs L70	75,000 hrs L70				
ELECTRICAL	LINE VOLTAGE 120V OR 277V	Integral power supply for 120V OR 277V				
CONTROL	DMX Dimming					
PHYSICAL	HOUSING	Extruded aluminum housing, powder-coat finish				
	OPTICAL SYSTEM	Transparent acrylic: 8mm thickness, 4" H x 24", 36", 48", 96" OR 7.5" H x 24", 36", 48", 96"				
	DIMENSIONS	24" FIXTURE: 7-1/4" X 2-1/2" X 24-1/4" OR 10-3/4" X 2-1/2" X 24-1/4" 36" FIXTURE: 7-1/4" X 2-1/2" X 36-1/4" OR 10-3/4" X 2-1/2" X 36-1/4" 48" FIXTURE: 7-1/4" X 2-1/2" X 48-1/4" OR 10-3/4" X 2-1/2" X 48-1/4" 96" FIXTURE: 7-1/4" X 2-1/2" X 96-1/4" OR 10-3/4" X 2-1/2" X 96-1/4"				
	OPERATING TEMPERATURE	-20° C to 40° C				
CERTIFICATION		ETL and cETL approved for Dry Location Compliant made mush				
WARRANTY		5 YEAR LIMITED				
All PARALED® products are to	ested to IES LM-79-08	'				







PRD1_								
STEP 1 - FIXTURE (ORDERING INFORMATION			
Prefix	Wattage Watts /Ft	LED Color/CCT	Mounting	Fixture Length	Voltage/Wiring Method	Control Options	Finish	Options
PRDI4 ParaLED 4" Acrylic Blade PRDI7 ParaLED 7.5" Acrylic Blade Contact factory for exterior applications	COMI 3.5W IS SU	ASHRAE PLIANT IITABLE FOR LE 24	Single Fixtures SMS = Surface/Ceiling ACS = Aircraft Cable PNS-X = Pendant Mount * RCS = Recessed Available with PRD14 only (T-Grid ceiling & gypsum ceilings) SRS = Semi-Recessed Available with PRD17 only (T-Grid ceiling & gypsum ceilings) Multiple Fixture Runs SMM = Surface/Ceiling ACM = Aircraft Cable PNM-X = Pendant Mount *	24" 36" 48" 96"	INT1 = 120V integral power supply INT2 = 277V integral power supply	DMXFX = Fixture Resolution DMX CONTROLS MUST BE PURCHASED SEPARATELY	W Semi-Gloss White BL Semi-Gloss Black N Semi-Gloss Natural BR Semi-Gloss Bronze S Semi-Gloss Satin CC Custom Color Contact factory. Additional charges will apply	ILC = Indirect Lighting Component (MAX. = 6W/FT) SC = Swivel Canopy for Pendant Mount Custom Acrylic Etching & Custom Acrylic Shapes are available. Please contact factory for details.

 $[\]bullet \ \mathsf{All} \ \mathsf{Color} \ \mathsf{Changing} \ \mathsf{products} \ \mathsf{require} \ \mathsf{a} \ \mathsf{DMX} \ \mathsf{programmer} \ \mathsf{for} \ \mathsf{proper} \ \mathsf{mixing}. \ \mathsf{Must} \ \mathsf{order} \ \mathsf{separately}.$

	STEP 2 - ORDER DMX DISTRIBUTION & PROGRAMMING KIT					
CATALOG NUMBER	DESCRIPTION					
LPT	DMX PROGRAMMING TOOL One LPT is required for field re-addressing of factory DMX settings.					
CDS-A	DMX DISTRIBUTION KIT ONLY (4 OUTPUTS) CDS-A consists of four outputs. Each output accommodates up to 32 fixtures in INT/REM wiring methods and unlimted fixtures in ACV wiring method. Four terminators are included for use as required.					


[•] One LPT is required for field re-addressing of factory DMX settings. See below.




SMS - SURFACE MOUNT, SINGLE FIXTURE





PRDI4






PRDI7





Fixture Length	24"	36"	48"	96"
DIM. A	24-1/4"	36-1/4"	48-1/4"	96-1/4"
DIM. B	16"	16"	32"	64"

SMM - SURFACE MOUNT, MULTIPLE FIXTURE RUN





Fixture Length	24"	36"	48"	96"
DIM. A	24-1/4"	36-1/4"	48-1/4"	96-1/4"
DIM. B	16"	16"	32"	64"








ACS MOUNT - AIRCRAFT CABLE, SINGLE FIXTURE













Fixture Length	24"	36"	48"	96"
DIM. A	24-1/4"	36-1/4"	48-1/4"	96-1/4"
DIM. B	16"	16"	32"	64"

STANDARD 10' OF AIRCRAFT CABLE IS PROVIDED TO BE CUT TO DESIRED LENGTH IN THE FIELD.

ACM MOUNT - AIRCRAFT CABLE, MULTIPLE FIXTURE RUN

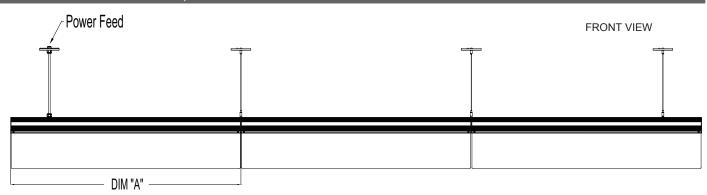



Fixture 36" 48" 96" Length DIM. A 24-1/4" 36-1/4" 48-1/4" 96-1/4" DIM. B 20-1/8" 26-1/8" 40-1/8" 80-1/8" DIM. C 24-1/4" 36-1/4" 48-1/4" 96-1/4"

IInsight Lighting www.insightlighting.com September 19, 2016 11:06 AM







PNS - PENDANT, SINGLE FIXTURE





PRDI4






PRDI7






Fixture Length	24"	36"	48"	96"
DIM. A	24-1/4"	36-1/4"	48-1/4"	96-1/4"
DIM. B	16"	16"	32"	64"

PNM - PENDANT, MULTIPLE FIXTURE RUN

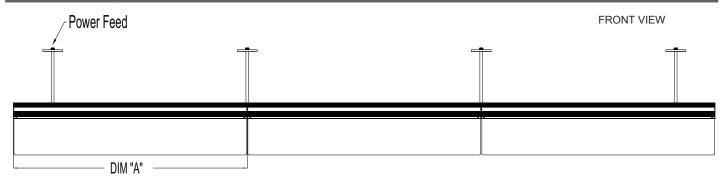


TOP VIEW





Fixture Length	24"	36"	48"	96"
DIM. A	24-1/4"	36-1/4"	48-1/4"	96-1/4"
DIM. B	20-1/8"	26-1/8"	40-1/8"	80-1/8"
DIM. C	24-1/4"	36-1/4"	48-1/4"	96-1/4"




RCS MOUNT - RECESSED, SINGLE FIXTURE









SRS MOUNT - SEMI RECESSED, SINGLE FIXTURE

