

DecoLED Fin 60



DecoLED Wedge 60



DecoLED Fin 120



DecoLED Wedge 120



DecoLED Fin 300







DecoLED Wedge 300



Pendant Mount, Single Fixture




Pendant Mount, Twin Fixture


SPECIFICATION					
OPTICS		ASYMMETRIC			
	COLOR TEMPERATURE	3000K, 3500K, 4000K			
OUTPUT	LUMENS & EFFICACY	WATTAGE	CERTIFICATION	LUMENS	EFFICACY (lm/W)
		60W 120W 300W	DRY DRY DRY	5688 lm 12220 lm 27239 lm	95.4 lm/W 101.0 lm/W 103.0 lm/W
	LUMEN MAINTENANCE	L70 AT 25° C, MINIMUM 75,000 HOURS			
ELECTRICAL	POWER SUPPLY	Integral within the fixture housing			
	INPUT VOLTAGE	120V to 277V			
	POWER CONSUMPTION	60W = 59.6 W 120W = 120.7 W 300W = 263.7 W			
	AMBIENT TEMPERATURE	DecoLED is rated for use in ambient temperatures not to exceed 40°C (104°F).			
PHYSICAL	HOUSING	Formed steel or aluminum, treated Powder-coat painted finish			
	LENS	Standard: Clear lighting grade acrylic Natatorium: Sealed light engines and electrical components for use in Natatorium applications			
CERTIFICATION		ETL and cETL approved for Dry and Damp Location    			
WARRANTY	5 YEAR	Limited			
Lumen measurement tested in accordance with IES LM-79-08					

ORDERING INFORMATION						
Prefix	Wattage	Color Temperature	Mounting	Power Supply	Finish	Options
DFLED = DecoLED Fin DWLED = DecoLED Wedge	60	30K 35K 40K	WM = Wall Mount AWM = Adjustable Wall PN-X = Pendant, Single Fixture T22-X = Pendant, Twin Fixture	INT-1 = 120V Integral Power Supply INT-2 = 277V Integral Power Supply IDIM-1 = 120V Integral (0-10V) Dimming Power Supply IDIM-2 = 277V Integral (0-10V) Dimming Power Supply	W = Semi-Gloss White BL = Semi-Gloss Black N = Semi-Gloss Natural BR = Semi-Gloss Bronze S = Semi-Gloss Satin CC = Custom Color ^① ^① Contact factory. Additional charges may apply.	NAT = For use in Natatorium Applications (ETL and cETL approved for Damp Location) CM-X = Column Mount X = Column diameter. Contact factory for minimum column diameter. PMF = Panel Mount Fuse
DFLED = DecoLED Fin DWLED = DecoLED Wedge	120	30K 35K 40K	WM = Wall Mount AWM = Adjustable Wall PN-X = Pendant, Single Fixture T22-X = Pendant, Twin Fixture	INT-1 = 120V Integral Power Supply INT-2 = 277V Integral Power Supply IDIM-1 = 120V Integral (0-10V) Dimming Power Supply IDIM-2 = 277V Integral (0-10V) Dimming Power Supply	W = Semi-Gloss White BL = Semi-Gloss Black N = Semi-Gloss Natural BR = Semi-Gloss Bronze S = Semi-Gloss Satin CC = Custom Color ^① ^① Contact factory. Additional charges may apply.	NAT = For use in Natatorium Applications (ETL and cETL approved for Damp Location) CM-X = Column Mount X = Column diameter. Contact factory for minimum column diameter. PMF = Panel Mount Fuse
DFLED = DecoLED Fin DWLED = DecoLED Wedge	300	30K 35K 40K	WM = Wall Mount AWM = Adjustable Wall PN-X = Pendant, Single Fixture T22-X = Pendant, Twin Fixture	INT-1 = 120V Integral Power Supply INT-2 = 277V Integral Power Supply IDIM-1 = 120V Integral (0-10V) Dimming Power Supply IDIM-2 = 277V Integral (0-10V) Dimming Power Supply	TW = Textured White TBL = Textured Black TN = Textured Natural TBR = Textured Bronze TLB = Textured Light Bronze TS = Textured Sandstone CC = Custom Color ^① ^① Contact factory. Additional charges may apply.	NAT = For use in Natatorium Applications (ETL and cETL approved for Damp Location) CM-X = Column Mount X = Column diameter. Contact factory for minimum column diameter. PMF = Panel Mount Fuse

WM - WALL MOUNT, DECO FIN 60W

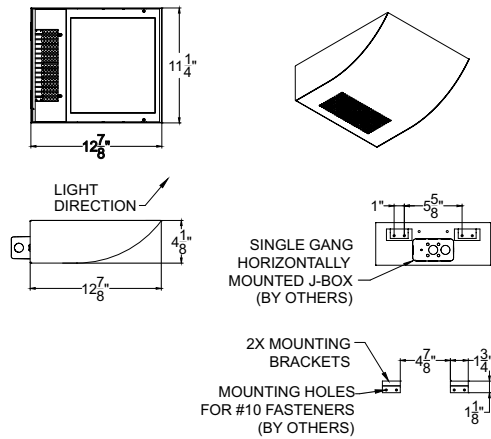


WM - WALL MOUNT DECO WEDGE 60W

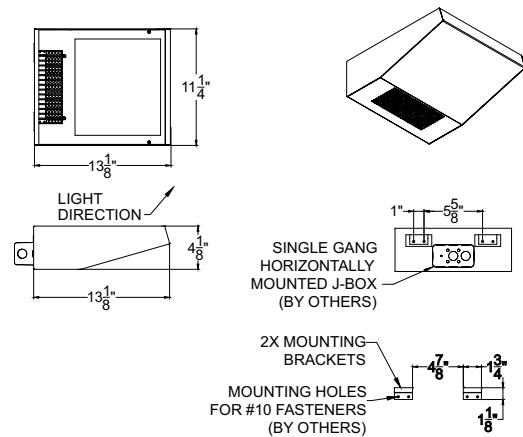


MOUNTING DIMENSIONS

WM - WALL MOUNT, DECO FIN 120W

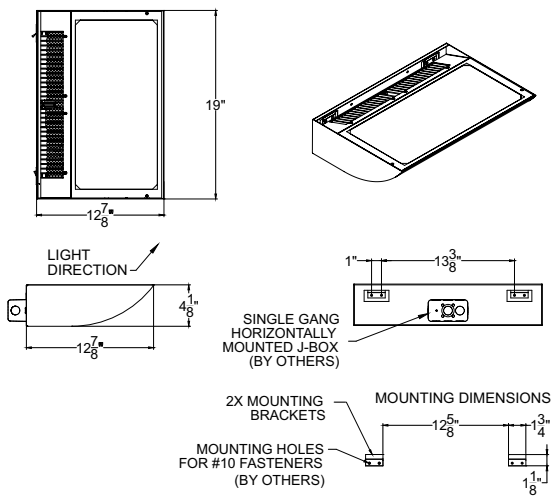


WM - WALL MOUNT DECO WEDGE 120W

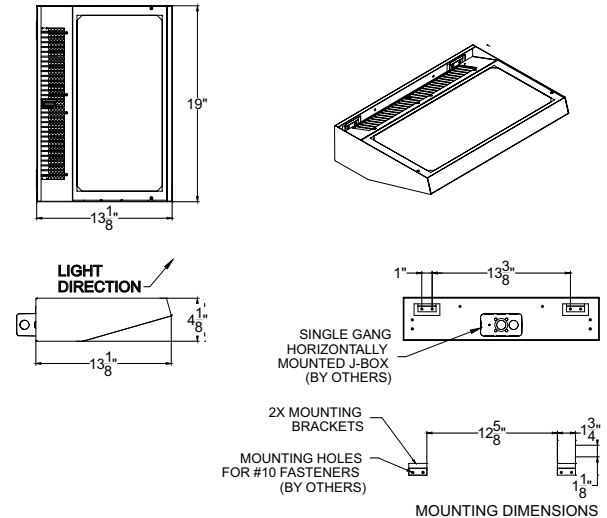


MOUNTING DIMENSIONS

WM - WALL MOUNT, DECO FIN 300W

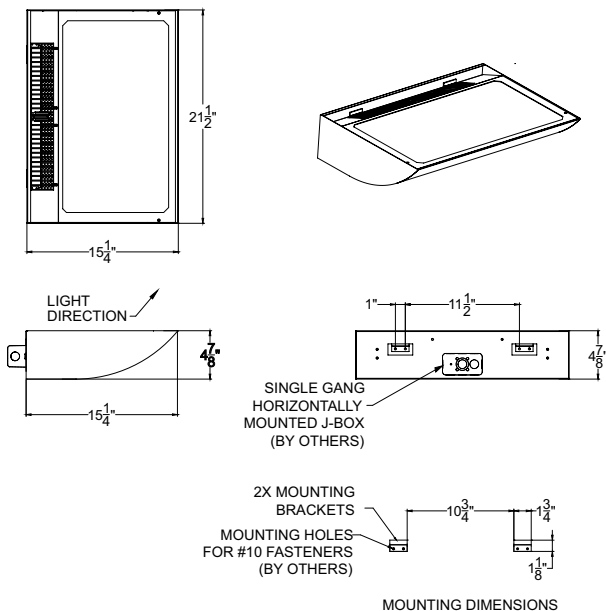


WM - WALL MOUNT DECO WEDGE 300W

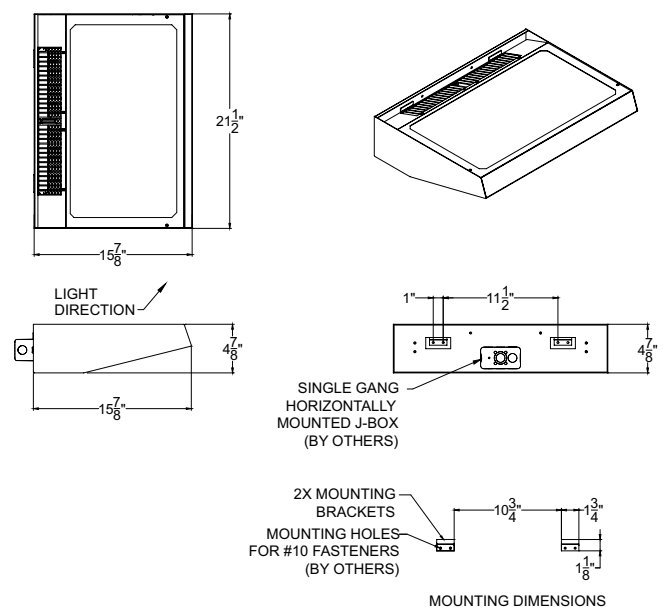


MOUNTING DIMENSIONS


AWM - ADJUSTABLE WALL MOUNT, DECO FIN 60W

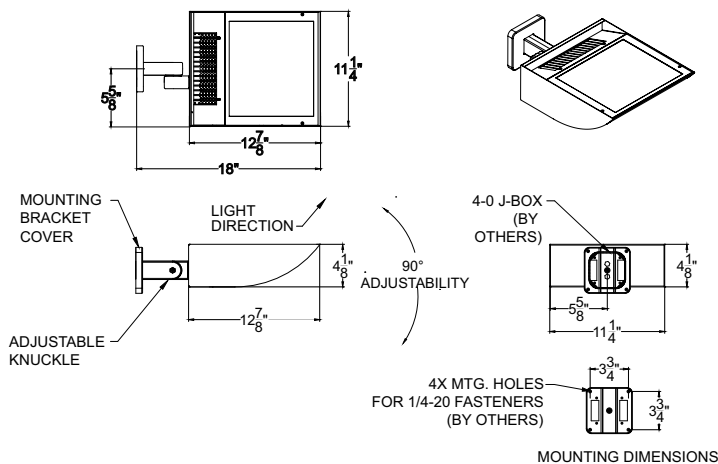


AWM - ADJUSTABLE WALL MOUNT, DECO WEDGE 60W

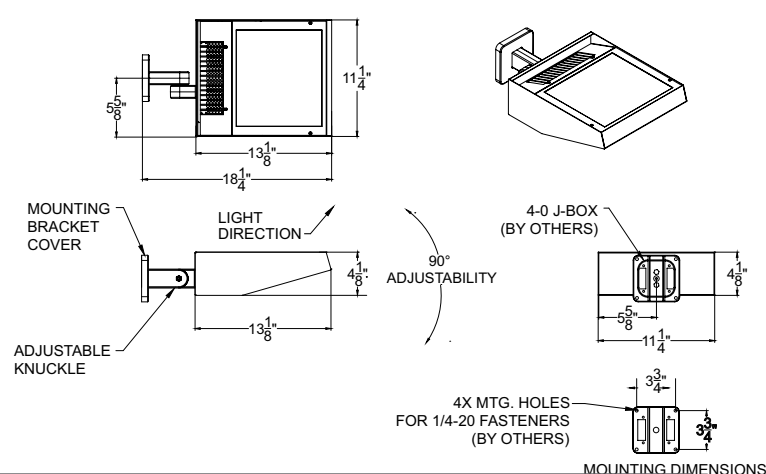


AWM - ADJUSTABLE WALL MOUNT, DECO FIN 120W

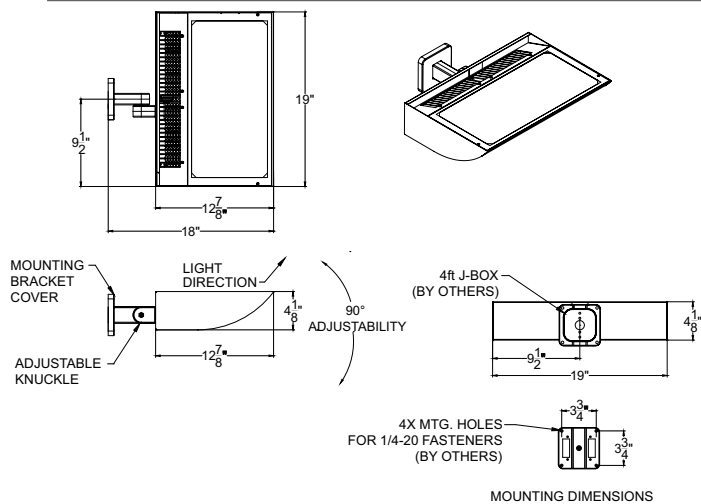


AWM - ADJUSTABLE WALL MOUNT, DECO WEDGE 120W

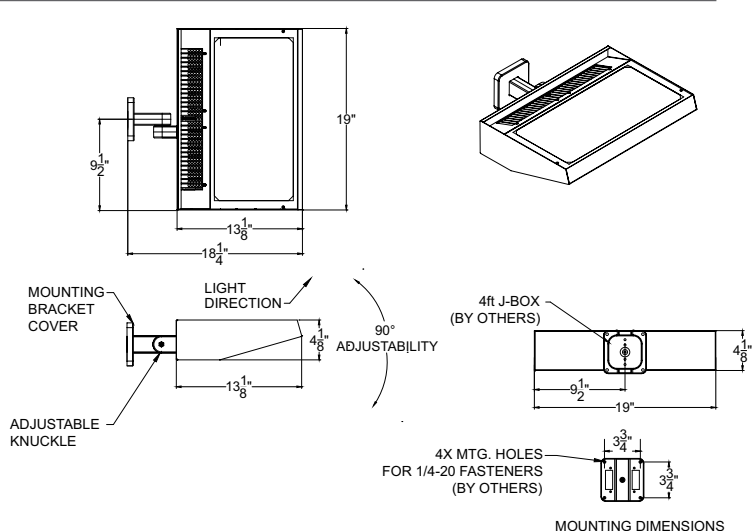


AWM - ADJUSTABLE WALL MOUNT, DECO FIN 300W

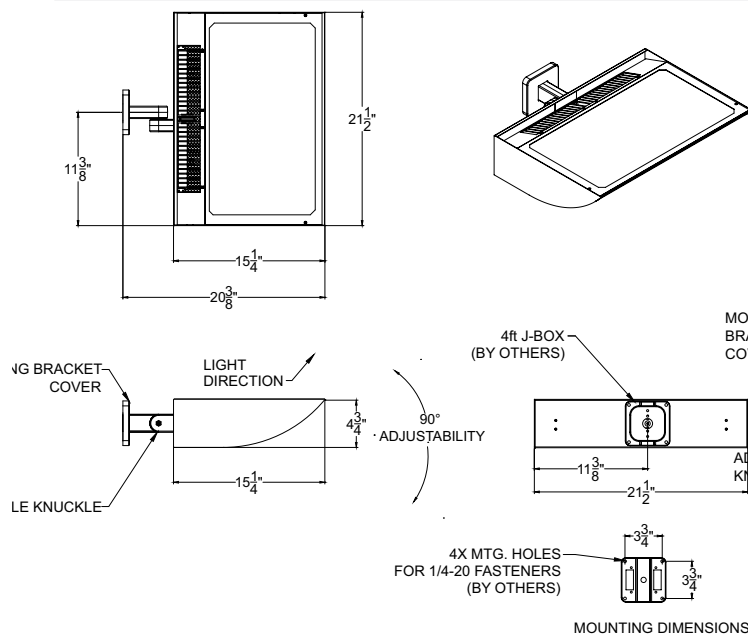


AWM - ADJUSTABLE WALL MOUNT, DECO WEDGE 300W

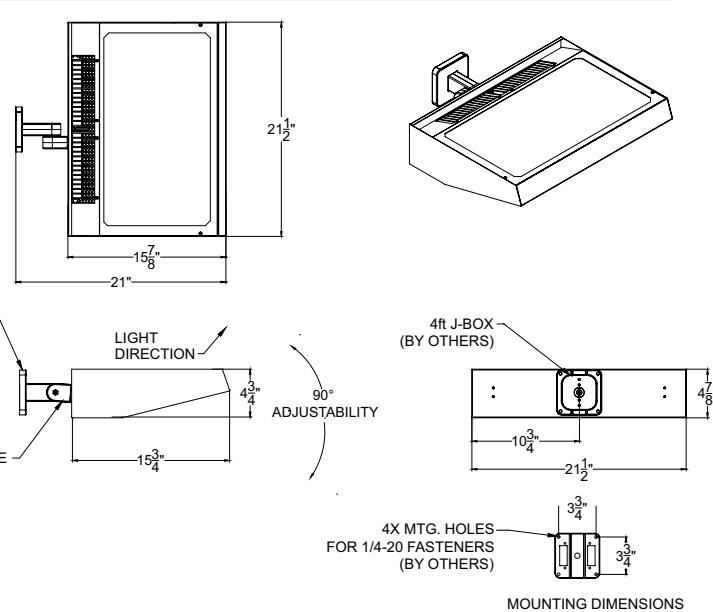


PN - PENDANT MOUNT, DECO FIN 60W

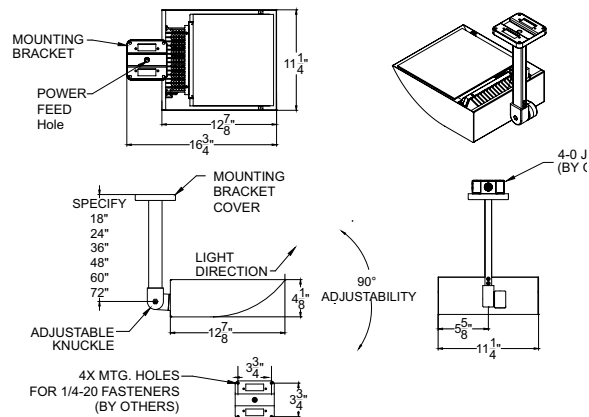


PN - PENDANT MOUNT, DECO WEDGE 60W

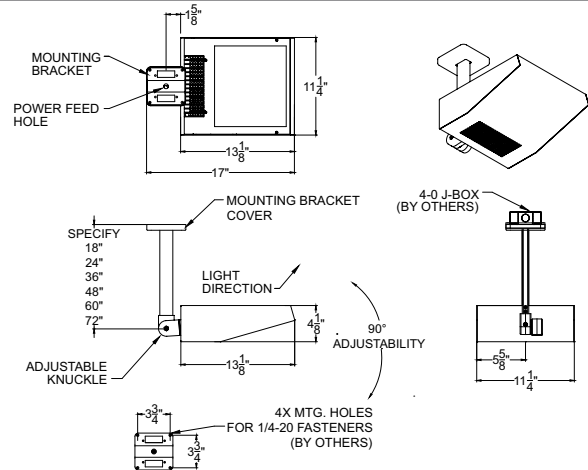


PN - PENDANT MOUNT, DECO FIN 120W

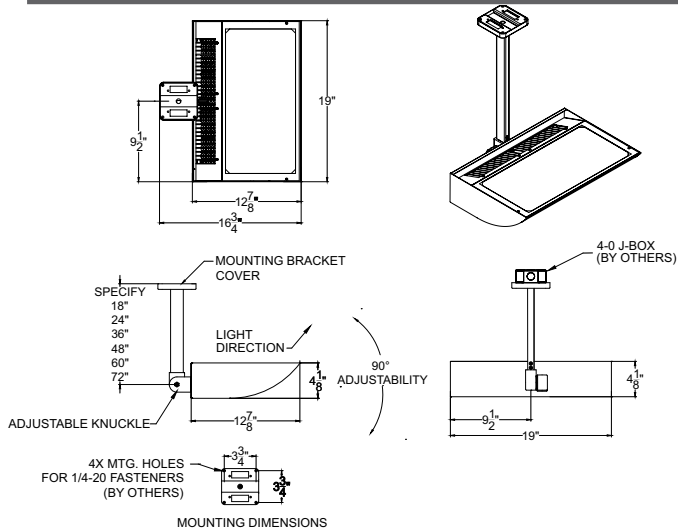


PN - PENDANT MOUNT, DECO WEDGE 120W

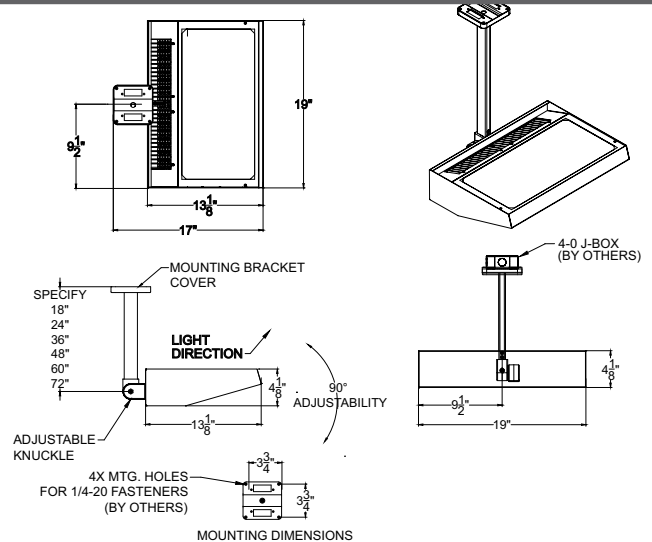


PN - PENDANT MOUNT, DECO FIN 300W

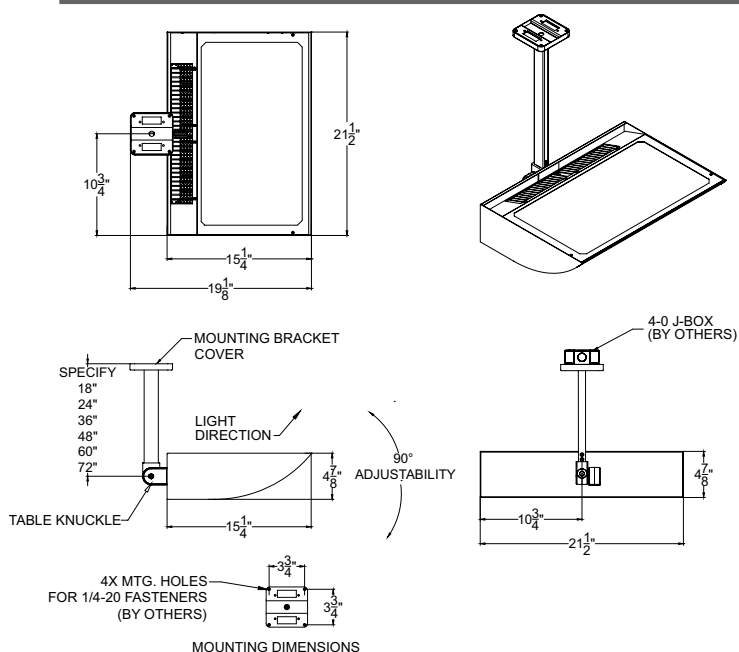


PN - PENDANT MOUNT, DECO WEDGE 300W

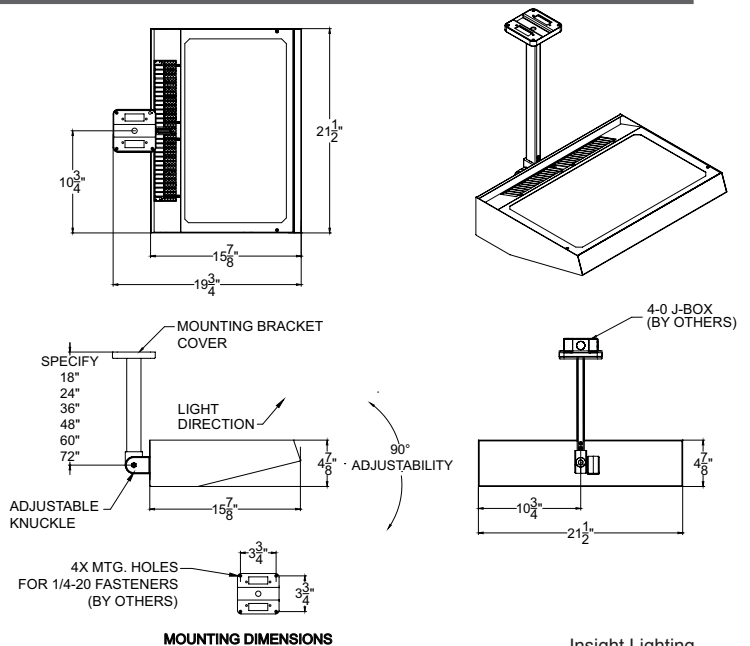


T22 - PENDANT - TWIN FIXTURE, DECO FIN 60W

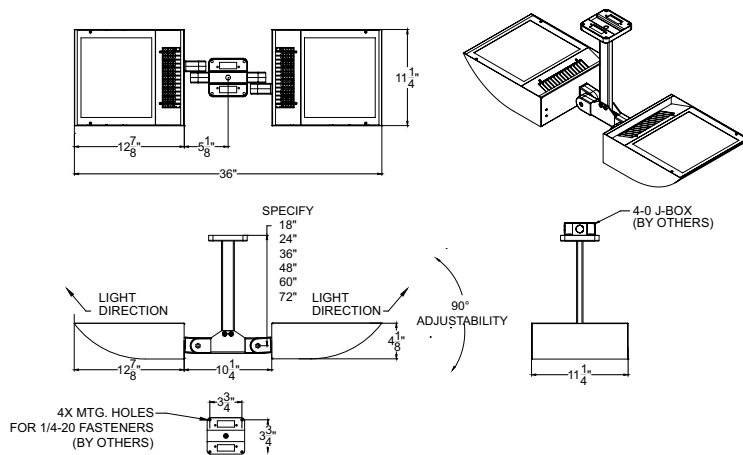


T22 - PENDANT - TWIN FIXTURE, DECO WEDGE 60W

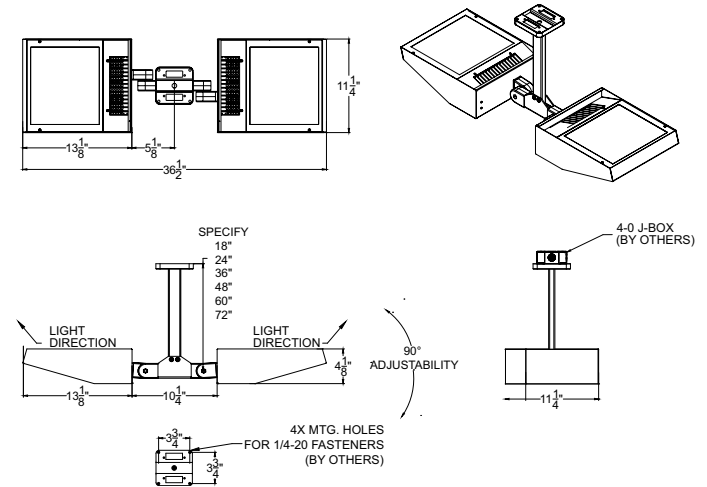


T22 - PENDANT - TWIN FIXTURE, DECO FIN 120W

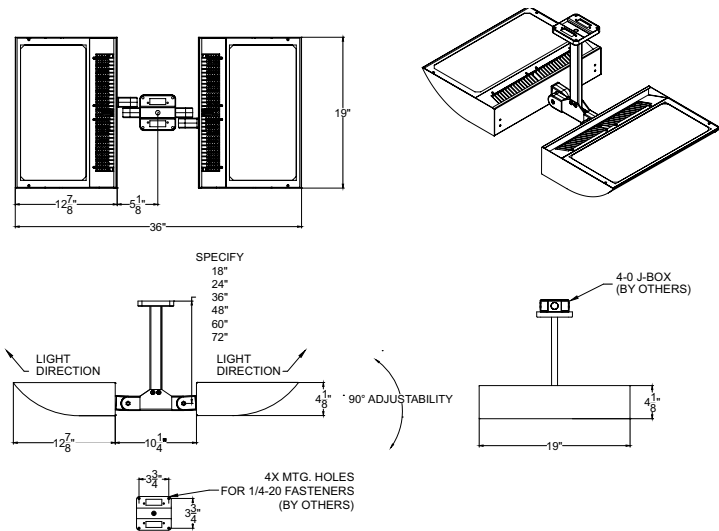

T22 - PENDANT - TWIN FIXTURE, DECO WEDGE 120W

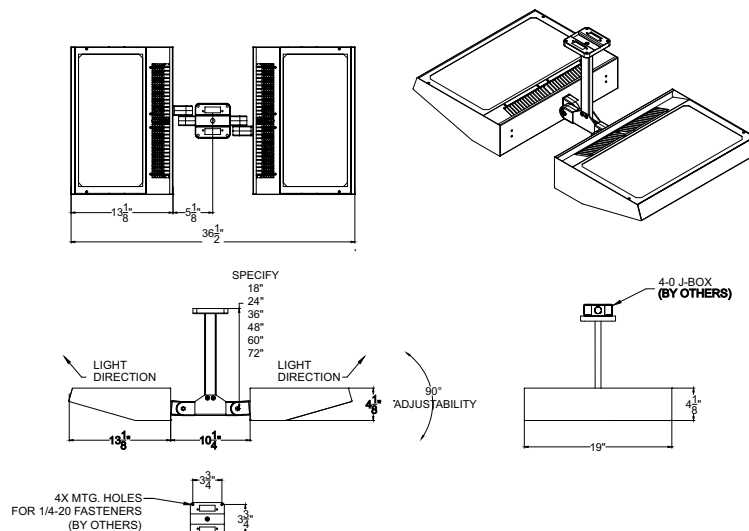

T22 - PENDANT - TWIN FIXTURE, DECO FIN 300W

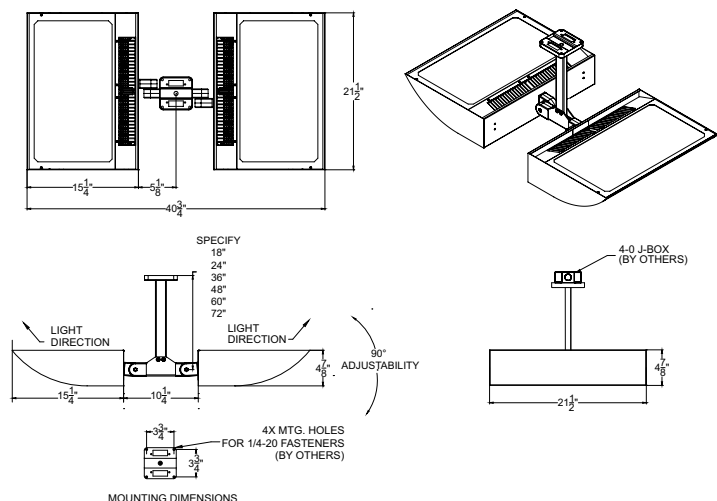

T22 - PENDANT - TWIN FIXTURE, DECO WEDGE 300W

