

CB3472 – FAIRFAX™



Type: Project:

VisaLighting.com/products/Fairfax

Fill in shaded boxes using information listed below

Order Code: **CB3472**
MODEL

A SOURCE **B** VOLTAGE **C** FINISH **D** DIFFUSER OPTION **E** OPTION(S)




This complete family includes pendants, flush mount ceiling units, and wall sconces that boast an elegant, classic trim. The luminous acrylic and traditional detailing enhance a wide range of architectural settings and styles.

DIMENSIONS

W = Width H = Height D = Depth MC = Mounting Center

W	19"	(483 mm)
H	9"	(229 mm)
D	9-1/2"	(241 mm)
MC	3-7/8"	(98 mm)



A SOURCE (Select one) B VOLTAGE

MVOLT fixture accepts 120 through 277 input voltage

Fluorescent and Incandescent Sources		Voltage
2LF13	13w twin tube 4-pin, 2GX7 base, FLR	Select MVOLT
2QF26	26w quad, 4-pin G24q-3 base, FLR	Select MVOLT or 347V
2TF26	26w triple, 4-pin GX24q-3 base, FLR	
2N60	60w, A-19, medium base, INC	120V

C FINISHES (Select one Trim Finish)

See page 2 for color chart

Powder Coat Painted Finishes (Standard)

AG7038	Agate Grey	CVBL	Cove Blue	GW9002	Grey White	PB1035	Pearl Beige
BMAT	Bronze Matte	CW9001	Cream White	HTHR	Heather	RUST	Rust
BRNZ	Bronze	GLIM	Glimmer	JB9005	Jet Black	SUNG	Sungold
BSIL	Blade Silver	GSIL	Graphite Silver	OBRZ	Old Bronze	TW9016	Traffic White

Metal Finishes (Premium)

BA	Brushed Aluminum	BCB	Brushed Chrome	PB	Polished Brass
BB	Brushed Brass	CB	Polished Chrome	SN	Satin Nickel

D DIFFUSER OPTION

Diffuser is matte white acrylic unless ABA option is selected

- ABA** Hand Painted Alabaster Alternative

E OPTIONS (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Voltage, Source or Other Options

- DCC** Damp clear coat for metal finishes
- DIM(A)** Advance Mark 10 fluorescent dimming specify 120V or 277V, not available with LF13
- FUSE** Fluorescent fusing, specify 120V or 277V
- MRI** MRI room application, incandescent only
- RB** Pre-ship recessed components (XEM junction box)
- REM** Remote emergency battery pack for fluorescent, not available with 347V
- TL** Top lens, tempered prismatic glass (not available with dimming)
- XEM** Emergency battery pack mounted in provided recessed box for fluorescent (replaces standard junction box), not available with 347V
- XPS** Express 10 day shipping. Items marked with a bullet (●) are not available with XPS



XPS



ETL Listed




5 Year Warranty

CB3472 – FAIRFAX™




Photometrics



Technical Information


- High power factor electronic ballast (fluorescent)
- MRI option allows use in magnetic resonance imaging (MRI) rooms (incandescent)
- Easy tool-less relamping
- Mounts to standard electrical junction box (by others) with provided hardware
- XEM option replaces standard junction box with proprietary junction box. The XEM junction box is available as a ship-ahead component for rough-in if needed
- Heavy gauge spun metal trim
- Thermally formed 1/8" thick white acrylic diffuser with matte finish
 - ◆ UV stable
 - ◆ UL-94 HB Flame Class rated
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications

Relative Scale Drawing

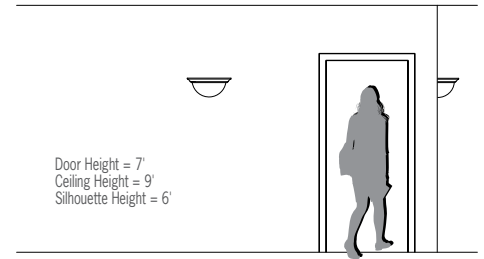


Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For additional information see VisaLighting.com/materials-finishes

Painted Finishes (Standard)

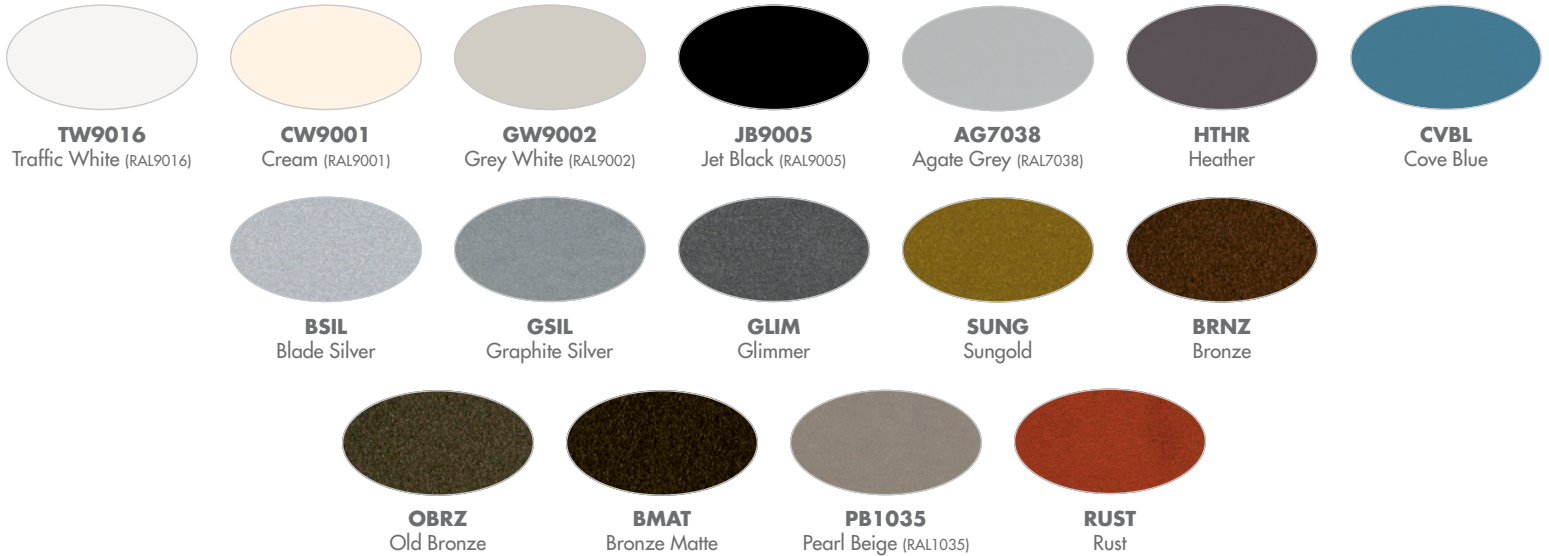

Metal Finishes (Premium)

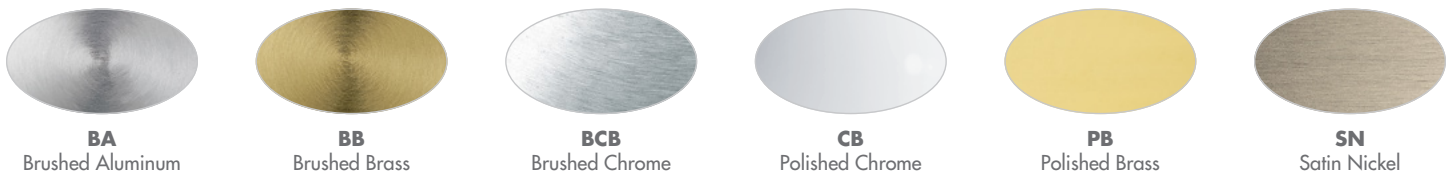

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved.