

**CP4210 – FAIRFAX™**  
27" Bowl, Stem Suspension



Type: Project:

[VisaLighting.com/products/Fairfax](http://VisaLighting.com/products/Fairfax)

Fill in shaded boxes using information listed below

Order Code: **CP4210**  
MODEL

**A** SOURCE      **B** VOLTAGE      **C** FINISH      **D** DIFFUSER      **E** OPTION(S)      **F** OAH



35" Bowl Depicted

This complete family includes pendants, flush mount ceiling units, and wall sconces that boast an elegant, classic trim. The luminous acrylic and traditional detailing enhance a wide range of architectural settings and styles.


**DIMENSIONS**

W = Width      OAH = Overall Height  
X = Body Height      NBS = Nominal Bowl Size

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(36) indicates an overall fixture height of 36"

**F** **⚠** OAH must be specified

W 26-1/2" (673 mm)  
OAH 25" (635 mm)  
X 7" (178 mm)  
NBS 23x5" (584x127 mm)



**A** SOURCE (Select one Uplight-Bodylight combination) **B** VOLTAGE (Select one)

MVOLT fixture accepts 120 through 277 input voltage

Fluorescent Sources		Voltage
<b>4F39-2FCS40/22</b>	Uplight - (4) 39w long twin tube, 2G11 base Bowl Light - (1) 40w and (1) 22w T5 Circular, 2GX13 base	Select <b>MVOLT, 120V or 277V</b>
<b>4TF26-2FCS40/22</b>	Uplight - (4) 26w triple, 4-pin GX24q-3 base Bowl Light - (1) 40w and (1) 22w T5 Circular, 2GX13 base	Select <b>MVOLT, 120V, 277V or 347V</b>
<b>4TF32-2FCS40/22</b>	Uplight - (4) 32w triple, 4-pin GX24q-3 base Bowl Light - (1) 40w and (1) 22w T5 Circular, 2GX13 base	
<b>4TF42-2FCS40/22</b>	Uplight - (4) 42w triple, 4-pin GX24q-4 base Bowl Light - (1) 40w and (1) 22w T5 Circular, 2GX13 base	

**C** FINISHES (Select one Trim Finish)

See page 3 for color chart

Powder Coat Painted Finishes (Standard)

<b>AG7038</b> Agate Grey	<b>CVBL</b> Cove Blue	<b>GW9002</b> Grey White	<b>PB1035</b> Pearl Beige
<b>BMAT</b> Bronze Matte	<b>CW9001</b> Cream White	<b>HTHR</b> Heather	<b>RUST</b> Rust
<b>BRNZ</b> Bronze	<b>GLIM</b> Glimmer	<b>JB9005</b> Jet Black	<b>SUNG</b> Sungold
<b>BSIL</b> Blade Silver	<b>GSIL</b> Graphite Silver	<b>OBRZ</b> Old Bronze	<b>TW9016</b> Traffic White

Metal Finishes (Premium)

<b>BA</b> Brushed Aluminum	<b>BUA</b> Brushed Copper Alternative	<b>PRA</b> Pewter Alternative
<b>BB</b> Brushed Brass	<b>BZA</b> Brushed Bronze Alternative	<b>RBA</b> Rustic Brass Alternative
<b>BBA</b> Brushed Brass Alternative	<b>CB</b> Polished Chrome	<b>SN</b> Satin Nickel
<b>BCA</b> Brushed Chrome Alternative	<b>OBA</b> Oil-Rubbed Bronze Alternative	<b>SNA</b> Satin Nickel Alternative
<b>BCB</b> Brushed Chrome	<b>PB</b> Polished Brass	

**D** DIFFUSER OPTION

Diffuser is matte white acrylic unless ABA option is selected

- ABA** Hand Painted Alabaster Alternative

Options continued on Page 2



XPS



ETL Listed



5 Year Warranty

## CP4210 – FAIRFAX™

### 27" Bowl, Stem Suspension



Options continued

#### AF Option




#### **E** OPTIONS (Multiple Selections Allowed)

**▲** Option availability may be interdependent with Voltage, Source or Other Options

- AF** Add Finial. Addition of **AF** option increases X dimension (height) by 1-1/8"
- BRD** Batwing reflector distribution (**F39** only)
- DCC** Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
- FUSE** Fusing, specify 120V or 277V
- REM** Remote emergency battery pack, not available for 347V
- **TL** Top lens, tempered prismatic glass
- XPS** Express 10 day shipping. Items marked with a bullet (•) are not available with XPS


#### Photometrics

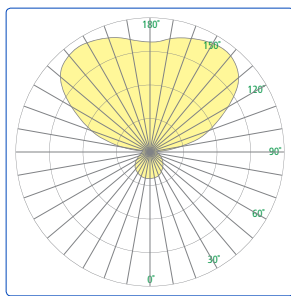

#### Technical Information

- Uplight and bowl light separated for optical performance and wired for discrete operation
- High power factor electronic ballast
- Wide reflector distribution is standard; optional batwing distribution
- Easy tool-less relamping
- Mounts to standard electrical junction box (by others) with provided hardware for sloped ceiling up to 45 degrees from horizontal
- Spun metal trim
- Thermally formed 1/8" thick white acrylic diffuser with matte finish
  - ◆ UV stable
  - ◆ UL-94 HB Flame Class rated
- No VOC powder coat paint; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications

#### Relative Scale Drawing

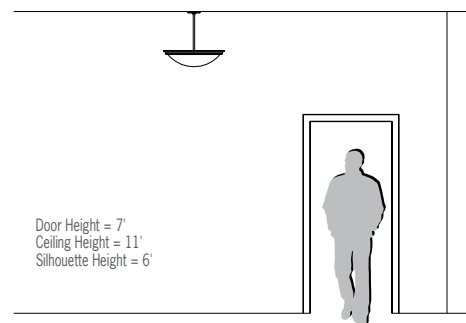


**CP4210 – FAIRFAX™**  
27" Bowl, Stem Suspension



Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#)  
For additional information see [VisaLighting.com/materials-finishes](http://VisaLighting.com/materials-finishes)

**Painted Finishes (Standard)**

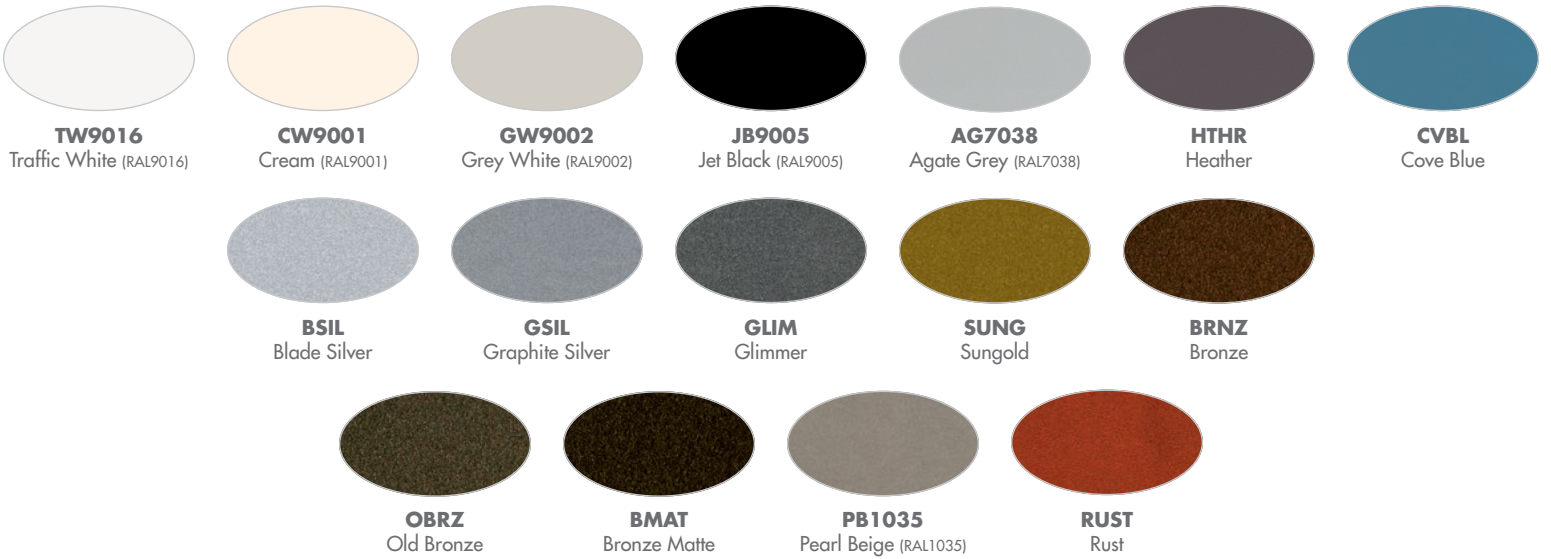

**Metal Finishes (Premium)**

