



the future is safer with altro


Altro Atlas™ 40



Robust safety flooring suitable for heavy industrial and commercial kitchens

- 4mm thick
- 6'7" width
- 41' length
- sheet format



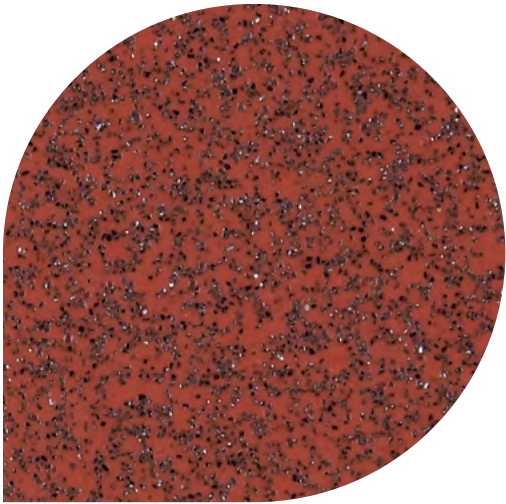

Quarry Red

X4060 LRV: 13


WR42 / AM42



Walnut

X4086 LRV: 10


WR62 / AM62



Pewter Grey

X4039 LRV: 26

WR81 / AM81



Anvil

X4094 LRV: 11




WR101 / AM72



Typical applications

Machine shops, chemical processing areas, heavy duty cart areas, 24/7 commercial kitchens

Slip resistance

Static coefficient of friction		ASTM D2047	.70 dry, .70 wet
Ramp test		DIN 51130	R10
TRRL pendulum test		BS 7976	36+

Specifications

Thickness	4.0mm .16"		
Roll dimensions	6'7" x 41' 2.0m x 12.5m		
Weight	9.95 lbs./yd ² 5.4 kg/m ²		
Wear layer	4.0mm .16"		
Cleaning technology		Altro Easyclean Original	
Warranty		15 years	
Sound insulation		ISO 140-8	7dB
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
VOC emissions		CA 01350 FloorScore	Pass Certified
Bio-based content		This product is manufactured with bio-based content.	
Recycled content		This product contains 10% post-consumer recycled content	
Composition	Silicon carbide, aluminum trioxide and colored quartz aggregate throughout thickness of PVC. Altro Easyclean Original Technology incorporated for cleanability.		
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install, heat weld, and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats . Please conduct stain test before installation.		

Altro, the future is safer with Altro, Altro Atlas 40, and Altro Easyclean Original are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.

© Copyright Altro USA 2016







LEED facts

LEED v4




This product may help contribute to the following credits:

Altro Atlas 40 total qualifying credits **8**

	Materials and resources 10% post-consumer recycled content	1
	Materials and resources Rapidly renewable bio-based content	1
	Materials and resources Environmental product declaration (EPD)	1
	Materials and resources Health product declaration (HPD)	1
	Environmental quality Low emitting materials, flooring CA 01350	3
	Environmental quality Low emitting materials, adhesives	1

For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit altrofloors.com/sustainability

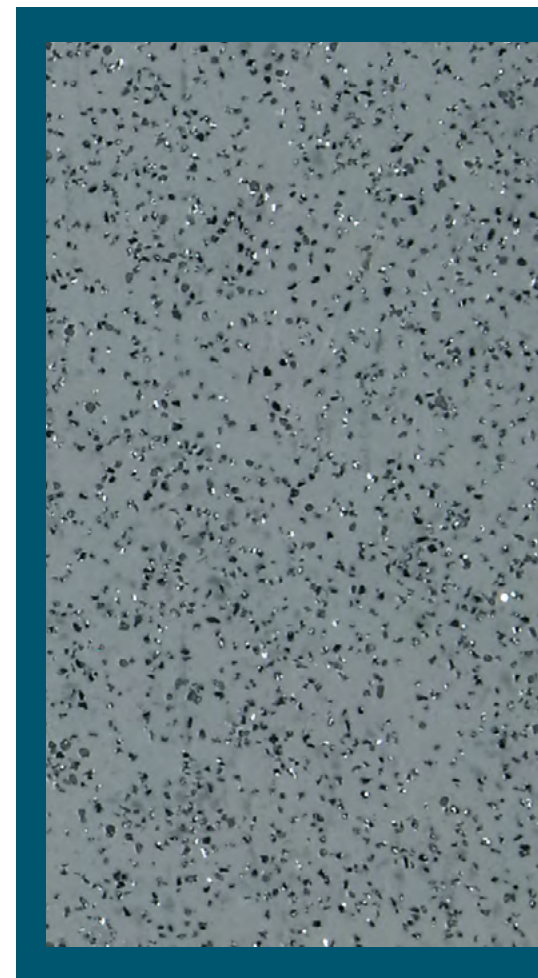

Color shown: Pewter Grey X4039

