




Designed for possibilities.
Made for people.

Altro Cantata™

The next evolution in smooth, adhesive-free, commercial flooring

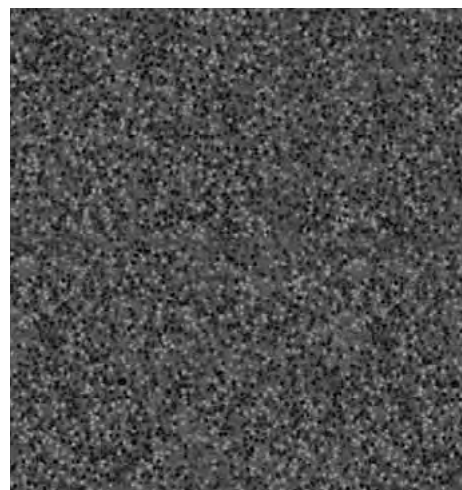

discover [altro.com](https://www.altro.com)


LITERATURE>DATASHEET

2.2mm
thick

6'7"
width

66'
length


sheet
format




Swan Lake CA2206
WR417 / AM417 LRV 13



Bridgadoon CA2210
WR389 / AM389 LRV 38




Butterfly CA2207
WR421 / AM421 LRV 31




Cabaret CA2205
WR391 / AM82 LRV 15




Carmen CA2214
WR420 / AM152 LRV 36



Carousel CA2208
WR416 / AM302 LRV 17




Chicago CA2203
WR390 / AM390 LRV 29




Cinderella CA2202
WR415 / AM415 LRV 47




Evita CA2209
WR385 / AM385 LRV 49




Firebird CA2215
WR393 / AM393 LRV 22




Jersey CA2213
WR419 / AM348 LRV 11



Midsummer CA2204
WR398 / AM398 LRV 25




Nutcracker CA2212
WR418 / AM239 LRV 23



Tosca CA2211
WR387 / AM387 LRV 32



West Side CA2201
WR388 / AM388 LRV 47



Wicked CA2216
WR399 / AM399 LRV 37



Altro Cantata

Adhesive-free, smooth sheet vinyl

Slip resistance

Static coefficient of friction		ASTM D2047	greater than .6
Ramp test		DIN 51130	R10

Specifications

Thickness	2.2mm .087"		
Roll dimensions	6'7" x 66' 2.0m x 20m		
Weight	4.79 lbs./yd ² 2.6 kg/m ²		
Wear layer	.8mm		
Cleaning technology		Altro Easyclean	
Warranty		10 years	
Static load limit		ASTM F970	2000 psi
Sound insulation		ISO 140-8	7dB
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
VOC emissions		CA 01350 FloorScore	Pass Certified
Bio-based content		Manufactured with rapidly renewable bio-based content.	
Recycled content		Contains 5% post-consumer recycled content.	
Composition	Heterogeneous PVC with glass fiber reinforcement scrim between the top layer of PVC and backing.		
Backing	Embossed PVC backing.		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install, heat weld, and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		

Altro, Altro Cantata and Altro Easyclean are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.
© Copyright Altro USA 2017

LEED facts



LEED v4

This product may help contribute to the following credits

Altro Cantata

7



Materials and resources
Contains recycled content

1



Materials and resources
Renewable bio-based content

1



Materials and resources
Environmental product declaration

1



Materials and resources
Health product declaration

1



Environmental quality
Low emitting materials, flooring

3

Discover more of our sustainability story and credentials at altro.com/sustainability

Follow us



USA 800 377 5597

CANADA 800 565 4658

support@altrofloors.com

www.altro.com