STAINLESS STEEL TORQUE HINGE

NO SCREW

SFTH

- Hinge with friction torque holds lid/door in desired position.
- Stainless steel construction for corrosive environments.
- Operating temperature: -20˚C~60˚C (-4˚F~140˚F)



Applicable torque range



SFTH-02

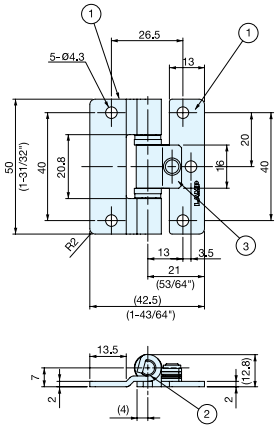

SFTH-03

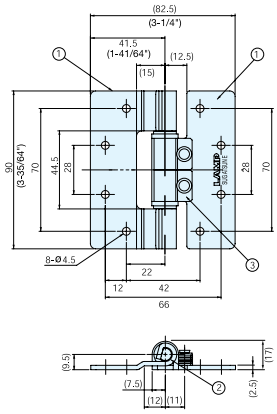

SFTH-05

Item No.	Torque per piece (kgf·cm)	Weight (g)	Box (pcs)	Carton (pcs)
SFTH-02- 5	5 (4.3 lbs·in) ±1 kgf·cm	21	50	500
SFTH-03- 9	9 (7.8 lbs·in) ±2 kgf·cm	51	30	300
SFTH-03-19	19 (16.5 lbs·in) ±2 kgf·cm			
SFTH-05-35	35 (30.4 lbs·in) ±5 kgf·cm	195	10	100
SFTH-05-58	58 (50.3 lbs·in) ±5 kgf·cm			

No.	Part Name	Material	Finish
①	Body A	304 Stainless Steel	Polished
②	Shaft	303 Stainless Steel	
③	Body B	301 Stainless Steel	

TORQUE HINGE

RoHS compliant

NO SCREW

SK-T-ZA

SK-T-ZA-1CR

- Hinge with friction torque for holding monitors, displays, lids etc. in desired position.
- Plastic cover provided for clean appearance.
- Recommended for use in pairs.
- Lubricant should not be applied on hinge.
- Successfully passed 20,000 open/close private cycle tests.

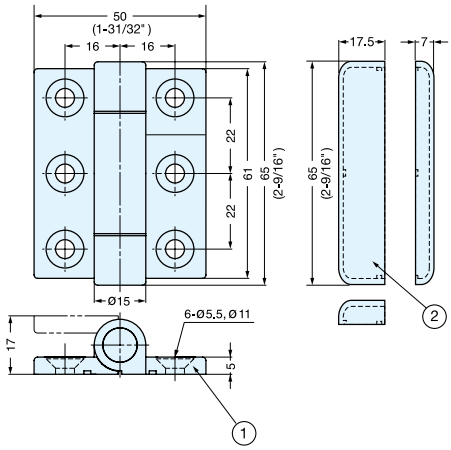

Item No.	Torque per piece (kgf·cm)	Weight (g)	Box (pcs)	Carton (pcs)
SK-T-ZA-1SCR	30 (26.0 lbs·in) ±15%	140	20	80
SK-T-ZA-2SCR	20 (17.0 lbs·in) ±15%			
SK-T-ZA-3SCR	15 (13.0 lbs·in) ±15%			
SK-T-ZA-1CR	30 (26.0 lbs·in) ±15%			
SK-T-ZA-2CR	20 (17.0 lbs·in) ±15%			
SK-T-ZA-3CR	15 (13.0 lbs·in) ±15%			

No.	Part Name	Material	Finish
①	Body	Zinc Alloy	Satin Chrome (SCR) Chrome (CR)
②	Cover	ABS	