

139 iQ™ Optima® Acoustiflor®

140 Accent® Wood Acoustiflor®

Veneto Acoustiflor® 141

iQ™ Toro SC 142

iQ™ Granit™ SD 143

144 Granit™ Safe-T

145 Accent® Wood Safe-T

145 Marbled Safe-T

146 Defiant™ Rubber Tile
and TreadsTerra-Turf® Recycled
Rubber Tile 147Clean Path Entrance
Barrier Modular Tile 147

148 Safe-T-First®



Specialty flooring. Details matter.

Wowing people. That's our thing. And we do it with floors that actually perform. Like absorbing and resisting and protecting and preventing. Our floors are ready. Let the wowing begin.





iQ™ Optima® Acoustiflor®

Hoot and holler.

Go ahead and get loud. Our high performance iQ™ Optima® Acoustiflor® will absorb that noise – and then some. It'll add comfort to that quiet, courtesy of a foam underlayer that reduces noise transmission and absorbs impact as well – relieving strain on joints and backs. Plus, with 12 colorways and advanced construction, that means no wax or finish for life.



iQ Optima Acoustiflor

TVOC ≤ 10 µg/m³

FloorScore® certified and meets CA 01350

Phthalate free, except for recycled materials

Recycled Content

Pre-consumer 25%

roll width = 6'5" nominal (1.95 m)

roll length = 82'7" nominal (25 m)


thickness = .146" nominal (3.7 mm)

adhesives pg. 190

The Solid and Multicolor Weld Rods listed are coordinating recommendations. Other color weld rods can be used for a variety of visual effects.

 862 Raw Ivory W Solid Weld Rod 1291862 Multicolor 1290025 22 Pearl CB *	 821 Frothy Latte CB Solid Weld Rod 1291821 Multicolor 1290032 31 Zephyr CB *	 860 Malt WB Solid Weld Rod 1287039 Multicolor 1290066 280 Shoreline *
 825 Caramel Infusion WB Solid Weld Rod 1291203 Multicolor 1290024 11 Canvas WB *	 824 Yellow Mustard Solid Weld Rod 1287036 Multicolor 1290070 75 Lemon *	 867 Tomato Paste Solid Weld Rod 1288409 Multicolor 1290047 259 Terra Firma *
 836 Turf Solid Weld Rod 1287040 Multicolor 1290078 190 Greege *	 856 Morning Sky Solid Weld Rod 1288905 Multicolor 1290051 139 Glacier *	 857 Popiu Bay Solid Weld Rod 1288034 Multicolor 1290037 70 Bluest *
 853 Thunderhead CG Solid Weld Rod 1292388 Multicolor 1290022 38 Pewter CG *	 866 Sidewalk CG Solid Weld Rod 1291216 Multicolor 1290026 38 Pewter CG *	 845 Stroke of Midnight B Solid Weld Rod 1291845 Multicolor 1290034 40 Black B *

*Suggested Johnsonite® colors for finishing borders (wall base). For our complete color offering, reference color guide in back.

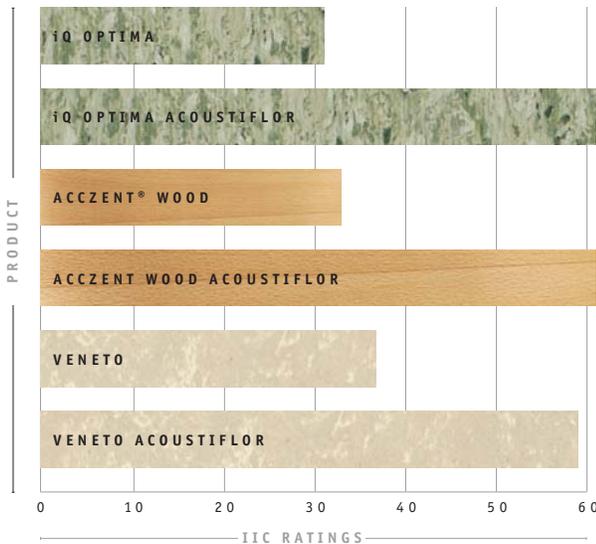

ACOUSTIFLOR VS. STANDARD PRODUCT

Floor coverings with an IIC rating above 45 dB are used to help reduce impact sound transmissions to lower levels, thus reducing or eliminating noises. Visit johnsonite.com for our latest IIC ratings.



ACOUSTIC | SOUND ABSORPTION


Acczent® Wood Acoustiflor®

Get tranquil.


Get the warmth and beauty of a wood floor without the hollow echo. With this sound- and impact-absorbing vinyl sheet, you'll find that quiet and comfort comes in 4 lovely colorways. Add the substantial 28 mil wear layer and you'll also get resistance to indentation, abrasion and tearing. Which means outstanding performance and the design-friendly look of wood. So go ahead and jump for joy. Acczent® is ready for action.



ACCENT WOOD ACOUSTIFLOR



002 Light Beech WB
Solid Weld Rod 1294316
BWG Balsa *



003 Medium Beech WB
Solid Weld Rod 1291205
112 Oakley *



011 Cabreuva
Solid Weld Rod 1292207
259 Terra Firma *



024 Wenge
Solid Weld Rod 1287344
WEN Wenge Wood *

*Suggested Johnsonite® colors for finishing borders (wall base).
For our complete color offering, reference color guide in back.



Accent Wood Acoustiflor

TVOC ≤ 10 µg/m³

FloorScore® certified and
meets CA 01350

Phthalate free, except for recycled
materials

Recycled Content

Pre-consumer 30%

A part of ReStart® program

roll width = 6'6" nominal (2 m)

roll length = 75'9" nominal (23 m)

thickness = .136" nominal (3.45 mm)

adhesives pg. 190

*The Solid Weld Rods listed are
coordinating recommendations.
Other color weld rods can be used
for a variety of visual effects.*

SOUND ABSORPTION

Veneto Acoustiflor®

Listen closely.

Fill your ears with peace and quiet. Then fill your brain with comfort and coordination. This linoleum super floor has a lot to offer. Like a 1.3 mm polyurethane foam underlayer that reduces noise, and adds thermal insulation and comfort. It's available in 6 neutral Veneto colorways. And to top it all off, our proprietary xF²™ finish provides superior surface protection and easy maintenance. See, even at reduced noise levels, Veneto Acoustiflor® sounds good.



Veneto Acoustiflor

TVOC ≤ 100 µg/m³

FloorScore® certified and meets CA 01350

Recycled Content

Pre-consumer 40%

Rapidly renewable 16%

roll width = 6'6" nominal (2 m)

roll length = 88'7" nominal (27 m)

thickness = .150" nominal (3.8 mm)

adhesives pg. 190

The Solid Weld Rods listed are coordinating recommendations. Other color weld rods can be used for a variety of visual effects.



VENETO ACOUSTIFLOR



601 Cloud Nine W
Solid Weld Rod 1751601
79 Bone White W *



611 Moonstone WB
Solid Weld Rod 1751313
285 Morning Light WB *



625 Arizona Tan WB
Solid Weld Rod 1751625
49 Beige WB *



673 Comet WG
Solid Weld Rod 1751673
71 Storm Cloud CG *



684 Cascade CG
Solid Weld Rod 1751684
38 Pewter CG *



604 Carlsbad WG
Solid Weld Rod 1751604
29 Moon Rock WG *

*Suggested Johnsonite® colors for finishing borders (wall base). For our complete color offering, reference color guide in back.

ELECTROSTATIC | CONDUCTIVE FLOORING

iQ™ Toro SC. ⚡

Gain control.

Concerned about conductivity? We've got you covered. iQ™ Toro SC has a low electrical resistance (10^4 to 10^6 ohms), protecting environments from damage by controlling and conducting static electricity. Whether that's a telecommunications center, operating room or explosives manufacturing facility, iQ Toro SC is a smart, safe choice. Available by roll or tile, in 12 color options, this flooring is both safe and aesthetically pleasing. Too bad it's not always this easy to be in charge.



iQ Toro SC

TVOC $\leq 10 \mu\text{g}/\text{m}^3$

FloorScore® certified and meets CA 01350

Phthalate free, except for recycled materials

Recycled Content

Pre-consumer 25%

A part of ReStart® program

tile size = 24" x 24"
(610 mm x 610 mm nominal)

roll width = 6'6" nominal (2 m)

roll length = 76' nominal (23 m)

thickness = .080" nominal (2 mm)

adhesives pg. 190

The Solid and Multicolor Weld Rods listed are coordinating recommendations. Other color weld rods can be used for a variety of visual effects.

iQ TORO SC - ELECTROSTATIC



100 Tundra WG
Solid Weld Rod 1287322
Multicolor 1290054
27 Mist WG *



570 Raw Ivory W
Solid Weld Rod 1287531
Multicolor 1290025
11 Canvas WB *



572 Tapestry
Solid Weld Rod 1287438
Multicolor 1290039
146 Butternut *



103 Blackjacket B
Solid Weld Rod 1292384
Multicolor 1290035
40 Black B *




104 Abalone WB
Solid Weld Rod 1288255
Multicolor 1290036
12 Hard Rock WB *




105 Amber Wave
Solid Weld Rod 1292372
Multicolor 1290031
130 Sisal *




573 Hot Ginger
Solid Weld Rod 1287059
Multicolor 1290042
473 Butterscotch *



107 Blue Belle
Solid Weld Rod 1291210
Multicolor 1290038
139 Glacier *



574 Flannel Blanket CB
Solid Weld Rod 1287379
Multicolor 1290088
80 Fawn CB *



575 Old Bark
Solid Weld Rod 1287456
Multicolor 1290089
47 Brown *



576 Turf
Solid Weld Rod 1287309
Multicolor 1290078
190 Greege *



578 Sidewalk
Solid Weld Rod 1291216
Multicolor 1290026
38 Pewter CG *

iQ GRANIT SD - ELECTROSTATIC



* Suggested Johnsonite® colors for finishing borders (wall base). For our complete color offering, reference color guide in back.

ELECTROSTATIC | STATIC DISSIPATIVE

iQ™ Granit™ SD.

Keep control. ⚡

Keeping static away from people and equipment is a priority that we take seriously too. So we engineered a high performance, homogeneous, permanently static dissipative resilient flooring with great aesthetics. That's iQ™ Granit™ SD. It provides low electrical resistance (10^6 to 10^9 ohms) that lasts a lifetime. And by balancing function with 12 varied colorways, this flooring can maintain safety, increase productivity, and best of all, provide peace of mind for all involved.



iQ Granit SD

TVOC $\leq 10 \mu\text{g}/\text{m}^3$

FloorScore® certified and meets CA 01350

Phthalate free, except for recycled materials

Recycled Content

Pre-consumer 25%

A part of ReStart® program

.....
 tile size = 24" x 24"
 (610 mm x 610 mm nominal)
 roll width = 6'6" nominal (2 m)
 roll length = 76' nominal (23 m)
 thickness = .080" nominal (2 mm)

adhesives pg. 190

.....
The Solid and Multicolor Weld Rods listed are coordinating recommendations. Other color weld rods can be used for a variety of visual effects.

SLIP RESISTANCE | SAFETY

Granit™ Safe-T. Don't slip up.

Watch out. For everyone. It's your job. To keep an environment safe means keeping those using it safe from slips. One fall on a slippery, wet floor is one too many. So we developed Granit™ Safe-T. It helps keep both physical and financial costs down, and just like the name says, this flooring is all about safety. With aluminum granules dispersed throughout the construction, it provides a lifetime of superior slip resistance. And a forever of safe and sound.



Granit Safe-T

TVOC ≤ 10 µg/m³

FloorScore® certified and meets CA 01350

Phthalate free, except for recycled materials

Recycled Content

Pre-consumer 25%

roll width = 6' 6" nominal (2 m)

roll length = 76' nominal (23 m)

thickness = .080" nominal (2 mm)

adhesives pg. 190

The Solid and Multicolor Weld Rods listed are coordinating recommendations. Other color weld rods can be used for a variety of visual effects.



GRANIT SAFE-T

 <p>697 Yoga CG Solid Weld Rod 1291811 Multicolor 1290028 38 Pewter CG *</p>	 <p>691 Soft Fleece WB Solid Weld Rod 1288255 Multicolor 1290036 49 Beige WB *</p>	 <p>698 Homing Pigeon CG Solid Weld Rod 1292383 Multicolor 1290021 23 Vapor Grey CG *</p>	 <p>692 Acorn WB Solid Weld Rod 1287407 Multicolor 1290023 130 Sisal *</p>	 <p>690 Semolina Solid Weld Rod 1287249 Multicolor 1290056 473 Butterscotch *</p>	 <p>693 Hot Chocolate Solid Weld Rod 1292375 Multicolor 1290046 286 Fortune Cookie WB *</p>
 <p>695 Blue Veranda Solid Weld Rod 1291210 Multicolor 1290038 139 Glacier *</p>	 <p>696 Full Sail Solid Weld Rod 1292379 Multicolor 1290041 84 Blue Jeans *</p>	 <p>694 Acadia Solid Weld Rod 1287332 Multicolor 1290059 289 Jaded *</p>	 <p>699 Eclipse CG Solid Weld Rod 1288327 Multicolor 1290027 71 Storm Cloud CG *</p>	 <p>700 After Midnight B Solid Weld Rod 1292384 Multicolor 1290035 40 Black B *</p>	

*Suggested Johnsonite® colors for finishing borders (wall base). For our complete color offering, reference color guide in back.

Accent® Wood Safe-T. ✎ Solve a lot.

Safety meets innovation and voilà, it's Accent® Wood Safe-T. By incorporating aluminum granules into the floor construction, we minimize slips, as well as maintenance requirements. And we do it in 4 coordinating wood tones. Choose Accent and take on any high performance challenge.



ACCENT WOOD SAFE-T



008 Light Beech WB
Solid Weld Rod 1292373
BWG Balsa *



009 Medium Beech WB
Solid Weld Rod 1291451
112 Oakley *



003 Cabreuva
Solid Weld Rod 1287050
259 Terra Firma *



004 Wenge
Solid Weld Rod 1287344
WEN WengeWood *



Accent Wood Safe-T and Marbled Safe-T

TVOC ≤ 100 µg/m³

FloorScore® certified and meets CA 01350

Recycled Content

Pre-consumer 32%

roll width = 6'6" nominal (2 m)

roll length = 67' nominal (20 m)

thickness = .080" nominal (2 mm)

adhesives pg. 190

The Solid Weld Rods listed are coordinating recommendations. Other color weld rods can be used for a variety of visual effects.

Marbled Safe-T. ✎ Extend your thinking.

Take the same amazing aluminum granules and superior slip resistance from Accent Wood Safe-T, change the look to marble, stone, pottery and clay, and that's Marbled Safe-T. A fantastically safe surface that coordinates with Veneto linoleum and Veneto Acoustiflor®. Imagine the possibilities.



MARBLLED SAFE-T



002 Marbled Pottery WB
Solid Weld Rod 1292762
49 Beige WB *



003 Marbled Clay
Solid Weld Rod 1287005
107 Neutrality *



004 Grecian Marble CB
Solid Weld Rod 1287291
121 Cement CB *



005 Roman Marble CB
Solid Weld Rod 1287497
80 Fawn CB *



007 Marbled Hearthstone WG
Solid Weld Rod 1287481
197 Shaded WG *




009 Olympic Marble CG
Solid Weld Rod 1287393
178 Iron Stone CG *

*Suggested Johnsonite® colors for finishing borders (wall base). For our complete color offering, reference color guide in back.

Defiant™ Oil- and Grease-Resistant Rubber Tile and Stair Treads. Stand tough.

Engineered to work most anywhere petroleum products, animal fats or vegetable oils are present, Defiant™ defends. It meets ASTM specs for oil and grease resistance, providing your space with the best protection available. Plus, you'll get the performance, longevity and slip-resistance of rubber. With Defiant, balancing safety and efficiency is simple. Allowing you to create a more productive environment.

STANDARD SPECKLED COLORWAYS

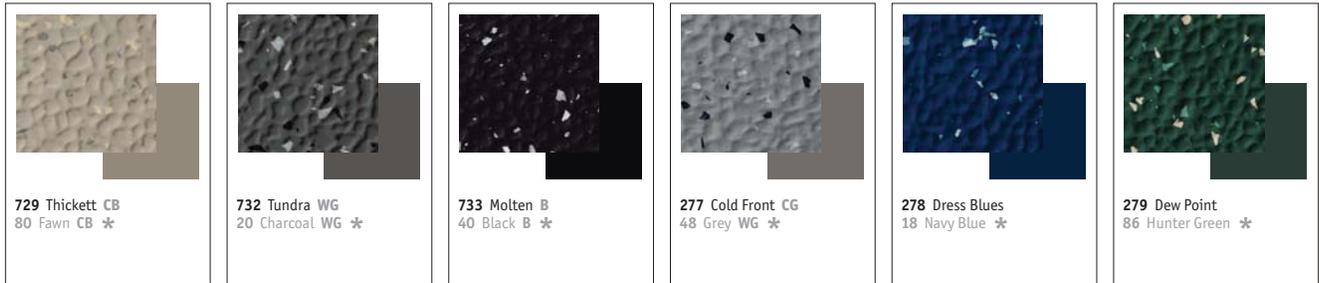

STANDARD MARBLEIZED™ COLORWAYS



SOLID COLOR TILES





* Suggested Johnsonite® colors for finishing borders (wall base). For our complete color offering, reference color guide in back.



Each tile is unique through variation of pattern and configuration.

DEFIANT OIL- AND GREASE-RESISTANT RUBBER TILE				
Patterns	Textures	Product Code	Gauge	Size
Solids	Hammered	GRHRT-XXX	1/8" (3.175 mm)	24" x 24" Tile
	Raised Round	GRRT-XXX		
Marbleized	Hammered	GRHRTP-XXX	1/8" (3.175 mm)	12" x 12" Tile
Speckled	Hammered and Raised Round	GRHRTSP-XXX and GRRTSP-XXX	1/8" (3.175 mm)	24" x 24" Tile

AVAILABLE TEXTURES



Defiant

Solids and speckled tile size = 24" x 24" (610 mm x 610 mm nominal)
 Marbleized™ tile size = 12" x 12" (305 mm x 305 mm nominal)
 thickness = 1/8" (3.175 mm)

Meets or exceeds the following tests:

- ASTM D hardness > 85
- ASTM D 471 oil and grease resistance
- ASTM D 2047 slip resistance > 0.8
- ASTM D 3389 abrasion resistance
- ASTM E 648 – class 1
- ASTM E 662 smoke < 450; passes
- ASTM F 970 static load < 0.005"
- ASTM F 1344 rubber floor tile
- ASTM F 1514 resistance to heat
- ASTM F 2199 dimensional stability

adhesives pg. 190
 chip details pg. 194

Terra-Turf® Recycled Tile. Take charge.

When rugged is what you need, you need Terra-Turf®. Made from post-consumer recycled tires, this flooring will not shrink or delaminate. Rough and tough Terra-Turf brings the necessary sustainability and performance to ramps and entryways, both indoors and out.

Available in Natural
Black/Brown



Terra-Turf

Recycled Content

Pre-consumer 90%

thickness = 3/8" (9.5 mm)

tile size = 12" x 12"
(305 mm x 305 mm nominal)

roll width = 12" nominal (305 mm)


roll length = 25' nominal (7.6 m)

adhesives pg. 190



Clean Path Entrance Barrier Modular Tile. Endure.

Walk all over it. That's what Clean Path is counting on. It's advanced technology and functionality disguised as carpet. Available in 2 colors of tiles, this walk-off modular tile stands its ground to protect all kinds of entryways. From hospitals to schools to office buildings to restaurants, Clean Path keeps dirt and moisture off your floors, and out of your hair for good.



QA1 Black



QA2 Brown



Clean Path

NSF-140 certified platinum (UL)

Recycled Content

Pre-consumer 30.8%

A part of ReStart® program

tile size = 24" x 24"
(610 mm x 610 mm nominal)

adhesives pg. 190



LIGHTS ON



LIGHTS OFF

Safe-T-First®. Find your way.

No one wants to mingle with danger. Darkness, smoke, evacuations. Nope. Which is why our Safe-T-First® System is so important. With our patented luminescent technology, Johnsonite® incorporates bright, long-lasting pigments into stair treads, wall base and other items. These crystals absorb and store light energy, releasing it in darkness – without depending on electricity or batteries. You are truly putting safety first with our innovative Safe-T-First System.


Safe-T-First® Photoluminescent Egress Routing System. Lead the way.

Hero training starts here. By helping individuals find their way out of a building in total darkness – and emergency personnel find their way in. The Safe-T-First® System protects from injury, disorientation and panic, and may ultimately save lives. The patented luminescence technology provides a low-located, lighted path. It can also highlight access to critical equipment and control panels during power failures or other emergency situations. Meet the challenges of safety and welfare head-on with the innovative Safe-T-First System.

AN INNOVATIVE CONCEPT IN SAFETY

Safe-T-First's photoluminescence is the result of a patented technology that incorporates bright, long-lasting pigments into Johnsonite® stair treads, traditional wall base and other items. This unique technology utilizes photoluminescent crystals that are inert, nontoxic and free of radioactivity.

Create a nonelectrical, low-location egress route by integrating photoluminescent technology into Johnsonite's fully integrated, high performance system.

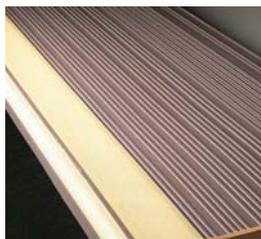

STAIR TREADS



STAIR NOSINGS



WALL BASE



MARKING
INDICATORS



HANDRAIL
COVERS

APPLICATIONS

- commercial
- institutional
- governmental
- theaters
- manufacturing
- educational
- transportation
- multifamily

FLOORING SYSTEMS

- rubber and vinyl stair treads for the visually impaired
- vinyl stair nosings for the visually impaired
- traditional wall base
- tactile warning system
- handrail covers
- corner bumper guards

ADA COMPLIANT MARKING INDICATORS

- tape
- guidance strips