


Crypton Persuasion

61266 Byzantine

PERFORMANCE FABRIC

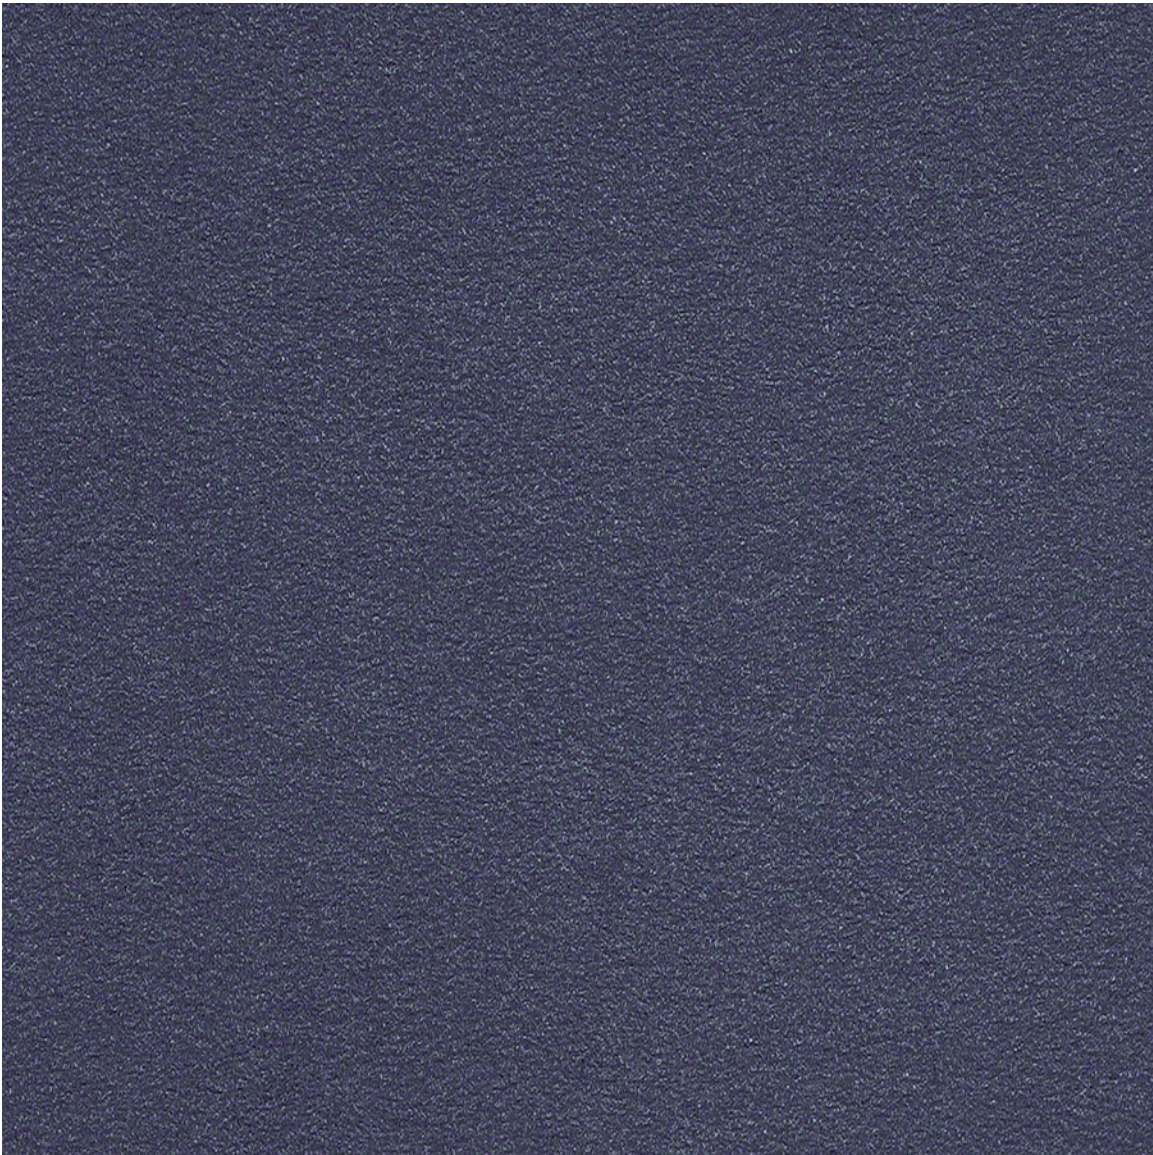

© 2017 C.F. Stinson, LLC. All rights reserved.

Crypton Persuasion

PERFORMANCE FABRIC

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Contains an antimicrobial agent

Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

For additional cleaning information visit cfstinson.com

For complete specifications visit cfstinson.com

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Specifications



Content	100% Polyester
Finish	Crypton® Non-PFOA Soil & Stain Protection
Backing	Crypton® Fluid Barrier
Weight	12.0 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	75 yards

Performance Characteristics

Abrasion Resistance ASTM D-4157	Exceeds 50,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 188.3 lbs. min., Fill: 232.1 lbs. min.
Tear Strength ASTM D-2261	Warp: 5.9 lbs. min., Fill: 17.5 lbs. min.
Seam Slippage ASTM D-4034	Warp: 125 lbs. min., Fill: 106.5 lbs. min.
Brush Pilling ASTM D-3511	Class 4.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.5
Crocking AATCC-8	Dry: Class 4.0, Wet: Class 3.0
Fluid Barrier	Crypton® Integrated Fluid Barrier
Antimicrobial	Crypton® fabric protection features silver ion technology which inhibits the growth of microbes on the protected surface.

Flammability*

California 191-53 Technical Bulletin 117, Section E	Passed
UFAC	Class 1
NFPA 260	Class 1

May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.



Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com