


# Carlisle

CRL30 Surf

VINYL SEATING

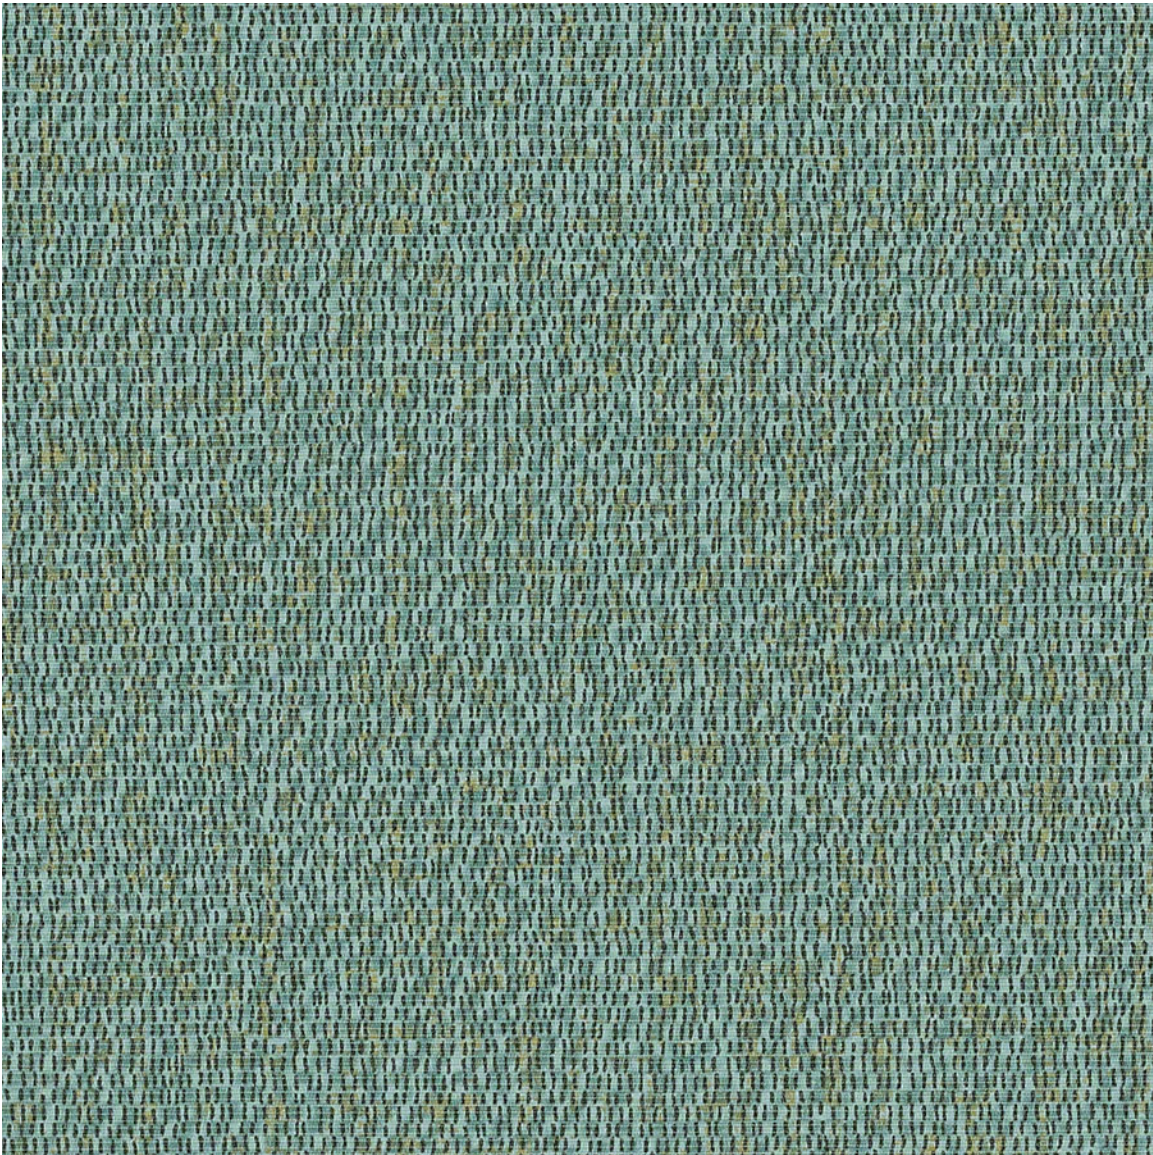

© 2017 C.F. Stinson, LLC. All rights reserved.

## Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Contains an antimicrobial agent
- Bleach-solution cleanable
- Enhanced fade resistance

## Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

For additional cleaning information visit [cfstinson.com](http://cfstinson.com)

For complete specifications visit [cfstinson.com](http://cfstinson.com)

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

\*\* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

## Specifications



Content	Vinyl Surface with Polyester Backing
Finish	Advanced Soil and Stain Resistant Top Coat
Backing	Polyester
Weight	28 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	40 yards

## Performance Characteristics

Abrasion Resistance** CFFA-1	Exceeds 1,300,000 double rubs - heavy duty
Break Strength CFFA-17	Warp: 85 lbs. min., Fill: 75 lbs. min.
Tear Strength CFFA-16	Warp: 20 lbs. min., Fill: 27 lbs. min.
Colorfastness to Light CFFA-2	600 Hours, Class 5.0
Crocking CFFA-7	Dry: Class 5.0, Wet: Class 5.0
Fluid Barrier	Inherent Fluid Barrier
Antimicrobial	This product features an antimicrobial agent which inhibits the growth of microbes on the protected surface.

## Flammability\*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1
NY / NJ Port Authority (FTMS 191-5903)	Passed
Boston Fire Code BFD 1X-1	Passed
FAA 25.853 (b)	Passed
NFPA 701 (Small Scale)	Passed
ASTM E-84 (Adhered) Class A or 1	Passed
Federal Specification CID A-A-2950	Passed
MVSS 302	Passed
BIFMA	Class 1
IMO A.652(16) 8.2 & 8.3	Passed

May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.



# Stinson®

C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

[cfstinson.com](http://cfstinson.com)