


Dakota

DKT27 Dune

NON PVC SEATING

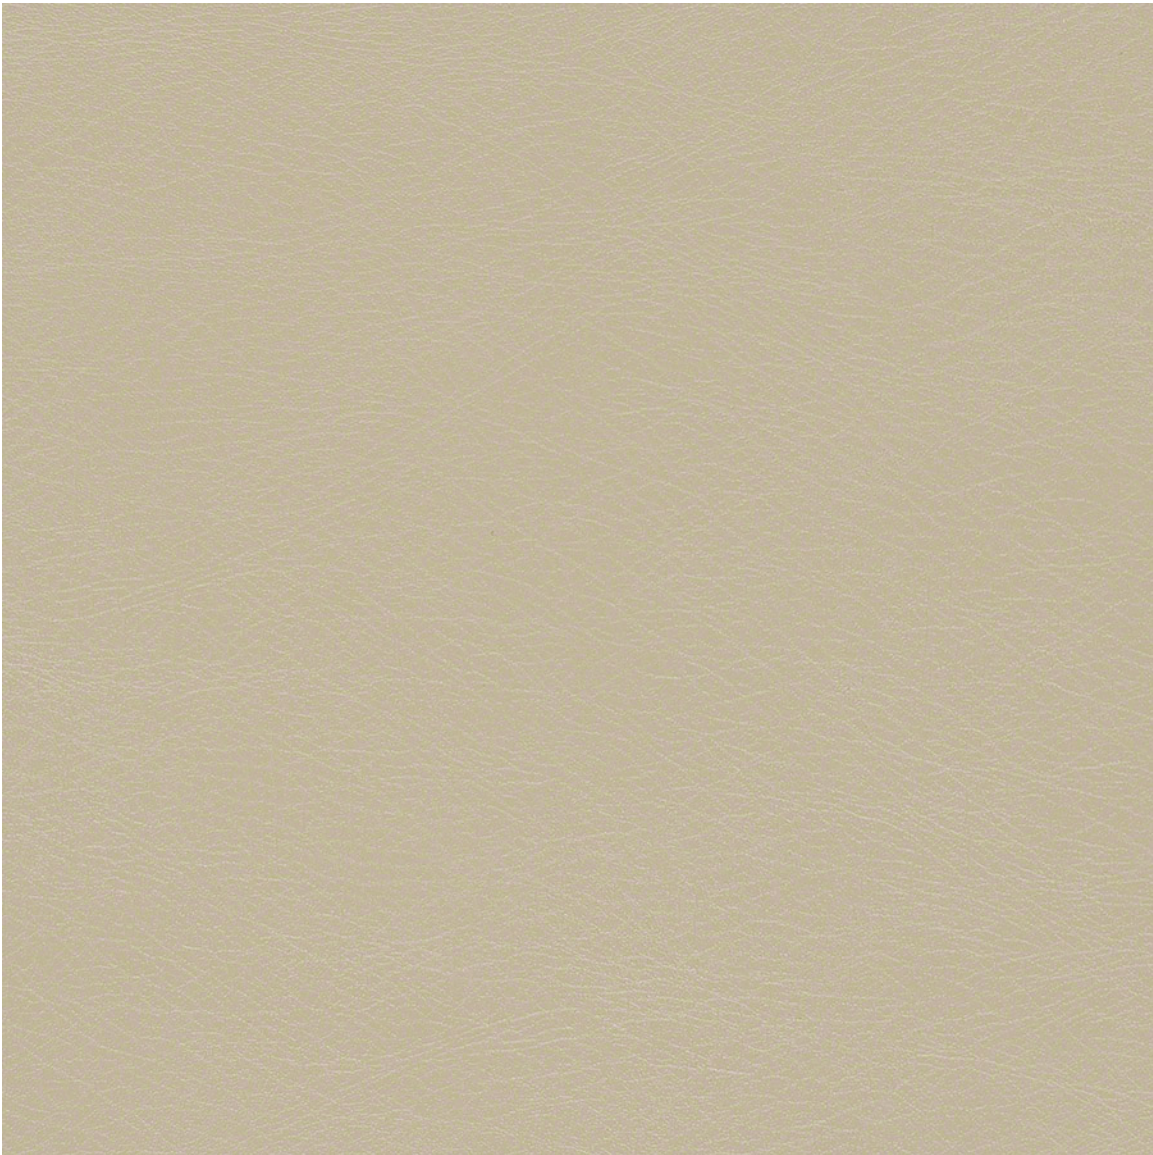

© 2017 C.F. Stinson, LLC. All rights reserved.

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Bleach-solution cleanable

Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

Bleach solutions of up to 20% may be used for more difficult stains.

For additional cleaning information visit cfstinson.com

For complete specifications visit cfstinson.com

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications



Content	Polyurethane with Polyester Backing
Finish	Enhanced Soil and Stain Protection
Backing	Polyester
Weight	16.5 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	30 yards

Performance Characteristics

Abrasion Resistance** ASTM D-5034	Exceeds 250,000 double rubs - heavy duty
Break Strength CFFA-17	Warp: 100 lbs. min., Fill: 100 lbs. min.
Tear Strength CFFA-16	Warp: 18 lbs. min., Fill: 18 lbs. min.
Seam Slippage CFFA-14	Warp: 70 lbs. min., Fill: 70 lbs. min.
Colorfastness to Light	40 Hours, Class 5.0
Crocking CFFA-7	Dry: Class 5.0, Wet: Class 5.0
Fluid Barrier	Inherent Fluid Barrier
Hydrolytic Stability ASTM D3690-02 Section 6.11	Passes a minimum of 5 years; making it suitable for high traffic commercial environments.

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1
BIFMA	Class 1
IMO A.652(16) 8.2	Passed

May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.

This product is Non PVC.



Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com