Spree

SRE54 Stone

VERTICAL SURFACE FABRIC

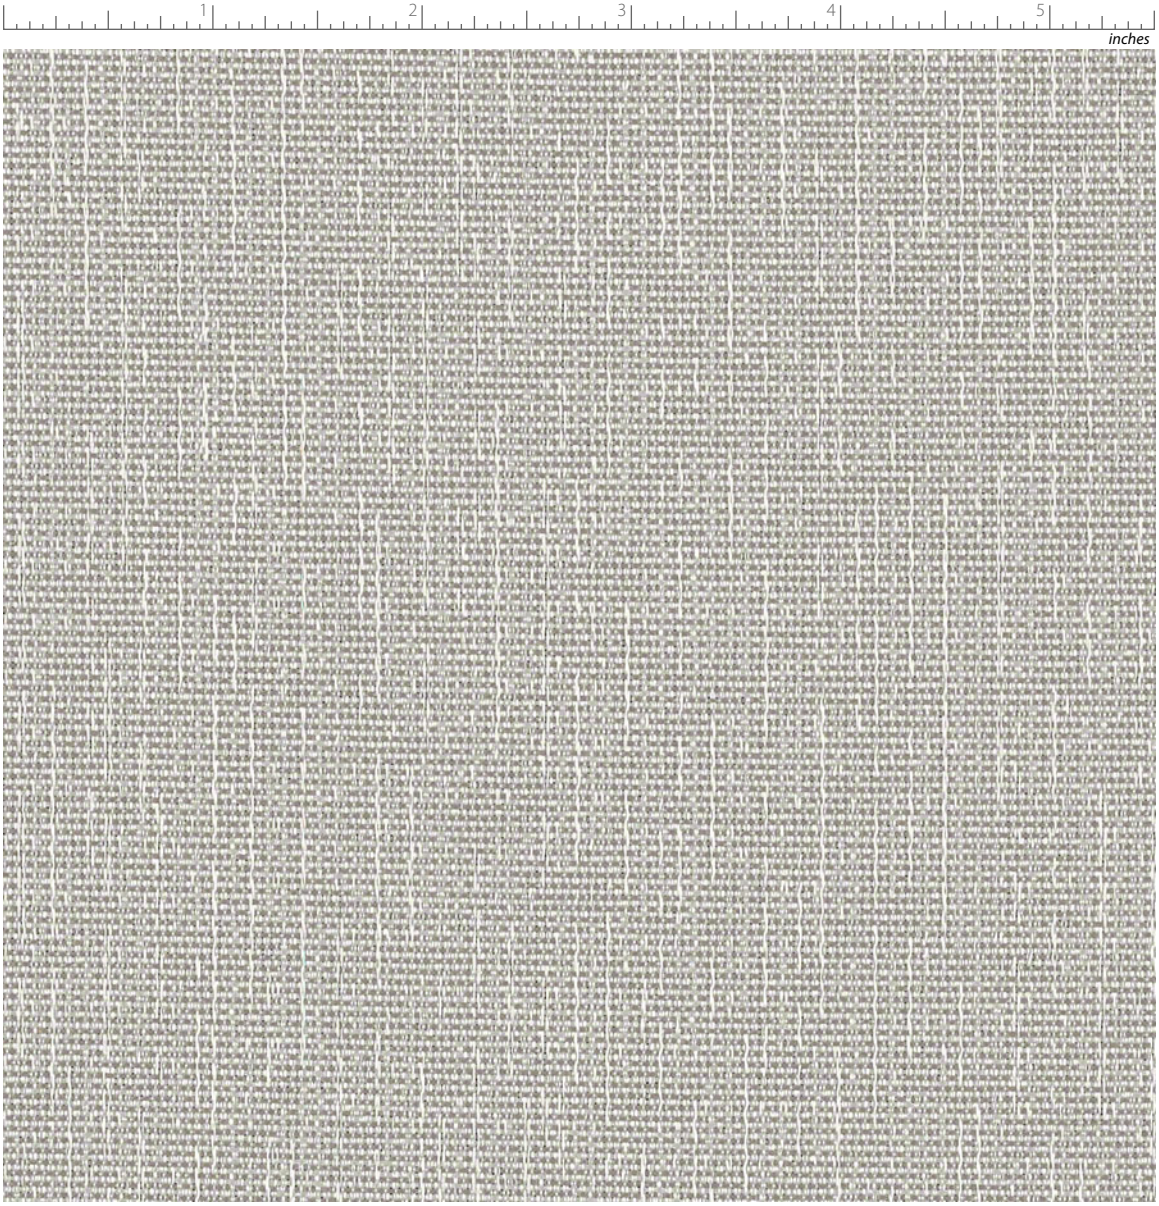

© 2017 C.F. Stinson, LLC. All rights reserved.

Stinson®

Spree

VERTICAL SURFACE FABRIC

Performance Summary

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

For additional cleaning information visit cfstinson.com

For complete specifications visit cfstinson.com

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Specifications	
Content	65% Post-Consumer Recycled Polyester, 35% Polyester
Backing	None
Weight	10.0 oz./lin. yd. ± 1.0 oz.
Width	66 inches
Repeat	Horizontal: 7 inches, Vertical: 9 inches, directional
Roll Size	80 yards
Performance Characteristics	
Break Strength ASTM D-3597	Warp: 100 lbs. min., Fill: 100 lbs. min.
Colorfastness to Light AATCC-16	40 Hours, Class 5.0
Crocking AATCC-8	Dry: Class 5.0, Wet: Class 5.0
Flammability*	
ASTM E-84 (Unadhered)	Class A or 1
REDUCED ENVIRONMENTAL IMPACT	This product is produced using 65% recycled fiber.
	Spree is an Underwriters Laboratory Recognized Component. Additional testing is not required on approved panel systems from participating manufacturers or remanufacturers.

GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818
GOLD

Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com