

## SafeTcork Solid Vinyl Tile

### Manufacturer


Roppe Corporation  
1602 N. Union Street  
P.O. Box 1158  
Fostoria, Ohio USA 44830-1158  
Website - [www.roppe.com](http://www.roppe.com)  
t: (419) 435.8546 tf: (800) 537.9527  
f: (419) 435.1056  
e-mail: [sales@roppe.com](mailto:sales@roppe.com)

### Product Description

SafeTcork Vinyl Tile combines the durability of homogeneous vinyl and post industrial cork with handsome styling. Ideal for heavy traffic areas that also need to be attractive. This product is a resilient, homogeneous, solid vinyl tile which provides excellent resistance to abrasion, chipping, cracking and permanent indentations and yet it is flexible for fast and economical installations.

### Features

Extremely Durable	Does Not Require A Finish
Excellent Slip Resistance	Excellent Chemical Resistance
100% Recyclable	Superior Indentation Resistance
FloorScore® Certified	Qualifies for LEED® Credits

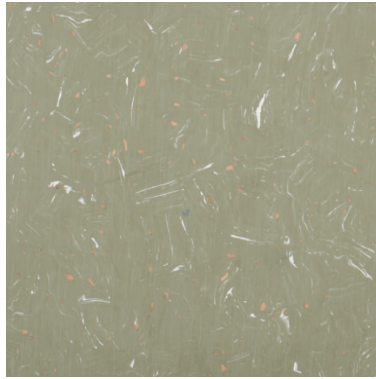

### SafeTcork Vinyl Tile

Gauge: 0.080" (2 mm)

Nominal Dimensions - Standard:  
12" x 12"  
24" x 24"  
36" x 36"

Nominal Dimensions- Pre-Grooved:  
24" x 24" x 2mm  
36" x 36" x 2mm

Quantity Per Carton:  
45 pcs (12" x 12")  
20 pcs (24" x 24")  
10 pcs (36" x 36")

Welding Bead: 400' ft roll, 4 mm diameter available in 12 colors.

### Technical Data

LEED v2009 IEQ Credit 4.1: Qualifies  
LEED v2009 IEQ Credit 4.3: Qualifies  
ASTM F1700 - Solid Vinyl Tile: Class I, Type A  
ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I, > 0.45 W/cm<sup>2</sup>  
ASTM E662 (NFPA 258) - Smoke Density: Passes < 450  
ASTM F970 - Static Load Limit: Passes, 250 PSI  
ASTM F970 - Max Weight: 2500 PSI  
ASTM F925 - Chemical Resistance: Passes  
ASTM D2047 - Slip Resistance: > 0.6  
ASTM F1514 - Heat Stability: Passes  
ASTM F1515 - Light Stability: Passes  
Acclimation Time: 48 Hours  
Storage & Acclimation Temperature: 65° - 85° F

### Approved Adhesive\* (Visit our website for complete Adhesive recommendations)

AW-510 Acrylic Wet-Set Adhesive  
MS-700 Modified Silane Adhesive  
EW-710 Epoxy Wet-Set Adhesive

### Installation\* (Visit our website for complete Installation instructions)

All materials are to be delivered to the installation location within 48 hours of installation in its original packaging with labels intact. Store products in a dry area protected from the weather with temperatures maintained between 65° F (19°C) and 85° F (30°C). DO NOT stack pallets. Remove all plastic wrapping and strapping from the pallets and un-box all material in the installation area at least 48 hours prior to installation.

### Maintenance\* (Visit our website for complete Maintenance instructions)

Refer to the SafeTcork Vinyl Tile Maintenance document for detailed instructions available on our website.

### Availability, Cost & Samples

Roppe Flooring products are sold through distribution. To locate the nearest distributor, visit [www.roppe.com](http://www.roppe.com). or send an email to [solutions@roppe.com](mailto:solutions@roppe.com)

### Technical Document Support

Additional product resources and technical documents are available online at [www.roppe.com](http://www.roppe.com). For additional technical support, send an e-mail to [solutions@roppe.com](mailto:solutions@roppe.com)

### Warranty

Roppe Provides a 5 year Limited Warranty. For additional information, see associated Warranty documents.

**\*For complete adhesive, installation & maintenance instructions, visit [www.roppe.com](http://www.roppe.com)**