

● PROJECT INFORMATION

Project:

Notes:

Type:


Quantity:

Approved by:


Date:

● DIMENSIONS

SECTION VIEW

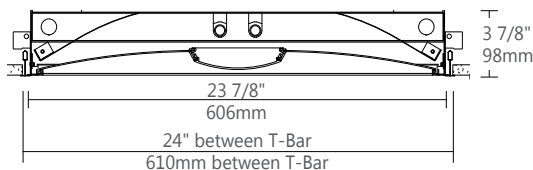

SIDE VIEW

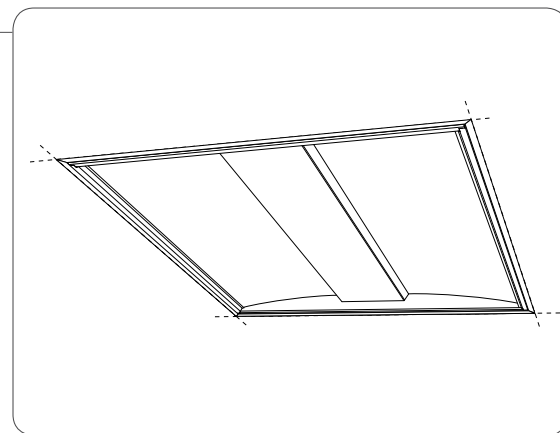

IC

cULus Listed
Type I.C.

● ORDERING CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14
---	---	---	---	---	---	---	---	---	----	----	----	----	----

● PRODUCT SPECIFICATIONS


1	PRODUCT ID	2	SIZE	3	CENTER OPTIC	4	LAMP	5	LAMP CONFIGURATION	6	FINISH
DAYF	flat	22	2'X2'	S	satin lens	T5	T5	1	1 lamp	AM	antimicrobial
DAYC	curved			SB	baffle ⁽¹⁾	T5HO	T5HO	2	2 lamps	W	white
						T8	T8	3	3 lamps ⁽²⁾	C	custom
						F25TT	TT25W (2G11)				
						F40TT	TT40W (2G11)				
						F50TT	TT50W (2G11)				
						F55TT	TT55W (2G11)				
(1) With frosted lens						(2) Not available for F25/40/50/55TT					

7	VOLTAGE	8	BALLAST	9	CIRCUITS	10	MOUNTING/SUSPENSION	11	BATTERY (OPTIONAL)
120	120V	D	dimming	1	1 regular	TB9	t-bar 9/16"	B#	battery pack
277	277V	E	instant start ⁽⁴⁾	2	2 regular	TB15	t-bar 15/16"		
347	347V ⁽³⁾	ERS	program start	2A/B	2 alternating	ST	screw slot t-bar		
UNV	universal	T	step dimming ⁽⁵⁾	+E(#)	emergency section	TG9	regular 9/16"		
		+M	master	+NL(#)	night light section	TG15	regular 15/16"		
		+S	satelite	+GTD(#)	generator transfer device	DF	drywall flange		
		BI	bi-level dimming						
(3) Please consult factory		(4) Available with T8 lamp only							
		(5) In T5HO, only available for 2x4' lamp configuration For F25TT, not available							


12 OTHER (OPTIONAL)		13 IC CONTROLS (OPTIONAL)		14 CUSTOM (OPTIONAL)		SPECIFY BALLAST NAME (if needed)	
+FW(#)	F fuse	DS#	daylight sensor	C	custom		
	AR air return	OS#	occupancy sensor				
	flex whip (6' std)	DS+OS#	daylight+occupancy sensor				
	CP chicago plenum	DOS#	daylight&occupancy sensor				
		See integrated controls guide for further details		Please specify			
						SPECIFY BATTERY NAME (if needed)	

● CEILING SYSTEM


T-BAR STYLE MOUNTING




9/16" T-BAR




15/16" T-BAR



9/16" TEGULAR




15/16" TEGULAR




SCREW SLOT

DRYWALL WITH FLANGE KIT (DF)




WITH WOOD FRAME



WITHOUT WOOD FRAME

DRYWALL MOUNTING KIT



FIXTURE DIMENSIONS

23 3/8" / 23 3/8"


CUT HOLE DIMENSIONS

24 7/16" / 24 7/16"


i Installation sheets for all mounting options are available at:
www.axislighting.com

● LAMP CONFIGURATION


T5/T5HO



1 LAMP




2 LAMPS




3 LAMPS


T8



1 LAMP




2 LAMPS




3 LAMPS

TT25W/TT40W/TT50W/TT55W



1 LAMP



2 LAMPS