

PERFORMA®

Aquarock™


\$\$\$

LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content

TOOLS

Visit CertainTeed.com/Ceilings
 Download HPDs and EPDs
 LEED® Information / BIM Objects
 3-Part Specs / Data Pages

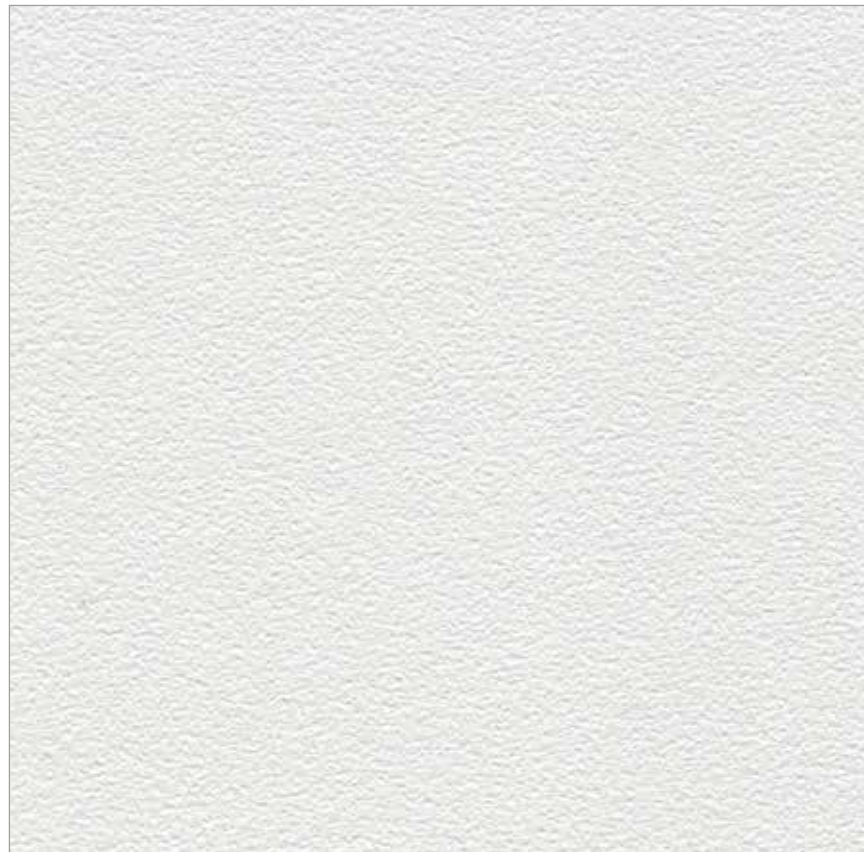

FEATURES & BENEFITS

- Paperless, exterior sheathing that is mold and abuse resistant embedded glass reinforced gypsum (EGRG)
- Sag resistant with exceptional indoor/outdoor performance in applications up to 95% relative humidity
- Vinyl facing cleanable with most sanitizing chemicals
- Wash tested to 2,000+ cycles with no sign of wear
- Clean room component to ISO Class 5
- Satisfies USDA/FSIS guidelines for sanitary applications
- Approved for use in federally registered Canadian food establishments

APPLICATIONS

- Parking Garages
- Locker Rooms
- Pools
- Shower Rooms
- Commercial Kitchens
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS













Trim
 15/16 Grid



Aquarock™ Trim (1182-CRF-1SV)

ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	 NRC	 CAC	 SAG RESISTANT	 MOLD RESISTANT	 LR	 WASHABLE	 WASHABLE WITH SANITIZING CHEMICALS	 FIRE CLASS (ASTM E1264)	 LOW VOC EMISSION COMPLIANT	 RECYCLED CONTENT
AQUAROCK™												
1182-CRF-1SV	24 x 24 x 1/2	Trim	—	40	Yes	Yes	0.78	Yes	Yes	Class A	—	0%
1180-CRF-1SV	24 x 48 x 1/2	Trim	—	42	Yes	Yes	0.78	Yes	Yes	Class A	—	0%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

MATERIAL

Embedded Glass Reinforced Gypsum

ASTM E1264 CLASSIFICATION

Type XX, Pattern G

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

MOLD/MILDEW RESISTANCE

Moisture- and mold-resistant core.

MAINTENANCE

Wash tested to 2,000+ cycles.
Cleanable with sanitizing chemicals.

WARRANTY

10-year 104/95 Limited Warranty

INSTALLATION CONSIDERATION

Use with environmental suspension system if harsh chemicals or moisture will be present. See Suspension Systems, page 245.