

Fine Fissured

Mineral Fiber Ceilings

LOW
VOC

\$\$\$

LEED® v4

LEED® v4

● MR: Environmental Product Declarations (EPDs)

● MR: Sourcing Raw Materials

● MR: Material Ingredients (HPDs)

● IEQ: Daylight

● IEQ: Low-Emitting Materials

● IEQ: Prereq. Min. Acoustic Performance (Schools)

● IEQ: Acoustic Performance

● MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting


● EA: Prereq. Min. Energy Performance

● EA: Optimize Energy Performance

● Recycled Content
CLASS A Pre: **33%** Post: **0%**
PROTECTONE® Pre: **45%** Post: **0%**

TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

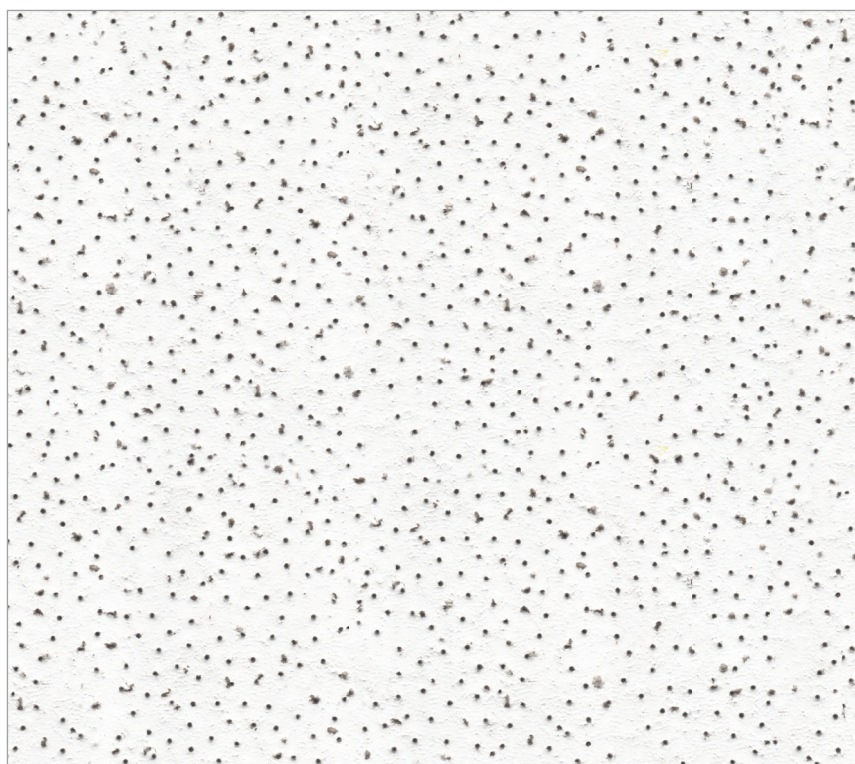

In addition to traditional white, you can make an impact with one of our 5 standard colors for item numbers HHF-154, HHF-157, HHF-197



Beige Breeze

Blondewood

Silver Lining

Wet Clay

White Wash

FEATURES & BENEFITS

- 100% non-directional pattern
- Available in fire-rated (Protectone®) versions
- Variety of edge detail options and panel sizes
- High humidity and sag resistant
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product

APPLICATIONS

- Schools
- Libraries
- Retail / Department Stores
- Offices
- Other Commercial Buildings / Space Applications



Carbon Footprint Reduction
Rapidly Renewable Resource Content
Recycled Content



EPD Available



HPD Available

AVAILABLE EDGE DETAILS



Trim
15/16 Grid



Reveal
Beveled
15/16 Grid



Narrow Reveal
Corner Bevel
9/16 Grid



Narrow Reveal
Corner Bevel
9/16 Grid Bolt Slot

Color-coordinated suspension systems available



Fine Fissured Reveal (White) (HHF-154)

ATTRIBUTES

	DIMENSIONS INCHES	EDGE DETAIL	UL NRC	CLASSIFIED CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
FINE FISSURED													
HHF-157	24 x 24 x 5/8	Trim	0.55	33	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
PFF-157	24 x 24 x 5/8	Trim	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Protectone*	Certified	45%
HHF-154	24 x 24 x 5/8	Reveal	0.55	33	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
PFF-154	24 x 24 x 5/8	Reveal	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Protectone*	Certified	45%
HHF-150	24 x 24 x 5/8	Narrow Reveal	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
HHF-197	24 x 48 x 5/8	Trim	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
PFF-197	24 x 48 x 5/8	Trim	0.55	40	Yes	Yes	Yes	BioShield	0.84	—	Protectone*	Certified	45%
HHF-194	24 x 48 x 5/8	Reveal	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
HHF-2067	20 x 60 x 5/8	Trim	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
HHF-177	24 x 60 x 5/8	Trim	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
FINE FISSURED - METRIC													
HHF-2067M	500 x 1500 x 15	Trim	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%

* Protectone®: A fire-resistive ceiling when used in applicable UL assemblies.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

Mineral Fiber

ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern C D

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY

15-Year Limited System Warranty

INSTALLATION CONSIDERATION

Colored ceilings are dye-lotted and should not be mixed.

Technical Support | certainteed.com/ceilings 800-233-8990

© 01/18 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings