

PERFORMA®

Fine Fissured High NRC **VOC Compliant**







LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content 70% | Post: 0%

TOOLS

Visit CertainTeed.com/Ceilings Download HPDs and EPDs LEED® Information / BIM Objects 3-Part Specs / Data Pages




Carbon Footprint Reduction Rapidly Renewable Recycled Content



EPD Available



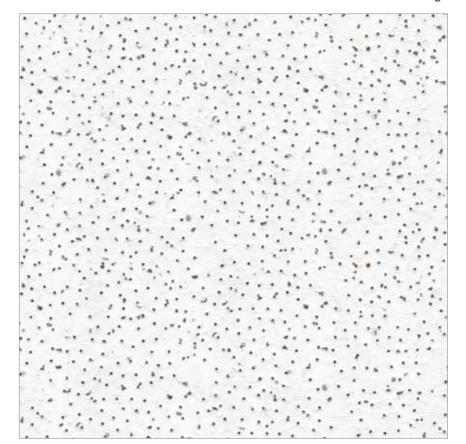

FEATURES & BENEFITS

- 100% non-directional fissured pattern
- Excellent for budgeted projects requiring high sound absorption
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Complies with LEED® v4 for Schools classroom acoustics prerequisite
- Health Product Declaration (HPD) available for this product
- Cuts cleanly, leading to quicker installation and lower installation costs

APPLICATIONS

- Schools / Classrooms
- Healthcare Spaces
- Libraries / Media Centers
- Open Plan Areas
- Computer Rooms
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS







Fine Fissured High NRC (HHF-454 HNRC)

24 × 48 × 3/4

ATTRIBUTES			*	<u> </u>	EPD	HPD	1			0	*	LOW	43
	DIMENSIONS (INCHES)	EDGE DETAIL	UL CLA NRC	SSIFIED CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
FINE FISSURED HIGH NRC													
HHF-457 HNRC	24 × 24 × 3/4	Trim	0.70	35	Yes	Yes	Yes	BioShield	0.83	_	Class A	Certified	70%
HHF-454 HNRC	24 × 24 × 3/4	Reveal	0.70	35	Yes	Yes	Yes	BioShield	0.83	_	Class A	Certified	70%
HHF-497 HNRC	24 × 48 × 3/4	Trim	0.70	35	Yes	Yes	Yes	BioShield	0.83	_	Class A	Certified	70%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

HHF-494 HNRC

ASTM E1264 CLASSIFICATION Type III, Form 2, Pattern C D

FIRE PERFORMANCE
Tested according to ASTM E84 & CAN S102 Flame Spread: 25 or less Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

Class A

Certified

70%

WARRANTY

BioShield 0.83

10-year 104/90 Limited Warranty

