

PERFORMA®

Vantage 10™
VOC Compliant

LOW
VOC

\$\$\$\$

LEED® v4

LEED® v4

● MR: Environmental Product Declarations (EPDs)

● MR: Sourcing Raw Materials

● MR: Material Ingredients (HPDs)

● IEQ: Daylight

● IEQ: Low-Emitting Materials

● IEQ: Prereq. Min. Acoustic Performance (Schools)

● IEQ: Acoustic Performance

● MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting


● EA: Prereq. Min. Energy Performance

● EA: Optimize Energy Performance

Recycled Content
● CLASS A Pre: **33%** Post: **0%**
PROTECTONE® Pre: **45%** Post: **0%**

TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

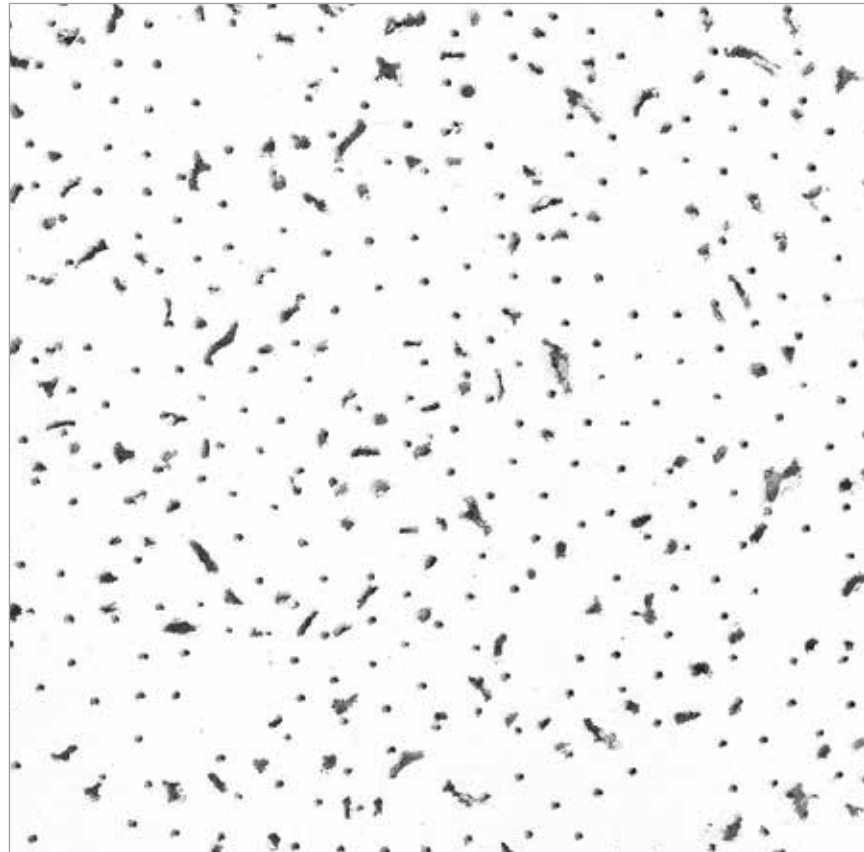

FEATURES & BENEFITS

- High humidity and sag resistant
- Available in fire-rated (Protectone®) versions
- Non-directional pattern
- Classic mineral ceiling look with sag-resistant core
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product

APPLICATIONS

- Schools
- Retail / Department Stores
- Many Commercial Interior Spaces
- Other Commercial Buildings / Space Applications



Carbon Footprint Reduction
Rapidly Renewable Resource Content
Recycled Content



EPD Available



HPD Available

AVAILABLE EDGE DETAILS



Trim
15/16 Grid



Reveal
Beveled
15/16 Grid



Narrow Reveal
Corner Bevel
9/16 Grid



Narrow Reveal
Corner Bevel
9/16 Grid Bolt Slot














Narrow Reveal
Corner Bevel
9/16 Grid Tier Drop



Vantage 10™ Trim (VAN-197)

ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	 NRC	 CAC	 EPD AVAILABLE	 HPD AVAILABLE	 SAG RESISTANT	 MOLD RESISTANT	 LR	 WASHABLE	 FIRE CLASS (ASTM E1264)	 EMISSION COMPLIANT	 RECYCLED CONTENT	
VANTAGE 10™														
VAN-157	24 x 24 x 5/8	Trim	0.55	33	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	33%	
PVN-157	24 x 24 x 5/8	Trim	0.55	35	Yes	Yes	Yes	BioShield	0.83	—	Protectone*	Certified	45%	
VAN-154	24 x 24 x 5/8	Reveal	0.55	33	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	33%	
PVN-154	24 x 24 x 5/8	Reveal	0.55	35	Yes	Yes	Yes	BioShield	0.83	—	Protectone*	Certified	45%	
VAN-150	24 x 24 x 5/8	Narrow Reveal	0.55	33	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	33%	
VAN-197	24 x 48 x 5/8	Trim	0.55	35	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	33%	
PVN-197	24 x 48 x 5/8	Trim	0.55	40	Yes	Yes	Yes	BioShield	0.83	—	Protectone*	Certified	45%	

*Protectone®: A fire-resistive ceiling when used in applicable UL assemblies.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

Mineral Fiber

ASTM E1264 CLASSIFICATION

Type IV, Form 2, Pattern E

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY

10-year 104/90 Limited Warranty