

OPTIMA®
OPTIMA®
 with Plant-based Binder
 Tegular
 fine texture



DESIGNFlex™
 CEILING SYSTEMS



See Optima® Shapes

Personalize Your Design!

Mix and match different sizes, shapes, and materials to reinvent your ceiling. More at:

armstrongceilings.com/designflex



Optima® Tegular 24" x 24" panels with Sonata® 9/16" suspension system (Pg. 401)



plus capabilities
 to do more



See more photos at:
armstrongceilings.com/photogallery
 SEARCH: optima

Smooth-textured panels provide excellent acoustical absorption and the most standard sizes of any Armstrong Ceilings product.

KEY SELECTION ATTRIBUTES

- DesignFlex™ options include shapes and tailor-made sizes available to ship in 3 weeks
- Optima® PB panels are part of the Sustain® portfolio and meet the most stringent sustainability compliance standards today
- Smooth, clean, durable finish – Washable, Impact-resistant, Scratch-resistant, Soil-resistant
- Items with PB suffix are manufactured with a plant-based binder
- Outstanding acoustical performance for open plan areas, both Articulation Class (180-200) and NRC (0.90-1.00)
- Energy-saving high light-reflective finish
- Non-directional visual reduces scrap and installation time
- Sag-resistant large-size panels
- Compatible with TechZone® Ceiling Systems
- 30-Year Limited System Warranty against visible sag, mold, and mildew


TYPICAL APPLICATIONS

- Open plan offices
- Computer rooms
- Corridors (walls-to-deck)
- Auditoriums
- Waiting rooms/nurses' stations – assists in addressing HIPAA and FGI acoustical requirements
- Areas with indirect lighting systems

COLOR



DETAILS (Other Suspension Systems compatible. Refer to listing on page 288.)

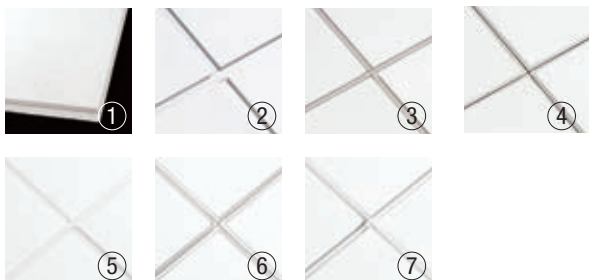

1. Optima® Square Tegular
2. Optima® Tegular with Prelude® 15/16" suspension system
3. Optima® Tegular with Interlude® XL® HRC 9/16" suspension system
4. Optima® Tegular with Silhouette® 9/16" suspension system with 1/8" reveal
5. Suprafine® ML, XL®, and XL® HRC with Blizzard White finish
6. Silhouette® XL® 1/4" and 1/8" reveal with Blizzard White finish
7. Interlude® XL® HRC with Blizzard White finish



UP TO **71%** RECYCLED CONTENT

LEED®

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- bio-based materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate LEED contribution at armstrongceilings.com/greengenie

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 407-411 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)	
OPTIMA® Tegular				
15/16" Square Tegular	8	1402	6 x 48 x 1"	
	8	1406	6 x 60 x 1"	
	8	3264	12 x 24 x 1"	
	8	3278	20 x 60 x 1"	
	8	3250 3250PB	24 x 24 x 1"	
	8	3354	24 x 24 x 1"	
	8	3253	24 x 24 x 1-1/2"	
	8	3252 3252PB	24 x 48 x 1"	
	8	3281	24 x 72 x 1"	
	8	3282	24 x 96 x 1"	
	8	3258	30 x 30 x 1"	
	8	3286	30 x 60 x 1"	
	8	3255 3255PB	48 x 48 x 1"	

PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$

UL Classified Acoustics		NRC	+ CAC =	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Mold & Mildew	Protection	Sag Resist	Certified Low VOC Emissions	Wash	Impact	Scratch	Soil	Recycled Content	Recycle Program	30-Yr Warranty
UL Class	AC																	
N/A	N/A	-	-	N/A	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•
N/A	N/A	-	-	N/A	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•
0.95*	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•
0.95*	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•
0.90	26	-	200	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•
1.00	N/A	-	200	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•	•	•

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. Optima items with the PB suffix are included in the Sustain® portfolio and carry Declare™ certification. * These items are not UL classified.

PHYSICAL DATA

Material
 3354 – Fiberglass with DuraBrite® acoustically transparent membrane; CAC backing
 All other items – Fiberglass with DuraBrite acoustically transparent membrane

Surface Finish
 DuraBrite scrim with factory-applied latex paint

Fire Performance
 ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification
 Type XII, Form 2, Pattern E
 Fire Class A

Humidity/Sag Resistance
 HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Mold/Mildew Protection
 Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

VOC Emissions (PB items only)
 Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the

guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
 See all LCA information on our EPDs.

High Recycled Content
 Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Acoustical Details
 Some items have CAC backing. CAC backing may be available as a special order. A CAC value of 37 can be achieved by backloading fiberglass products with Item 769 or 770.

Insulation Value
 3253 –
 R Factor – 6.0 (BTU units)
 R Factor – 1.05 (Watts units)
 3281, 3282 –
 R Factor – 3.0 (BTU units)
 R Factor – 0.53 (Watts units)
 All other items –
 R Factor – 4.0 (BTU units)
 R Factor – 0.70 (Watts units)

30-Year Performance Guarantee & Warranty
 When installed with Armstrong® Suspension System. Details at armstrongceilings.com

Weight; Square Feet/Carton
 1402 – 0.55 lbs/SF; 24 SF/ctn
 1406 – 0.55 lbs/SF; 30 SF/ctn
 3250, 3250PB – 0.46 lbs/SF; 48 SF/ctn
 3252, 3252PB, 3282 – 0.55 lbs/SF; 96 SF/ctn
 1410 – 0.55 lbs/SF; 16 SF/ctn
 1411 – 0.55 lbs/SF; 20 SF/ctn
 1412 – 0.55 lbs/SF; 6 SF/ctn
 3264 – 0.55 lbs/SF; 48 SF/ctn
 3253 – 0.64 lbs/SF; 32 SF/ctn
 3255, 3255PB – 0.55 lbs/SF; 96 SF/ctn
 3258 – 0.55 lbs/SF; 75 SF/ctn
 3278, 3286 – 0.55 lbs/SF; 100 SF/ctn
 3281 – 0.55 lbs/SF; 72 SF/ctn
 3354 – 0.47 lbs/SF; 48 SF/ctn

Minimum Order Quantity
 1 carton

Metric Items Available
 3250M, 3252M, 3253M, 3354M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



FIBERGLASS

OPTIMA® *Now in Shapes!*
OPTIMA®
 with Plant-based Binder
 Tegular
 fine texture

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 407-411 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)	
		1410	4 x 48 x 1"	
		1411	4 x 60 x 1"	
		1412	6 x 6 x 1"	
		1413	6 x 12 x 1"	
		1415	6 x 42 x 1"	
		1403	6 x 48 x 1"	
		1417	6 x 54 x 1"	
		1407	6 x 60 x 1"	
		1409	6 x 96 x 1"	
		3263	12 x 24 x 1"	
		3290	12 x 48 x 1"	
		1414	12 x 96 x 1"	

DeclareSM
 Living Building Challenge Compliant
 PB Suffix Only

SUSTAINSM
 High Performance Sustainable Ceiling Systems
 PB Suffix Only

UP TO 71% RECYCLED CONTENT

LEEDSM

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT PB ONLY PB ONLY PB ONLY

Calculate LEED contribution at armstrongceilings.com/greengenie

PERFORMANCE SELECTION Dots represent high level of performance.

UL Classified Acoustics			Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Wash	Impact	Scratch	Soil	Recycled Content	Recycle Program	30-Yr Warranty
NRC	+	CAC														
N/A	N/A	-	N/A	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
N/A	N/A	-	N/A	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
N/A	N/A	-	N/A	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
N/A	N/A	-	N/A	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
N/A	N/A	-	N/A	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
N/A	N/A	-	N/A	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
N/A	N/A	-	N/A	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•

¹ Total AcousticsSM ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. Optima items with the PB suffix are included in the SustainSM portfolio and carry DeclareSM certification.



FIBERGLASS

OPTIMA® *Now in Shapes!*
OPTIMA®
 with Plant-based Binder
 Tegular
 fine texture

SUSTAIN®
 High Performance Sustainable Ceiling Systems
 PB Suffix Only

Declare™
 Living Building Challenge Compliant
 PB Suffix Only

UP TO 71% RECYCLED CONTENT
 Calculate LEED contribution at armstrongceilings.com/greengenie

LEED®	energy management	construction waste mgmt	regional materials	design for flexibility	EPD	recyclable/extended producer resp.	bio-based materials	recycled content	sourcing of raw materials	material ingredient reporting	low emitting materials	lighting quality	acoustics

LOCATION DEPENDENT PB ONLY PB ONLY PB ONLY

VISUAL SELECTION

PERFORMANCE SELECTION Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 407-411 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)	UL Classified Acoustics		Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Wash	Impact	Scratch	Soil	Recycled Content	Recycle Program	30-Yr Warranty
				NRC	CAC														
OPTIMA® Tegular																			
9/16" Square Tegular	26, 43, 47, 51, 55	3276	20 x 54 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3266	20 x 56 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3277	20 x 60 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3279	21 x 24 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3251 3251PB	24 x 24 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3254	24 x 24 x 1-1/2"	1.00	N/A	-	200	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3355	24 x 24 x 1"	0.90	26	-	200	Class A	0.90	•	•	-	•	•	•	•	•	-	•
	26, 43, 47, 51, 55	3257 3257PB	24 x 48 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3265 3265PB	24 x 60 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3261 3261PB	24 x 72 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3262 3262PB	24 x 96 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•
	26, 43, 47, 51, 55	3283	27 x 30 x 1"	0.95	N/A	-	190	Class A	0.90	•	•	-	•	•	•	•	•	•	•

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. Optima items with the PB suffix are included in the Sustain® portfolio and carry Declare™ certification.



OPTIMA® *Now in Shapes!*
OPTIMA®
 with Plant-based Binder
 Tegular
 fine texture



Declare™
 Living Building
 Challenge Compliant
 PB Suffix Only

SUSTAIN®
 High Performance
 Sustainable
 Ceiling Systems
 PB Suffix Only

UP TO **71%** RECYCLED CONTENT

LEED®

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT PB ONLY PB ONLY PB ONLY

Calculate LEED contribution at armstrongceilings.com/greengenie

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 407-411 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)	
OPTIMA® Tegular				
9/16" Square Tegular	26, 43, 47, 51, 55	3268	28 x 30 x 1"	<input type="checkbox"/>
	26, 43, 47, 51, 55	3269	28 x 60 x 1"	<input type="checkbox"/>
	26, 43, 47, 51, 55	3259	30 x 30 x 1"	<input type="checkbox"/>
	26, 43, 47, 51, 55	3284	30 x 54 x 1"	<input type="checkbox"/>
	26, 43, 47, 51, 55	3289	30 x 56 x 1"	<input type="checkbox"/>
	26, 43, 47, 51, 55	3285	30 x 60 x 1"	<input type="checkbox"/>
	26, 43, 47, 51, 55	3287	42 x 48 x 1"	<input type="checkbox"/>
	26, 43, 47, 51, 55	3288	44 x 48 x 1"	<input type="checkbox"/>
	26, 43, 47, 51, 55	3256 3256PB	48 x 48 x 1"	<input type="checkbox"/>
	26, 43, 47, 51, 55	3249	48 x 54 x 1"	<input type="checkbox"/>

PERFORMANCE SELECTION Dots represent high level of performance.

UL Classified Acoustics			Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Wash	Impact	Scratch	Soil	Recycled Content	Recycle Program	30-Yr Warranty
NRC	+ CAC	=	NRC + CAC	AC	Fire	Light	Bio-Block	Humi-Guard+	VOC	Wash	Impact	Scratch	Soil	Recycled Content	Recycle Program	30-Yr Warranty
0.95*	N/A	-	190*	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•
0.95	N/A	-	190	Class A	0.90	•	•	•	-	•	•	•	•	•	•	•

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.
 Optima items with the PB suffix are included in the Sustain® portfolio and carry Declare™ certification.
 * These items are not UL classified.



FIBERGLASS



Declare™
 Living Building
 Challenge Compliant
 PB Suffix Only

SUSTAIN™
 High Performance
 Sustainable
 Ceiling Systems
 PB Suffix Only

UP TO 71% RECYCLED CONTENT

Calculate LEED contribution at armstrongceilings.com/greengenie

LEED	energy management	construction waste mgmt	regional materials	design for flexibility	EPD	recyclable/extended producer resp.	biobased materials	recycled content	sourcing of raw materials	material ingredient reporting	low emitting materials	lighting quality	acoustics

LOCATION DEPENDENT PB ONLY PB ONLY PB ONLY

VISUAL SELECTION

Edge Profile	Dimensions (Inches)
OPTIMA® Size Capabilities	Width Length
15/16" & 9/16" Square Tegular 1 CTN MIN Made-to-Order Sizes (3 Wks)	Non-PB 1" Thick
	4" – 5-1/2" 9" – 96"
	6" – 11-1/2" 6" – 96"
	12" – 48" 4" – 120"
	PB 1" Thick
	4" – 5-1/2" 9" – 72"
6" – 11-1/2" 6" – 72"	
12" – 48" 4" – 96"	
15/16" Square Tegular 1 CTN MIN Made-to-Order Sizes (3 Wks)	Non-PB 1-1/2" Thick
	4" – 5-1/2" 9" – 96"
	6" – 11-1/2" 6" – 96"
	12" – 36-1/2" 4" – 120"
	37" – 42-1/2" 4" – 120"
	43" – 48" 4" – 89"

PERFORMANCE SELECTION Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Wash	Impact	Scratch	Soil	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC =	NRC + CAC	AC	Fire	Light	Bio-Block	Humi-Guard+	—	—	—	—	—	—	—	—
N/A N/A =	—	N/A	Class A	0.90	•	•	—	•	•	•	•	•	•	•
N/A N/A =	—	N/A	Class A	0.90	•	•	—	•	•	•	•	•	•	•
N/A N/A =	—	N/A	Class A	0.90	•	•	—	•	•	•	•	•	•	•

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. Optima items with the PB suffix are included in the Sustain® portfolio and carry Declare™ certification.

SUSPENSION SYSTEMS



Blizzard White – Suspension System Finish

A color and texture coordinated suspension system to complement Optima® ceiling panels for a monolithic look and feel. Available for: Prelude® XL® and XL® HRC, Suprafine ML, XL, and XL HRC, Silhouette® XL® 1/4" and 1/8" Reveal, Interlude® XL® HRC

ACCESSORIES (not included; ordered separately)

435 Stabilizer Clip (3/4" & 1")
 Recommended for panels 60" and greater in length
NOTE: Panels 60" up to 96" – One clip near mid-point of each long edge.
 Panels 96" and over – Two clips at 1/3 points of each long edge.

PHYSICAL DATA

Material
 3355 – Fiberglass with DuraBrite® acoustically transparent membrane; CAC backing
 All other items – Fiberglass with DuraBrite acoustically transparent membrane

Surface Finish
 DuraBrite scrim with factory-applied latex paint

Fire Performance
 ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification
 Type XII, Form 2, Pattern E
 Fire Class A

Humidity/Sag Resistance
 HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Mold/Mildew Protection
 Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

VOC Emissions (PB items only)
 Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the

guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
 See all LCA information on our EPDs.

High Recycled Content
 Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
 3254 –
 R Factor – 6.0 (BTU units)
 R Factor – 1.05 (Watts units)

30-Year Performance Guarantee & Warranty
 When installed with Armstrong® Suspension System. Details at armstrongceilings.com

Weight; Square Feet/Carton
 1403 – 0.55 lbs/SF; 24 SF/ctn
 1407 – 0.55 lbs/SF; 30 SF/ctn
 1409, 3249, 3257, 3257PB, 3262, 3262PB – 0.55 lbs/SF; 96 SF/ctn
 1413 – 0.55 lbs/SF; 12 SF/ctn
 1414, 3263, 3290 – 0.55 lbs/SF; 48 SF/ctn
 1415 – 0.55 lbs/SF; 21 SF/ctn

3251, 3251PB – 0.46 lbs/SF; 48 SF/ctn
 1417 – 0.55 lbs/SF; 27 SF/ctn
 3254 – 0.64 lbs/SF; 32.5 SF/ctn
 3256 – 0.55 lbs/SF; 96 SF/ctn
 3259, 3276 – 0.55 lbs/SF; 75 SF/ctn
 3261 – 0.55 lbs/SF; 72 SF/ctn
 3265, 3285, 3277 – 0.55 lbs/SF; 100 SF/ctn
 3266 – 0.55 lbs/SF; 62.22 SF/ctn
 3268 – 0.55 lbs/SF; 70 SF/ctn
 3269 – 0.55 lbs/SF; 93.33 SF/ctn
 3280 – 0.55 lbs/SF; 84 SF/ctn
 3279 – 0.45 lbs/SF; 42 SF/ctn
 3283 – 0.55 lbs/SF; 67.5 SF/ctn
 3284 – 0.55 lbs/SF; 90 SF/ctn
 3287 – 0.55 lbs/SF; 112 SF/ctn
 3288 – 0.55 lbs/SF; 117.33 SF/ctn
 3355 – 0.47 lbs/SF; 48 SF/ctn
 3289 – 0.40 lbs/SF; 93.33 SF/ctn
 3251 – 0.45 lbs/SF; 96 SF/ctn

Minimum Order Quantity
 1 carton

Metric Items Available
 3251M, 3254M, 3256M, 3257M, 3355M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



FIBERGLASS