Kimball

DOCK® MEETING

Price List Effective Dates:

Pricing 07.02.18
Revision 09.17.18



	➤See page
Statement of Line	2.2
Table Tops	2.2
Bases	2.5
Cable Management and Power Components	2.7
Planning	2.8
Table Tops	2.8
Rim Profiles	2.9
Power & Cord Mgmt.	2.10
Disc Bases	2.11
Blade Bases	2.13
Tubular Bases	2.16
Rectangular Base	2.17
Rectangular Beam Bases	2.20
Panel Bases	2.23
Square & Cylinder Bases	2.26
Pricing	2.29
24"D Table Tops	2.29
30"D Table Tops	2.33
36"D Table Tops	2.39
42"D Table Tops	2.51
48"D Table Tops	2.60
54"D Table Tops	2.81
60"D Table Tops	2.95
Disc Bases	2.107
Blade Bases	2.109
Pull-Up Tables	2.114
Tubular Bases	2.115
Rect. Bases	2.116
Rect. Beam Bases	2.117
Panel Bases	2.119
Square Bases	2.120
Cylinder Bases	2.121
Power Components	2.122

Surface Materials

2.128



Statement of Line

IMPORTANT: All dimensions shown below are nominal and have been rounded to the nearest inch. Refer to the appropriate pricing pages for actual dimensions.

The pricing section for Dock Meeting is organized by top size: by depth first, then width. All top shapes offered in a particular size are listed on the same pricing and how to specify page, which is followed by a chart of applicable bases with grommet/cut-out options for that top size.

	➤See pages
24"D Table Tops	2.29-2.32
30"D Table Tops	2.33-2.38
36"D Table Tops	2.39-2.50
42"D Table Tops	2.51-2.59
48"D Table Tops	2.60-2.80
54"D Table Tops	2.81-2.94
60"D Table Tops	2.95-2.106



Round

24" diameter	•
30" diameter	•
36" diameter	•
42" diameter	•
48" diameter	•
54" diameter	•
60" diameter	•





Soft Square

24" x 24"	•	24" x 24"	•	
30" x 30"	•	30" x 30"	•	
36" x 36"	•	36" x 36"	•	
42" x 42"	•	42" x 42"	•	
48" x 48	•	48" x 48	•	
54" x 54"	•	54" x 54"	•	
60" x 60"	•	60" x 60"	•	



Rectangular

	48"VV	60AA	72"VV	84"VV	96"77	120"VV	144"VV	168"VV	192"W	216"W	240"VV
24"D	•										
30"D		•	•								
36"D		•	•	•	•						
42"D			•	•	•						
48"D			•	•	•	•	•	•	•	•	•
54"D						•	•	•	•	•	•
60"D							•	•	•	•	•



Statement of Line

IMPORTANT: All dimensions shown below are nominal and have been rounded to the nearest inch. Refer to the appropriate pricing pages for actual dimensions.

continued



Soft Rectangular

	48"W	60"W	72"W	84"W	96"W	120"W	144"W	168"W	192"W	216"W	240"W
24"D	•										
30"D		•	•								
36"D		•	•	•	•						
42"D			•	•	•						
48"D			•	•	•	•	•	•	•	•	•
54"D						•	•	•	•	•	•
60"D							•	•	•	•	•



Arc Rectangular

	48"W	60"W	72"W	84"W	96"W	120"W	144"W	168"W	192"W	216"W	240"W
24"D											
30"D		•	•								
36"D			•	•	•						
42"D				•	•						
48"D					•	•	•	•	•	•	
54"D						•	•	•	•	•	•
60"D							•	•	•	•	•



Boat

	48"W	60"W	72"W	84"W	96"W	120"W	144"W	168"W	192"W	216"W	240"W
24"D											
30"D											
36"D			•								
42"D				•							
48"D					•	•	•	•	•	•	•
54"D						•	•	•	•	•	•
60"D							•	•	•	•	•



Racetrack

	48"W	60"W	72"W	84"W	96"W	120"W	144"W	168"W	192"W	216"W	240"W
24"D											
30"D		•	•								
36"D			•	•	•						
42"D				•	•						
48"D					•	•	•	•	•	•	•
54"D						•	•	•	•	•	•
60"D							•	•	•	•	•




Statement of Line

IMPORTANT: All dimensions shown below are nominal and have been rounded to the nearest inch. Refer to the appropriate pricing pages for actual dimensions.

continued



Ellipse

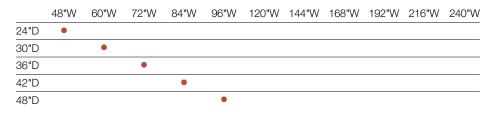



Tapered

	48"W	60"W	72"W	84"W	96"W	120"W	144"W	168"W	192"W	216"W	240"W
24"D											
30"D											
36"D			•								
42"D				•							
48"D					•	•					

IMPORTANT: All dimensions shown below are nominal and have been rounded to the nearest inch. Refer to the appropriate pricing pages for actual dimensions.





Disc Bases

- >See page 2.11 for product information; pages 2.107-2.108 to specify.
- = Without cord management
- = With cord management

	15"H	19"H	28"H	35"H	41"H	
17" diameter	•		•	•	•	
22" diameter	•		•	•	•	
27" diameter	•		•	•	•	



Blade X Bases

- ➤ See page 2.13 for product information; page 2.109 to specify.
- = With glides
- = With casters

	15"H	19"H	28"H	35"H	41"H
20"D	•	•	•	•	•
26"D	•	•	•	•	•
32"D	•		•	•	•





Blade Quad Bases


➤ See page 2.13 for product information; page 2.110 to specify.


	28"H	35"H	41"H	
33"D	•	•	•	
37"D	•	•	•	
















Blade Y Bases

- ➤ See page 2.13 for product information; pages 2.111–2.113 for available widths and to specify.
- = Single column
- = Double column

	15"H	19"H	28"H	35"H	41"H
16"D	•		•		
22"D	•		•	•	•
27"D			•	•	•
42"D					

IMPORTANT: All dimensions shown below are nominal and have been rounded to the nearest inch. Refer to the appropriate pricing pages for actual dimensions.

continued



Pull-Up Table with Blade Base

>See page 2.13 for product information; page 2.114 to specify.

= With glides

26"H 16"D



Tubular X Bases

>See page 2.16 for product information; page 2.115 to specify.

- = With glides
- = With casters

	28"H	35"H	41"H	
22"D	•		•	
26"D	•		•	
32"D	•		•	
38"D	•		•	




Rectangular Bases

Available with or without aluminum radius end caps.

>See page 2.17 for product information; page 2.116 to specify.

	28"H	35"H	41"H	
18"D	•			
24"D	•			
30"D	•			





Rectangular Beam Bases

Available with or without aluminum radius end caps.

➤ See page 2.20 for product information; pages 2.117–2.118 to specify.

	28"H	35"H	41"H
18"D	•		•
24"D	•		•
30"D	•		



Panel Bases

➤ See page 2.23 for product information; page 2.119 to specify.

	28"H	35"H	41"H	
18"D				
24"D	•			
30"D				



Square Bases

With cord access.

>See page 2.26 for product information; page 2.120 to specify.

	28"H	35"H	41"H	
18"D	•			
24"D	•			






Cylinder Bases

Available with or without cord access. >See page 2.26 for product information; page 2.121 to specify.

	28"H	35"H	41"H	
18" dia.	•			
24" dia.	•			

IMPORTANT: All dimensions shown below are nominal and have been rounded to the nearest inch. Refer to the appropriate pricing pages for actual dimensions.



M2X Dual Retractable Power Centers

➤ See page 2.122 to specify.



Mho® Retractable Power Centers

➤See page 2.123 to specify.



E2X Power/Data Centers

➤ See page 2.124 to specify.




Vault Turnbox

➤See page 2.125 to specify.



Node® Power Center

➤ See page 2.126 to specify.



P-Shaped Cable Managers

➤See page 2.127 to specify.




Plastic Leg Cable Managers

➤ See page 2.127 to specify.



Metal Vertical Cable Managers

➤ See page 2.127 to specify.



Cable Management Accessories

- Loop-style cable manager
- Flexchain cable manager
- Expandable cable manager
- See the Dock Training chapter in the Kimball Meeting & Collaboration Price List to specify.



Table TopsPlanning

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Details

Dock meeting tops are available in:


- 1¹/8"-thick thermally-fused laminate (TFL)
- 11/8"-thick 3D laminate (select sizes)
- 13/16"-thick high-pressure laminate (HPL)
- 13/16"-thick high-pressure laminate (HPL) with a wood rim
- 13/16"-thick wood veneer

Ten top shapes are available:


- Round
- Square
- Soft Square
- Rectangular
- Soft Rectangular
- Arc Rectangular
- Boat
- Racetrack
- Ellipse
- Tapered
- See statement of line and/or the price list pages for shapes and available sizes.

Six rim profile options are available.


➤See page 2.9.



Grain direction on one-piece wood tops runs with the width in all veneers and finishes




Grain direction on two- and threepiece wood tops runs with the width on plain-sliced cherry, maple, walnut, and quarter-sliced sapale.



Grain direction on two- and threepiece wood tops runs with the depth on the following quartered (straight) grain finishes

- CO Canvon Oak
- YO Monterey Oak
- NW Tuscan Walnut
- CZ Clear on Zebrawood



Grain direction on on one-, two-, and three-piece woodgrain laminate tops runs with the width. On two- and three-piece HPL and TFL surfaces, the woodgrain pattern will not be matched.

Connections

Two- and three-piece tops ship with flat brackets to connect tops at seams.

Hardware ships with base to attach the base to the top.

Dock Meeting table tops are designed to be specified with the applicable bases as listed in this price list section by top size. They are not to be used with bases from other table series.

➤ Refer to the "Applicable Bases" charts in the pricing section for your top size to determine the correct base style and model number for your application.

Related Products

Grommet and cut-out location applicability depends on the top size and the base you choose.

- ➤ See page 2.15 for blade Y base locations.
- See page 2.19 for rectangular base locations
- See page 2.22 for rectangular beam base locations.
- ➤ See page 2.25 for panel base locations.
- See page 2.28 for square and cylinder base locations.

Grommets are also available for field installation.


See the Perks chapter in the Kimball Desks & Accessories Price List.



Statement of Line ➤See page 2.2 Planning 2.8 2.29 Pricing Surface Materials 2.128

Rim Profiles

Rim profiles differ based on the top material selected.




- P Softened vinyl rim
- Applies to TFL or HPL surfaces
- 3mm vinyl edgeband
- Profile is on all four sides








- Applies to 3D laminate surfaces
- Profile is on all four sides



- J Self-edge rim
- Applies to HPL surfaces
- Profile is on all four sides



- **F** Softened wood rim
- Applies to HPL with wood rim or wood
- 3mm shaped wood profile is on all four sides





- M Reed wood rim
- Applies to HPL with wood rim or wood
- 3mm shaped wood profile is on all four sides





Planning

- **S** Knife wood rim
- Applies to HPL with wood rim or wood
- 3mm shaped wood profile is on all four sides



Table Tops Planning

Power and Cord Management

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Details

Several flexible options for routing and concealing cords and cables are available with Dock training:

- Factory-installed grommets (G1)
- Factory-installed C2, C4, C6, C7, C8, and C9 size for power/data/USB centers
- Cord manager clips

Factory-installed grommets and cut-outs are available as an option in pre-determined locations; upcharge applies.

Grommet and cut-out location applicability depends on the top size and the base you choose.

- ➤See page 2.12 for disc base locations.
- ➤ See page 2.15 for blade Y base locations.
- >See page 2.19 for rectangular base locations.
- ➤See page 2.22 for rectangular beam base locations.
- ➤See page 2.25 for panel base locations.
- ➤See page 2.28 for square and cylinder base locations.



G1 plastic grommet is a two-piece unit with snap-in lid. Lid cutout slides open to route cables or can be closed when not in use. Available in:

Silver MB Matte Black



C2 cut-outs are for use with:

• M2X retractable power/data (KCU0810ELPDC or KCU0810ELPDCH)

C4 cut-outs are for use with:

center with 3 prona plua

(KCEB2PDUPS)

Mho® retractable power/data center

with 3 prong plug (KCEB2PDPS

Mho retractable power/data/USB

 M2X retractable power/data/USB/ HDMI/VGA Center (KCE820ELPDC or KCE820ELPDH)





 Vault power/USB turnbox (KCE4124PD)



(KCE4164PD)



C6 cut-outs are for use with:

- Node® power center (KCEBN20PP)
- Node® power/USB center (KCEBN11PU)



C7 cut-outs are for use with:

 E2X power/data center (KCE1110PDESMAA or KCE1110PDEHWSMAA)




C8 cut-outs are for use with:



C9 cut-outs are for use with:

Vault power/data/USB turnbox



Plastic leg cable manager fits blade bases to hold cords and cables being routed from the floor to the top. These clips are simple to use and no installation hardware is required; they snap onto the column. Available in silver or clear plastic. Set of 3.



Metal vertical cable manager acts as a sleeve to cover cables on Dock Meeting and Dock Training blade bases only, and features a powdercoat finish to match the base. Snapon installation can be repositioned and accommodates two power cords or six data cables, or one power cord and three data cables.


Related Products



Wire manager provides large J channel for additional wire capacity; black

plastic. Wires can easily be added or removed by the user. Attachment tape is included. Wire manager can be cut to desired length in the field.

➤See page 2.127.



Perks loop-style undersurface cable manager organizes cords and cables under tops. Cables pressure fit into individual loops. Openings are 1"D x 5/8"W x 1"H and can be removed to expand capacity. Black plastic. Set of 6.

See the Perks chapter in the Kimball Desks & Accessories Price List to specify.




Perks flexchain and expandable cable manager manages cables and attaches to the underside of top to route cables and cords to the floor. See the Perks chapter in the Kimball Desks & Accessories Price List to specify.

Grommets are also available for field installation.

See the Perks chapter in the Kimball Desks & Accessories Price List to specify.

B = Distance between columns

Details



Disc bases with and without cord management are available in four heights:

- Occasional height (16"H) for reception areas
- Worksurface height (28"H) for sitdown meeting areas and cafeterias
- Standing counter height (36"H) for teaming and standing laptop use
- Standing height (42"H) for cafeterias and general meeting


Bases are metal and are available in several powdercoat finishes.

Disc base column is 3" in diameter on non-cord management model and 4" in diameter on cord management models. Assembly required to attach the disc and column in the field. Black plastic glides are standard on disc bases. Glide floats base 1/4" above the floor with 1/6" adjustability.

Disc bases can be used singularly to support round, square, and soft-square tops from 24" to 48". They can be used in sets of 2 or 3 to support rectangular and other shaped tops.

Connections

Disc Bases



Disc bases with cord management

allow cords to pass through the base and exit at the bottom to floor or wall plug. Glide floats base ½" above the floor with ½" adjustability and allow cord to pass underneath the disc. Appropriately sized table top must be specified. Disc bases with cord management are compatible with G1 grommet, C4* cutout, and C6* cutouts only.

IMPORTANT: Factory-installed grommets and cut-outs are not available in left and right locations over the bases on 60"W tops. However, C4- and C6-size cut-outs can be field installed on this size top.

All disc bases mount to the underside of tops with a fixed steel plate.

Attachment hardware is standard.

Related Products

Wish stools and sit-to-stand seating adjust for standing-counter-height tables.

▶See the Kimball Seating Price List.


Wish stools and Bingo stools pair well with standing-height tables

▶See the Kimball Seating Price List.

Clearance Dimensions:

Clearance dimensions listed apply to all top shapes unless indicated otherwise.

- >Refer to the statement of line or pricing pages for top shape availability by size; Not all top shapes are available in all sizes
- >Refer to the "Applicable Bases" charts in the pricing section for your top size to determine the correct base model number for your application.




	60"W	/ Тор	72"W	Тор	84"W	′ Тор	96"W	/ Тор	
	Α	В	Α	В	Α	В	Α	В	
Disc Base C	Clearance	es							
30"D top	13"	26"	16"	32"					
36"D top	13"	26"	16"	32"	22"	32"			
42"D top			16"	32"	22"	32"	22"	44"	
48"D top					22"	32"	22"	44"	

Disc Bases, continued

Grommet and Cut-Out Locations:

>Refer to the pricing page and base applicability table for your top size to see applicable grommet and cut-out sizes, locations, designators, and option upcharges.


24"-48" Dia. Round Tops 24"-42"W Square, Soft-Square Tops



CENTER (C)


24", 30",
36", 42",
48", 54",
or 60"

60"W One-Piece Tops





72"W One-Piece Tops

48"




84"W One-Piece Tops





96"W One-Piece Tops






LEFT, CENTER, & RIGHT (LCR)

Bases Planning

Blade Bases

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Details




Blade X bases can be used singularly to support round, square, and soft-square tops from 24" to 48". They are available in five heights:

- Occasional height (16"H) for reception areas
- End table height (20"H) for reception areas
- Worksurface height (28"H) for sitdown meeting areas and cafeterias
- Standing counter height (36"H) for teaming and standing laptop use
- Standing height (42"H) for cafeterias and general meeting




Quad bases are used to support 48" square and soft-square tops, as well as 54" and 60" round, square, and soft-square tops. They available in three heights:

- Worksurface height (28"H) for sitdown meeting areas and cafeterias
- Standing counter height (36"H) for teaming and standing laptop use
- Standing height (42"H) for cafeterias and general meeting



Y bases are used to support occasional, meeting, and conference tops in a variety of sizes and shapes. They available in four heights in select sizes:


- Occasional height (16"H) for reception areas
- Worksurface height (28"H) for sitdown meeting areas and cafeterias
- Standing counter height (36"H) for teaming and standing laptop use
- Standing height (42"H) for cafeterias and general meeting



Y bases are offered in single- and double-column models to support various table depths and lengths.
See "Applicable Bases" chart in the pricing section.


Columns on blade bases are 23/6"-diameter, 10-gauge tubular steel with a cast aluminum foot.

Column, feet, and bridges on blade bases are available in matching and contrasting powdercoat finishes. The foot and bridge are also available in polished aluminum at no upcharge; foot and bridge on quad and Y models are always the same color/finish.



Glides on blade bases adjust ³/₄" and are standard in:

- Silver on Polished Aluminum, Designer White, Platinum Metallic, Silver Pearl, Antique White, or Frosty White foot
- Black on all other foot colors.



Non-hooded, locking casters on mobile blade X base models are available in:

- Black
- White/grey

Connections

Blade bases are specified based on the size of the top they will support.

See the "Applicable Bases" chart in the pricing section for the top size.

Column spacing and top overhang vary depending on size of the base and top.

See clearance dimensions chart on the next page.

Bases mount to the underside of tops with a fixed steel plate. Attachment hardware is standard with all bases.


Grommets and power/data

centers are not applicable with round and square tops; the base mounting plate and column of blade bases are centered beneath the top.

Related Products



Pull-up table pairs a blade X base with a top as a built-up unit; assembly required. Top is 3/4" thick with 1"-radius corners, 153/4"D, and 19"W. Height of the unit with the top is 255/8". Features standard floor glides.



Plastic leg cable manager fits blade bases to hold cords and cables being routed from the floor to the top. These clips are simple to use and no installation hardware is required; they snap onto the column. Available in silver or clear plastic. Set of 3.



Metal vertical cable manager acts as a sleeve to cover cables on Dock Meeting and Dock Training blade bases only, and features a powdercoat finish to match the base. Snapon installation can be repositioned and accommodates two power cords or six data cables, or one power cord and three data cables.

Wish stools and sit-to-stand seating adjust for standing-counter-height tables.

See the Kimball Seating Price List.

Wish stools and Bingo stools pair well with standing-height tables
>See the Kimball Seating Price List.

B = Distance between columns


Quad and Y Base Clearance Dimensions:

Clearance dimensions listed apply to all top shapes unless indicated otherwise.

>Refer to the statement of line or pricing pages for top shape availability by size; Not all top shapes are available in all sizes.

Blade Bases, continued

>Refer to the "Applicable Bases" charts in the pricing section for your top size to determine the correct base model number for your application.

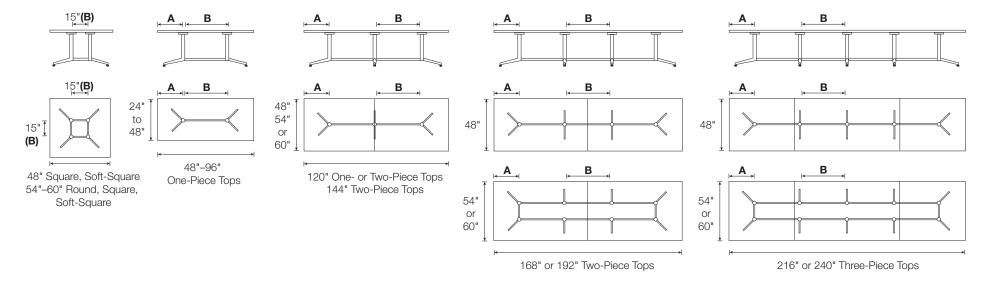

	48"W Top	60"W Top	72"W Top	84"W Top	96"W Top	120"W Top	144"W Top	168"W Top	192"W Top	216"W Top	240"W Top
	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B
Y Base Clea	arances										
24"D top	12" 21 ⁵ /8"*										
30"D top		15" 275/8"	15" 395/8"								
36"D top		15" 275/8"	15" 395/8"	18" 455/8"	24" 455/8"						
42"D top			15" 39 ⁵ /8"	18" 45 ⁵ /8"*	24" 45 ⁵ /8"						
48"D top			15" 39 ⁵ /8"	18" 455/8"	24" 455/8"	24" 395/8"	18" 455/8"	26" 375/8"	24" 455/8"	24" 395/8"	24" 455/8"
54"D top						24" 335/8"	24" 455/8"	24" 375/8"	24" 455/8"	24" 395/8"	24" 455/8"
60"D top						24" 335/8"	24" 45 ⁵ /8"	24" 37 ⁵ /8"	24" 45 ⁵ /8"	24" 395/8"	24" 455/8"

*Exceptions for Ellipse tops:

24"D x 48"W **A**=14" **B**=175/8"


42"D x 84"W **A**=24" **B**=335/8"

- = Grommet Location
- □ = Cut-Out Location

Blade Bases, continued

Grommet and Cut-Out Locations:

>Refer to the pricing page and base applicability table for your top size to see applicable grommet and cut-out sizes, locations, designators, and option upcharges.

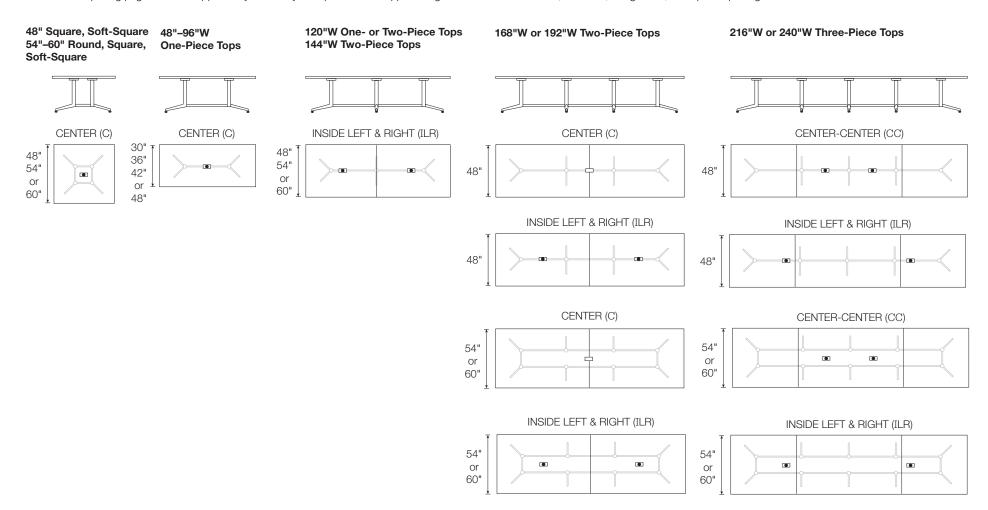




Bases

Planning

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Tubular X Bases




Tubular X bases are available in two heights:


- Worksurface height (273/4"H) for sitdown meeting areas and cafeterias
- Standing height (41"H) for cafeterias and general meetingå

Bases are metal and are available in two powdercoat finishes.

Column is 3" in diameter and feet are 17/8" in diameter. Constructed of 14gauge tubular steel.



Glides adjust 3/4" and are standard in black.



Non-hooded, locking casters are available on worksurface-height (27³/₄"H) bases. They are standard in black.

Connections

Bases mount to the underside of tops with a fixed steel plate. Attachment hardware is standard with all bases.

Related Products

Wish stools and Bingo stools pair well with standing-height tables ➤ See the Wish and Bingo chapters in the Kimball Seating Price List.




Bases Planning

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2 128


Rectangular Bases

Details



Rectangular access bases are available in two aesthetics—with or without aluminum radius end caps. They support a a variety of top sizes and shapes at worksurface height (28"H) for sit-down meeting areas.

See "Applicable Bases" chart in the pricing section for the table top size you are specifying for applicability and number of bases required.




Removable panels lift off on both sides of the base to access wires. Base can be set over a floor outlet or cords can exit the bottom to a floor outlet located between two bases.

Rectangular access bases are available in TFL, HPL, and wood veneer; grain runs vertically.

Black leveling glides are standard and provide 1" of adjustment.

Connections


Rectangular access bases attach to top with metal brackets.



Side panels on the base sit 2" below the top to allow grommets and select power centers to be positioned above the base.

Related Products

Perks power strip can be used to link power/data centers and power/data grommets together.

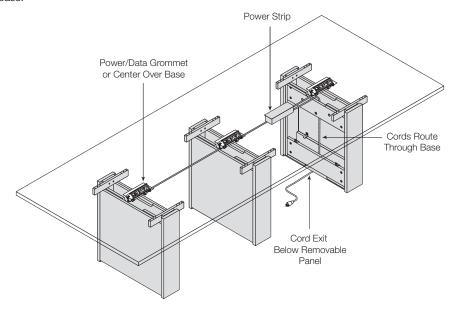

Clearance Dimensions for Rectangular Bases:


B = Distance between bases


Clearance dimensions listed apply to all top shapes unless indicated otherwise. Individual rectangular base is 6"D.


▶Refer to the statement of line or pricing pages for top shape availability by size; Not all top shapes are available in all sizes.

Rectangular Bases, continued

>Refer to the "Applicable Bases" charts in the pricing section for your top size to determine the correct base model number for your application.





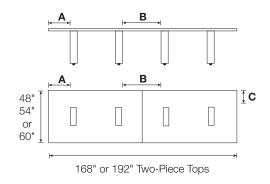

	All Widths	72"W	/Top	84"W		96"W	Top	120"\	W Top	144"\	W Top	168"\	N Top	192"	W Top
	С	Α	В	Α	В	Α	В	Α	В	Α	В	Α	В	Α	В
36"D top	8"	15"	30"	21"	30"	21"	42"								
42"D top	11"	15"	30"	21"	30"	21"	42"								
48"D top	11"	15"	30"	21"	30"	21"	42"	21"	30"	21"	42"	21"	34"	21"	42"
54"D top	11"							21"	30"	21"	42"	21"	34"	21"	42"
60"D top	14"									21"	42"	21"	34"	21"	42"

- = Grommet Location
- □ = Cut-Out Location


Rectangular Bases, continued

Grommet and Cut-Out Locations:

>Refer to the pricing page and base applicability table for your top size to see applicable grommet and cut-out sizes, locations, designators, and option upcharges.


72" One-Piece Tops 84" One-Piece Tops








96" One-Piece Tops















120"W One- or Two-Piece Tops 144"W Two-Piece Tops













168"W Two-Piece Tops 192"W Two-Piece Tops











Bases

Dlanning	Statement of Line	➤See page 2.2
Planning	Planning	2.8
	Pricing	2.29

Surface Materials


2.128

Rectangular Beam Bases

Details

Rectangular beam bases are available in two aesthetics—with or without aluminum radius end caps. They support a a variety of top sizes and shapes. Beam bases consist of two or four rectangular bases and cross beams (Cinder paint) to support longer spans with fewer bases. Beam bases are available in two heights:

- Worksurface height (28"H) for sitdown meeting areas
- Standing height (42"H) for general meeting
- >See "Applicable Bases" chart in the pricing section for the table top size you are specifying.




Removable panels lift off on both sides of the base to access wires. Base can be set over a floor outlet or cords can exit the bottom to a floor outlet located between two bases.

Rectangular beam bases are available in TFL, HPL, and wood veneer; grain runs vertically.


Black leveling glides are standard and provide 1" of adjustment.

Connections

Bases attach to top with metal angle brackets along ot he top of the rail.




Outside panels extend up to the bottom of the table top, to hide the ends of the rails. The inside panel sits 2" below the top to allow cords to be routed into the base.



Related Products

Perks power strip can be used to link power/data centers and power/data grommets together.

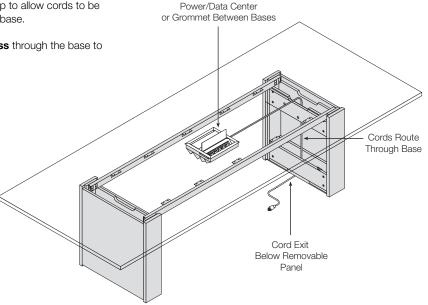

Planning

KEY:

A = Distance from edge of base to the edge of the top


B = Distance between bases

Clearance Dimensions for Rectangular Beam Bases:

Clearance dimensions listed apply to all top shapes unless indicated otherwise. Individual rectangular base is 6"D.

- ▶Refer to the statement of line or pricing pages for top shape availability by size; Not all top shapes are available in all sizes.
- >Refer to the "Applicable Bases" charts in the pricing section for your top size to determine the correct base model number for your application.

Rectangular Beam Bases, continued

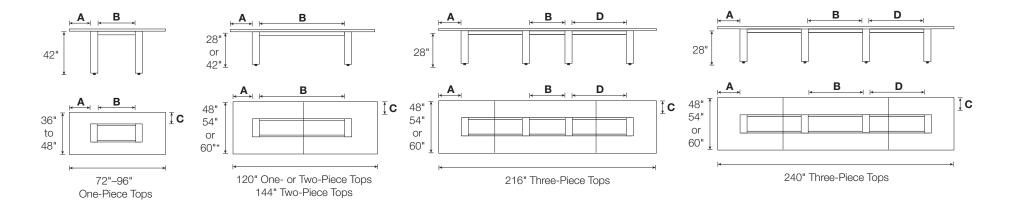

^{* 60&}quot;D available for 144"W only.

	All Sizes	72"W	/Top	84"W	/Top	96"W	/Top	120"	W Top	144"\	W Top	216"W Top		240)"W Top		
	С	Α	В	Α	В	Α	В	Α	В	Α	В	A B	D	Α	В	D	
36"D top	8"	14"	32"	20"	32"	21"	42"										
42"D top	11"	14"	32"	20"	32"	21"	42"										
48"D top	11"	14"	32"	20"	32"	21"	42"	21"	66"	21"	90"	21" 341/2	573/4"	21"	581/2"	573/4"	
54"D top	11"							21"	66"	21"	90"	21" 341/2	573/4"	21"	581/2"	573/4"	
60"D top	14"									21"	90"	21" 341/2	" 573/4"	21"	581/2"	573/4"	



Bases

Planning

KEY:

- = Grommet Location
- □ = Cut-Out Location

Grommet and Cut-Out Locations:

>Refer to the pricing page and base applicability table for your top size to see applicable grommet and cut-out sizes, locations, designators, and option upcharges.

48"


54"


60'

52"


Rectangular Beam Bases, continued

72"-96" One-Piece Tops 120"W One- or Two-Piece Tops 144"W Two-Piece Tops CENTER (C) CENTER (C) 48" 48" 36" 54" 54" to • or or 48" 60" 60"* LEFT & RIGHT (LR)





* 60"D available for 144"W only.

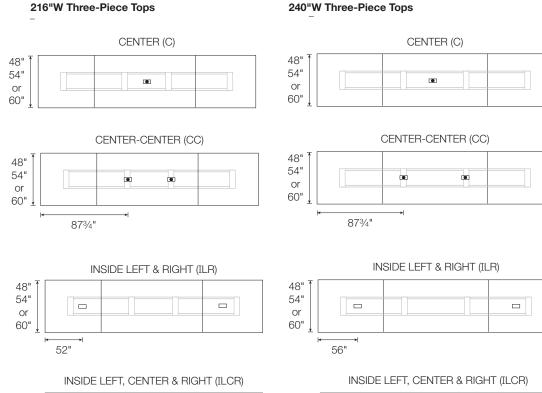

48"

54"

or

60"

56"

36"

to

48"



Bases

Planning

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Details



Panel bases are available HPL and wood veneer; grain runs vertically. They support a a variety of top sizes and shapes at worksurface height (28"H) for sit-down meeting areas. >See "Applicable Bases" chart in the pricing section for the table top size you are specifying for applicability and number of bases required.

Black leveling glides are standard and provide 1" of adjustment.

Connections

Panel Bases

Panel bases attach to top with black metal brackets.


Table top grommets and cut-outs must be located between bases. Panel bases are solid; cables cannot be routed inside the base.

Related Products

Perks power strip can be used to link power/data centers and/or power/data grommets together.

Flexchain (99K36CMFC) or expandable cable manager (99KECMB) can be used to route cables to the floor.

Perks round plastic grommet (99KG60 or 99KG65) can be field installed on the center panel base to allow cords to flow through to the other side.

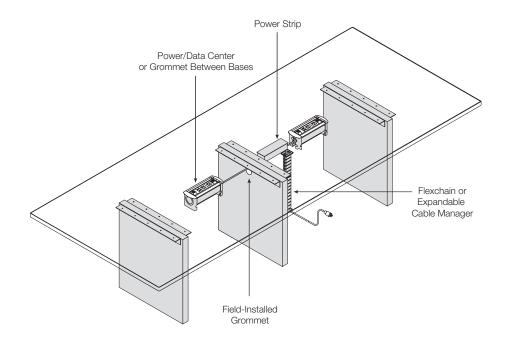

KEY:

A = Distance from edge of base to the edge of the top


B = Distance between bases


Clearance Dimensions for Panel Bases:


Clearance dimensions listed apply to all top shapes unless indicated otherwise. Individual rectangular base is 6"D.

Panel Bases, continued

- ▶Refer to the statement of line or pricing pages for top shape availability by size; Not all top shapes are available in all sizes.
- >Refer to the "Applicable Bases" charts in the pricing section for your top size to determine the correct base model number for your application.





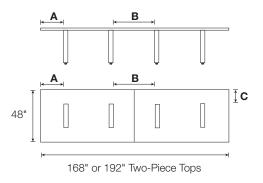

	All Widths	72"W	72"W Top		84"W Top		96"W Top		120"W Top		144"W Top		W Top	192"\	N Top
	С	Α	В	Α	В	Α	В	Α	В	Α	В	Α	В	Α	В
36"D top	6"	14"	42"	17"	46"	23"	46"								
42"D top	9"	14"	42"	17"	46"	23"	46"								
48"D top	12"	14"	42"	17"	46"	23"	46"	23"	34"	23"	46"	23"	38"	23"	46"


Panel Bases, continued

- = Grommet Location
- □ = Cut-Out Location


Grommet and Cut-Out Locations:

>Refer to the pricing page and base applicability table for your top size to see applicable grommet and cut-out sizes, locations, designators, and option upcharges.

72" One-Piece Tops 84" One-Piece Tops 96" One-Piece Tops



120"W One- or Two-Piece Tops 144"W Two-Piece Tops



INSIDE LEFT & RIGHT (ILR)

48"

(30)

(30)

(31)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)
(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)
(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)

(48)


(48)


(48)

(48)

(48)

168"W Two-Piece Tops 192"W Two-Piece Tops





INSIDE LEFT & RIGHT (ILR)





Bases Plan


nnina	Statement of Line	➤See page 2.2
anning	Planning	2.8
	Pricing	2.29
	Surface Materials	2.128

Square and Cylinder Bases

Details







Square and cylinder bases are available in HPL and wood veneer; square bases are also available in TFL. Grain runs vertically. They support a a variety of top sizes and shapes at worksurface height (28"H) for sit-down meeting areas, and are available in 18" and 24" square/ diameter sizes.

See "Applicable Bases" chart in the pricing section for the table top size you are specifying for applicability and number of bases required.

IMPORTANT: Cylinder bases cannot be used with square or soft-square table top shapes as they are unstable.

Square base features two removeable panels that lift off on opposite sides of the base to access wires.

Two mouse holes on square base, located in the top edge of both removable panels, allows cords to pass between bases. Exits at the bottom of the base allows cords to exit to floor power.






Cylinder base is available with or without a wire access door. Access door model features a 10" x 10" hinged door with touch latch. Both models feature a mounting for ease of installation.

Two mouse holes on all cylinder bases, located on each side at the top, allows cords to pass between bases.

Cord exits at the bottom of the cylinder base with wire access door allows cords to exit to floor power.




Square and cylinder bases require additional counterweight, specified separately, in most cases to prevent tipping. Open top on square base and round opening in top of cylinder base allows insertion of additional counterweight. A 51/2"-diamter tube inside the base protects cords and cables routed through the base to the floor.

See "Applicable Bases" chart in the pricing section for the table top size you are specifying for additional counterweight requirements.





Panel bases attach to top with black metal brackets. Cylinder bases are standard with a mounting pad to attach to the top.

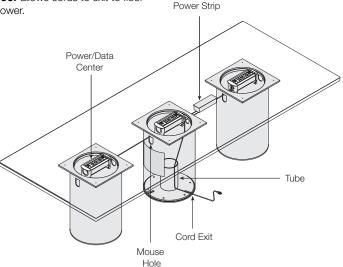



Select table top grommets and cut-outs to accommodate power/data centers or grommets are applicable for use above square and cylinder bases.






Square and cylinder bases can be positioned over a floor outlet or cords can exit the bottom to a floor outlet located between two bases. Outlet must be able to fit inside the 5½"-diameter tube inside the base; tube may not accommodate all sizes of floor outlets.

Related Products

Power/data centers and grommets can be linked together by utilizing a Perks power strip (99KKELPS).

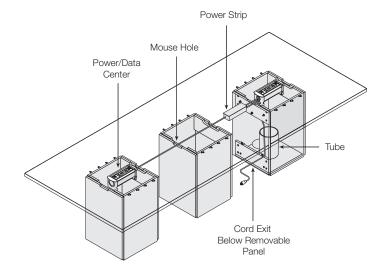

Dock MeetingKimball Meeting & Collaboration

Planning

KEY:

A/C = Distance from edge of base to the edge of the top

B/D = Distance between bases

Square and Cylinder Bases, continued

Square and Cylinder Base Clearance Dimensions:

Clearance dimensions listed apply to all top shapes unless indicated otherwise. Cylinder bases are not applicable for square or soft-square shapes.

54"


or

- >Refer to the statement of line or pricing pages for top shape availability by size; Not all top shapes are available in all sizes.
- >Refer to the "Applicable Bases" charts in the pricing section for your top size to determine the correct base model number for your application.







36"-60" Round, Square, Soft-Square Tops



72", 84" or 96 " One-Piece Tops



120" One- or Two-Piece Tops 144", 168", or 192" Two-Piece Tops

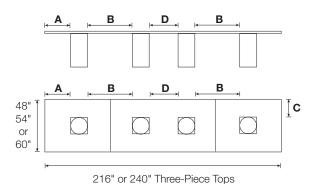

		36"W Top		42"W Top		48"W Top		54"W Top		60"V	60"W Top		•			84"W Top		p 96"\		W Top		
	Base W	Α	C	Α	C	Α	C	Α	C	Α	Ċ		Α	В	С	Α	В	С	Α	В	С	
36"D top	18"	9"	9"										9"	18"	9"	15"	18"	9"	15"	30"	9"	
42"D top	18"			12"	12"								9"	18"	12"	15"	18"	12"	15"	30"	12"	
48"D top	18"												9"	18"	15"	15"	18"	15"	15"	30"	15"	
	24"					12"	12"															
54"D top	24"							15"	15"													
60"D top	24"									18"	18"											

	120"W Top				144"W Top			168"W Top			192"W Top			216	216"W Top			240"W Top			
	Base W	Α	В	С	Α	В	С	Α	В	С	Α	В	С	Α	В	С	D	Α	В	С	D
48"D top	18"	15"	18"	15"	15"	30"	15"	15"	42"	15"	15"	54"	15"	15"	453/4"	15"	221/2"	15"	453/4"	15"	461/2"
54"D top	24"	12"	12"	15"	12"	24"	15"	12"	36"	15"	12"	48"	15"	12"	393/4"	15"	161/2"	12"	393/4"	15"	401/2"
60"D top	24"				12"	24"	18"	12"	36"	18"	12"	48"	18"	12"	393/4"	18"	16 ¹ /2"	12"	393/4"	18"	401/2"

Planning


KEY:

- = Grommet Location
- □ = Cut-Out Location

Square and Cylinder Bases, continued

Grommet and Cut-Out Locations:

>Refer to the pricing page and base applicability table for your top size to see applicable grommet and cut-out sizes, locations, designators, and option upcharges.

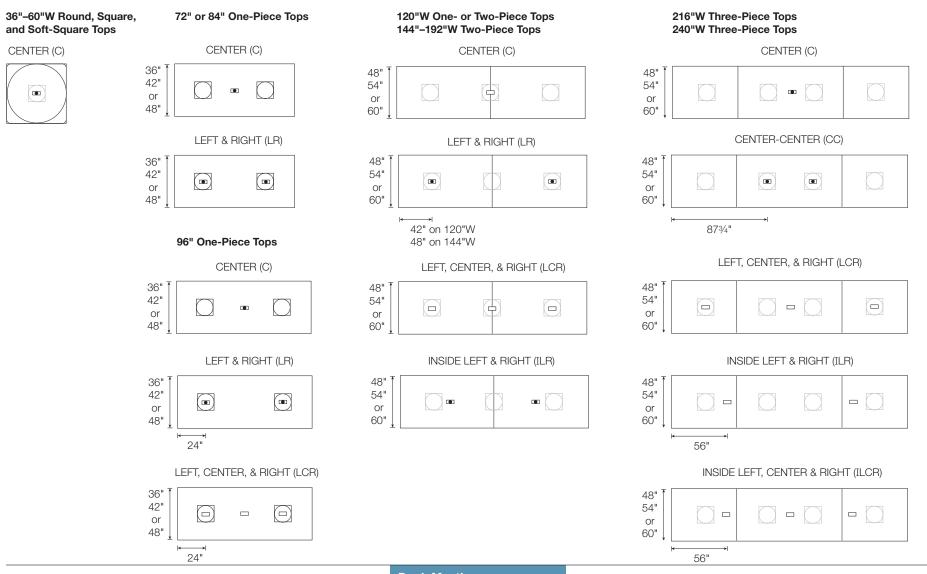



24"D x 24"W Table Tops (13/16"H)

Pricing

Wood

GSA SIN 711-11

HPL

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

	D W	Model	(LL)* Vinyl P Rim	(L) Vinyl P Rim	(T)* Sloped SL Rim	(2L) Self J Rim	(LW) Wood F/M Rim	(W) Wood F/M Rim	(1LW) Wood S Rim	(1W) Wood S Rim
	Round									
	24" diameter	74K24RD	\$344	\$410	\$410	\$431	\$856	\$856	\$942	\$942
\Diamond	Square									
	24" 24"	74K2424SQ	344	410	410	431	856	856	942	942
	Soft Square									
\Diamond	24" 24"	74K2424SSQ	344	410	410	431	856	856	942	942

TFL

HPL

3D Lam

HPL

HPL

Wood

Standard Includes

Top

How to Specify

- Model
- 2 Material:
 - **LL** = TFL with P rim
 - **L** = HPL with P rim
 - **2L** = HPL with J rim
 - T = 3D laminate with SL rim
 - **LW** = HPL with wood F or M rim
 - **W** = Wood with wood F or M rim
 - **1LW** = HPL with wood S rim
 - **1W** = Wood with wood S rim
- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - **SL** = Sloped Rim (T)
 - **J** = HPL self rim (2L)
 - **F** = Softened wood rim (LW or W)
 - **M** = Reed wood rim (LW or W)
 - **S** = Knife wood rim (1LW or 1W)
- ④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 ▶See page 2.30 for applicability and designators.
 - **X** = None
- ⑤ Surface finish price group (omit for LL models):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 6 Surface finish designator
- ② Rim finish price group (include for LW and 1LW models only):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 8 Rim finish designator (include for LL, L, LW and 1LW models only)

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".




24"D x 24"W Table Tops (13/16"H)

Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options Note: Bases are specified separately. ➤See page 2.107. Type Disc Height Occasional Worksurface Standing Counter Standing 74K1728D 74K1741D Models 74K1715D 74K1735D 74K1735DCM 74K1741DCM 74K1715DCM 74K1728DCM Quantity Grommets G1CMB*, G1CSL* Cut-outs C6C* *For use with cord management bases only. >See page 2.12 for grommet/cut-out location diagrams.

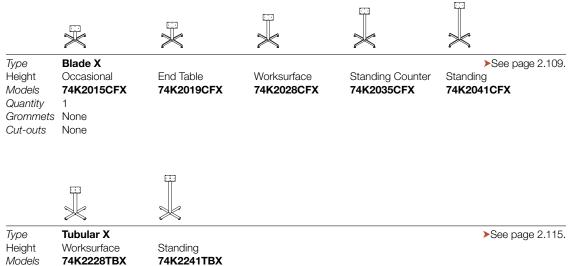

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size —

G1 = G1 grommet

Location -

C = Center; one grommet over the

base

 $\mathsf{Finish} -$

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C6 = C6 cut-out

Location -

C = Center; one cut-out over the base

Quantity 1 Grommets None

Cut-outs

None



24"D x 48"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Recta	ngular									
24"	48"	74K2448RT	\$241	\$293	\$293	\$306	\$471	\$471	\$518	\$518



Soft	Soft Rectangular										
24"	48"	74K2448SRT	241	293	293	306	471	471	518	518	



Ellip	se									
24"	48"	74K2448EL	254	308	308	324	494	494	545	545

Top

How to Specify

- Model
- 2 Material:
 - **LL** = TFL with P rim
 - **L** = HPL with P rim
 - **2L** = HPL with J rim
 - T = 3D laminate with SL rim
 - **LW** = HPL with wood F or M rim
 - **W** = Wood with wood F or M rim
 - **1LW** = HPL with wood S rim
 - **1W** = Wood with wood S rim
- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - **SL** = Sloped Rim (T)
 - $\mathbf{J} = HPL \text{ self rim (2L)}$
 - **F** = Softened wood rim (LW or W)
 - **M** = Reed wood rim (LW or W)
 - **S** = Knife wood rim (1LW or 1W)
- Surface finish price group (omit for) LL models):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- Surface finish designator
- 6 Rim finish price group (include for LW and 1LW models only):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- Rim finish designator (include for LL, L, LW and 1LW models only)

Standard Includes

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".



24"D x 48"W Table Tops (13/16"H)

Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y ▶See page 2.111.

Height Occasional

Models **74K223715CFYL** (rectangular or soft rectangular)

74K162815CFYL (ellipse)

Quantity1GrommetsNoneCut-outsNone



30"D x 30"W Table Tops (13/16"H)

Pricing

Wood

GSA SIN 711-11

HPL

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

D	W	Model	(LL)* Vinyl P Rim	(L) Vinyl P Rim	(T)* Sloped SL Rim	(2L) Self J Rim	(LW) Wood F/M Rim	(W) Wood F/M Rim	(1LW) Wood S Rim	(1W) Wood S Rim
Rou	nd									_
30" d	iameter	74K30RD	\$375	\$446	\$446	\$469	\$931	\$931	\$1025	\$`1025

3D Lam

HPL

HPL

Wood

HPL

TFL



Squa	re									
30"	30"	74K3030SQ	375	446	446	469	931	931	1025	1025



Soft	Square									
30"	30"	74K3030SSQ	375	446	446	469	931	931	1025	1025

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

1 - 1 1000 WOOD 11111 (EVV OI VV)

S = Knife wood rim (1LW or 1W) ④ Grommet/cut-out option (+\$64 per

grommet or +\$58 per cut-out):
See page 2.34 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

8 Rim finish designator (include for LL, L, LW and 1LW models only)

Standard Includes

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".



30"D x 30"W Table Tops (13/16"H)

Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options Note: Bases are specified separately. Туре Disc ➤See pages 2.107-2.108. Height Occasional Worksurface Standing Counter Standing Models 74K2215D 74K2228D 74K2235D 74K2241D 74K2215DCM 74K2228DCM 74K2235DCM 74K2241DCM Quantity Grommets G1CMB*, G1CSL* Cut-outs C6C* *For use with cord management bases only. >See page 2.12 for grommet/cut-out location diagrams. Type Blade X ➤See page 2.109. Height Occasional **End Table** Standing Counter Worksurface Mobile Standing 74K2615CFX 74K2619CFX 74K2628CFX 74K2628CFXM 74K2635CFX 74K2641CFX

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet over the

base

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C6 = C6 cut-out

Location -

C = Center; one cut-out over the base

Worksurface

74K2628TBX

None

Tubular X

Mobile 74K2628TBXM

➤See page 2.115.

Standina 74K2641TBX

Models Quantity Grommets None

Cut-outs

Туре

Height

Models

Quantity Grommets None Cut-outs None



30"D x 60"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

R 30
30

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
30"	60"	74K3060RT	\$322	\$415	\$415	\$437	\$604	\$604	\$665	\$665



Soft	Rectang	jular								
30"	60"	74K3060SRT	322	415	415	437	604	604	665	665



Arc Re	ectangular	•								
30"	60"	74K3060AR	542	714	714	749	797	797	900	900



Race	track									
30"	60"	74K3060RC	542	714	714	749	797	797	900	900



Ellips	e									
30"	60"	74K3060EL	542	714	714	749	797	797	900	900

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W) ④ Grommet/cut-out option (+\$64 per

grommet or +\$58 per cut-out):

See page 2.36 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ② Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

8 Rim finish designator (include for LL, L, LW and 1LW models only)

 $^{^{\}star}$ Height (thickness) for TFL and 3D laminate worksurfaces is 1 $^{1}\!/\!\!s$ ".



30"D x 60"W Table Tops (13/16"H)

Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Bases below are applicable to Rectangular, Soft Rectangular, Arc Rectangular, and Racetrack tops; bases are specified separately.









Disc

74K1715DCM Quantity

Type

Height

Models

Grommets G1CMB, G1CSL*

Occasional

74K1715D

Cut-outs C2C, C4C, C6C, C8C, C9C*



➤See pages 2.107-2.108.

74K1741D 74K1735DCM 74K1741DCM

Standing

▶See page 2.11 for clearance dims. >See page 2.12 for grommet/cut-out location diagrams.

➤See page 2.15 for grommet/cut-out location diagrams.

*See note at far right.





Worksurface

74K1728DCM

74K1728D



Standing Counter

74K1735D

Type Blade Y ➤See pages 2.111-2.112.

Height Worksurface Standing Counter Standing 74K224328CFYL 74K224335CFYL 74K224341CFYL Models

Quantity

Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C8C, C9C

➤ See page 2.14 for clearance dims.

Bases below are applicable to **Ellipse** tops; bases are specified separately.





Blade Y ➤See page 2.111. Type


Height Occasional Worksurface Models

Quantity

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C8C, C9C

➤ See page 2.14 for clearance dims. >See page 2.15 for grommet/cut-out location diagrams.



Type **Tubular T** Height Worksurface 75K2628TBT Model 75K2628TBTM Quantity Set of 2 Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C,

See the Dock Training chapter in the Kimball Meeting & Collaboration Price List to specify.

C8C, C9C



Type Blade T Heiaht Worksurface Model 75K2628CFTL 75K2628CFTM

Set of 2 Quantity Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C8C, C9C

Note: Undersurface support rail required when using Tubular and Blade T bases.

See the Dock Training chapter in the Kimball Meeting & Collaboration Price List to specify.

*Note: Factory-installed left and right grommets/cut-outs are not available over Disc bases on this top size; grommets, C4 or C6 cut-outs may be field installed for use over cable management bases.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

G1 = G1 grommet

Location -

C = Center; one grommet

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out

Dock Meeting Kimball Meeting & Collaboration



Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Model	(LL)* Vinyl P Rim	(L) Vinyl P Rim	(T)* Sloped SL Rim	(2L) Self J Rim	HPL (LW) Wood F/M Rim	(W) Wood F/M Rim	(1LW) Wood S Rim	(1W) Wood S Rim
Rect	angular									
30"	72"	74K3072RT	\$374	\$495	\$495	\$519	\$687	\$687	\$756	\$756



Soft F	Soft Rectangular									
30"	72"	74K3072SRT	374	495	495	519	687	687	756	756



Arc F	Rectango	ılar								
30"	72"	74K3072AR	597	788	788	828	1056	1056	1193	1193



Race	track									
30"	72"	74K3072RC	597	788	788	828	1056	1056	1193	1193

Top

How to Specify

- Model
- 2 Material:
 - **LL** = TFL with P rim
 - **L** = HPL with P rim
 - **2L** = HPL with J rim
 - T = 3D laminate with SL rim
 - **LW** = HPL with wood F or M rim
 - **W** = Wood with wood F or M rim
 - **1LW** = HPL with wood S rim
 - **1W** = Wood with wood S rim
- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - **SL** = Sloped Rim (T)
 - **J** = HPL self rim (2L)
 - **F** = Softened wood rim (LW or W)
 - **M** = Reed wood rim (LW or W)
 - **S** = Knife wood rim (1LW or 1W)
- ④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 ▶See page 2.38 for applicability
 - and designators.
 - **X** = None
- ⑤ Surface finish price group (omit for LL models):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 6 Surface finish designator
- ② Rim finish price group (include for LW and 1LW models only):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 8 Rim finish designator (include for LL, L, LW and 1LW models only)

Standard Includes

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".



Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.







Type Disc Height Worksurface Standing Counter Standing 74K1741D Models 74K1728D 74K1735D 74K1728DCM 74K1735DCM 74K1741DCM

Quantity

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C8C, C9C

>See page 2.11 for clearance dims.

>See page 2.12 for grommet/cut-out location diagrams.

Note: Factory-installed left and right grommets/cut-outs are not available over Disc bases on this top size; grommets, C4 or C6 cut-outs may be field installed for use over cable management bases.









Type Blade Y

Height Occasional Models

Worksurface

Standing Counter

Standing


74K225515CFYL 74K225528CFYL 74K225535CFYL 74K225541CFYL

Quantity Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C8C, C9C

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.




Type **Tubular T** Heiaht Worksurface Model 75K2628TBT 75K2628TBTM

Quantity Set of 2 Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C8C, C9C

Note: Undersurface support rail required.

See the Dock Training chapter in the Kimball Meeting & Collaboration Price List to specify.



Туре Blade T Height Worksurface Model 75K2628CFTL 75K2628CFTLM

Quantity Set of 2 Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C8C, C9C

Note: Undersurface support rail required.

See the Dock Training chapter in the Kimball Meeting & Collaboration Price List to specify.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

G1 = G1 grommet

Location -

C = Center; one grommet

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out

➤See pages 2.107-2.108.

➤See pages 2.111–2.112.



Pricing

Wood

GSA SIN 711-11

HPL

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Model	(LL)* Vinyl P Rim	(L) Vinyl P Rim	(T)* Sloped SL Rim	(2L) Self J Rim	(LW) Wood F/M Rim	(W) Wood F/M Rim	(1LW) Wood S Rim	(1W) Wood S Rim
Rour	nd									
36" di	ameter	74K36RD	\$404	\$485	\$485	\$509	\$1012	\$1012	\$1114	\$1114

3D Lam

HPL

HPL

Wood

HPL

TFL



Squa	re									
36"	36"	74K3636SQ	404	485	485	509	1012	1012	1114	1114



Soft	Square									
36"	36"	74K3636SSQ	404	485	485	509	1012	1012	1114	1114

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

 ④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 ▶See page 2.40 for applicability

and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

Standard Includes

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".



Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

DESIGNATOR KEY:

G1 = G1 arommet Location -

MB = Matte black

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C = Center; one cut-out

Location -

C = Center; one grommet

Cut-Outs (+\$58 per cut-out):

Size-

Finish-

Size-

SL = Silver

Grommets (+\$64 per grommet):

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.









Туре Disc Heiaht Occasional Models 74K2215D 74K2215DCM

Worksurface 74K2228D 74K2228DCM Standing Counter **74K2235D** (round) **74K2235DCM** (round) 74K2735D (square or soft-sq.) 74K2735DCM (square or soft-sq.)

➤See page pages 2.107–2.108. Standing

74K2241D (round) **74K2241DCM** (round) 74K2741D (square or soft-sq.) 74K2741D (square or soft-sq.)

Туре Square ▶page 2.120. Heiaht Worksurface Model 74K1828SQA Quantity Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C7C, C8C

Type

Height

Model

Quantity

- >See page 2.27 for clearance dims.; limited kneespace.
- See page 2.28 for grommet/cut-out location diagrams.

Cylinder

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C7C, C8C ➤ See page 2.27 for clearance dims.;

limited kneespace.

location diagrams.

Worksurface

74K1828CY

74K1828CYA



▶page 2.121.

Grommets G1CMB*, G1CSL* Cut-outs C4C*, C6C*

Quantity

Туре

Height

*For use with cord management models only.

>See page 2.12 for grommet/cut-out location diagrams.



Blade X

Occasional



Worksurface

74K3228CFX



Mobile

74K3228CFXM



Standing Counter

74K3235CFX



➤ See page 2.109. Standing

74K3241CFX

Models 74K3215CFX Quantity 1 Grommets None Cut-outs None







Type **Tubular X** Worksurface Height Models 74K3228TBX

Quantity Grommets None Cut-outs None

Mobile 74K3228TBXM

Standing 74K3241TBX ➤See page 2.115.

require four 27 lb. bags (108 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.

Note: Square and cylinder bases

See page 2.28 for grommet/cut-out



Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128





D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
36"	60"	74K3660RT	\$436	\$600	\$600	\$629	\$676	\$676	\$745	\$745
Soft	Rectang	ular								
36"	60"	74K3660SRT	436	600	600	629	676	676	745	745

Standard Includes

Top

How to Specify

- Model
- 2 Material:
 - **LL** = TFL with P rim
 - **L** = HPL with P rim
 - **2L** = HPL with J rim
 - T = 3D laminate with SL rim
 - **LW** = HPL with wood F or M rim
 - **W** = Wood with wood F or M rim
 - **1LW** = HPL with wood S rim
 - **1W** = Wood with wood S rim
- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - **SL** = Sloped Rim (T)
 - **J** = HPL self rim (2L)
 - **F** = Softened wood rim (LW or W)
 - **M** = Reed wood rim (LW or W)
 - **S** = Knife wood rim (1LW or 1W)
- Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 See page 2.42 for applicability and designators.
 - **X** = None
- ⑤ Surface finish price group (omit for LL models):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 6 Surface finish designator
- ② Rim finish price group (include for LW and 1LW models only):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 8 Rim finish designator (include for LL, L, LW and 1LW models only)



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Bases below are applicable to **Rectangular, Soft Rectangular, Arc Rectangular,** and **Racetrack** tops; bases are specified separately.









Type Disc Standing Counter Height Occasional Worksurface Standing Models 74K2215D 74K2228D 74K2235D 74K2241D 74K2215DCM 74K2228DCM 74K2235DCM 74K2241DCM

Quantity 2

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C8C, C9C

➤ See page 2.11 for clearance dims.

➤ See page 2.12 for grommet/cut-out location diagrams.

Note: Factory-installed left and right grommets/cut-outs are not available over the bases on this top size; grommets, C4 or C6 cut-outs may be field installed for use over cable management bases.







 Type
 Blade Y

 Height
 Worksurface
 Standing Counter
 Standing

 Models
 74K274628CFYL
 74K274635CFYL
 74K274641CFYL

Quantity 1

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C8C, C9C

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.



Height Worksurface

Model 75K2628TBT
75K2628TBTM

Quantity Set of 2

Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C8C, C9C

Note: Undersurface support rail required.

See the Dock Training chapter in the Kimball Meeting & Collaboration Price List to specify.



Type Blade T
Height Worksurface
Model 75K2628CFTL
75K2628CFTLM

Quantity Set of 2
Grommets G1CMB, G1CSL
Cut-outs C2C, C4C, C6C,
C8C, C9C

Note: Undersurface support rail required.

See the Dock Training chapter in the Kimball Meeting & Collaboration Price List to specify.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location —

C = Center; one grommet

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out

➤See pages 2.107-2.108.

➤See pages 2.111-2.112.



Pricing

GSA SIN 711-11

Statement of Line
Planning
2.8
Pricing
2.29
Surface Materials
2.128

* Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".















D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
36"	72"	74K3672RT	\$494	\$680	\$680	\$714	\$766	\$766	\$843	\$843
Soft	Rectang	ular								
36"	72"	74K3672SRT	494	680	680	714	766	766	843	843
Arc F	Rectangu	ılar								
36"	72"	74K3672AR	653	864	864	907	1317	1317	1401	1401
Boat	:									
36"	72"	74K3672BT	653	864	864	907	1317	1317	1401	1401
Race	etrack									
36"	72"	74K3672RC	653	864	864	907	1317	1317	1401	1401
Ellips	se									
36"	72"	74K3672EL	653	864	864	907	1317	1317	1401	1401
Таре	ered									
36"**	72"	74K3672TP	653	864	864	907	1317	1317	1401	1401

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 See page 2.44 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

6 Surface finish designator

Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Bases below are applicable to Rectangular, Soft Rectangular, Arc Rectangular, Boat and Racetrack tops; bases are specified separately.

>See next page for more applicable bases and options.



Type

Height

Models









Standing Counter 74K2235D 74K2235DCM

➤See pages 2.107-2.108. Standing

74K2241D 74K2241DCM

74K2228DCM Quantity


Grommets G1CMB, G1CSL, G1LRMB*, G1LRSL* Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C4LR*, C6LR*

- >See page 2.11 for clearance dims.
- >See page 2.12 for grommet/cut-out location diagrams.

*For use with cord management bases only.







Standina

74K275841CFYL

➤See pages 2.111-2.112.

Blade Y Worksurface Standing Counter 74K275828CFYL 74K275835CFYL

Quantity

Type

Height

Models

Grommets G1CMB, G1CSL

C2C, C4C, C6C, C7C, C8C, C9C Cut-outs

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

G1 = G1 grommet

Location -

C = Center; one grommet

LR = Left and right; two grommets

over the bases

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center: one cut-out

LR = Left and right, two cut-outs

over the bases







Type Square Heiaht Worksurface Model 74K1828SQA Cylinder Worksurface 74K1828CY 74K1828CYA ➤See pages 2.120-2.121.

Quantity

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL C2C, C4C, C6C, C7C, C8C, C9C C2LR, C4LR, C6LR, C8LR

- >See page 2.27 for clearance dims.
- >See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require one 27 lb. bag of counterweight per base to prevent tipping. Counterweight is ordered separately.



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options, continued

Applicable Bases and Grommet/Cut-Out Options

Bases below are applicable to **Rectangular, Soft Rectangular, Arc Rectangular, Boat** and **Racetrack** tops; bases are specified separately. >See next page for Ellipse and Tapered tops.



Type **Rectangular** ➤ page 2.116.

Height Worksurface
Model 74K1828R
74K1828RR

Quantity 2

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C.

C2LR, C4LR, C6LR

➤ See page 2.21 for clearance dims. ➤ See page 2.19 for grommet/cut-out

location diagrams.



Type **Beam** ➤ See page 2.118. Height Standing

Model 74K184241B 74K184241BR

Quantity

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL

Cut-outs C2C, C4C, C6C, C7C, C8C. C9C

➤See page 2.21 for clearance dims.

See page 2.22 for grommet/cut-out location diagrams.

Type Panel ➤See page 2.119.

Height Worksurface Model 74K2428PN

Quantity 2

Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C,

C8C, C9C

➤See page 2.24 for clearance dims.

See page 2.25 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size

G1 = G1 grommet

Location -

C = Center; one grommet

LR = Left and right; two grommets

over the bases

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

CI = CI Cul-0

C8 = C8 cut-out


C9 = C9 cut-out

Location -

C = Center: one cut-out

LR = Left and right, two cut-outs

over the bases




Type Tubular T
Height Worksurface
Model 75K2628TBT
75K2628TBTM

Quantity Set of 2

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C Note: Undersurface support rail required.

See the Dock Training chapter in the Kimball Meeting & Collaboration Price List to specify.



 Type
 Blade T

 Height
 Worksurface

 Model
 75K2628CFTL

 75K2628CFTM

Quantity Set of 2
Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C Note: Undersurface support rail required.

See the Dock Training chapter in the Kimball Meeting & Collaboration Price List to specify.



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options, continued

Applicable Bases and Grommet/Cut-Out Options

Bases below are applicable to **Ellipse and Tapered** tops; bases are specified separately.





Worksurface

Type Blade Y

➤See page 2.111.

Height Occasional Models 74K225515CFY

74K225515CFYL 74K225528CFYL (ellipse) **74K275628CFYL** (tapered)

Quantity 1

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

➤ See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location-

C = Center; one cut-out



Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128











D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
36"	84"	74K3684RT	\$543	\$801	\$801	\$840	924	\$924	\$1015	\$1015
Soft	Rectang	ular								
36"	84"	74K3684SRT	543	801	801	840	924	924	1015	1015
Arc F	Rectangu	ılar								
36"	84"	74K3684AR	715	982	982	1031	1589	1589	1795	1795
Race	etrack									
36"	84"	74K3684RC	715	982	982	1031	1589	1589	1795	1795

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

4 Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out): ➤See page 2.48 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ① Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".

Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Type

Height

Models

Quantity

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type

Height

Quantity





Disc Worksurface Models 74K2228D 74K2228DCM

Standing Counter 74K2235D

74K2235DCM

Grommets G1CMB, G1CSL, G1LRMB*, G1LRSL* Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C4LR*, C6LR*

>See page 2.11 for clearance dims.

>See page 2.12 for grommet/cut-out location diagrams.

*For use with to cord management bases only.



➤See pages 2.107-2.108. Standing

74K2241D

74K2241DCM

Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

Blade Y

Worksurface

74K276428CFYL

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.

Standing Counter

74K276435CFYL



Grommets (+\$64 per grommet):

Size -

G1 = G1 grommet

Location -

C = Center; one grommet

LR = Left and right; two grommets

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size -

 $C^* = Cut$ -out size

Location -

C = Center; one cut-out

LR = Left and right; two cut-outs

➤See pages 2.120-2.121.



Tvpe **Rectangular** ▶ page 2.116. Heiaht Worksurface Model 74K1828R 74K1828RR Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR

>See page 2.18 for clearance dims.

>See page 2.19 for rectangular base locations.



Beam ➤ See page 2.118. Type Height Standing Model 74K184241B 74K184241BR

Quantity Grommets G1CMB, G1CSL,

G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C. C9C

➤See page 2.21 for clearance dims. >See page 2.22 for grommet/cut-out

location diagrams.



Panel ➤See page 2.119. Type Height Worksurface Model 74K2428PN Quantity Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

>See page 2.24 for clearance dims. >See page 2.25 for grommet/cut-out

location diagrams.





2

Quantity



Cylinder Worksurface 74K1828CY

74K1828CYA Grommets G1CMB, G1CSL, G1LRMB, G1LRSL

C2LR, C4LR, C6LR, C7LR, C8LR >See page 2.27 for clearance dims.; limited kneespace. See page 2.28 for grommet/cut-out location diagrams.

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

➤See pages 2.111-2.112.

Note: Square and cylinder bases require two 27 lb. bags (54 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.



Standing

74K276441CFYL







Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128











D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
36"	96"	74K3696RT	\$560	\$933	\$933	\$980	\$1034	\$1034	\$1137	\$1137
Soft	Rectang	ular								
36"	96"	74K3696SRT	560	933	933	980	1034	1034	1137	1137
Arc F	Rectangu	ılar								
36"	96"	74K3696AR	738	1138	1138	1194	1756	1756	1985	1985
Race	track									
36"	96"	74K3696RC	738	1138	1138	1194	1756	1756	1985	1985

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

J = HPL self rim (2L)

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per

grommet or +\$58 per cut-out):
See page 2.50 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ② Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".



Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Grommets (+\$64 per grommet):

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.







Type Disc Heiaht Worksurface Models 74K2228D 74K2228DCM

Quantity

Туре

Standing Counter 74K2235D 74K2235DCM

Grommets G1CMB, G1CSL, G1LRMB*, G1LRSL* Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C4LR*. C6LR*

>See page 2.11 for clearance dims.

>See page 2.12 for grommet/cut-out location diagrams.

*For use with to cord management bases only.

Rectangular ▶page



➤See pages 2.107-2.108. Standing 74K2241D

74K2241DCM

Quantity Grommets G1CMB, G1CSL

Type

Height

Models

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C


>See page 2.14 for clearance dims.

Worksurface

74K276428CFYL

➤ See page 2.15 for grommet/cut-out location diagrams.





Standing Counter 74K276435CFYL

Standing

74K276441CFYL

➤See pages 2.111-2.112.

Size -C* = Cut-out size Location -

C = Center; one cut-out

DESIGNATOR KEY:

G1 = G1 grommet Location -

MB = Matte black

C = Center; one grommet LR = Left and right; two grommets

Cut-Outs (+\$58 per cut-out):

Size-

Finish-

SL = Silver

LR = Left and right; two cut-outs

LCR = Left, center, right; three cut-outs

➤See pages 2.120-2.121.



2.116. Height Worksurface Model 74K1828R 74K1828RR Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C C2LR, C4LR, C6LR C2LCR, C4LCR, C6LCR

>See page 2.18 for clearance dims. >See page 2.19 for rectangular base



Beam ➤ See page 2.118. Туре Heiaht Standina Model 74K185441B 74K185441BR Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

See page 2.21 for clearance dims. See page 2.22 for grommet/cut-out

location diagrams.

Panel ➤See page 2.119. Туре Heiaht Worksurface Model 74K2428PN Quantity Grommets G1CMB, G1CSL

C2C, C4C, C6C, C7C, Cut-outs C8C, C9C

>See page 2.24 for clearance dims.

>See page 2.25 for grommet/cut-out location diagrams.









Туре Square Cylinder Heiaht Worksurface Worksurface Model 74K1828SQA 74K1828CY 74K1828CYA Quantity

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL C2C, C4C, C6C, C7C, C8C, C9C, Cut-outs C2LR, C4LR, C6LR, C7LR, C8LR C2LCR, C4LCR, C6LCR, C7LCR, C8LCR,

>See page 2.27 for clearance dims.; limited kneespace.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require two 27 lb. bags (54 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.

locations.



Pricing

Wood

GSA SIN 711-11

HPL

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Model	(LL)* Vinyl P Rim	(L) Vinyl P Rim	(T)* Sloped SL Rim	(2L) Self J Rim	(LW) Wood F/M Rim	(W) Wood F/M Rim	(1LW) Wood S Rim	(1W) Wood S Rim
Round										
42" diam	neter	74K42RD	\$448	\$538	\$538	\$565	\$1138	\$1138	\$1252	\$1252

3D Lam

HPL

HPL

Wood

HPL

TFL



Squa	ire									
42"	42"	74K4242SQ	448	538	538	565	1138	1138	1252	1252



Soft	Square									
42"	42"	74K4242SSQ	448	538	538	565	1138	1138	1252	1252

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

4 Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out): ➤See page 2.52 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ① Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.





Туре Disc Height Occasional Worksurface Models 74K2715D 74K2728D

74K2728DCM 74K2715DCM

Quantity 1; applicable for round top only.

Grommets G1CMB*, G1CSL* Cut-outs C4C*, C6C*

>See page 2.11 for clearance dims.

>See page 2.12 for grommet/cut-out location diagrams.

*Applies to cord management bases only.



Туре Square ▶page 2.120. Worksurface Heiaht

Model 74K1828SQA Quantity

Type

Height

Model

Quantity

Cut-outs

location diagrams.

Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C,

C7C, C8C

➤ See page 2.27 for clearance dims.

See page 2.28 for grommet/cut-out location diagrams.



Cylinder

top only. Grommets G1CMB, G1CSL

C7C, C8C >See page 2.27 for clearance dims. >See page 2.28 for grommet/cut-out

Worksurface

74K1828CY

74K1828CYA

C2C, C4C, C6C,

1; applicable for round



▶page 2.121.

Blade X Type ➤ See page 2.109. Height Occasional Worksurface Mobile Standing Counter Standing 74K3228CFX 74K3228CFXM 74K3235CFX 74K3241CFX Models 74K3215CFX Quantity

None



Mobile

74K3828TBXM



Туре **Tubular X** Height Worksurface Models 74K3828TBX

Quantity Grommets None Cut-outs None

Grommets None

Cut-outs

Standing 74K3841TBX ➤See page 2.115.

➤See pages 2.107-2.108.

Note: Square and cylinder bases require four 27 lb. bags (108 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

Location -

C = Center; one cut-out



Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128





D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	tangular									
42"	72"	74K4272RT	\$549	\$829	\$829	\$870	\$1836	\$1836	\$2076	\$2076

Soft	Rectang	jular								
42"	72"	74K4272SRT	549	829	829	870	1836	1836	2076	2076

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 See page 2.54 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ② Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".

Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Grommets (+\$64 per grommet):

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type

Heiaht

Quantity





Disc Worksurface Models 74K2728D 74K2728DCM

Standing Counter 74K2735D 74K2735DCM

Type

Grommets G1CMB, G1CSL, G1LRMB*, G1LRSL* Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C4LR*. C6LR*

- >See page 2.11 for clearance dims.
- >See page 2.12 for grommet/cut-out location diagrams.



➤See pages 2.107-2.108. Standing 74K2741D

74K2741DCM

Quantity

Type

Height

Models


Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

Worksurface

74K275828CFYL

- >See page 2.14 for clearance dims.
- ➤ See page 2.15 for grommet/cut-out location diagrams.





Standing Counter 74K275835CFYL

Standing

74K275841CFYL

➤See pages 2.111-2.112.

Location -C = Center; one cut-out

DESIGNATOR KEY:

G1 = G1 grommet Location -

MB = Matte black

C = Cut-out size

C = Center; one grommet LR = Left and right; two grommets

Size-

Finish-

Size -

SL = Silver

LR = Left and right; two cut-outs

➤See pages 2.120-2.121.

Cut-Outs (+\$58 per cut-out):



Tvpe **Rectangular** ▶ page 2.116. Height Worksurface Model 74K1828R 74K1828RR Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR

>See page 2.18 for clearance dims. >See page 2.19 for grommet/cut-out location locations.



Beam ➤ See page 2.118.

Height Standing Model 74K184241B 74K184241BR Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C. C9C

➤See page 2.21 for clearance dims. >See page 2.22 for grommet/cut-out location diagrams.

Panel ➤See page 2.119. Type Height Worksurface Model 74K2428PN Quantity Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

>See page 2.24 for clearance dims. >See page 2.25 for grommet/cut-out location diagrams.





74K1828SQA



Cylinder Worksurface 74K1828CY 74K1828CYA

Quantity 2 Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR, C7LR, C8LR

- >See page 2.27 for clearance dims.
- >See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require two 27 lb. bags (54 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.



Tvpe

Height

Model






^{*}For use with cord management bases only.



Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

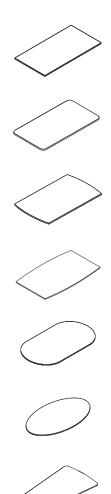

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
42"	84"	74K4284RT	\$587	\$1012	\$1012	\$1064	\$2038	\$2038	\$2301	\$2301
Soft	Rectang	ular								
42"	84"	74K4284SRT	587	1012	1012	1064	2038	2038	2301	2301
Arc F	Rectangu	ılar								
42"	84"	74K4284AR	869	1072	1072	1117	2139	2139	2415	2415
Boat										
42"	84"	74K4284BT	869	1072	1072	1117	2139	2139	2415	2415
Race	etrack									
42"	84"	74K4284RC	869	1072	1072	1117	2139	2139	2415	2415
Ellips	se									
42"	84"	74K4284EL	869	1072	1072	1117	2139	2139	2415	2415
 Tape	red									
42"**	84" row end is	74K4284TP 36"D.	869	1072	1072	1117	2139	2139	2415	2415

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W) 4 Grommet/cut-out option (+\$64 per

grommet or +\$58 per cut-out): >See page 2.56 for applicability

and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

6 Surface finish designator

② Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".

Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Bases below are applicable to Rectangular, Soft Rectangular, Arc Rectangular, Boat and Racetrack tops; bases are specified separately.

➤See pages 2.107-2.108.

>See next page for Ellipse and Tapered tops.







Standing

74K2741D

74K2741DCM






Quantity

Standing Counter 74K2735D 74K2735DCM

Grommets G1CMB, G1CSL, G1LRMB*, G1LRSL* Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C4LR*. C6LR*

- >See page 2.11 for clearance dims.
- ➤See page 2.12 for grommet/cut-out location diagrams.





Models

Type

Quantity 1

Worksurface Standing Counter 74K276428CFYL

74K276435CFYL

Type

Height

Model

➤See pages 2.111-2.112. Standing 74K276441CFYL

Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.

Panel ➤See page 2.119.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size -

G1 = G1 grommet

C = Center; one grommet

LR = Left and right; two grommets

Finish-

Location -

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size -

C = Cut-out size


Location -

C = Center; one cut-out

LR = Left and right; two cut-outs

➤See pages 2.120-2.121.







Туре	Beam ➤ See page 2.118
Height	Standing
Model	74K184241B
	74K184241BR
Quantity	1
Grommets	G1CMB, G1CSL,
	G1LRMB, G1LRSL
Cut-outs	C2C, C4C, C6C, C7C,
	C8C, C9C
➤See page	2.21 for clearance dims.
Soo nago	2.22 for arammet/cut-out

➤ See page 2.22 for grommet/cut-out location diagrams.



Height	Worksurface					
Model	74K2428PN					
Quantity	2					
Grommets	G1CMB, G1CSL					
Cut-outs	C2C, C4C, C6C, C7C,					
	C8C, C9C					
➤See page 2.24 for clearance dims.						

>See page 2.25 for grommet/cut-out location diagrams.



Square



Worksurface

74K1828SQA





Cylinder Worksurface 74K1828CY 74K1828CYA

Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR, C7LR, C8LR

- See page 2.27 for clearance dims.
- >See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require three 27 lb. bags (81 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.

location locations.

^{*}For use with cord management bases only.



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options, continued

Applicable Bases and Grommet/Cut-Out Options

Bases below are applicable to **Ellipse and Tapered** tops; bases are specified separately.



Type Blade Y

➤See page 2.111.

Height Worksurface

Models 74K275228CFYL (ellipse)

74K275928CFYL (tapered)

Quantity

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

➤ See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location-

C = Center; one cut-out



Pricing

Wood

GSA SIN 711-11

HPL

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128





3D Lam

HPL

HPL

Wood

HPL

TFL



Soft Rectangular										
42"	96"	74K4296SRT	763	1219	1219	1278	2378	2378	2687	2687







Racetrack										
42"	96"	74K4296RC	1074	1350	1350	1418	2544	2544	2873	2873

Standard Includes

Top

How to Specify

- Model
- 2 Material:
 - **LL** = TFL with P rim
 - **L** = HPL with P rim
 - **2L** = HPL with J rim
 - T = 3D laminate with SL rim
 - **LW** = HPL with wood F or M rim
 - **W** = Wood with wood F or M rim
 - 1LW = HPL with wood S rim
 - 1W = Wood with wood S rim
- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - **SL** = Sloped Rim (T)
 - J = HPL self rim (2L)
 - **F** = Softened wood rim (LW or W)
 - **M** = Reed wood rim (LW or W)
 - **S** = Knife wood rim (1LW or 1W)
- ④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 ▶See page 2.59 for applicability and designators.
 - $\mathbf{X} = \text{None}$
- ⑤ Surface finish price group (omit for LL models):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 8 Rim finish designator (include for LL, L, LW and 1LW models only)

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Type

Height

Models

Quantity

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type

Туре

Height

Models









Standing Counter 74K2735D 74K2735DCM

➤See pages 2.107-2.108. Standing 74K2741D

74K2741DCM

Quantity Grommets G1CMB, G1CSL, G1LRMB*, G1LRSL* Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C4LR*. C6LR*

>See page 2.11 for clearance dims.


>See page 2.12 for grommet/cut-out location diagrams.

*For use with cord management bases only.

Rectangular ▶page







➤See pages 2.111-2.112. Standing

Standing Counter 74K276435CFYL

74K276441CFYL

Grommets G1CMB, G1CSL

74K276428CFYL

Worksurface

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size -

G1 = G1 grommet

Location -

C = Center; one grommet

LR = Left and right; two grommets

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size -

C = Cut-out size

Location -

C = Center; one cut-out

LR = Left and right; two cut-outs LCR = Left, center, right: three

➤See pages 2.120-2.121.

cut-outs



2.116.	
Height	Worksurface
Model	74K2428R
	74K2428RR
Quantity	2
Grommets	G1CMB, G1CSL,
	G1LRMB, G1LRSL
Cut-outs	C2C, C4C, C6C, C7C,
	C8C, C9C,
	C2LR, C4LR, C6LR,
	C2LCR, C4LCR, C6LCF
➤See page	2.18 for clearance dims.

>See page 2.19 for grommet/cut-out



74K185441BR Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL C2C, C4C, C6C, C7C, Cut-outs C8C, C9C

>See page 2.21 for clearance dims. >See page 2.22 for grommet/cut-out location diagrams.



Туре	Panel >See page 2.119
Height	Worksurface
Model	74K2428PN
Quantity	2
Grommets	G1CMB, G1CSL
Cut-outs	C2C, C4C, C6C, C7C,
	000 000

C8C. C9C >See page 2.24 for clearance dims.

>See page 2.25 for grommet/cut-out location diagrams.







Туре	Square	Cylinder
Height	Worksurface	Worksurface
Model	74K1828SQA	74K1828CY
		74K1828CY/
~	•	

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR, C7LR, C8LR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR

>See page 2.27 for clearance dims.

See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require three 27 lb. bags (81 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.

location locations.



Pricing

Wood

GSA SIN 711-11

HPL

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Model	(LL)* Vinyl P Rim	(L) Vinyl P Rim	(T)* Sloped SL Rim	(2L) Self J Rim	(LW) Wood F/M Rim	(W) Wood F/M Rim	(1LW) Wood S Rim	(1W) Wood S Rim
Rour	nd									
48" di	ameter	74K48RD	\$493	592	\$592	620	\$1281	\$1281	\$1412	\$1412

3D Lam

HPL

HPL

Wood

HPL

TFL



Squa	re									
48"	48"	74K4848SQ	493	592	592	620	1281	1281	1412	1412



Soft	Square									
48"	48"	74K4848SSQ	493	592	592	620	1281	1281	1412	1412

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

J = HPL self rim (2L)

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 ▶See page 2.59 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

Standard Includes

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".

Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Disc

Туре

Height

Models





1

None

Grommets None

Cut-outs

Tubular X

Worksurface

74K3828TBX



Mobile

74K3828TBXM





➤See page 2.115.

➤See page 2.109.

➤ See page 2.110.

74K3841TBX

Standing



Occasional Worksurface 74K2715D 74K2728D 74K2728DCM 74K2715DCM

Quantity 1; applicable for round top only. Grommets G1CMB*, G1CSL*

Cut-outs C4C*, C6C*

- >See page 2.11 for clearance dims.
- >See page 2.12 for grommet/cut-out location diagrams.
- *For use with cord management models only.









Standing

74K3241CFX







Worksurface 74K3215CFX 74K3228CFX 1; applicable for round top only.

Grommets None Cut-outs None

Quantity

Type



Blade Quad





Standing Counter

74K3235CFX

Height Worksurface Standing Counter Standing 74K3735CFQX 74K3741CFQX Models 74K3728CFQX Quantity 1; applicable for square and soft-square tops only.

Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C8C >See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.



Туре Square ▶page 2.120. Height Worksurface Model 74K2428SQA Quantity 1 Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

- ➤ See page 2.27 for clearance dims. See page 2.28 for grommet/cut-out
- location diagrams.





Cylinder ▶page 2.121. Туре Worksurface Heiaht 74K2428CY Model 74K2428CYA Quantity 1; applicable for round top only. Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

- ➤ See page 2.27 for clearance dims.
- >See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require three 27 lb. bags (81 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 arommet

Location -

C = Center; one grommet

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -


C = Center; one cut-out



Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
48"	72"	74K4872RT	\$687	\$864	\$864	\$907	\$1876	\$1876	\$2099	\$2099
Soft	Rectang	ular								
48"	72"	74K4872SRT	687	864	864	907	1876	1876	2099	2099

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

J = HPL self rim (2L)

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 See page 2.63 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".



Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Grommets (+\$64 per grommet):

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Type

Height

Models

Quantity

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.







Туре Disc Height Worksurface Models 74K2728D 74K2728DCM

Standing Counter 74K2735D 74K2735DCM

➤See pages 2.107-2.108. Standing 74K2741D 74K2741DCM

Quantity Grommets G1CMB, G1CSL, G1LRMB*, G1LRSL* Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C4LR*, C6LR* ➤ See page 2.11 for clearance dims.

>See page 2.12 for grommet/cut-out location diagrams.

*For use with cord management bases only.





Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

>See page 2.15 for grommet/cut-out location diagrams.

Standing Counter 74K275828CFYL 74K275835CFYL

Standing 74K275841CFYL

➤See pages 2.111-2.112.

Cut-Outs (+\$58 per cut-out):

Size-C = Cut-out size

Finish-

SL = Silver

Location — C = Center: one cut-out

DESIGNATOR KEY:

G1 = G1 grommet Location -

MB = Matte black

C = Center; one grommet LR = Left and right: two grommets

LR = Left and right; two cut-outs

➤See pages 2.120-2.121.



Type Rectangular ▶page 2.116. Height Worksurface Model 74K2428R 74K2428RR Quantity

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR

>See page 2.18 for clearance dims.

>See page 2.19 for grommet/cut-out location locations.



Beam ➤ See page 2.118. Type Heiaht Standina Model 74K244241B 74K244241BR Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL C2C, C4C, C6C, C7C, Cut-outs C8C, C9C

See page 2.21 for clearance dims. >See page 2.22 for grommet/cut-out

location diagrams.



Grommets G1CMB, G1CSL

>See page 2.14 for clearance dims.

Type Panel ➤See page 2.119. Heiaht Worksurface Model 74K2428PN Quantity Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

➤ See page 2.24 for clearance dims. >See page 2.25 for grommet/cut-out

location diagrams.







Type Cylinder Square Heiaht Worksurface Worksurface 74K1828CY Model 74K1828SQA 74K1828CYA Quantity

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR, C7LR, C8LR

See page 2.27 for clearance dims.

See page 2.28 for grommet/cut-out location diagrams.


Note: Square and cylinder bases require two 27 lb. bags (54 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.



Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
48"	84"	74K4884RT	\$833	\$1046	\$1046	\$1100	\$2271	\$2271	\$2544	\$2544
Soft	Rectang	ular								
48"	84"	74K4884SRT	833	1046	1046	1100	2271	2271	2544	2544

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim **1W** = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

J = HPL self rim (2L)

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 See page 2.65 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".

Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Type

Models

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Туре

Height

Models

Quantity







74K2735D 74K2735DCM 74K2728DCM

Standing Counter

➤See pages 2.107-2.108. Standing 74K2741D 74K2741DCM

Grommets G1CMB, G1CSL, G1LRMB*, G1LRSL* Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C4LR*, C6LR*

- >See page 2.11 for clearance dims.
- >See page 2.12 for grommet/cut-out location diagrams.
- *For use with cord management bases only.





Worksurface Standing Counter 74K276428CFYL 74K276435CFYL Quantity

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C >See page 2.14 for clearance dims.

➤ See page 2.15 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

G1 = G1 grommet

Location -

C = Center; one grommet

LR = Left and right: two grommets

Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C = Cut-out size

Location —

C = Center: one cut-out

LR = Left and right; two cut-outs

➤See pages 2.120-2.121.



Туре	Rectangular ▶page
2.116.	
Height	Worksurface
Model	74K2428R
	74K2428RR
Quantity	2
Grommets	G1CMB, G1CSL,
	G1LRMB, G1LRSL
Cut-outs	C2C, C4C, C6C, C7C,

>See page 2.18 for clearance dims.

C2LR, C4LR, C6LR

C8C, C9C,

>See page 2.19 for grommet/cut-out location locations.



Туре	Beam ➤See page 2.118.
Height	Standing
Model	74K244241B
	74K244241BR
Quantity	1
Grommets	G1CMB, G1CSL,
	G1LRMB, G1LRSL
Cut-outs	C2C C4C C6C C7C

- C8C, C9C See page 2.21 for clearance dims. >See page 2.22 for grommet/cut-out
- location diagrams.



Grommets G1CMB, G1CSL

Туре	Panel	➤See page 2.119.			
Height	Worksurface				
Model	74K2428PN				
Quantity	2				
Grommets	G1CME	3, G1CSL			
Cut-outs	C2C, C	24C, C6C, C7C,			
	C8C, C	9C			
Coo page 2.24 for elegrapes dime					

- ➤ See page 2.24 for clearance dims. >See page 2.25 for grommet/cut-out
- location diagrams.







Туре	Square	Cylinder
Height	Worksurface	Worksurface
Model	74K1828SQA	74K1828CY
		74K1828CY/

➤See pages 2.111-2.112.

Standing

74K276441CFYL

Quantity

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR, C7LR, C8LR, C9LR

See page 2.27 for clearance dims.

See page 2.28 for grommet/cut-out location diagrams.


Note: Square and cylinder bases require four 27 lb. bags (108 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.



Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128















* Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T)* Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
48"	96"	74K4896RT	\$973	\$1340	\$1340	\$1408	\$2412	\$2412	\$2702	\$2702
Soft	Rectang	ular								
48"	96"	74K4896SRT	973	1340	1340	1408	2412	2412	2702	2702
Arc F	Rectangu	ılar								
48"	96"	74K4896AR	1308	1485	1485	1559	2581	2581	2891	289 ⁻
Boat										
48"	96"	74K4896BT	1308	1485	1485	1559	2581	2581	2891	289 ⁻
Race	etrack									
48"	96"	74K4896RC	1308	1485	1485	1559	2581	2581	2891	289 ⁻
Ellips	se									
48"*	96"	74K4896EL	1308	1485	1485	1559	2581	2581	2891	289 ⁻
Tape	red									
48"**	96"	74K4896TP	1308	1485	1485	1559	2581	2581	2891	289

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

T = 3D laminate with SL rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

SL = Sloped Rim (T)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 See page 2.67 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

6 Surface finish designator

⑦ Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Bases below are applicable to Rectangular, Soft Rectangular, Arc Rectangular, Boat and Racetrack tops; bases are specified separately. Note: Bases are specified separately.

➤See pages 2.107-2.108.







Standing

74K2741D

74K2741DCM

Type Disc Height Worksurface Models 74K2728D

Quantity

Standing Counter 74K2735D 74K2735DCM

74K2728DCM

Grommets G1CMB, G1CSL, G1LRMB*, G1LRSL* Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C4LR*, C6LR*

>See page 2.11 for clearance dims.

>See page 2.12 for grommet/cut-out location diagrams.

*For use with cord management bases only.





Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

>See page 2.14 for clearance dims. >See page 2.15 for grommet/cut-out location diagrams.



Grommets (+\$64 per grommet):

G1 = G1 grommet

Location -

C = Center; one grommet

LR = Left and right: two grommets

Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C = Cut-out size

Location -

C = Center: one cut-out

LR = Left and right; two cut-outs LCR = Left, center, right; three

➤See pages 2.120-2.121.

cut-outs



Туре Rectangular ▶page 2.116. Height Worksurface Model 74K2428R 74K2428RR Quantity Grommets G1CMB, G1CSL,

G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR, C2LCR, C4LCR, C6LCR

>See page 2.18 for clearance dims. >See page 2.19 for grommet/cut-out

location diagrams.



Beam ➤ See page 2.118. Type Heiaht Standina Model 74K244241B 74K244241BR Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C,

C8C, C9C See page 2.21 for clearance dims. >See page 2.22 for grommet/cut-out

location diagrams.

Туре Panel ➤See page 2.119. Heiaht Worksurface Model 74K2428PN Quantity Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

>See page 2.24 for clearance dims. >See page 2.25 for grommet/cut-out







Type Square Cylinder Heiaht Worksurface Worksurface 74K1828CY Model 74K1828SQA 74K1828CYA

➤See pages 2.111-2.112.

Standing

74K276441CFYL

Quantity Grommets G1CMB, G1CSL, G1LRMB, G1LRSL C2C, C4C, C6C, C7C, C8C, C9C, Cut-outs C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR,

See page 2.27 for clearance dims.

See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require four 27 lb. bags (108 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options, continued

Applicable Bases and Grommet/Cut-Out Options

Bases below are applicable to **Ellipse and Tapered** tops; bases are specified separately.



Type Blade Y

➤See page 2.111.

Height Worksurface
Models 74K276428CFYL

Quantity 1

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

➤See page 2.14 for clearance dims.

➤ See page 2.15 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location-

C = Center; one cut-out



Pricing

Planning Pricing GSA SIN 711-11

Statement of Line


Surface Materials

➤See page 2.2


2.8

2.29

2.128













* Height (thickness) for TFL worksurfaces is 11/8".

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Recta	angular									
One-F	Piece Top									
48"	120"	74K48120RT1P	_	\$1928	_	\$2024	\$3854	\$3854	\$4313	\$4313
Two-F	Piece Top									
48"	120"	74K48120RT	\$1335	2051	_	2153	4097	4097	4588	4588
Soft I	Rectangu	lar								
One-F	Piece Top									
48"	120"	74K48120SRT1P	_	1928	_	2024	3854	3854	4313	4313
Two-F	Piece Top									
48"	120"	74K48120SRT	1335	2051	_	2153	4097	4097	4588	4588
Arc R	Rectangula	ar								
One-F	Piece Top									
48"	120"	74K48120AR1P	_	2033	_	2363	4134	4134	4673	4673
Two-F	Piece Top									
48"	120"	74K48120AR	1842	2162	_	2270	4151	4151	4649	4649
Boat										
One-F	Piece Top									
48"	120"	74K48120BT1P	_	2033	_	2363	4134	4134	4673	4673
Two-F	Piece Top									
48"	120"	74K48120BT	1842	2162	_	2270	4151	4151	4649	4649
Race	track									
One-F	Piece Top									
48"	120"	74K48120RC1P	_	2033	_	2363	4134	4134	4673	4673
Two-F	Piece Top									
48"	120"	74K48120RC	1842	2162	_	2270	4151	4151	4649	4649
Tape	red							**Na	arrow end	is 34"D.
One-F	Piece Top									
48"**	120"	74K48120TP1P		2033	_	2363	4134	4134	4673	4673
	Piece Top									
48"**	120"	74K48120TP	1842	2162	_	2270	4151	4151	4649	4649

Standard Includes

• One- or two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per

grommet or +\$58 per cut-out): ➤ See page 2.70 for applicability

and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

6 Surface finish designator

Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Туре	Blade Y>See page
2.111.	

Height Worksurface
Model 74K279828CFYL
Quantity 1

Grommets G

Grommets G1ILRMB, G1ILRSL
Cut-outs C2ILR, C4ILR, C6ILR,
C7ILR, C8ILR, C9ILR

➤See page 2.14 for clearance dims.

➤ See page 2.15 for grommet/cut-out location diagrams.



Type Rectangular ➤ page 2.116.

Height Worksurface
Models 74K2428RR
74K2428RR

Quantity 3


Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C,

C2LR, C4LR, C6LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR

➤ See page 2.18 for clearance dims.

See page 2.19 for grommet/cut-out



Type **Beam**Height Worksurface

Worksurface Standing
74K247828B 74K247841B
74K247828BR 74K247841BR

Quantity

Models

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL
Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,
C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

See page 2.21 for clearance dims.

▶See page 2.22 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

LR = Left and right; two grommets

ILR = Inside left and right; two grommets

Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center: one cut-outs

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three cut-outs



Type Panel ➤See page 2.119.

Height Worksurface

Model 74K2428PN

Quantity 3

Grommets G1ILRMB, G1ILRSL
Cut-outs C2ILR, C4ILR, C6ILR,
C7ILB, C8ILB, C9ILB

➤See page 2.24 for clearance dims.

See page 2.25 for grommet/cut-out location diagrams.







 Type
 Square
 Cylinder

 Height
 Worksurface
 Worksurface

 Model
 74K1828SQA
 74K1828CY

 74K1828CYA
 74K1828CYA

Quantity 3

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C9LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

➤See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

➤See pages 2.120–2.121.

➤See pages 2.117-2.118.


Note: Square and cylinder bases require three 27 lb. bags (81 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.



Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

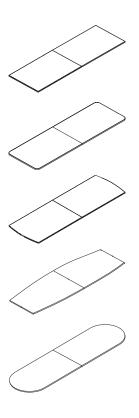

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
48"	144"	74K48144RT	\$1466	\$2186	_	\$2294	\$4353	4353	\$4879	\$4879
Soft	Rectangu	ılar								
48"	144"	74K48144SRT	1466	2186	_	2294	4353	4353	4879	4879
Arc F	Rectangu	lar								
48"	144"	74K48144AR	2052	2403	-	2525	4399	4399	4970	4970
Boat										
48"	144"	74K48144BT	2052	2403	_	2525	4399	4399	4970	4970
Race	etrack									
48"	144"	74K48144RC	2052	2403	_	2525	4399	4399	4970	4970

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

4 Grommet/cut-out option (+\$64 per

Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

➤ See page 2.72 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- (7) Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Grommets (+\$64 per grommet):

LR = Left and right; two grommets ILR = Inside left and right: two

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y>See page 2.111.

Height Worksurface 74K2711028CFYL Model Quantity

Grommets G1ILRMB, G1ILRSL Cut-outs C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.



Rectangular ▶page Type 2.116.

Height Worksurface Models 74K2428R 74K2428RR


Quantity Grommets G1LRMB, G1LRSL,

G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C,

C2LR, C4LR, C6LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR

>See page 2.18 for clearance dims.

>See page 2.19 for grommet/cut-out



74K2410241BR

Beam Type Height Worksurface Standina Models 74K2410228B 74K2410241B 74K2410228BR

Quantity

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.21 for clearance dims.

>See page 2.22 for grommet/cut-out location diagrams.

➤See pages 2.117-2.118.

➤See pages 2.120-2.121.

Cut-Outs (+\$58 per cut-out):

DESIGNATOR KEY:

G1 = G1 grommet Location -

MB = Matte black

Size-

C2 = C2 cut-out

C4 = C4 cut-out

arommets Finish-

SL = Silver

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center: one cut-out

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three cut-outs

Panel ➤See page 2.119. Type Height Worksurface Model 74K2428PN Quantity Grommets G1ILRMB, G1ILRSL Cut-outs C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.24 for clearance dims. >See page 2.25 for grommet/cut-out location diagrams.







Type Square Cylinder Worksurface Height Worksurface Model 74K1828SQA 74K1828CY 74K1828CYA

Quantity

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR


See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require three 27 lb. bags (81 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.










48"D x 168"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

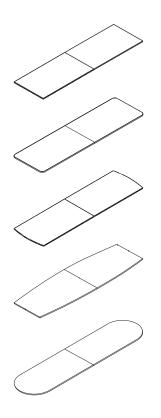

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
48"	168"	74K48168RT	\$1562	\$2700	_	\$2860	\$5589	\$5589	\$6260	\$6260
Soft	Rectangu	ılar								
48"	168"	74K48168SRT	1562	2700	_	2860	5589	5589	6260	6260
Arc F	Rectangu	lar								
48"	168"	74K48168AR	2155	2781	_	2945	5645	5645	6322	6322
Boat										
48"	168"	74K48168BT	2155	2781	_	2945	5645	5645	6322	6322
Race	track									
48"	168"	74K48168RC	2155	2781	_	2945	5645	5645	6322	6322

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

See page 2.74 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ① Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



48"D x 168"W Table Tops (13/16"H)

➤ See page 2.111.

➤See page 2.119.

Pricina

➤See page 2.116.


➤See pages 2.120-2.121.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y Height Worksurface

Model 74K2713628CFYL

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR

➤ See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.



Type **Panel** Height Worksurface Model 74K2428PN

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.24 for clearance dims.

>See page 2.25 for grommet/cut-out location diagrams.



Type Rectangular Height Worksurface Models 74K2428R

74K2428RR

Quantity

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR,

C2LCR, C4LCR, C6LCR

>See page 2.18 for clearance dims.

>See page 2.19 for grommet/cut-out location locations.







Туре Square Height Worksurface Model 74K1828SQA

Cylinder Worksurface 74K1828CY 74K1828CYA

Quantity 3

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

>See page 2.27 for clearance dims.

➤ See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require two 27 lb. bags (54 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.



DESIGNATOR KEY:

Grommets (+\$64 per grommet):

G1 = G1 grommet

Location -

C = Center; one grommet

LR = Left and right: two grommets

ILR = Inside left and right; two grommets

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size -

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three




48"D x 192"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

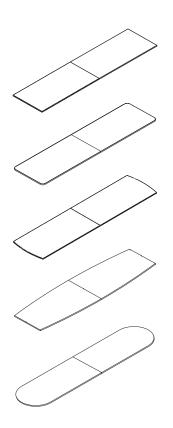

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
48"	192"	74K48192RT	\$1661	\$2842	_	\$2984	\$6346	\$6346	\$7106	\$7106
Soft	Rectangu	ular								
48"	192"	74K48192SRT	1661	2842	_	2984	6346	6346	7106	7106
Arc F	Rectangu	lar								
48"	192"	74K48192AR	2241	2926	_	3073	6408	6408	7178	7178
Boat										
48"	192"	74K48192BT	2241	2926	_	3073	6408	6408	7178	7178
Race	track									
48"	168"	74K48192RC	2241	2926	_	3073	6408	6408	7178	7178

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

➤ See page 2.76 for applicability and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



48"D x 192"W Table Tops (13/16"H)

➤ See page 2.111.

Pricing

➤ See page 2.116.


➤See pages 2.120-2.121.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Blade Y Type Height Worksurface

Model 74K2716028CFYL

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.



Type Rectangular Height Worksurface Models 74K2428R

74K2428RR

Quantity

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C, C2LR, C4LR, C6LR,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR,

C2LCR, C4LCR, C6LCR

>See page 2.18 for clearance dims.

>See page 2.19 for grommet/cut-out location locations.







➤See page 2.119. Type Panel Heiaht Worksurface

Model 74K2428PN

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.24 for clearance dims.

>See page 2.25 for grommet/cut-out location diagrams.

Type Square Heiaht Worksurface Model

74K1828SQA

Cylinder Worksurface 74K1828CY 74K1828CYA

3 Quantity

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

>See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require two 27 lb. bags (54 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

G1 = G1 grommet

Location -

C = Center; one grommet

LR = Left and right; two grommets

ILR = Inside left and right; two arommets

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size -

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three




48"D x 216"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

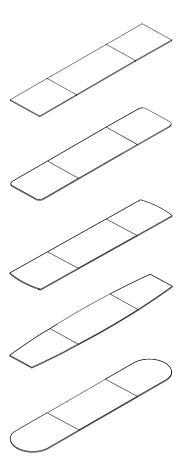

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rlim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
48"	216"	74K48216RT	\$2392	\$3549	_	\$3763	\$6790	\$6790	\$7604	\$7604
Soft	Rectangu	ılar								
48"	216"	74K48216SRT	2392	3549	_	3763	6790	6790	7604	7604
Arc I	Rectangu	lar								
48"	216"	74K48216AR	3158	3655	_	3875	6925	6925	7755	7755
Boat	:									
48"	216"	74K48216BT	3158	3655	_	3875	6925	6925	7755	7755
Race	etrack									
48"	216"	74K48216RC	3158	3655	_	3875	6925	6925	7755	7755

Standard Includes

• Three-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

Grommet/cut-out option (+\$64 per

grommet or +\$58 per cut-out):

➤ See page 2.78 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ② Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



48"D x 216"W Table Tops (13/16"H)

➤ See page 2.111.

➤See pages 2.120-2.121.

Pricing


➤See page 2.117.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Blade Y Type Height Worksurface

Model 74K2718428CFYL

Quantity

Grommets G1CCMB, G1CCSL

Cut-outs C2CC, C4CC, C6CC, C7CC, C8CC, C9CC,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.







Туре Square Height Worksurface 74K1828SQA Model

Cylinder Worksurface 74K1828CY

Quantity


Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

> C2CC, C4CC, C6CC, C7CC, C8CC, C9CC, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR,

74K1828CYA

- >See page 2.27 for clearance dims.
- >See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require two 27 lb. bags (54 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.



Type Beam Height Worksurface

Model 74K2417428B 74K2417428BR

Quantity

Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR

- >See page 2.27 for clearance dims.
- ➤ See page 2.28 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

G1 = G1 grommet

Location -

C = Center; one grommet

CC = Center center: two grommets

Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location —

C = Center; one cut-out

CC = Center center: two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three

cut-outs

ILCR = Inside left, center, right; three



48"D x 240"W Table Tops (13/16"H)

Pricing

Wood

GSA SIN 711-11

HPL

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

D	W	Model	(LL)* Vinyl P Rim	(L) Vinyl P Rim	(T) Sloped SL Rim	(2L) Self J Rim	(LW) Wood F/M Rim	(W) Wood F/M Rim	(1LW) Wood S Rim	(1W) Wood S Rim
Rec	tangular									
48"	240"	74K48240RT	\$2551	\$3973	_	\$4171	\$7265	\$7265	\$8138	\$8138
Soft	Rectang	ular								
48"	240"	74K48240SRT	2551	3973	_	4171	7265	7265	8138	8138
	Rectangu									
48"	240"	74K48240AR	3315	4091	_	4297	7410	7357	8300	8300
Boa	t									
48"	240"	74K48240BT	3315	4091	_	4297	7410	7357	8300	8300
Race	etrack									
48"	240"	74K48240RC	3315	4091	_	4297	7410	7357	8300	8300

TFL

HPL

3D Lam

HPL

HPL

Wood

Standard Includes

Three-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

See page 0 for applicability and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ⑦ Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



48"D x 240"W Table Tops (13/16"H)

➤ See page 2.111.

➤See pages 2.120-2.121.

Pricing


➤See page 2.117.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y
Height Worksurface

Model **74K2720828CFYL**

Quantity 1

Grommets G1CCMB, G1CCSL

Cut-outs C2CC, C4CC, C6CC, C7CC, C8CC, C9CC,

C2ILR. C4ILR. C6ILR. C7ILR. C8ILR. C9ILR

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.







Type Square
Height Worksurface
Model 74K1828SQA

Cylinder
ce Worksurface
SOA 74K1828CY

74K1828CY 74K1828CYA


Quantity 4

Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC, C7CC, C8CC, C9CC, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR,

- >See page 2.27 for clearance dims.
- >See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require two 27 lb. bags (54 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.



Type Beam

Height Worksurface

Model 74K2419828B

74K2419828BR

Quantity :

Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR

- ➤See page 2.27 for clearance dims.
- ➤ See page 2.28 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet

CC = Center center: two grommets

Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location —

C = Center; one cut-out

CC = Center center: two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three

cut-outs

ILCR = Inside left, center, right; three



54"D x 54"W Table Tops (13/16"H)

Pricing

Wood

GSA SIN 711-11

HPL

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Model	(LL)* Vinyl P Rim	(L) Vinyl P Rim	(T) Sloped SL Rim	(2L) Self J Rim	(LW) Wood F/M Rim	(W) Wood F/M Rim	(1LW) Wood S Rim	(1W) Wood S Rim
Roun	d									
54" dia	meter	74K54RD	\$622	\$747	_	\$785	\$1564	\$1564	\$1721	\$1721

3D Lam

HPL

HPL

Wood

HPL

TFL



Squa	re									
54"	54"	74K5454SQ	622	747	_	785	1564	1564	1721	1721



Soft	Square									
54"	54"	74K5454SSQ	622	747	-	785	1564	1564	1721	1721

Standard Includes

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

 $\mathbf{W} = \text{Wood with wood F or M rim}$

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

Grommet/cut-out option (+\$64 per

4 Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

➤ See page 2 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ⑦ Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



54"D x 54"W Table Tops (13/16"H)

Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.







Type Blade Quad Height Worksurface

74K3328CFQX (round) 74K3728CFQX (square)

74K3728CFQX (square)

Quantity

Models

Grommets G1CMB, G1CSL
Cut-outs C2C, C4C, C6C, C8C
➤See page 2.14 for clearance dims.

See page 2.15 for grommet/cut-out location diagrams.

Standing Counter

74K3335CFQX (round) 74K3735CFQX (square) 74K3735CFQX (soft-square) Standing

74K3341CFQX (round) 74K3741CFQX (square) 74K3741CFQX (soft-square)

➤See page 2.110.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out







Type Square
Height Worksurface

Cylinder
Worksurfac

➤See pages 2.120-2.121.

Worksurface

74K2428CY (round top only) 74K2428CYA (round top only)

Quantity 1

Model

Rudinity 1

Grommets G1CMB, G1CSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C

>See page 2.27 for clearance dims.

74K2428SQA

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require three 27 lb. bags (81 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.





54"D x 120"W Table Tops (13/16"H)


Pricing


GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128









D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
	angular									
54"	120"	74K54120RT	\$1736	\$2667	_	\$2800	\$4506	\$4506	\$5047	\$5047
Soft	Rectangi	ular								
54"	120"	74K54120SRT	1736	2667	_	2800	4506	4506	5047	5047
Arc I	Rectangu	lar								
54"	120"	74K54120AR	2082	2748	_	2885	4642	4642	5198	5198
Boat	:									
54"	120"	74K54120BT	2082	2748	_	2885	4642	4642	5198	5198
Race	etrack									
54"	120"	74K54120RC	2082	2748	_	2885	4642	4642	5198	5198

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

➤ See page 2.84 for applicability and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



54"D x 120"W Table Tops (13/16"H)

➤ See page 2.113.

➤ See page 2.117.

Pricing

➤See page 2.116.


➤See pages 2.120-2.121.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y
Height Worksurface
Model 74K428828CFYL

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

➤ See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.



Type Beam
Height Worksurface
Models 74K307828B
74K307828BR

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.21 for clearance dims.

>See page 2.22 for grommet/cut-out location diagrams.



Type Rectangular
Height Worksurface
Models 74K3028R

74K3028RR

Quantity 3

Grommets G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C,

C2LR, C4LR, C6LR,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR,

C2LCR, C4LCR, C6LCR

See page 2.18 for clearance dims.

➤See page 2.19 for grommet/cut-out location locations.







 Type
 Square
 Cylinder

 Height
 Worksurface
 Worksurface

 Model
 74K2428SQA
 74K2428CY

 74K2428CYA
 74K2428CYA

Quantity 3

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR,

C2ILR, C4ILR, C6ILR, C8ILR

C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

➤ See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases to not require additional weight when used with these tops.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

LR = Left and right; two grommets

ILR = Inside left and right; two

grommets

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three




54"D x 144"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

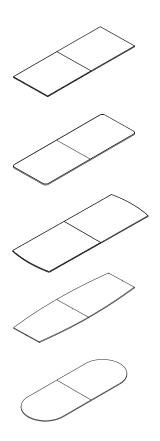

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
54"	144"	74K54144RT	\$1906	\$2933	_	\$3079	\$5002	\$5002	\$5601	\$5601
Soft	Rectangu	ular								
54"	144"	74K54144SRT	1906	2933	_	3079	5002	5002	5601	5601
Arc I	Rectangu	lar								
54"	144"	74K54144AR	2288	3020	_	3171	5152	5152	5768	5768
Boat	<u> </u>									
54"	144"	74K54144BT	2288	3020	_	3171	5152	5152	5768	5768
Race	etrack									
54"	144"	74K54144RC	2288	3020	_	3171	5152	5152	5768	5768

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

> ➤ See page 2.86 for applicability and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



54"D x 144"W Table Tops (13/16"H)

➤ See page 2.113.

➤ See page 2.117.

Pricing

➤See page 2.116.


➤See pages 2.120-2.121.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y
Height Worksurface
Model 74K4211228CFYL

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

➤ See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.



Type Beam
Height Worksurface
Models 74K3010228B
74K3010228BR

Quantity

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.21 for clearance dims.

>See page 2.22 for grommet/cut-out location diagrams.



Type Rectangular
Height Worksurface
Models 74K3028R

74K3028RR

Quantity 3

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C,

C2LR, C4LR, C6LR,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR,

C2LCR, C4LCR, C6LCR

See page 2.18 for clearance dims.

See page 2.19 for grommet/cut-out location locations.







Type Square
Height Worksurface
Model 74K2428SQA

 uare
 Cylinder

 rksurface
 Worksurface

 K2428SQA
 74K2428CY

 74K2428CYA

Quantity 3

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C9LR, C9LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

➤ See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases to not require additional weight when used with these tops.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

LR = Left and right; two grommets

ILR = Inside left and right; two

grommets

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center: one cut-out

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three




54"D x 168"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

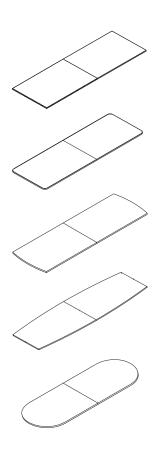

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
54"	168"	74K54168RT	\$2031	\$3226	_	\$3420	\$6137	\$6137	\$6874	\$6874
Soft	Rectangi	ılar								
54"	168"	74K54168SRT	2031	3226	_	3420	6137	6137	6874	6874
Arc F	Rectangu	lar								
54"	168"	74K54168AR	2437	3322	_	3522	6321	6321	7080	7080
Boat										
54"	168"	74K54168BT	2437	3322	_	3522	6321	6321	7080	7080
Race	etrack									
54"	168"	74K54168RC	2437	3322	_	3522	6321	6321	7080	7080

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

 $\mathbf{W} = \text{Wood with wood F or M rim}$

1LW = HPL with wood S rim

1W = Wood with wood S rim

- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - $\mathbf{J} = HPL \text{ self rim (2L)}$
 - **F** = Softened wood rim (LW or W)
 - **M** = Reed wood rim (LW or W)
 - **S** = Knife wood rim (1LW or 1W)
- Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 - See page 2.88 for applicability and designators.
 - **X** = None
- ⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ⑦ Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



54"D x 168"W Table Tops (13/16"H)

➤ See page 2.113.

➤See pages 2.120-2.121.

Pricing


➤See page 2.116.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y
Height Worksurface

Model **74K4213628CFYL**

Quantity 1

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.14 for clearance dims.

➤ See page 2.15 for grommet/cut-out location diagrams.







Type Square
Height Worksurface
Model 74K2428SQA

Cylinder
Worksurface
74K2428CY
74K2428CYA

Quantity 3

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

>See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases to not require additional weight when used with these tops.



Type Rectangular
Height Worksurface
Models 74K3028R

74K3028RR

Quantity 4

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR C2LCR, C4LCR, C6LCR

See page 2.18 for clearance dims.

>See page 2.19 for grommet/cut-out location locations.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

LR = Left and right; two grommets

ILR = Inside left and right; two

grommets

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center: one cut-out

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three






54"D x 192"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

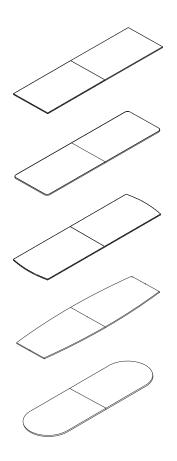

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
54"	192"	74K54192RT	\$2158	\$3585	_	\$4272	\$6779	\$6779	\$7593	\$7593
Soft	Rectangı	ılar								
54"	192"	74K54192SRT	2158	3585	_	4272	6779	6779	7593	7593
Arc F	Rectangu	lar								
54"	192"	74K54192AR	2590	3693	_	4400	6983	6983	7820	7820
Boat	:									
54"	192"	74K54192BT	2590	3693	_	4400	6983	6983	7820	7820
Race	etrack									
54"	192"	74K54192RC	2590	3693		4400	6983	6983	7820	7820

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

 $\mathbf{W} = \text{Wood with wood F or M rim}$

1LW = HPL with wood S rim

1W = Wood with wood S rim

- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - $\mathbf{J} = HPL \text{ self rim (2L)}$
 - **F** = Softened wood rim (LW or W)
 - **M** = Reed wood rim (LW or W)
 - **S** = Knife wood rim (1LW or 1W)
- Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 - See page 2.90 for applicability and designators.
 - **X** = None
- ⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ⑦ Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



54"D x 192"W Table Tops (13/16"H)

➤ See page 2.113.

➤See pages 2.120-2.121.

Pricing


➤See page 2.116.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y Height Worksurface

Model 74K4216028CFYL

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.14 for clearance dims.

➤ See page 2.15 for grommet/cut-out location diagrams.







Type Square Height Worksurface Model 74K2428SQA Cylinder Worksurface

74K2428CY 74K2428CYA

Quantity 3

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

>See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases to not require additional weight when used with these tops.



Type Rectangular Height Worksurface

Models 74K3028R 74K3028RR

Quantity

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

C2LCR, C4LCR, C6LCR

>See page 2.18 for clearance dims.

➤ See page 2.19 for grommet/cut-out location locations.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

G1 = G1 grommet

Location -

LR = Left and right; two grommets

ILR = Inside left and right: two

grommets

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center: one cut-out

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three



54"D x 216"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

D	W
Rect	angula
54"	216"
Soft	Rectar
54"	216"
Arc I	Rectan
54"	216"
Boat	:
54"	216"
Race	etrack
54"	216"

74K54216RC

3608

4143

4352

7552

7552

8459

8459

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
54"	216"	74K54216RT	\$3137	\$4024	_	\$4226	\$7332	\$7332	\$8212	\$8212
Soft	Rectangi	ılər								
54"	216"	74K54216SRT	3137	4024	_	4226	7332	7332	8212	8212
Arc I	Rectangu	lar								
54"	216"	74K54216AR	3608	4143	_	4352	7552	7552	8459	8459
Boat	t									
54"	216"	74K54216BT	3608	4143	_	4352	7552	7552	8459	8459

* Height (thickness) for TFL worksurfaces is 11/8".

Standard Includes

• Three-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per

grommet or +\$58 per cut-out): ➤ See page 2.92 for applicability

and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ① Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)



54"D x 216"W Table Tops (13/16"H)

➤ See page 2.113.

➤See pages 2.120-2.121.


Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y
Height Worksurface

Model 74K4218428CFYL

Quantity 1

Grommets G1CCMB, G1CCSL

Cut-outs C2CC, C4CC C6CC, C7CC, C8CC, C9CC,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

➤ See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.





Cylinder



Type Square
Height Worksurface
Model 74K2428SQA

face Worksurface 3SQA 74K2428CY 74K2428CYA


Quantity 4

Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC, C7CC, C8CC, C9CC, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR, C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR

- ➤ See page 2.27 for clearance dims.
- >See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases do not require additional weight when used with these tops.



Type **Beam**Height Worksurface

Model 74K3017428B 74K3017428BR

Quantity 1

Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR,

C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR,

>See page 2.21 for clearance dims.

>See page 2.22 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet

CC = Center center; two grommets

Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

➤See page 2.117.

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location —

C = Center; one cut-out

CC = Center center; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three

cut-outs

ILCR = Inside left, center, right; three

cut-outs

Dock MeetingKimball Meeting & Collaboration



54"D x 240"W Table Tops (13/16"H)

TFL

HPL

3D Lam

HPL

HPL

Wood

Pricing

Wood

Wood

S Rim

\$8913

8913

9179

9179

9179

(1W)

GSA SIN 711-11

HPL

(1LW)

Wood

S Rim

\$8913

8913

9179

9179

9179

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

(W) Wood F/M Rim	(LW) Wood F/M Rim	(2L) Self J Rim	(T) Sloped SL Rim	(L) Vinyl P Rim	(LL)* Vinyl P Rim	Model	W	D
		Node Node						
\$7957	\$7957	\$5217	_	\$4969	\$4214	74K54240RT	240"	54"
						 Jlar	Rectangu	Soft
7957	7957	5217	_	4969	4214			
8196	0100	5074		F110	4045			
0190	0190	3374	_	3110	4040	74104240AN	240	
								 3oat
8196	8196	5374	_	5118	4845	74K54240BT	240"	54"
							etrack	Race
8196	8196	5374		5118	4845	74K54240RC	240"	54"

^{*} Height (thickness) for TFL worksurfaces is 11/8".

Standard Includes

• Three-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

➤ See page 2.94 for applicability and designators.

X = None

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ② Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)



54"D x 240"W Table Tops (13/16"H)

➤ See page 2.113.


Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y

Height Worksurface Model 74K4220828CFYL

Quantity

Grommets G1CCMB, G1CCSL

Cut-outs C2CC, C4CC C6CC, C7CC, C8CC, C9CC,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.



Height Worksurface

74K3019828BR

Grommets G1CMB, G1CSL, G1CCMB, G1CCSL

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR,

C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR

>See page 2.21 for clearance dims.



Grommets (+\$64 per grommet):

Size -

G1 = G1 arommet

Location -

C = Center; one grommet

CC = Center center; two grommets

Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

➤ See page 2.117.

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out

CC = Center center: two cut-outs

ILR = Inside left and right; two


cut-outs

LCR = Left, center, and right; three

cut-outs

ILCR = Inside left, center, right; three

cut-outs



Beam Туре

Model 74K3019828B

Quantity

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC,

>See page 2.22 for grommet/cut-out location diagrams.







Square Cylinder ➤See pages 2.120-2.121.

Height Worksurface Worksurface Model 74K2428SQA 74K2428CY 74K2428CYA

Quantity

Type

Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC, C7CC, C8CC, C9CC, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR, C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR

>See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases do not require additional weight when used with these tops.



60"D x 60"W Table Tops (13/16"H)

Pricing

Wood

GSA SIN 711-11

HPL

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Model	(LL)* Vinyl P Rim	(L) Vinyl P Rim	(T) Sloped SL Rim	(2L) Self J Rim	(LW) Wood F/M Rim	(W) Wood F/M Rim	(1LW) Wood S Rim	(1W) Wood S Rim
Roun	d									
60" dia	ameter	74K60RD	\$676	\$812	_	\$852	\$1701	\$1701	\$1871	\$1871

3D Lam

HPL

HPL

Wood

HPL

TFL



Squa	re									
60"	60"	74K6060SQ	676	812	_	852	1701	1701	1871	1871



Soft	Square								
60"	60"	74K6060SSQ	676	812	 852	1701	1701	1871	1871

Top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

4 Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

➤ See page 2.96 for applicability and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

Standard Includes

^{*} Height (thickness) for TFL worksurfaces is 11/8".



60"D x 60"W Table Tops (13/16"H)

Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.







Туре **Blade Quad**

74K3728CFQX

Standing Counter 74K3735CFQX

Standing

➤See page 2.110.

74K3741CFQX

Height Worksurface

Models Quantity

Grommets G1CMB, G1CSL Cut-outs C2C, C4C, C6C, C8C

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.







Type Square Height Worksurface Model

Cylinder

Worksurface

➤See pages 2.120-2.121.

74K2428SQA

74K2428CY (round top only) 74K2428CYA (round top only)

Quantity

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR

➤ See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases require three 27 lb. bags (81 lbs. total) of counterweight per base to prevent tipping. Counterweight is ordered separately.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet

LR = Left and right; two grommets

Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out

LR = Left and right; two cut-outs




60"D x 144"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

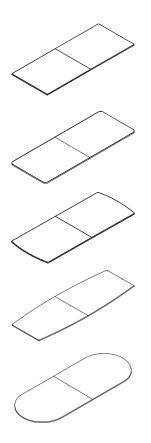

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
60"	144"	74K60144RT	\$2412	\$4233	_	\$4444	\$5902	\$5902	\$6669	\$6669
Soft	Rectangu	ılar								
60"	144"	74K60144SRT	2412	4233	_	4444	5902	5902	6669	6669
Arc I	Rectangu	lar								
60"	144"	74K60144AR	2895	4359	_	4577	6079	6079	6870	6870
Boat	:									
60"	144"	74K60144BT	2895	4359	-	4577	6079	6079	6870	6870
Race	etrack									
60"	144"	74K60144RC	2895	4359	_	4577	6079	6079	6870	6870

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

 $\mathbf{L} = HPL$ with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

 $\mathbf{W} = \text{Wood with wood F or M rim}$

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

4 Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

See page 2.98 for applicability and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- ⑦ Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



60"D x 144"W Table Tops (13/16"H)

➤ See page 2.113.

➤ See page 2.117.


Pricina

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y Height Worksurface Model 74K4211228CFYL

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.



Rectangular Type Height Worksurface Models 74K3028R

Quantity

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C,

74K3028RR

C2LR, C4LR, C6LR,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR,

C2LCR, C4LCR, C6LCR

➤ See page 2.18 for clearance dims.

➤See page 2.19 for grommet/cut-out location locations.



Туре Square Cylinder Height Worksurface Worksurface Model 74K2428SQA 74K2428CY

Quantity

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

74K2428CYA

>See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases to not require additional weight when used with these tops.

➤See page 2.116.

➤See pages 2.120-2.121.

MB = Matte black

SL = Silver

grommets Finish-

Cut-Outs (+\$58 per cut-out):

DESIGNATOR KEY:

G1 = G1 grommet Location -

Grommets (+\$64 per grommet):

LR = Left and right; two grommets ILR = Inside left and right: two

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center: one cut-out

LR = Left and right; two cut-outs ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three

cut-outs



74K3010228B

Туре Beam Height Worksurface

74K3010228BR Quantity

Models

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.21 for clearance dims.

>See page 2.22 for grommet/cut-out location diagrams.




60"D x 168"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

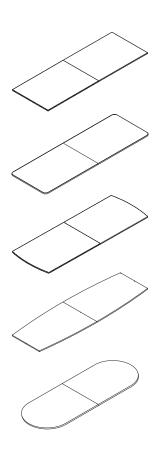

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
60"	168"	74K60168RT	\$2582	\$4541	_	\$4764	\$6610	\$6610	\$7403	\$7403
Soft	Rectangi	ular								
60"	168"	74K60168SRT	2582	4541	_	4764	6610	6610	7403	7403
Arc I	Rectangu	lar								
60"	168"	74K60168AR	3098	4678	_	4908	6807	6807	7625	7625
Boat	t									
60"	168"	74K60168BT	3098	4678	_	4908	6807	6807	7625	7625
Race	etrack									
60"	168"	74K60168RC	3098	4678	_	4908	6807	6807	7625	7625

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

➤ See page 2.100 for applicability and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



60"D x 168"W Table Tops (13/16"H)

➤ See page 2.113.

➤See pages 2.120-2.121.

Pricing


➤See page 2.116.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y
Height Worksurface

Model **74K4213628CFYL**

Quantity

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.14 for clearance dims.

➤ See page 2.15 for grommet/cut-out location diagrams.







Type Square
Height Worksurface
Model 74K2428SQA

Cylinder
Worksurface
74K2428CY
74K2428CYA

Quantity 3

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

>See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases to not require additional weight when used with these tops.



Type Rectangular Height Worksurface

Models **74K3028R 74K3028RR**

Quantity 4

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR

C2LCR, C4LCR, C6LCR

➤See page 2.18 for clearance dims.

>See page 2.19 for grommet/cut-out location locations.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

LR = Left and right; two grommets

ILR = Inside left and right; two

grommets Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out C9 = C9 cut-out

Location -

C = Center: one cut-out

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three






60"D x 192"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

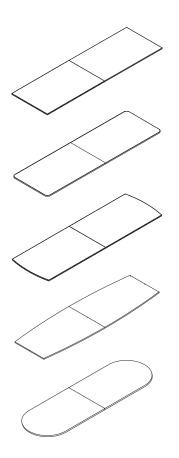

			TFL (LL)*	HPL (L)	3D Lam	HPL (2L)	HPL (LW)	Wood (W)	HPL (1LW)	Wood (1W)
D	W	Model	Vinyl P Rim	Vinyl P Rim	Sloped SL Rim	Self J Rim	Wood F/M Rim	Wood F/M Rim	Wood S Rim	Wood S Rim
Rect	angular									
60"	192"	74K60192RT	\$2762	\$5047	_	\$5289	\$7398	\$7398	\$8284	\$8284
Soft	Rectangi	ılar								
60"	192"	74K60192SRT	2762	5047	_	5289	7398	7398	8284	8284
Arc F	Rectangu	lar								
60"	192"	74K60192AR	3314	5198	-	5448	7619	7619	8533	8533
Boat	:									
60"	192"	74K60192BT	3314	5198	_	5448	7619	7619	8533	8533
Race	etrack									
60"	192"	74K60192RC	3314	5198	_	5448	7619	7619	8533	8533

Standard Includes

• Two-piece top

How to Specify

- Model
- 2 Material:

LL = TFL with P rim

L = HPL with P rim

2L = HPL with J rim

LW = HPL with wood F or M rim

W = Wood with wood F or M rim

1LW = HPL with wood S rim

1W = Wood with wood S rim

3 Rim profile:

P = Softened vinyl rim (LL or L)

 $\mathbf{J} = HPL \text{ self rim (2L)}$

F = Softened wood rim (LW or W)

M = Reed wood rim (LW or W)

S = Knife wood rim (1LW or 1W)

④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):

➤ See page 2.102 for applicability and designators.

 $\mathbf{X} = \text{None}$

⑤ Surface finish price group (omit for LL models):

STD = Group 1

STD2 = Group 2 (+20%)

- 6 Surface finish designator
- Rim finish price group (include for LW and 1LW models only):

STD = Group 1

STD2 = Group 2 (+20%)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



60"D x 192"W Table Tops (13/16"H)

➤ See page 2.113.

➤See pages 2.120-2.121.

Pricing


➤See page 2.116.

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y
Height Worksurface

Model **74K4216028CFYL**

Quantity 1

Grommets G1ILRMB, G1ILRSL

Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.14 for clearance dims.

➤ See page 2.15 for grommet/cut-out location diagrams.







Type Square
Height Worksurface
Model 74K2428SQA

Cylinder
Worksurface
74K2428CY
74K2428CYA

Quantity 3

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR, C7LR, C8LR, C9LR, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR

- >See page 2.27 for clearance dims.
- >See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases to not require additional weight when used with these tops.



Type Rectangular Height Worksurface

Models **74K3028R 74K3028RR**

Quantity 4

Grommets G1LRMB, G1LRSL, G1ILRMB, G1ILRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2LR, C4LR, C6LR,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

C2LCR, C4LCR, C6LCR

➤ See page 2.18 for clearance dims.

➤ See page 2.19 for grommet/cut-out location locations.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

LR = Left and right; two grommets

ILR = Inside left and right; two

grommets

Finish-

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out C9 = C9 cut-out

Location -

C = Center; one cut-out

LR = Left and right; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three





60"D x 216"W Table Tops (13/16"H)

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

60"

216"

74K60216RC

4606

5772

6065

8397

8397

9403

9403

D	W	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Rect	angular									
60"	216"	74K60216RT	\$4006	\$5605	_	\$5887	\$8152	\$8152	\$9131	\$9131
Soft	Rectangi	ular								
60"	216"	74K60216SRT	4006	5605	-	5887	8152	8152	9131	9131
Arc I	Rectangu	lar								
60"	216"	74K60216AR	4606	5772	_	6065	8397	8397	9403	9403
Boat										
60"	216"	74K60216BT	4606	5772	_	6065	8397	8397	9403	9403
Race	etrack									

Standard Includes

• Three-piece top

How to Specify

- Model
- 2 Material:
 - **LL** = TFL with P rim
 - **L** = HPL with P rim
 - **2L** = HPL with J rim
 - **LW** = HPL with wood F or M rim
 - **W** = Wood with wood F or M rim
 - **1LW** = HPL with wood S rim
 - **1W** = Wood with wood S rim
- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - **SL** = Sloped Rim (T)
 - **J** = HPL self rim (2L)
 - **F** = Softened wood rim (LW or W)
 - **M** = Reed wood rim (LW or W)
 - **S** = Knife wood rim (1LW or 1W)
- ④ Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 - See page 2.104 for applicability and designators.
 - **X** = None
- ⑤ Surface finish price group (omit for LL models):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 6 Surface finish designator
- ② Rim finish price group (include for LW and 1LW models only):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 8 Rim finish designator (include for LL, L, LW and 1LW models only)

^{*} Height (thickness) for TFL worksurfaces is 11/8".



60"D x 216"W Table Tops (13/16"H)

➤ See page 2.113.

➤See pages 2.120-2.121.


Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y
Height Worksurface

Model **74K4218428CFYL**

Quantity

Grommets G1CCMB, G1CCSL

Cut-outs C2CC, C4CC C6CC, C7CC, C8CC, C9CC,

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

➤ See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.





Cylinder



Type Square
Height Worksurface
Model 74K2428SQA

Worksurface Worksurface 74K2428SQA 74K2428CY 74K2428CYA

Quantity 4


Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC, C7CC, C8CC, C9CC, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR, C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR

➤ See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases do not require additional weight when used with these tops.



Type **Beam**Height Worksurface

Model 74K3017428B 74K3017428BR

Quantity 1

Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR, C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR

See page 2.21 for clearance dims.

>See page 2.22 for grommet/cut-out location diagrams.

DESIGNATOR KEY:

Grommets (+\$64 per grommet):

Size-

G1 = G1 grommet

Location -

C = Center; one grommet

CC = Center center; two grommets

Finish—

MB = Matte black

SL = Silver

Cut-Outs (+\$58 per cut-out):

Size-

➤See page 2.117.

C2 = C2 cut-out

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center; one cut-out

CC = Center center; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three

cut-outs

ILCR = Inside left, center, right; three





60"D x 240"W Table Tops (13/16"H)

HPL

Vinyl

\$6508

6508

6702

6702

6702

P Ŕim

(L)

TFL

(LL)*

HPL

(2L)

Self

J Rim

\$6833

6833

7037

7037

7037

HPL

(LW)

\$9280

9280

9557

9557

9557

Wood

F/M Rim

Wood

Wood

\$9280

9280

9557

9557

9557

F/M Rim

(W)

3D Lam

Sloped

SL Rim

(T)

Pricing

Wood

(1W)

Wood

S Rim

\$10394

10394

10594

10594

10594

GSA SIN 711-11

HPL

(1LW)

Wood

S Rim

\$10394

10394

10594

10594

10594

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

D	W	Model	Vinyl P Rim
Recta	angular		
60"	240"	74K60240RT	\$5007
Soft	Rectangı	ılar	
60"	240"	74K60240SRT	5007
Arc F	Rectangu	lar	
60"	240"	74K60240AR	5757
Boat			
60"	240"	74K60240BT	5757
60"	240"	74K60240RC	
60	240	/4R0U24UHC	5757

* Height (thickness) for TFI
worksurfaces is 11/8".

• Three-piece top

How to Specify

- Model
- 2 Material:
 - **LL** = TFL with P rim
 - $\mathbf{L} = HPL$ with P rim
 - **2L** = HPL with J rim
 - **LW** = HPL with wood F or M rim
 - **W** = Wood with wood F or M rim
 - **1LW** = HPL with wood S rim
 - **1W** = Wood with wood S rim
- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - **SL** = Sloped Rim (T)
 - $\mathbf{J} = HPL \text{ self rim (2L)}$
 - **F** = Softened wood rim (LW or W)
 - **M** = Reed wood rim (LW or W)
 - **S** = Knife wood rim (1LW or 1W)
- 4 Grommet/cut-out option (+\$64 per grommet or +\$58 per cut-out):
 - ➤ See page 2.106 for applicability and designators.
 - **X** = None
- Surface finish price group (omit for LL models):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 6 Surface finish designator
- ① Rim finish price group (include for LW and 1LW models only):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 8 Rim finish designator (include for LL, L, LW and 1LW models only)



60"D x 240"W Table Tops (13/16"H)

➤ See page 2.113.


Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Applicable Bases and Factory-Installed Grommet/Cut-Out Options

Applicable Bases and Grommet/Cut-Out Options

Note: Bases are specified separately.



Type Blade Y Height Worksurface

Model 74K4220828CFYL Quantity

Grommets G1CCMB, G1CCSL

Cut-outs C2CC, C4CC C6CC, C7CC, C8CC, C9CC, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR

>See page 2.14 for clearance dims.

>See page 2.15 for grommet/cut-out location diagrams.

Beam Туре Height Worksurface

74K3019828B Model 74K3019828BR

Quantity

Grommets G1CMB, G1CSL, G1CCMB, G1CCSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC

C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR,

C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR

>See page 2.21 for clearance dims.

▶See page 2.22 for grommet/cut-out location diagrams.



➤See page 2.117.

Cut-Outs (+\$58 per cut-out):

DESIGNATOR KEY:

G1 = G1 arommet Location -

C = Center; one grommet

Grommets (+\$64 per grommet):

CC = Center center; two grommets LR = Left and right; two grommets

Size-

Finish-

Size -

C2 = C2 cut-out

MB = Matte black SL = Silver

C4 = C4 cut-out

C6 = C6 cut-out

C7 = C7 cut-out

C8 = C8 cut-out

C9 = C9 cut-out

Location -

C = Center: one cut-out

CC = Center center; two cut-outs

ILR = Inside left and right; two

cut-outs

LCR = Left, center, and right; three

cut-outs

ILCR = Inside left, center, right; three

cut-outs







➤See pages 2.120-2.121.

Type Square Height Worksurface Model 74K2428SQA

Worksurface 74K2428CY 74K2428CYA

Cylinder

Quantity

Grommets G1CMB, G1CSL, G1LRMB, G1LRSL Cut-outs C2C, C4C, C6C, C7C, C8C, C9C,

C2CC, C4CC, C6CC, C7CC, C8CC, C9CC, C2ILR, C4ILR, C6ILR, C7ILR, C8ILR, C9ILR C2LCR, C4LCR, C6LCR, C7LCR, C8LCR, C9LCR, C2ILCR, C4ILCR, C6ILCR, C7ILCR, C8ILCR, C9ILCR

>See page 2.27 for clearance dims.

>See page 2.28 for grommet/cut-out location diagrams.

Note: Square and cylinder bases do not require additional weight when used with these tops.



Disc Bases

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29

Without Cord Management



Diameter	Н	Model	Price		
Occasion	Occasional Height				
17"	15"	74K1715D	\$487		
22"	15"	74K2215D	514		
27"	15"	74K2715D	650		





Worksurface Height			
17"	28"	74K1728D	\$509
22"	28"	74K2228D	536
27"	28"	74K2728D	683





Standing Counter Height			
17"	35"	74K1735D	\$621
22"	35"	74K2235D	649
27"	35"	74K2735D	753



Note: Assembly required.

How to Specify

Model

② Paint designator (+10% on select metallic paint finishes)



Standing Height			
17"	41"	74K1741D	\$645
22"	41"	74K2241D	676
27"	41"	74K2741D	765



Disc Bases

Pricing

Planning
Pricing

➤See page 2.2

2.8

2.29

2.128

Surface Materials

Statement of Line

GSA SIN 711-11

With Cord Management



Diameter	Н	Model	Price
Occasion	al Height		_
17"	15"	74K1715DCM	\$624
22"	15"	74K2215DCM	652
27"	15"	74K2715DCM	788



Worksu	Worksurface Height			
17"	28"	74K1728DCM	\$646	
22"	28"	74K2228DCM	674	
27"	28"	74K2728DCM	821	



Standing Counter Height			
17"	35"	74K1735DCM	\$758
22"	35"	74K2235DCM	787
27"	35"	74K2735DCM	891



Standing Height			
17"	41"	74K1741DCM	\$783
22"	41"	74K2241DCM	814
27"	41"	74K2741DCM	903

Standard Includes

• Attachment hardware Note: Assembly required.

How to Specify



② Paint designator (+10% on select metallic paint finishes)



Blade X Bases

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2 128













D	W	Н	Model	Price			
Occa	Occasional Height						
20"	20"	14¾"	74K2015CFX	\$449			
26"	26"	143⁄4"	74K2615CFX	497			
32"	32"	143/4"	74K3215CFX	526			

End	End Table Height				
20"	20"	18¾"	74K2019CFX	\$462	
26"	26"	18¾"	74K2619CFX	511	

Work	Worksurface Height				
20"	20"	273/4"	74K2028CFX	\$473	
26"	26"	273/4"	74K2628CFX	525	
32"	32"	273/4"	74K3228CFX	551	
Mobil	e				
26"	26"	273/4"	74K2628CFXM	577	
32"	32"	273/4"	74K3228CFXM	603	

Standing Counter Height				
20"	20"	34¾"	74K2035CFX	\$527
26"	26"	34¾"	74K2635CFX	584
32"	32"	343⁄4"	74K3235CFX	612

Standing Height				
20"	20"	403/4"	74K2041CFX	\$549
26"	26"	403/4"	74K2641CFX	609
32"	32"	403/4"	74K3241CFX	639

Standard Includes

- X base
- Adjustable glides or locking dualwheel casters on mobile model
- Attachment hardware

How to Specify

- Model
- ② Column paint designator (+10% on select metallic paint finishes)
- 3 Foot paint or non-paint finish designator
- ④ Caster finish designator (include for worksurface-height mobile model only):

C45 = Black

C46 = White/Grey




Blade Quad Bases

Pricing


GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

















Standard Includes

- Quad base
- Adjustable glides
- Attachment hardware

- Model
- ② Column paint designator (+10% on select metallic paint finishes)
- 3 Foot and bridge paint or nonpaint finish designator




Blade Y Bases

Occasional and Worksurface Heights

Pricing

GSA SIN 711-11 † GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

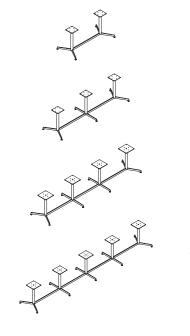

D	W	Н	Number of Columns	Model	Price
Occa	asional	Height			
16"	28"	143⁄4"	2	74K162815CFYL	\$760
16"	40"	143/4"	2	74K164015CFYL	845
22"	37"	143⁄4"	2	74K223715CFYL	882
22"	55"	143⁄4"	2	74K225515CFYL	900
Worl	csurface	e Height			
16"	40"	273/4"	2	74K164028CFYL	\$889
22"	43"	273/4"	2	74K224328CFYL	1046
22"	55"	273/4"	2	74K225528CFYL	1056
27"	46"	273/4"	2	74K274628CFYL	1089
27"	52"	273/4"	2	74K275228CFYL	1105
27"	58"	273/4"	2	74K275828CFYL	1126
27"	64"	273/4"	2	74K276428CFYL	1149
27"	98"	273/4"	3	74K279828CFYL	1854
27"	110"	273/4"	3	74K2711028CFYL	1926
27"	136"	273/4"	4	74K2713628CFYL †	2527
27"	160"	273/4"	4	74K2716028CFYL †	2624
27"	184"	273/4"	5	74K2718428CFYL †	3199
27"	208	27¾"	5	74K2720828CFYL †	3373
For U	lse with	Tapered To	ops*		
27"	56"	27¾"	2	74K275628CFYL	\$1117
27"	59"	27¾"	2	74K275928CFYL	1126

*Bases for use with 36x72 and 42x84 tapered tops have different depths to correspond with the end depths of the top; 48x96 and 48x120 tapered tops utilize a standard base.

Illustrations on this page have been reduced in size relative to the others to show their full width.

- Y base with bridge and columns as indicated
- Adjustable glides
- Attachment hardware Note: Assembly required.

- Model
- Column paint designator (+10% on select metallic paint finishes)
- ③ Foot and bridge paint or non-paint finish designator



Blade Y Bases

Pricing

Planning
Pricing

Statement of Line

Pricing 2.29
Surface Materials 2.128

➤See page 2.2

2.8

Standing Counter and Standing Heights





D	W	Н	Model	Price		
Stan	Standing Counter Height					
22"	43"	34¾"	74K224335CFYL	\$1152		
22"	55"	343/4"	74K225535CFYL	1164		
27"	46"	343/4"	74K274635CFYL	1201		
27"	58"	34¾"	74K275835CFYL	1241		
27"	64"	343/4"	74K276435CFYL	1266		



Standing Height				
22"	43"	403/4"	74K224341CFYL	\$1214
22"	55"	403/4"	74K225541CFYL	1226
27"	46"	403/4"	74K274641CFYL	1264
27"	58"	403/4"	74K275841CFYL	1308
27"	64"	403/4"	74K276441CFYL	1333

Standard Includes

- Y base
- Adjustable glides
- Attachment hardware

Note: Assembly required.

- Model
- ② Column paint designator (+10% on select metallic paint finishes)
- 3 Foot and bridge paint or nonpaint finish designator




Double-Column Blade Y Bases

Pricing

Worksurface Height GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

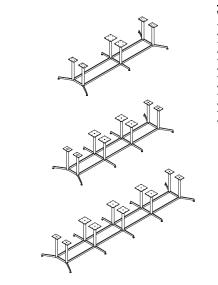

D	W	Н	Number of Columns	Model	Price
Work	ksurface	e Height			
42"	88"	27¾"	3 double	74K428828CFYL	\$3613
42"	112"	273/4"	3 double	74K4211228CFYL	4063
42"	136"	27¾"	4 double	74K4213628CFYL	4869
42"	160"	27¾"	4 double	74K4216028CFYL	5041
42"	184"	273/4"	5 double	74K4218428CFYL	6224
42"	208"	27¾"	5 double	74K4220828CFYL	6394

Standard Includes

- Y base with bridge and columns as indicated
- Adjustable glides
- Attachment hardware Note: Assembly required.

How to Specify

- Model
- ② Column paint designator (+10% on select metallic paint finishes)
- 3 Foot and bridge paint or non-paint finish designator

Illustrations on this page have been reduced in size relative to the others to show their full width.



Pull-Up Tables

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



D	W	Н	Model	TFL (LL)* Vinyl P Rim	HPL (L) Vinyl P Rim	3D Lam (T) Sloped SL Rim	HPL (2L) Self J Rim	HPL (LW) Wood F/M Rim	Wood (W) Wood F/M Rim	HPL (1LW) Wood S Rim	Wood (1W) Wood S Rim
Pull	I-Up Ta	able									
153/4	4" 19"	255/8"	74K161926PUT	\$617	\$695	_	\$722	_	\$842	_	_

Standard Includes

- Blade 4-prong base
- Top with 1" radius corners
- Glides

Note: Assembly required.

- Model
- 2 Material:
 - **LL** = TFL with P rim
 - $\mathbf{L} = HPL$ with P rim
 - **2L** = HPL with J rim
 - $\mathbf{W} = \text{Wood with wood F}$
- 3 Rim profile:
 - **P** = Softened vinyl rim (LL or L)
 - $\mathbf{J} = HPL \text{ self rim (2L)}$
 - **F** = Softened wood rim (W)
- 4 Surface finish price group (omit for LL models):
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- Surface finish designator
- 6 Column paint designator (+10% on select metallic paint finishes)
- Toot and bridge paint or non-paint finish designator



Tubular X Bases

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2 128







D	W	Н	Model	Price
Work	ksurfac	e Height		
22"	22"	273/4"	74K2228TBX	\$551
26"	26"	273/4"	74K2628TBX	587
32"	32"	273/4"	74K3228TBX	608
38"	38"	273/4"	74K3828TBX	670
Mobil	le			
26"	26"	273/4"	74K2628TBXM	638
32"	32"	273/4"	74K3228TBXM	660
38"	38"	273/4"	74K3828TBXM	720

Standing Height						
22"	22"	403/4"	74K2241TBX	\$585		
26"	26"	403/4"	74K2641TBX	644		
32"	32"	403/4"	74K3241TBX	668		
38"	38"	403/4"	74K3841TBX	736		

Standard Includes

- X base
- Black glides or hooded, locking dual-wheel casters (black)
- Attachment hardware

How to Specify



2 Paint designator:462 = Cinder

501 = Platinum Metallic



Rectangular Bases

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128





D	W	Н	Model	TFL (LL)	HPL (L)	(W)
Work	csurfac	e Height				
Plain	End Ca	ps				
20"	6"	273/4"	74K1828R	\$608	\$926	\$964
26"	6"	273/4"	74K2428R	718	972	1012
32"	6"	273/4"	74K3028R	909	1029	1072
Alumi	inum Ra	adius End Caps				
20"	6"	273/4"	74K1828RR	734	956	993
26"	6"	273/4"	74K2428RR	846	1001	1041
32"	6"	273/4"	74K3028RR	1048	1064	1085

Standard Includes

- Base with cord access
- Adjustable glides
- Attachment hardware

- Model
- 2 Material:
 - **LL** = TFL
 - $\mathbf{L} = \mathsf{HPL}$
 - $\mathbf{W} = \mathsf{Wood}$
- 3 Finish price group:
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 4 Finish designator
- (5) Radius end cap finish designator (include for radius end cap model only):
 - 486 = Clear anodized aluminum



Rectangular Beam Bases


Worksurface Height

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128





D	W	Н	Number of Bases	Number of Rails	Model	TFL (LL)	HPL (L)	Wood (W)
Work	csurface	Height						
Plain	End Cap	s (shown)						
26"	78"	273/4"	2	2	74K247828B	\$2588	\$3024	\$3185
26"	102"	273/4"	2	2	74K2410228B	2902	3387	3567
32"	78"	273/4"	2	2	74K307828B	3209	3783	3980
32"	102"	273/4"	2	2	74K3010228B	3528	4133	4349
26"	174"	273/4"	4	6	74K2417428B	5804	6776	7133
26"	198"	273/4"	4	6	74K2419828B	5919	6912	7277
32"	174"	273/4"	4	6	74K3017428B	7060	8266	8701
32"	198"	273/4"	4	6	74K3019828B	7197	8432	8876
Alum	inum Rad	dius End C	Caps					
26"	78"	273/4"	2	2	74K247828BR	\$3131	\$3288	\$3462
26"	102"	273/4"	2	2	74K2410228BR	3443	3594	3784
32"	78"	273/4"	2	2	74K307828BR	3915	4112	4326
32"	102"	273/4"	2	2	74K3010228BR	4304	4492	4729
26"	174"	273/4"	4	6	74K2417428BR	6885	7188	7567
26"	198"	273/4"	4	6	74K2419828BR	7022	7332	7718
32"	174"	273/4"	4	6	74K3017428BR	8610	8986	9458
32"	198"	273/4"	4	6	74K3019828BR	8776	9164	9647

Standard Includes

- Two or four beam bases with cord access, as indicated
- Two or six beams, as indicated
- Adjustable glides
- Attachment hardware

Note: Assembly required.

- Model
- 2 Material:
 - LL = TFL
 - **L** = HPL
 - $\mathbf{W} = \mathsf{Wood}$
- 3 Finish price group:
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 4 Finish designator
- (5) Radius end cap finish designator (include for radius end cap model only):
 - 486 = Clear anodized aluminum



Rectangular Beam Bases

Standing Height

Pricing

Statement of Line

GSA SIN 711-11

	1 3 -
Planning	2.8
Pricing	2.29
Surface Materials	2 128

➤See page 2.2



D	W	Н	Number of Bases	Number of Rails	Model	TFL (LL)	HPL (L)	Wood (W)
Stan	ding Hei	ight						
Plain	End Caps	S						
20"	433/4"	403/4"	2	2	74K184241B	\$2557	\$2893	\$3046
20"	54"	403/4"	2	2	74K185441B	2637	2982	3139
26"	433/4"	403/4"	2	2	74K244241B	2716	2911	3235
26"	54"	403/4"	2	2	74K245441B	2801	3168	3335
26"	78"	403/4"	2	2	74K247841B	2889	3268	3439
26"	102"	403/4"	2	2	74K2410241B	3251	3793	3993
Alum	inum Rad	lius End (Caps (shown)					
20"	433/4"	403/4"	2	2	74K184241BR	\$2692	\$3095	\$3259
20"	54"	403/4"	2	2	74K185441BR	2776	3192	3359
26"	433/4"	403/4"	2	2	74K244241BR	2863	3288	3463
26"	54"	403/4"	2	2	74K245441BR	2948	3388	3569
26"	78"	403/4"	2	2	74K247841BR	3434	3881	4114
26"	102"	403/4"	2	2	74K2410241BR	3537	4059	4273
20	102	4094	2	2	/4K241U241DK	3331	4059	

Standard Includes

- Two beam bases with cord access
- Two beams
- Adjustable glides
- Attachment hardware

Note: Assembly required.

How to Specify

- Model
- 2 Material:

LL = TFL

L = HPL

 $\mathbf{W} = \mathsf{Wood}$

3 Finish price group:

STD = Group 1

STD2 = Group 2 (+20%)

⑤ Radius end cap finish designator (include for radius end cap model only):

486 = Clear anodized aluminum

^{*} Height (thickness) for TFL and 3D laminate worksurfaces is 11/8".



Panel Base

Pricing

GSA SIN 711-11

Statement of Line Planning 2.8
Pricing 2.29
Surface Materials 2.128



D	W	Н	Model	HPL (L)	(W)
Worl	ksurfac	ce Height			
233/4"	2"	273/4"	74K2428PN	\$486	\$516

Standard Includes

- Panel base
- Adjustable glides
- Attachment hardware

- Model
- 2 Material:
 - **L** = HPL
 - $\mathbf{W} = \mathsf{Wood}$
- 3 Finish price group:
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 4 Finish designator



Square Bases

Pricing

Planning 2.8
Pricing 2.29

➤See page 2.2

2.128

GSA SIN 711-11



D	W	Н	Model	(LL)	(L)	(W)
Worl	ksurfac	e Height				
18"	18"	273/4"	74K1828SQA	\$846	\$1143	\$1204
24"	24"	273/4"	74K2428SQA	951	1188	1248

Related Products:

Quantity	Total weight	Model	Price
Counterw	reight (27 lb. Bags)		_
1	27 lbs.	74K1COUNTERWEIGHT	\$34
2	54 lbs.	74K2COUNTERWEIGHT	44
3	81 lbs.	74K3COUNTERWEIGHT	55

IMPORTANT: Square bases require counterweight in each base to prevent tipping, unless specifically noted.

See the applicable base tables for the size top you are specifying for

appropriate pounds required.

Standard Includes

- Square base with removable side panels
- Adjustable glides

Statement of Line

Surface Materials

How to Specify

Base

- Model
- 2 Material:
 - **LL** = TFL
 - **L** = HPL
 - $\mathbf{W} = \mathsf{Wood}$
- 3 Finish price group:
 - **STD** = Group 1
 - **STD2** = Group 2 (+20%)
- 4 Finish designator

Counterweight



Cylinder Bases

Pricing

GSA SIN 711-11

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128



Diameter	Н	Model	HPL (L)	Wood (W)			
Worksurfa	Worksurface Height						
18"	277/8"	74K1828CY	\$1154	\$1283			
24"	277/8"	74K2428CY	1276	1419			



With Hinged Access Door							
18"	277/8"	74K1828CYA	\$1306	\$1481			
24"	277/8"	74K2428CYA	1426	1738			

Related Products:

Quantity	Total weight	Model	Price
Counterw	veight (27 lb. Bags)		_
1	27 lbs.	74K1COUNTERWEIGHT	\$34
2	54 lbs.	74K2COUNTERWEIGHT	44
3	81 lbs.	74K3COUNTERWEIGHT	55

IMPORTANT: Cylinder bases require counterweight in each base to prevent tipping, unless specifically noted.

See the applicable base tables for the size top you are specifying for appropriate pounds required.

Standard Includes

- Cylinder base with or without hinged access door, as specified
- Mounting pad
- Adjustable glides

How to Specify

Base

Model

2 Material:

L = HPL

 $\mathbf{W} = \mathsf{Wood}$

3 Finish price group:

STD = Group 1

STD2 = Group 2 (+20%)

4 Finish designator

Counterweight



Pricing

GSA SIN 711-8

 Planning
 2.8

 Pricing
 2.29

 Surface Materials
 2.128

➤See page 2.2

M2X Retractable Units for C2 Cut-Out



D	W	Н	Model	Price
M2X	Rectra	ctable Power	/Data Center	
8"	10"	21/2"	KCU0810ELPDC	\$1006
For F	lardwire	Application		
8"	10"	21/2"	KCU0810ELPDCH	1057

M2X	/I2X Rectractable Power/Data/USB/HDMI/VGA Center						
8"	10"	21/2"	KCE820ELPDC	\$1247			
For F	Hardwire	Application					
8"	10"	21/2"	KCE820ELPDCH	1247			

IMPORTANT: Specify C2 factory-installed cut-out for top.

All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Standard Includes

Statement of Line

M2X Power/Data Center

- Four power outlets (2 per side)
- Six blank data ports (3 per side)
- Voice/adapter kit to accept couplers and jacks
- One touch pivot open/close
- Two 10' power cords
- Silver, anodized aluminum finish
- Fits C2 cut-out

M2X Power/Data/USB/HDMI/ VGA Center

- Four power outlets (2 per side)
- Two duplex USB charging ports (1 duplex per side)
- One HDMI port
- One VGA port
- Two blank data ports (1 per side)
- Voice/adapter kit to accept couplers and jacks
- Two touch pivot open/close
- Two 6' power cords, rated at 15 amps 120 volts (1 per side)
- Silver, anodized aluminum finish
- Fits C2 cut-out

How to Specify



14/

Pricing

Drico

GSA SIN 711-8

 Planning
 2.8

 Pricing
 2.29

 Surface Materials
 2.128

➤See page 2.2

Mho® Retractable Units for C4 Cut-Out



<i>D</i>	VV	Model	11100
Mho	® Rectra	ctable Power/Data Center with Three-Prong Plug	
43/8"	83/8"	KCEB2PDPS	\$377

Model



Mho®	Rectra	actable Power/Data/USB with Three-Prong Plug	
43/8"	83/8"	KCEB2PDUPS	\$487

All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Standard Includes

Statement of Line

Mho Power/Data Center

- 10' cord with 15-amp straight, three-prong plug
- Two 15-amp receptacles
- Two blank data ports that can accommodate one of eight provided adapter plates
- Silver, anodized aluminum finish
- Pop-up lid that sits flush with surface when closed
- Fits C4 cut-out

Mho Power/Data/USB Center

- 10' cord with 15-amp straight, three-prong plug
- Two 15-amp receptacles
- One blank data port that can accommodate one of eight provided adapter plates
- One port with two USB charging outlets
- Silver, anodized aluminum finish
- Pop-up lid that sits flush with surface when closed
- Fits C4 cut-out





Pricing

GSA SIN 711-8

Statement of Line ➤See page 2.2 Planning 2.8 2.29 Pricing Surface Materials 2.128

E2X Power/Data Center for C7 Cut-Out



D	W	Н	Model	Price
E2X P	ower/D	Data Cente	•	
113⁄8"	101/8"	31/2"	KCE1110PDESMAA †	\$1269
For Ha	rdwire 4	Application		
-		• •	KOE4440DDELIMOMAA	1000
113⁄8"	101/8"	31/2	KCE1110PDEHWSMAA †	1269

• Three power outlets with 72" power cord

Standard Includes

- One VGA DB15HD female with 120" cable
- One USB 2-port simplex charger
- One 3.5mm stereo jack

Side 2:

Side 1:

- Three power outlets with 72" power cord
- One USB 2-port siplex charger
- One HDMI coupler
- One open port
- Housing: Silver, anodized aluminum finish
- Fits C7 cut-out

How to Specify



All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Technology may remain connected while lid is closed, concealing connections.



Pricing

GSA SIN 711-8

Vault Turnbox Drop-In Units for C8 and C9 Cut-outs

Statement of Line ➤See page 2.2 Planning 2.8 2.29 Pricing Surface Materials 2.128



D	W	Н	Model	Price
Vault	Turnbo	ox Powe	r/USB Center	_
113⁄4"	43/8"	43/8"	KCE4124PD	\$1250



Vault Turnbox Power/Data/USB Center				
15 ⁷ /8"	43/8"	43/8"	KCE4164PD	\$1388

Standard Includes

Power/USB Center

- 12' cord with 15-amp, three-prong plug
- Two 15-amp receptacles
- Two USB ports
- One touch open and close mechanism
- Safety photo-electronic eye prevents rotation when unit is in use
- Housing: anodized aluminum finish
- Fits C8 cut-out

Power/Data/USB Center

- 12' cord with 15-amp, three-prong
- Three 15-amp receptacles
- One RJ45 CAT5e data port
- One USB port
- One HDMI port
- One VGA port
- Two 3.5mm audio ports
- One touch open and close mechanism
- Safety photo-electronic eye prevents rotation when unit is in use
- Housing: anodized aluminum finish
- Fits C9 cut-out

How to Specify

Model

IMPORTANT: Specify C8 factoryinstalled cut-out in top for power/data center. Specify C9 factory-installed cut-out for power/data/USB center.

All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.



Pricing

GSA SIN 711-8

Pricing Surface Materials 2.128

➤See page 2.2


2.8

2.29

Node® Drop-In Units for C6 Cut-Out



Diameter	Model	Price		
Node® Power Center				
33/8"	KCEBN20PP	\$192		





Node® Power/USB Center				
33%"	KCEBN11PU	\$296		

IMPORTANT: Specify C6 factoryinstalled cut-out in top.

All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Standard Includes

Node Power Center

Statement of Line

Planning

- 10' cord with three-prong plug
- Two power receptacles
- Silver powdercoat finish
- Fits C6 cut-out

Node Power/USB Center

- 10' cord with three-prong plug
- One power receptacle
- One duplex USB
- Silver powdercoat finish
- Fits C6 cut-out


How to Specify



Pricing

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

Wire Managers



15/8" [
H	23/8"

D	W	Н	Model	Price		
P-Sh	P-Shaped Wire Managers					
23/8"	24"	15⁄8"	KCE24LJWM	\$44		
23/8"	30"	1 ⁵ ⁄8"	KCE30LJWM	50		
23/8"	36"	15⁄8"	KCE36LJWM	57		
23/8"	48"	15⁄8"	KCE48LJWM	61		



Plastic Leg Cable Managers (Set of 3)						
Clear	Clear					
27/8"	33/4"	11/8"	KCE3CCL	\$27		
Silver						
27/8"	33/4"	11/8"	KCE3CSL	\$27		



Metal Vertical Cable Managers					
For us	e with 2	7³/4"H Blade Ba	se		
13/4"	1 ³ / ₄ " 2 ¹ / ₂ " 17 ³ / ₄ " 74K0218VCMP \$\$				
For us	e with 3	4 ³ /4" H and 40 ³ /4	"H Blade Base		
13/4"	21/2"	303/4"	74K0231VCMP	\$100	

P-shaped wire manager can be cut in the field to desired length.

P-Shaped Wire Manager

- Wire manager: black plastic
- Dual stick tape

Plastic Leg Cable Managers

• Set of 3 cable managers: clear or silver plastic

Metal Vertical Cable Managers

- Snap-on cable manager: metal powdercoat
- For use with blade base only

How to Specify

P-Shaped Wire Manager and **Plastic Leg Cable Managers**

Model

Metal Vertical Cable Manager

Model

2 Paint designator



Wood Surface Materials

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

- See the Kimball Surface Materials
 Reference Guide at www.kimball.com
 for a complete overview of the Kimball
 materials program, including:
- Characteristics of wood
- Special wood finishes
- Customer-specified laminate (CSL)
- Customer-specified paint (CSP)
- Fabric application and colorways
- Customer's own material (COM) overview
- Alliance program
- TB133 process

Wood

Applies to:

• Dock Meeting tops

Group 1

MC	Amber Cherry
CC	Cordoba Cherry
MH	Mocha Cherry
SC	Sedona Cherry

IM Brighton MapleTM Huntington Maple

ES Espresso Walnut MW Midtown Walnut TW Tribeca Walnut UW Urban Walnut

CO Canyon Straight Grain
DF Driftwood Straight Grain
YO Monterey Straight Grain
NW Tuscan Straight Grain

Group 2

CS Coco Sapele SS Sienna Sapele

CZ Clear Zebrawood



Laminate Surface Materials

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

- See the Kimball Surface Materials
 Reference Guide at www.kimball.com
 for a complete overview of the Kimball
 materials program, including:
- Characteristics of wood
- Special wood finishes
- Customer-specified laminate (CSL)
- Customer-specified paint (CSP)
- Fabric application and colorways
- Customer's own material (COM) overview
- Alliance program
- TB133 process

Customer-specified laminate (CSL) is available for HPL surfaces.

➤ See the Surface Materials
Reference Guide at www.kimball.com.

HPL

Λ	n	n	ies	to.
ч	IJ	レル	150	IU.

• Dock Meeting tops

Wood	dgrain
MC	Amber Cherry
CC	Cordoba Cherry
MH	Mocha Cherry
SC	Sedona Cherry
IM	Brighton Maple
TM	Huntington Maple
MW	Midtown Walnut
TW	Tribeca Walnut
UW	Urban Walnut
CO	Canyon Straight Grain
DF	Driftwood Straight Grain
YO	Monterey Straight Grain
NW	Tuscan Straight Grain
CZ	Clear Zebrawood

Woodgrain

Solid	
480	Antique White
403	Chamois
462	Cinder
440	Cloud
405	Designer White
450	Fog
488	Frosty White
461	Graphite
416	Putty
420	Sandstone
425	Shadow
460	Storm
419	Wallaby

Patter	Pattern		
874	Bronze Legacy		
842	Canyon Zephyr		
823	Carbon Evolv		
841	Desert Zephyr		
862	Grey Glace		
844	Loden Zephyr		
843	Misted Zephyr		
846	Morro Zephyr		
812	Mushroom Tigris		
808	Nickel Evolv		
807	Silcon Evolv		
873	Tawny Legacy		
805	Titanium Evolv		
809	Tungsten Evolv		
802	White Nebula		
814	White Tigris		

TFL

Applies to:

Dock Meeting tops

MC	Amber Cherry	480	Ant
CC	Cordoba Cherry	403	Cha
MH	Mocha Cherry	462	Cin
SC	Sedona Cherry	440	Clo
		405	Des
IM	Brighton Maple	450	Fog
MW	Midtown Walnut	488	Fros
		461	Gra
MW	Midtown Walnut	420	San
TW	Tribeca Walnut	425	Sha
UW	Urban Walnut	460	Sto
		419	Wal
CO	Canyon Straight Grain		
DF	Driftwood Straight Grain		
YO	Monterey Straight Grain		
NW	Tuscan Straight Grain		
CZ	Clear Zebrawood		

_	
So	lid

480	Antique White
403	Chamois
462	Cinder
440	Cloud
405	Designer White
450	Fog
488	Frosty White
461	Graphite
420	Sandstone
425	Shadow
460	Storm
419	Wallaby



Laminate Surface Materials

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

See the Kimball Surface Materials
Reference Guide at www.kimball.com
for a complete overview of the Kimball
materials program, including:

- Characteristics of wood
- Special wood finishes
- Customer-specified laminate (CSL)
- Customer-specified paint (CSP)
- Fabric application and colorways
- Customer's own material (COM) overview
- Alliance program
- TB133 process

3D Laminate

continued

Applies to:

Dock Meeting tops

Woodgrain		Solid		
MC	Amber Cherry	480	Antique White	
MH	Mocha Cherry	462	Cinder	
		440	Cloud	
CO	Canyon Straight Grain	405	Designer White	
DF	Driftwood Straight Grain	450	Fog	
YO	Monterey Straight Grain	420	Sandstone	
NW	Tuscan Straight Grain			

Pattern

484 Cashmere Fiber466 Concrete Fiber



Paint and Vinyl

Surface Materials

Statement of Line	➤See page 2.2
Planning	2.8
Pricing	2.29
Surface Materials	2.128

- ➤ See the Kimball Surface Materials Reference Guide at www.kimball.com for a complete overview of the Kimball materials program, including:
- Characteristics of wood
- Special wood finishes
- Customer-specified laminate (CSL)
- Customer-specified paint (CSP)
- Fabric application and colorways
- Customer's own material (COM) overview
- Alliance program
- TB133 process

IMPORTANT: Due to the reflective qualities of metallic paint, variations in color may occur.

Customer-specified paint (CSP) is available.

➤ See the Surface Materials Reference Guide at www.kimball.com.

Applies to:

- Dock blade bases
- Disc bases
- Metal vertical cable manager

Group	1
480	Antique White
462	Cinder
405	Designer White
488	Frosty White
461	Graphite
125	Shadow

Group M

514 Carbon Metallic¹ 501 Platinum Metallic 544 Silver Pearl¹

¹ Upcharge applies for column leg on blade base. No upcharge if selected for foot only.

Group 1 Non-Paint

Polished Aluminum²

² Available for specification on foot and bridge part of blade base only; not available on column (leg).

Applies to:

• Tubular bases

462 Cinder 501 Platinum Metallic1

¹ No upcharge.

Vinyl

Applies to:

• Dock Meeting top rims

۷	۷	o	0	d	g	r	a	İ	I

MC Amber Cherry CC Cordoba Cherry МН Mocha Cherry SC Sedona Cherry

ΙM Brighton Maple TM Huntington Maple

Espresso Walnut ES MW Midtown Walnut TW Tribeca Walnut Urban Walnut IJW

CO Canyon Straight Grain DF Driftwood Straight Grain YO Monterey Straight Grain Tuscan Straight Grain NW

Clear Zebrawood

Solid

480 Antique White 403 Chamois 462 Cinder 440 Cloud

485 Dark Chocolate 405 Designer White

450 Fog

488 Frosty White 461 Graphite 420 Sandstone

425 Shadow 460 Storm 419 Wallaby



Notes Surface Materials

Statement of Line	➤See page 2.2		
Planning	2.8		
Pricing	2.29		
Surface Materials	2.128		