





CEILINGS CATALOG

- SPECIALTY CEILING SYSTEMS
- ACOUSTICAL CEILING PANELS
- INTEGRATED CEILING SYSTEMS
- SUSPENSION SYSTEMS



TABLE OF CONTENTS


USG is the global leader in the manufacturing of ceiling suspension systems and a recognized innovator in the development of acoustical and gypsum panels as well as specialty ceiling systems. We believe that USG Ceiling products should not only bring visions to life, but they should also enhance and inspire those visions while reducing the building industry's impact on the environment.

USG Ceiling Solutions offers an extensive line of acoustical panels, suspension systems, integrated ceiling systems and specialty ceiling systems, and all USG Ceiling products are built to provide design freedom, easy installation and outstanding performance. USG. It's Your World. Build $It.^{M}$

	Page		Page	
Overview	2	Online Resources	6	Acoustics
	4	Sustainability	8	Special Performance
JSG	10	USG Billo™ 3-Dimensional Panels	34	USG Geometrix* 3-Dimensional Metal Panels
Specialty	12	USG C² Paired Compässo™ Channel Accents	36	USG GridWare™ Open Cell Decorative System
Ceiling Svstems	14	USG Celebration™ Snap-In Metal Panels	38	USG Libretto® Gridless Metal System
Systems	16	USG Celebration™ Canopies	40	USG Panz® Metal Panels
	18	USG Celebration™ Torsion Spring System	42	USG Paraline® Linear Metal Systems
	20	USG Compässo™ Elite/Standard Perimeter Trims	44	USG Pixels® Metal Ceiling Panels
	22	USG Compässo™ Slim Perimeter Trims	46	USG Pixels® Wall Mounted Panels
	24	USG Compässo™ Elite for Drywall Perimeter Trims	48	USG Topo™ 3-Dimensional System
	26	USG Compässo™ Elite Transitions	50	USG Translucents™ Luminous Infill Panels
	28	USG Compässo™ Elite Perimeter Trims with Island	52	USG Translucents™ Canopies
		Accent Lighting	54	USG True™ Wood Panels
	30	USG Compositions® Decorative Clouds	56	USG True™ Wood Renditions™ Panels
	32	USG Curvatura™ 3-Dimensional Ceiling System	58	USG WireWorks™ Open Cell Ceiling Panels
USG	60	USG Aspen™ Basic Acoustical Panels	106	
Acoustical Ceiling	62	USG Astro® Acoustical Panels	108	USG Orion™ Acoustical Panels
Panels	64	USG Clean Room™ Acoustical Panels	110	USG Pebbled™ Acoustical Panels
	66	USG Eclipse™/Eclipse™ High-NRC Acoustical Panels	112	USG Premier Hi-Lite™ Acoustical Panels
	68	USG Eclipse™ Illusion™ & Pedestals™ Acoustical Panels	114	USG Premier Nubby™ Acoustical Panels
	70	USG "F" Fissured™ Basic Acoustical Panels	116	USG Radar™ Basic Acoustical Panels
	72	USG Fissured™ Basic Acoustical Panels	118	USG Radar™ Ceramic Acoustical Panels
	74	USG Frost™ Basic Acoustical Panels	120	USG Radar™ Acoustical Panels
	76	USG Frost™ High-NRC/High-CAC Acoustical Panels	122	USG Radar™ High-NRC/High-CAC Acoustical Panel
	78	USG Glacier™ Basic Acoustical Panels	124	USG Radar™ Illusion™ Acoustical Panels
	80	USG Halcyon™ Acoustical Panels	126	USG Radar™ Education Acoustical Panels
	84	USG Halcyon™ Healthcare Acoustical Panels	128	USG Radar™ Open Plan Acoustical Panels
	86	USG Halcyon™ Planks and Large Size Acoustical Panels	130	USG Renditions™ Animations Acoustical Panels
	00		132	USG Renditions™ Boundaries Acoustical Panels
	88		134	USG Renditions™ Custom Acoustical Panels
	90	USG Mars™ Acoustical Panels	136	USG Rock Face® Acoustical Panels
	92		138	USG Sandrift™ Acoustical Panels
	96	3 , 3	140	USG Sheetrock® Brand Lay-in Gypsum
	100	USG Mars™ Planks/USG Mars™ High-NRC Planks and Large Sizes	140	Ceiling Panels
	10.4	USG Millennia® High-NRC Acoustical Panels	142	USG Touchstone™ Acoustical Panels

	Page		Page	
USG Logix™	144	USG Logix™ Introduction	150	USG Mars™ High-NRC Logix™ Acoustical Panels
Integrated Ceiling System	146	USG Halcyon™ Logix™ Acoustical Panels	164	USG Logix™ Suspension Systems and USG Panz® Metal Panels and Connector Panels
USG Suspension	174	USG Donn® Brand AdvanceSpan™ Suspension System	196	USG Donn® Brand Fineline® 1/8" DXFF™ Acoustical Suspension System
Systems	176	USG Donn® Brand AX™/AXCE™ Acoustical Suspension System	198	USG Donn® Brand Fineline® DXFEV™ Acoustical Suspension System
	178	USG Donn® Brand CE™ Acoustical Suspension System	200	USG Donn® Brand Identitee® DXI™ Acoustical Suspension System
	180	,	204	USG Indexed Support Bar
		Acoustical Suspension System USG Donn* Brand DX*/DXL™ Acoustical	206	
	102	Suspension System	208	Suspension System USG Drywall Suspension System—Curved Ceilings
		USG Donn® Brand DX®/DXL™ Concealed Acoustical Suspension System	210	USG Drywall Suspension System—Flat Ceilings
		USG Donn® Brand DXLA™/DXACE™ Acoustical	212	USG Drywall Suspension System—Wall-to-Wall
	100	Suspension System	214	USG Donn® Brand M7 Overlapping Wall Angle
	188	USG Donn® Brand DXSS™ Acoustical Suspension System	216	USG Donn* Brand Transition Molding
	190	USG Donn® Brand DXW™ Acoustical Suspension System	218	USG Suspension Systems Accessories
	192	USG Donn® Brand Fineline® DXF™/DXLF™ Acoustical Suspension System		
Additional	228	System Interface	250	Special Applications
Resources	232	USG Ceiling Solutions Color Program	252	Balanced Acoustics
	238	Metal Finishes	254	USG Acoustical Data
	241	Metal Perforations	256	Acoustical Panel Packaging Data
	245	Wood Finishes	275	Suspension System Packaging Data
	246	USG Translucents™ Finishes	280	Item Number Index
	248	Sustainability Commitment	292	History of Innovation



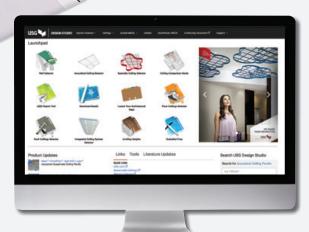

USGDESIGNSTUDIO.COM CGCDESIGNSTUDIO.COM

THE SUPPORT YOU NEED.

Our Design Studio® websites are much more than just valuable resources for product information. Designed around the way you think and work, these powerful tools are filled with features that foster collaboration and enable your entire team to work faster and more efficiently.



ARCHITECTURAL REPRESENTATIVE LOCATOR

Easily find your representative's contact information with this interactive state-by-state locator.



CEILING COMPARISON GUIDE

Select individual or multiple products and generate one specification that includes product information and installation references, submittals, delivery and storage of materials and cleaning instructions.



LEED* REPORT TOOL

Generate custom reports that determine how USG products can assist your project in qualifying for LEED credits.



SUBMITTAL BUILDER

Dynamically combine system files and product data sheets, including warranty information, installation guides and material safety data sheets (MSDS), into one document for easy download, customization, printing or emailing.



USG CEILING SOLUTIONS RECYCLING PROGRAM

Learn how you can help preserve resources with a program that takes back approved ceiling panels from any manufacturer and recycles them into new building materials.



VISIT THE WEBSITES TO:


- Find product and warranty information
- Order samples and literature (for CGC contact your local Sales Representative)
- Learn about USG's rich history of innovation within the building industry



WHERE WE MAKE AN IMPACT TOGETHER

Reaching the highest goals in sustainability requires a beginning-to-end focus on everything we do including the product development cycle. We've identified three corporate priorities where USG can make the most impact on sustainability.

- 1. Develop responsible solutions
- 2. Enhance energy management
- 3. Improve resource utilization

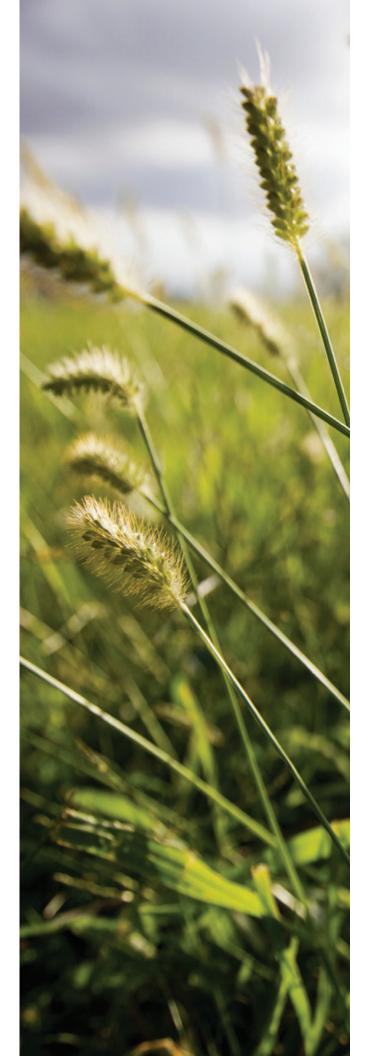

Climate Change

Stewardship

Biomimicry 🕏

HPD—Health Product Declarations

Chemicals of Concern

of Concern Biodiversity
Solar Energy

The 2030 Challenge EPD—Environmenta **Product Declarations**

Zero Net Energy


Biomass

Cradle-to-Cradle

OUR COMMITMENT IS A NEVER-ENDING PROCESS. WE WILL CONTINUE TO IMPROVE WHAT WE DO IN ORDER TO MAKE **OUR COMPANY AND PRODUCTS** MORE SUSTAINABLE.

FOR MORE INFORMATION, GO TO PAGES 248-249



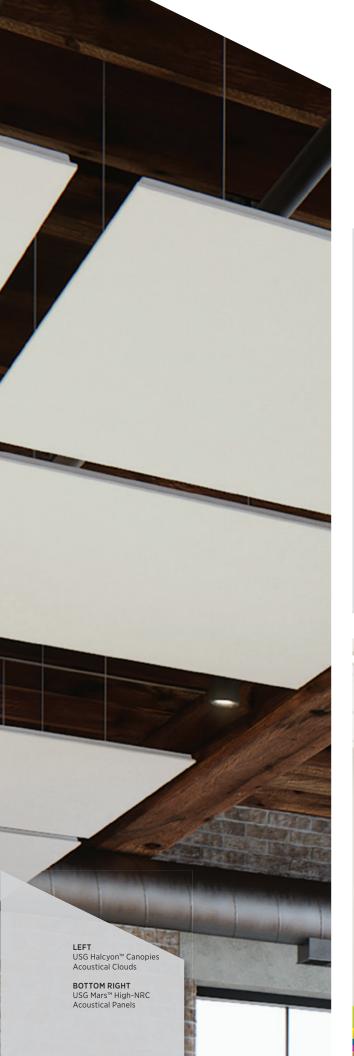

HEAR AND EXPERIENCE THE DIFFERENCE WITH USG CEILING SOLUTIONS

The quality of sound can greatly enhance or inhibit any space. That's why balanced acoustics are essential to every space. Our wide range of ceiling solutions is designed to be not only pleasing to the eye, but also music to your ears. Along with ceilings, USG manufactures walls and floors, so you have a partner to help you design to the broader acoustical needs of any space.

FOR MORE INFORMATION, GO TO PAGES 252–255





FOR PERFORMANCE THAT ENSURES YOUR BUILDING AND ITS OCCUPANTS ARE SAFE, CHOOSE USG CEILING SOLUTIONS

From the threat of earthquakes, fires and outdoor elements, to air quality, there are numerous factors that can affect the integrity of your building and, most importantly, the occupants inside of it.

Our commitment to Clean Room technologies, seismic solutions, fire-rated materials and exterior ceiling systems has enabled us to deliver special-performance solutions.

Ensuring your building, and those who inhabit it, stand tall in the



USG BILLO™ 3-DIMENSIONAL PANELS



USG BILLO[™] **3-DIMENSIONAL PANELS**

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

PRODUCT INFORMATION

Materials	Sizes and Weight	Module Size
Panels: Preformed polycarbonate Suspension System: All 2'x2' USG Donn® Brand 9/16" Centricitee™ DXT™ and Fineline® DXF™/DXFF™ profiles.	Panels: 2'x2' Weight: 0.25 lb./sq. ft.	Full 2'x2' modules only


FINISHES

EDGE DETAILS

Panel Color	Panel Light Transmission	Suspension System Coordinating C	olors
White Translucent	26%	Flat White	
White Opaque	8%	Flat White	
Color Gallery Colors	Varies per Color	Flat White or per Specification	
USG Billo™ Panels with 9/16" USG Donn® Brand Centricitee™ DXT™ Suspension	USG Billo™ Panels with 9/16″ USG Donn* Brand Fineline* DXF™ Suspension	USG Billo™ Panels with 9/16" USG Donn® Brand Fineline® 1/8 DXFF™ Suspension	USG Billo™ Panels with 9/16" USG Identitee* DXI™ Suspension


PANEL HOLD-DOWN CLIP

Supplied with 9/16" down panels



ASSEMBLY

View from above

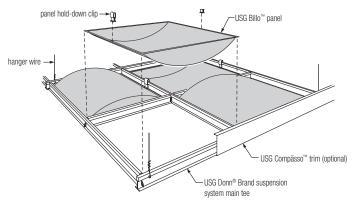

FOR MORE INFORMATION

Product literature System brochure: IC472 Data sheet: IC473

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Code approval

Infill panels meet Class B requirements for flame spread and smoke developed as defined by ASTM E1264, NFPA and IBC (UBC) as tested in accordance with ASTM E84 and CAN/ULC S102 surface-burning characteristics.


For Canadian product needs, please contact your local

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC473/rev. 11-16

USG C² PAIRED COMPÄSSO[™] CHANNEL ACCENTS

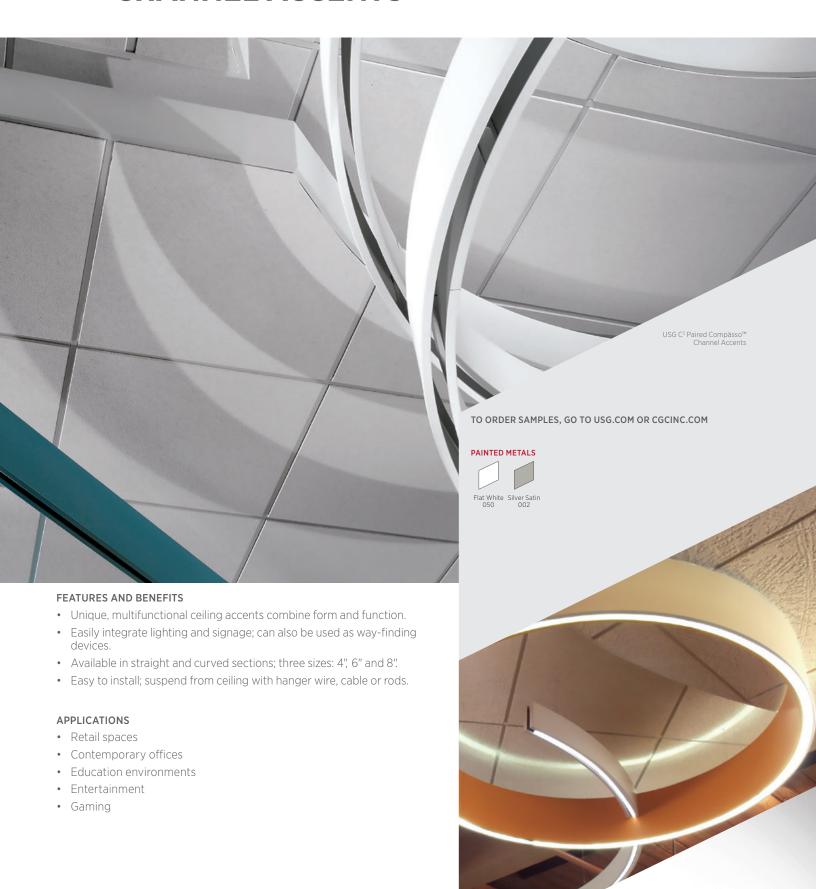

USG C² PAIRED COMPÄSSO™ CHANNEL ACCENTS

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com


TECHNICAL SERVICES 800 USG.4YOU (874-4968)

PRODUCT INFORMATION


CUSTOM DESIGNS¹

Pre-engineeredno field cutting

Materials Finishes Painted steel Flat White (050) and Silver Satin (002) are standard. Wood Tones and custom colors available.

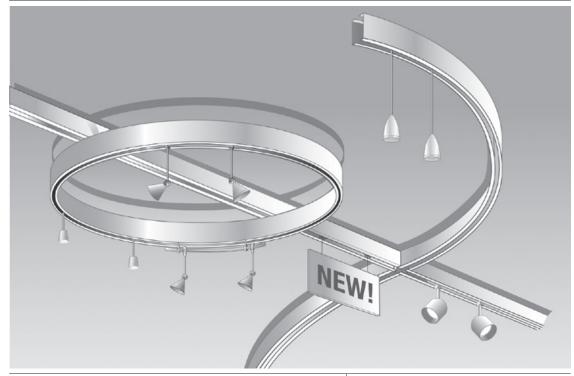

SIZE OPTIONS

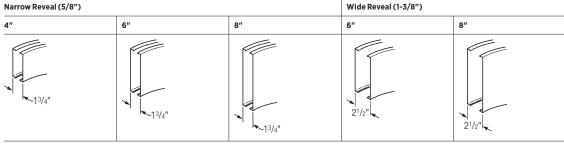

FOR MORE INFORMATION

Product literature System brochure: IC400 Data sheet: IC401

Online tools usgdesignstudio.com or cgcdesignstudio.com

Recycled content
USG C² Paired Compässo™ Channel Accents:
25% recycled content.

Notes
1. Lighting is supplied by others.


Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC401/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG CELEBRATION™ SNAP-IN METAL PANELS

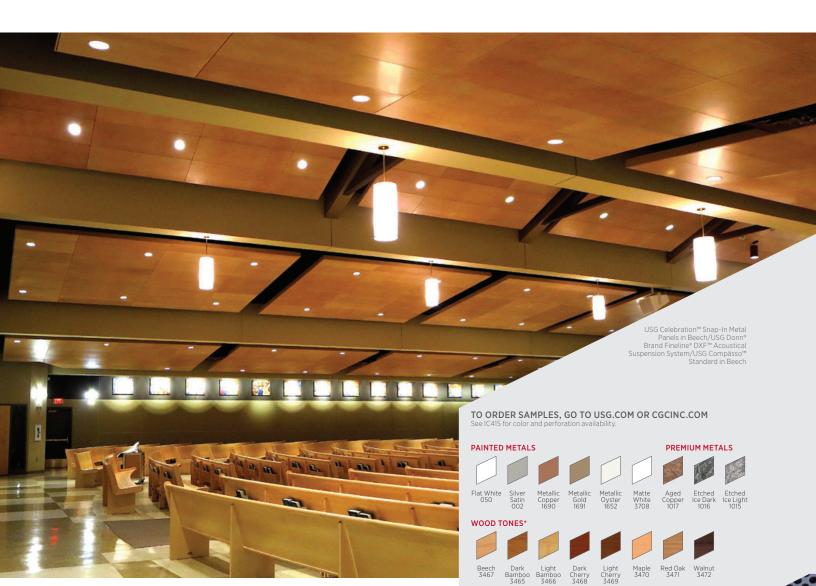


FEATURES AND BENEFITS

- Aluminum panels provide a monolithic appearance.
- Easy installation into standard USG Donn® Brand Fineline® DXF™ Acoustical Suspension System.
- Aluminum panels are positively attached to the suspension system through engineered connection.
- Downward panel access is excellent for shallow plenum areas.
- Wall-mount solution available; see IC605.
- Wind load tested and approved, including Miami-Dade NOA, for exterior applications with proper bracing and framing.

APPLICATIONS

- Entertainment
- Gaming
- Exterior ceilings
- Hospitality
- Transportation terminals





USG CELEBRATION SNAP-IN **METAL PANELS**

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG,4YOU (874-4968)



PRODUCT INFORMATION

Materials	Finishes	Typical Module Sizes ¹	Plenum Depth	Weight
Aluminum panels	Painted, powder coated or anodized in a variety of optional perforation and embossing patterns.	1'x 4', 1'x 5', 2'x 2', 2'x 4', 2'x 6', 2'x 8', 4'x 4' ² , 20"x 60", 30"x 30", 30"x 60"	Since panels are installed from below, the clearance for installation and removal of panels is minimal. Additional plenum clearance of up to 9" may be required for air boot and lighting installations, depending on the unit selected.	Approximately 0.53 lb./sq. ft., not including lights and air diffusers.

GRID LAYOUT

 $The modular nature of USG Celebration \c^{\mathsf{M}} Snap-In panels must be considered when an assembly is designed. The main tees and cross tees must be considered when an assembly is designed. The main tees and cross tees must be considered when an assembly is designed. The main tees and cross tees must be considered when an assembly is designed. The main tees and cross tees must be considered when an assembly is designed. The main tees are considered when an assembly is designed. The main tees are considered when an assembly is designed. The main tees are considered when an assembly is designed. The main tees are considered when an assembly is designed. The main tees are considered when an assembly is designed. The main tees are considered when an assembly is designed. The main tees are considered when an assembly is designed. The main tees are considered when a c$ $installed\ exactly\ on\ module\ lines.\ USG\ Celebration\ Snap-In\ panels\ cannot\ be\ installed\ across\ main\ tee\ and\ a\ 4\ ft.\ cross\ tee.\ Panels\ may\ be\ field\ -cut\ at\ terms$ walls and columns or terminated at a grid module for island installations. Larger panels will require cross tees at their midspan². Please refer to IC592 for more information.

ACOUSTICS³

Description	Optional Acoustical Material	Sound Rating - NRC		
		Perforation A062	Perforation A116	
Perforated Panel	Acoustibond™ backer	0.60	0.70	
Perforated Panel	2", 0.75 lb. fiberglass in polybag (by others)	0.85	0.90	

AIR HANDLING


The USG Celebration™ diffuser is an extruded aluminum frame with matching faceplate and color-coordinated vanes, in one-, two-, three- and fourslot configurations, with four-directional throw. Please refer to IC415 for more information.

CODE APPROVAL

 $USG\ Celebration {}^{\mathtt{M}}\ Snap-In\ panels\ provide\ a\ continuous\ interlock\ with\ the\ suspension\ system\ through\ positive\ attachment.\ Supporting\ grid\ is\ capable\ provide\ provide$ of sustaining loads greater than those imposed by the USG Celebration system when installed in accordance with manufacturer's instructions. The system meets requirements of ASTM C635 and tested per AC368. See PER-14077 and PER-12055.

View from below


PERSPECTIVE

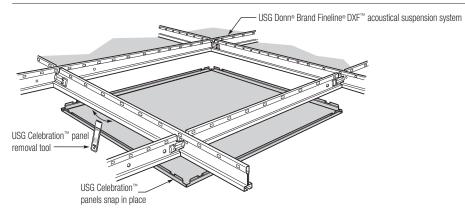

USG CELEBRATION™ **AIR DIFFUSER**

Available in one-, two-, threeand four-slot configurations, with four-directional throw. See IC415.

View from above



FOR MORE INFORMATION

Client: Resurrection Roman Catholic Parish, Regina, Saskatchewan Architect: Stantec Architecture Ltd. Structural: JC Kenyon Engineering Mechanical: Stantec Consulting Electrical: Ritenburg and Associates Ltd. Interior Design Consultant: Innovative Interiors

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC308/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature

System brochure: IC415 Data sheet: IC308 Perforations selection guide: IC425 Exterior ceiling systems guide: SC2561

usadesianstudio.com or cacdesianstudio.com

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A Flame spread: 25 or less Smoke developed: 50 or less

ASTM E84 surface-burning characteristics

(with light diffusing backer) Class A

Flame spread: 25 or less Smoke developed: 50 or less

1. Additional sizes available on request.

- 2. If panel length is ≥ 60 inches then one stabilizer bar or cross
- tee is required at midpoint. If panel length is ≥ 96 inches then two stabilizer bars or cross tees are required at the 1/3 and 2/3 points.

 - Cross tees ≥ 96 inches used in large modules shall have
- hanger wires installed minimum 4 ft. o.c.
- 3. Refer to IC425 for additional NRC information based on perforation pattern.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC quidelines.




The trademarks USG, CGC, ACOUSTIBOND, CELEBRATION. COMPÄSSO, DONN, DXF, FINELINE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.




USG CELEBRATION™ CANOPIES

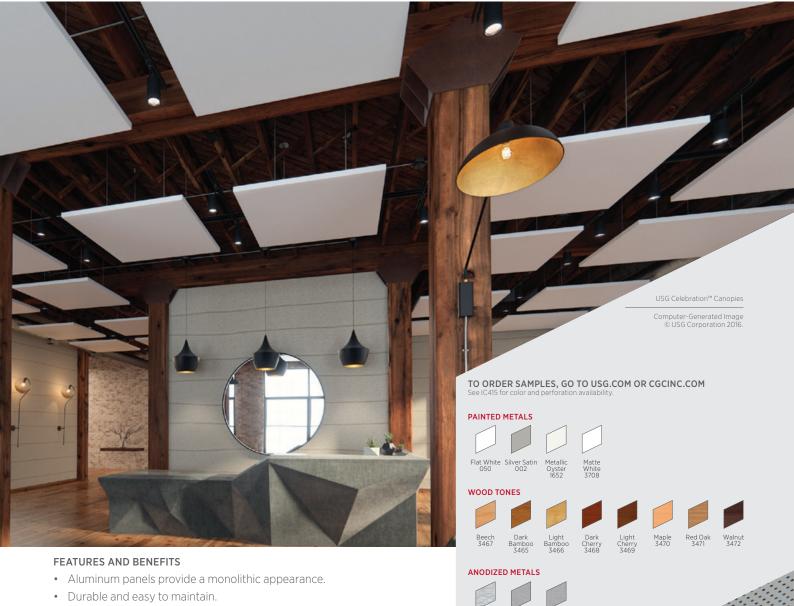

- Shipped pre-assembled, ready for easy and fast installation.
- Specially engineered hardware allows for simple suspension.
- Exceptional noise reduction with absorption from both the front and back of the panels.
- High light-reflective finish (LR-0.90) for Matte White, 3708.
- Integral return edge requires no finish trim.
- Concealed suspension components with no visible hardware.
- Innovative connection options allow for grouped and ungrouped designs.
- Unconstrained by a linked suspension system to allow freedom of assembly and alignment.

APPLICATIONS

• All interior general-use areas

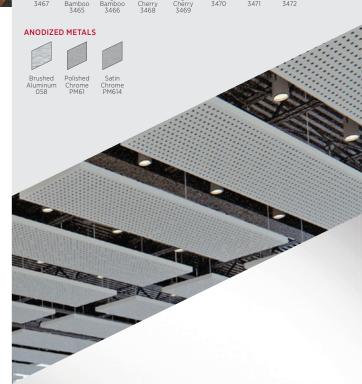

USG CELEBRATION™ CANOPIES

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL










PRODUCT INFORMATION1


				Fire Rating	LR	Recycled Content	Acoustical Performance Data
Materials	Edge	Panel Size	Weight		Ø	HRC	
Aluminum panels; painted and anodized	1.75 in. 90° vertical return leg with 1/2 in. horizontal return flange	24"x 24", 24"x 48", 24"x 60", 24"x 72", 24"x 96", 30"x 30", 30"x 60", 48"x 48", 48"x 60"	0.63 lb./sq. ft.	Class A	0.90 for Matte White, 3708	≤90% Recycled Content	See USG Celebration™ Canopies Systems Guide (IC633) for acoustical performance data.

Finishes

PERSPECTIVE

 $Panels\ available\ with\ perforation.\ Custom\ perforation\ sizes\ and\ patterns\ are\ available\ upon\ inquiry.\ A\ special\ acoustical\ backing\ is\ available\ for\ all\ patterns\ are\ available\ pon\ inquiry.$ perforated panels. See USG Celebration™ Canopies Systems Guide (IC633) for perforation availability. See Perforation Selection Guide (IC425) for custom perforation availability



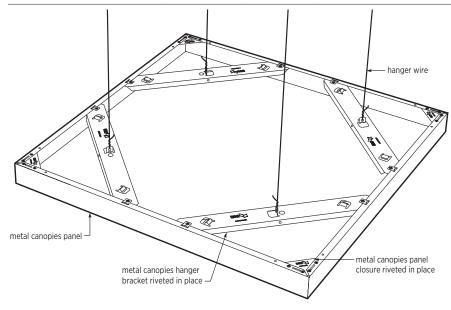

Note: USG Celebration™ canopies are shipped with the hanger brackets and panel closure brackets assembled and attached.

High Recycled Content

 $Classified as \, containing \, greater \, than \, 50\% \, total \, recycled \, content. \, Total \, recycled \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, content \, is \, based \, on \, product \, composition \, of \, postconsumer \, and \, content \, conte$ $preconsumer \ (postindustrial) \ recycled \ content \ per \ FTC \ guidelines.$

FOR MORE INFORMATION

Product literature

Installation guide: IC632 System guide: IC633 Data sheet: IC631

Online tools usgdesignstudio.com or cgcdesignstudio.com

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system.

Color variations

Some commercially acceptable color variation may occur between lots and between different size canopies of the same color.

One (1) year limited warranty. See USG 30-Year Limited System Warranty Commercial Applications (SC2102) for additional details.

NoteFor Canadian product needs, please contact your local sales representative.


Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC631/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG CELEBRATION™ TORSION SPRING SYSTEM

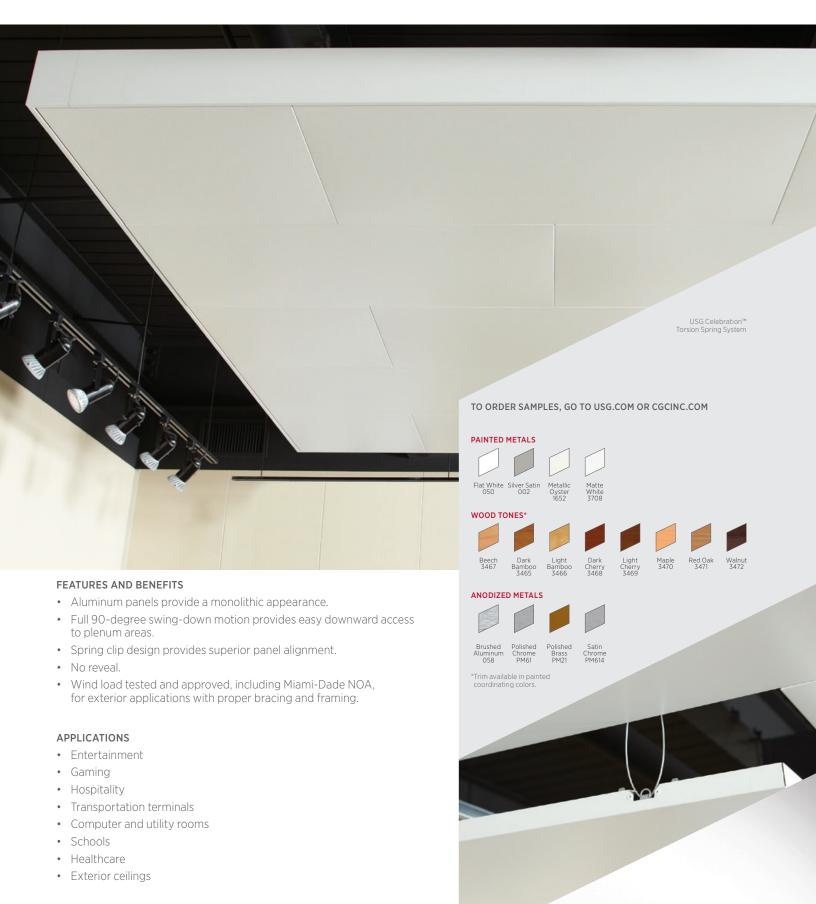

USG CELEBRATION™ TORSION SPRING SYSTEM

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL

TECHNICAL SERVICES 800 USG.4YOU (874-4968)





PRODUCT INFORMATION

SUSPENSION SYSTEMS

Materials	Finishes	Standard Sizes	Plenum Depth	Weight
Aluminum panels; painted and anodized	Panels available with perforation. Custom perforation sizes and patterns are available upon inquiry. A special acoustical backing is available for all perforated panels.	2'x2', 2'x4', 2'x6', 2'x8', 4'x4'	6" minimum to accommodate suspension system and torsion spring	Approximately 0.63 lb./sq. ft.

ACCESS

Any uncut USG Celebration™ Torsion Spring panel has downward accessibility and can be lowered and disengaged lengthwise for access to the space above while the engaged side continues to hold the panel in place to the grid system at a 90° angle. A special panel removal hand tool (part number 209216) available through USG is also recommended for use when lowering panels.

	Component	ASTM Class	Length	Height	Item No.
Main Tees	15/16" Main Tee ¹	Intermediate Duty	12' (3600 mm)	USG: 1.64" (42 mm) CGC: 1.5" (25 mm)	DX/DXL24
	15/16" Main Tee ¹	Heavy Duty	12' (3600 mm)	USG: 1.64" (42 mm) CGC: 1.5" (25 mm)	DX/DXL26
Cross Tees	15/16" Cross Tee ¹	_	2' (600 mm)	1-1/2" (38 mm)	TSCT22
	15/16" Cross Tee ¹	_	4' (1200 mm)	1-1/2" (38 mm)	TSCT44
	15/16" Cross Tee ¹	_	6' (1800 mm)	1-1/2" (38 mm)	тѕст66
Wall Moldings	15/16" Wall Angle ¹	_	12' (3600 mm)	7/8" (22 mm)	M7
	2" Wall Angle ^{1,2}	_	10' (3000 mm)	1" (25 mm)	M20
	2-1/2" F-Molding ³	_	10' (3000 mm)	2-1/2" (64 mm)	CTS15AL
Molding Accessories	Panel Hold-Down Clip ⁴	_	10" (254 mm)	1-9/16" (40 mm)	T15
	Component	ASTM Class	Length	Height	Item No.
Perimeter Trims	6" USG Compässo™ Trim	_	_	6" (152 mm)	CP610
	8" USG Compässo™ Trim	_	_	8" (203 mm)	CP810
Perimeter Trim Clips	6" USG Compässo™ Clip			_	TSCLP615CP
	8" USG Compässo™ Clip	••••••		_	TSCLP815CP
	Perimeter main tee attachme	ent clip for partial modul	e trim applications	_	CTS-CMSC
	Component		Length	Height	Item No.
Fixture Frames	Fixture Frame 2' x 2' Lay-In		_	_	FFLI2424IN
	Fixture Frame 2' x 4' Lay-In	••••••	_	_	FFLI2448IN
	Fixture Frame 2' x 2' Semi-Fl	ush	_	_	FFSF2424IN
	Fixture Frame 2' x 4' Semi-Fl	ush	_	_	FFSF2448IN

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature

Data sheet: IC622 System guide: IC638 Installation guide: IC637 Perforations selection guide: IC425

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Acoustics

The NRC rating of 0.60 is for standard A062 perforation pattern with Acoustibond™ backer.

Lighting Trim Splice Clip

Lay-In Light Fixture Trim Extrusion

Semi-Flush Light Fixture Trim Extrusion

Recycled content USG Celebration™ Torsion Spring aluminum panels: up to 90% recycled content.

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction

Code approval See PER-12055

ASTM F84 surface-hurning characteristics (with Acoustibond™ backer)

10' (3000 mm)

10' (3000 mm)

Class A Flame spread: 25 or less Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A Flame spread: 25 or less Smoke developed: 50 or less

Min. G30 hot-dipped galvanized. Install according to ASTM C636, ASTM E580, CISCA and USG requirements.

CTS-LTS

CTS-LILFT

CTS-SFLFT

- 2. For seismic applications. The main-tee and cross-tee connections meet IBC requirements for tension and compression strength.
- 3. Produced from aluminum.
- When hold-down clips are required at the perimeter, the CTS15AL F-Mold can accommodate the USG T-15 Hold-Down Clip. Refer to IC638 for details.


Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC622/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG COMPÄSSO™ ELITE EXTRUDED ALUMINUM PERIMETER TRIMS USG COMPÄSSO™ STANDARD PERIMETER TRIMS

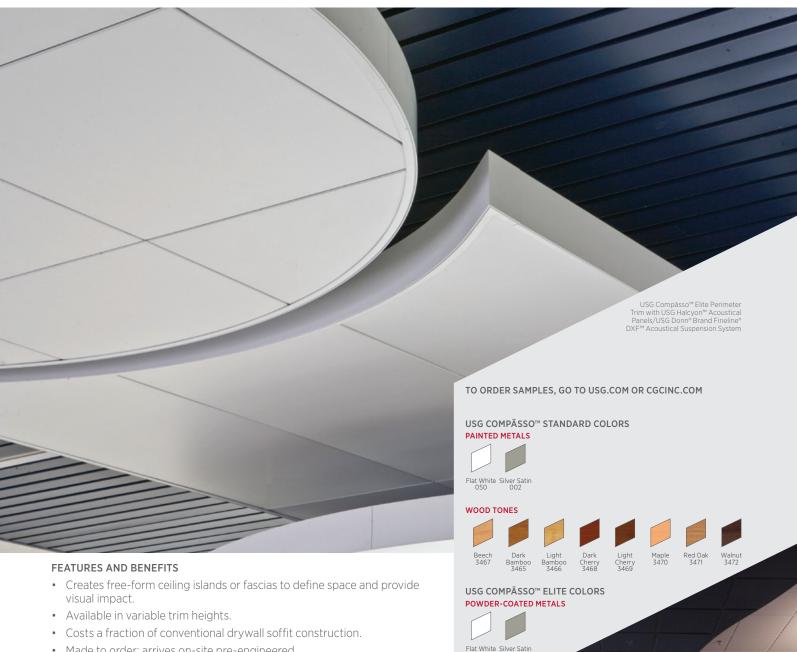

- · Made to order; arrives on-site pre-engineered.
- Strong, durable and long-lasting steel or aluminum construction.
- · Fits all USG ceiling systems.

APPLICATIONS

- · Contemporary offices
- Entertainment
- Gaming
- · High-bay areas
- · Retail spaces



USG COMPÄSSO™ ELITE EXTRUDED ALUMINUM PERIMETER TRIMS USG COMPÄSSO™ STANDARD PERIMETER TRIMS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

CGC: contact Sales Representative TECHNICAL SERVICES


FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

800 USG.4YOU (874-4968)


PRODUCT INFORMATION

Materials Finishes Painted, anodized, plated, powder coat Steel, aluminum


Perspective

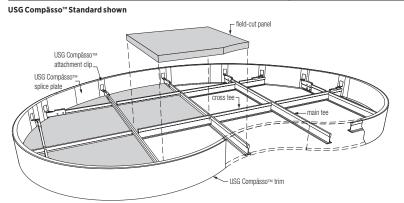

Trim Profiles

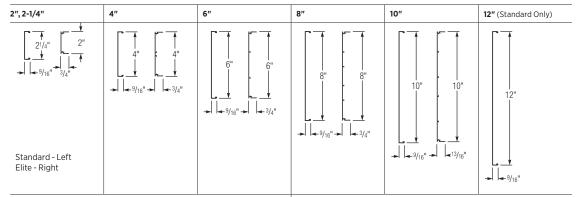

Attachment Clip

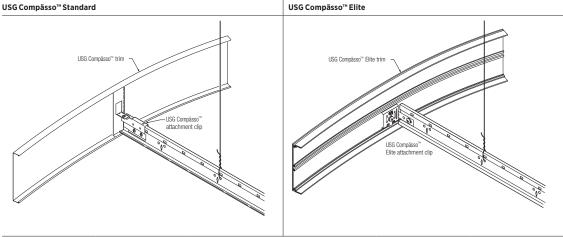

FOR MORE INFORMATION

Product literature System brochure: IC400 Data sheet: IC309

Online tools usgdesignstudio.com or cgcdesignstudio.com Recycled content See the Sustainability selector on usgdesignstudio.com or cgcdesignstudio.com.


Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC309/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG COMPÄSSO™ SLIM PERIMETER TRIMS

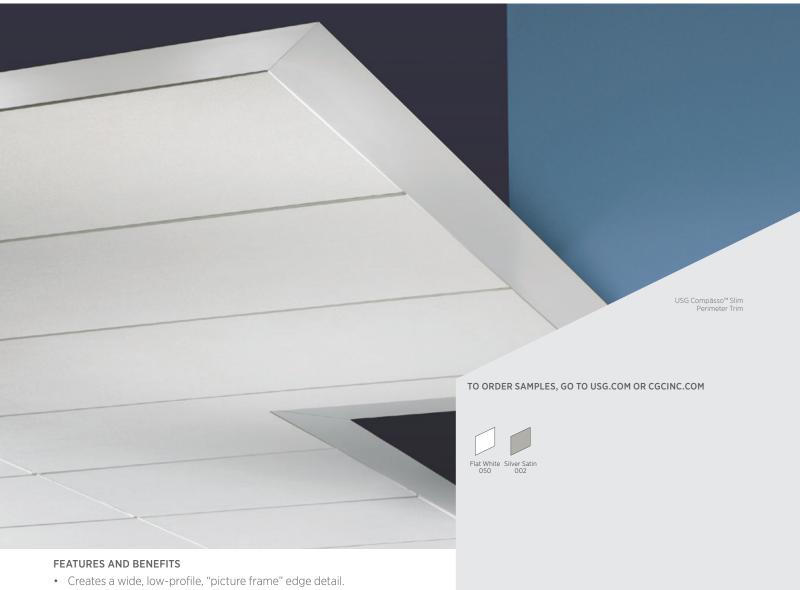


Section Detail

- Dramatically frames ceiling islands.
- An innovative alternative to traditional perimeter trim.
- Extruded aluminum with durable Flat White powder-coated finish.
- Precision-engineered to fit USG Donn® Brand DX®/DXL™, Centricitee™
 DXT™, Identitee® DXI™ and Fineline® DXF™/DXFF™ suspension systems.
- Compatible with Square (SQ), Shadowline (SL) and Fineline (FL) acoustical panel edge profiles and drywall suspension systems.

APPLICATIONS

- Contemporary offices
- Entertainment
- Gaming
- · High-bay areas
- Retail spaces

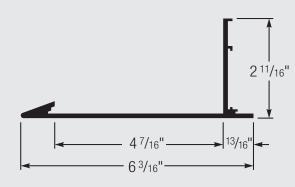

USG COMPÄSSO™ SLIM PERIMETER TRIMS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

CGC: contact Sales Representative TECHNICAL SERVICES


FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

800 USG.4YOU (874-4968)


PRODUCT INFORMATION


Reflected Plan



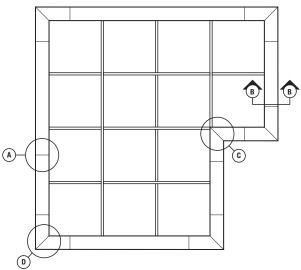

B. Edge Detail – USG Donn® Brand DX®/DXL™ and Centricitee™, A. Splice Assembly Full Module, at Cross Tees USG Compässo™ Slim alignment plate -USG Compässo Elite attachment clip USG Compässo™ Slim alignment plate ⊕ ⊕ 6" perimeter trim L on-module condition B. Edge Detail - USG Donn® Brand DX®/DXL™ and Centricitee™, B. Edge Detail - USG Donn* Brand Fineline* Full and Partial Module Full and Partial Module





Corner Assembly

C. Inside Corner D. Outside Corner Product literature

FOR MORE INFORMATION

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC538/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Drywall Suspension SystemsFor USG Compāsso™ Slim Perimeter Trim with drywall suspension applications, use the USG Compässo™ Elite Celebration™ Clip with the USG Drywall Suspension System


usgdesignstudio.com or cgcdesignstudio.com

Recycled content ≤ 50% recycled content; 100% recyclable.



USG COMPÄSSO™ ELITE FOR DRYWALL

EXTRUDED PERIMETER TRIMS - STRAIGHT

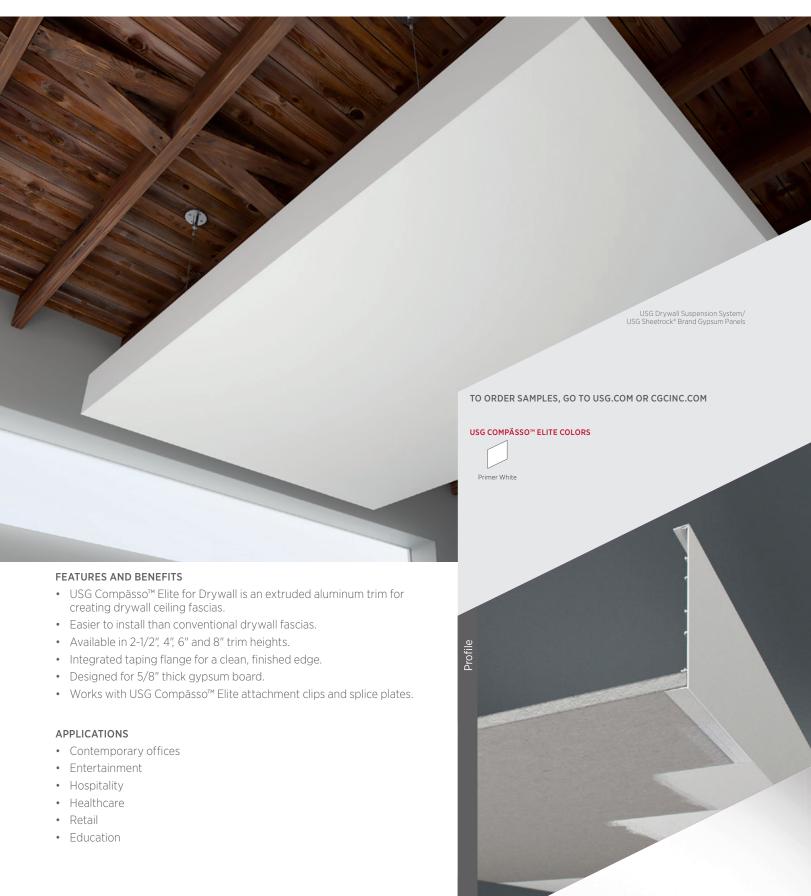

USG COMPÄSSO™ ELITE FOR DRYWALL

EXTRUDED PERIMETER TRIMS - STRAIGHT

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative


> TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com


COMPONENTS

Trim Profiles

Item#

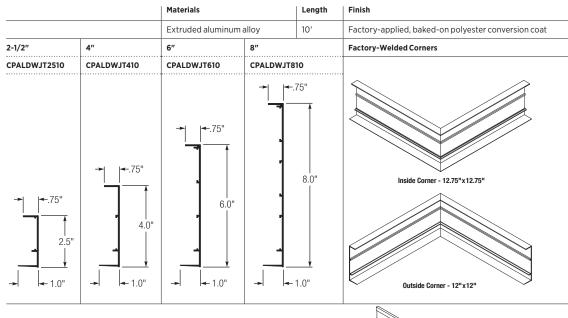

Attachment and Finishing Details

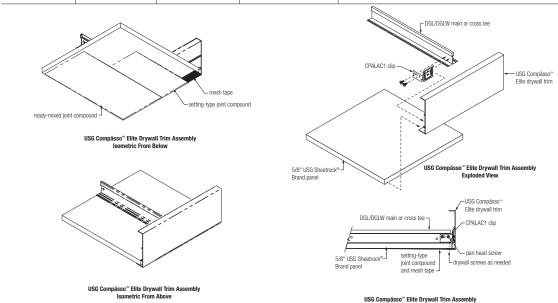

FINISHING RECOMMENDATIONS

- Embed fiberglass mesh tape over flange using setting-type joint compound.
- Apply second coat using ready-mixed or setting-type joint compound.
 Apply third coat of joint compound if needed.

Note

Use USG Compässo™ Elite splice plates for joining pieces together.

FOR MORE INFORMATION

Product literature Installation guide: IC624

Extruded aluminum alloy

Samples 2-1/2" - 259732 4" - 258410 6" - 259412

Recycled content

For details, see the LEED report tool at usgdesignstudio.com or cgcdesignstudio.com

Online tools usgdesignstudio.com or cgcdesignstudio.com

Limitations Interior applications only.

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3317/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

The trademarks USG, CGC, COMPÄSSO, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate persona protective equipment. Read SDS and literature before specification and installation.



USG COMPÄSSO™ ELITE TRANSITIONS



USG COMPÄSSO[™] ELITE TRANSITIONS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com


FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com CGC: contact Sales Representative

800 USG.4YOU (874-4968)


TECHNICAL SERVICES

PRODUCT INFORMATION

TRIM PROFILES

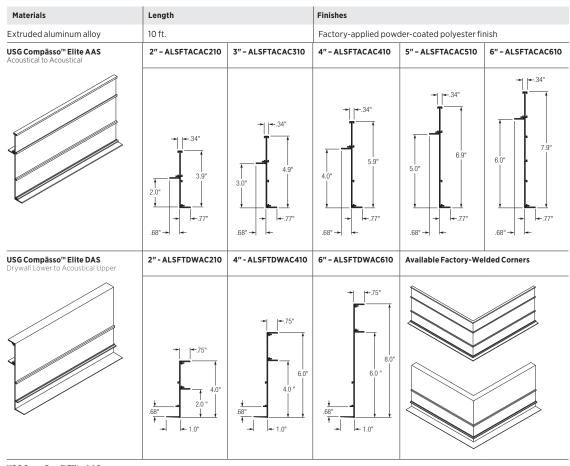

ATTACHMENT DETAILS

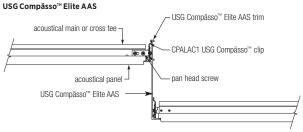

USG Compässo™ Elite DAS CPALAC1 clip USG Compässo™ Elite DAS acoustical main or cross tee DGL/DGLW main or cross teeacoustical panel pan head screw setting-type 5/8" USG Sheetrock® J L drywall screws as needed joint compound Brand panel and mesh tape

Manufactured by

USG Interiors, LLC

Chicago, IL 60661

550 West Adams Street

Taping flange must be lightly sanded before applying joint compound. For complete installation instructions, refer to USG Compässo™ Elite Transitions Installation Guide (IC624).

FOR MORE **INFORMATION**

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC623/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature Installation guide: IC624

USG Corporation or its affiliates.

Installation guide. 1024 Samples: 2" AAS - 259402, 3" AAS - 259403, 4" AAS - 259404, 5" AAS - 259405, 6" AAS - 259406, 2" DAS - 259407 4" DAS - 259408, 6" DAS - 259409

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Material

The trademarks USG, CGC, COMPÄSSO, DONN, DXI, IDENTITEE.

MARS, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo,

the design elements and colors, and related marks are trademarks of


Extruded aluminum alloy.

Limitations

Interior applications only.

USG COMPÄSSO™ ELITE

PERIMETER TRIMS WITH ISLAND ACCENT LIGHTING

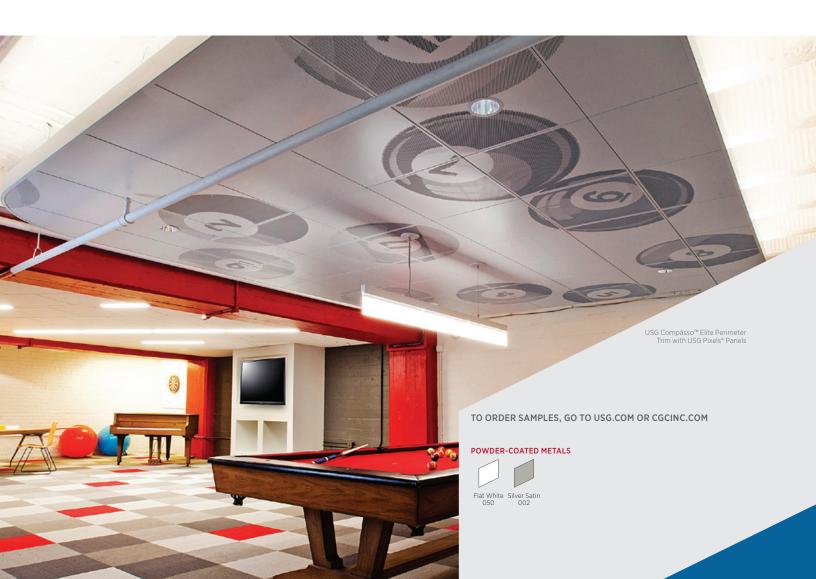

FEATURES AND BENEFITS

- Creates free-form ceiling islands with uplighting.
- Accommodates GE's Accent lighting modules.
- Available on all engineered USG Compässo™ Elite designs.
- Unique flexible track accommodates curved island designs.
- Proprietary clip attaches to USG Compässo™ Elite trim and provides cradle track and lights with exact angle for optimal lighting results.
- Designed together to work together.
- Available with USG Compositions® Decorative Clouds.

APPLICATIONS

- Contemporary offices
- Entertainment
- Gaming
- Retail spaces
- · Virtually anywhere



PERIMETER TRIMS WITH ISLAND ACCENT LIGHTING

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com CGC: contact Sales Representative


TECHNICAL SERVICES 800 USG.4YOU (874-4968)

PRODUCT INFORMATION


Finishes

Standard colors, Advantage colors and custom colors


PERSPECTIVE

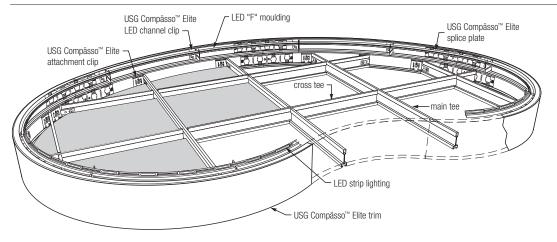


Trim Profiles Elite

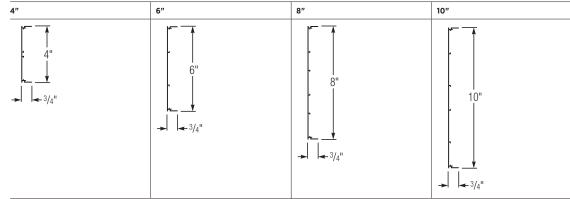

Attachment Clip

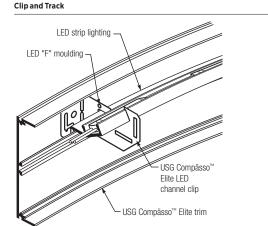

USG Compässo* Elite Accent Lighting Assembly

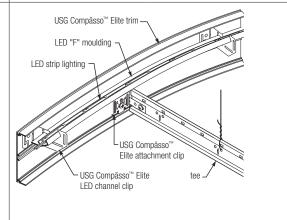

FOR MORE INFORMATION

Product literature System brochure: IC400 Data sheet: IC612 Online tools usgdesignstudio.com or cgcdesignstudio.com

Recycled contentSee the Sustainability selector on usg.com or cgcinc.com

High Recycled Content is for USG Compässo™ Standard only.


Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC612/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.


USG COMPOSITIONS® DECORATIVE CLOUDS

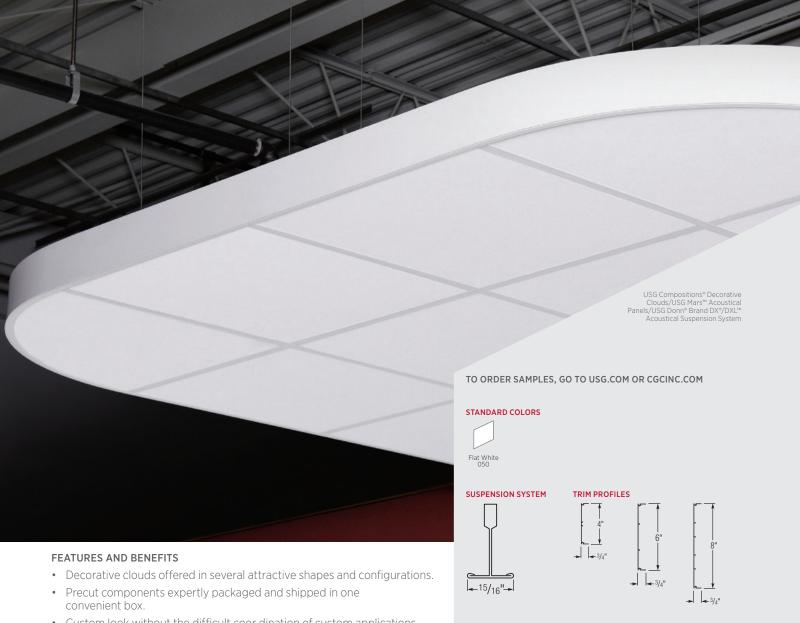

- Custom look without the difficult coor dination of custom applications.
- Premier USG Compässo™ Elite extruded perimeter trim.
- Fit-and-finish trim aesthetics appear seamless with minimal trim intersections and no corner trim intersections.
- Installation requires minimal hanger wires, eliminating the need for wires at perimeters.
- Simplifies specifying and ordering. Note: Panels are selected and shipped separately.

APPLICATIONS

• All interior general-use areas

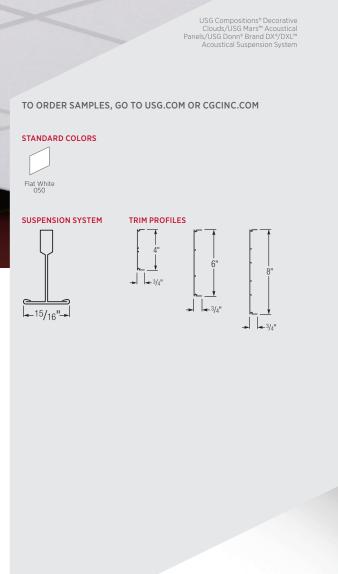

USG COMPOSITIONS® DECORATIVE CLOUDS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

CGC: contact Sales Representative TECHNICAL SERVICES

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

800 USG.4YOU (874-4968)

15/16" TEE SYSTEM Main Tee

Cross Tee

PANEL OPTIONS

ACCENT LIGHTING

OPTION

LAYOUTS

Tees		ASTM Class	Length		Height	Item N	lumber	Color
	—15/ ₁₆ "→	Heavy Duty	Custom per ki	it	1-1/2"	DX/D	XL26	Flat White
	7	_	4'		1-1/2"	DX/D	XL424	Flat White
	-15/ ₁₆ "-	_	2'		1-1/2"	DX22	4	Flat White
Square Edge		Shadowline		Shado	wline Tapered		Shadowline Be	eveled
						1		: [

AL Clip	AL Flexible Track	AL Lighting
		Supplied by GE GElighting.com

Note: Panels are selected and shipped separately.

Squares		Rounded Rectangles	Rounded Rectangles		
Layout	Trim	Layout	Trim		
6'x6'	4", 6", 8"	6'x6'	4", 6", 8"		
6'x8'	4", 6", 8"	6'x8'	4", 6", 8"		
6'x10'	4", 6", 8"	6'x10'	4", 6", 8"		
6'x12'	4", 6", 8"	6'x12'	4", 6", 8"		
6'x14'	4", 6", 8"	6'x14'	4", 6", 8"		
8'x8'	4", 6", 8"	8'x8'	4", 6", 8"		
8'x10'	4", 6", 8"	8'x10'	4", 6", 8"		
8'x12'	4", 6", 8"	8'x12'	4", 6", 8"		
8'x14'	4", 6", 8"	8'x14'	4", 6", 8"		
10'x10'	4", 6", 8"	10'x10'	4", 6", 8"		
10'x12'	4", 6", 8"	10'x12'	4", 6", 8"		
10'x14'	4", 6", 8"	10'x14'	4", 6", 8"		
12'x12'	4", 6", 8"	12'x12'	4", 6", 8"		
12'x14'	4", 6", 8"	12'x14'	4", 6", 8"		
4"	6"	8"			

EDGE TRIM OPTIONS






Splice Plate

The trademarks USG, CGC, COMPÄSSO, COMPOSITIONS, DONN,

DX, DXL, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo,

the design elements and colors, and related marks are trademarks



ACCESSORIES

FOR MORE INFORMATION

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IS282/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature System guide: IS267 Installation guide: IS266 Data sheet: IS282

Installation

Manufactured by

USG Interiors, LLC

Chicago, IL 60661

550 West Adams Street

Tee Brace

Must be installed in compliance with ASTM C636, ASTM E580, CISCA and standard industry practices, within all applicable code requirements. Alternative assemblies and installation methods may be utilized when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system

of USG Corporation or its affiliates.

Online tools usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Attachment Clip

LA Research Report - RR 25764
Refer to usg.com for most current version.


NoticeWe shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

12-Gauge Hanger Wire





USG CURVATURA™ 3-DIMENSIONAL CEILING SYSTEM

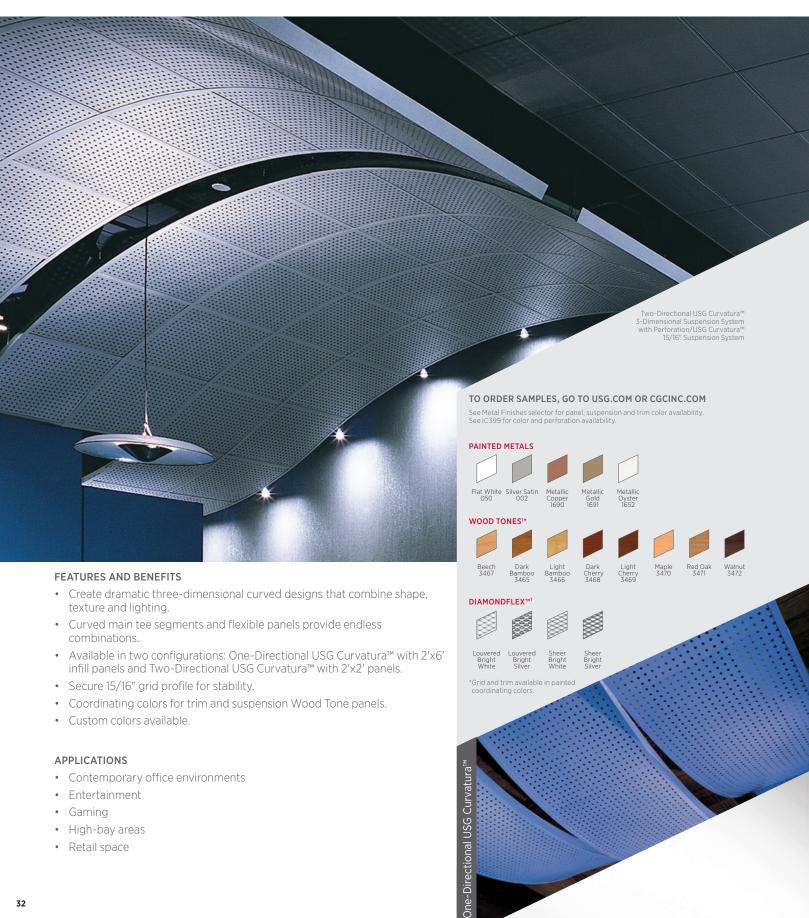

USG CURVATURA 3-DIMENSIONAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

PRODUCT INFORMATION

PERSPECTIVE

Two-Directional System

Materials


2'x2' Panels

Panel: Available smooth or perforated Painted Metals and DiamondFlex™ expanded metal.¹ 2'x2' USG Translucents™ panels are also available.

Finishes

Available with perforation and/or embossing


Available Grid Profile

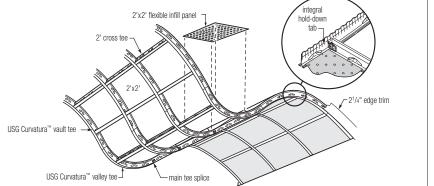

Standard --¹⁵/₁₆"-----15/16"--- Valley Vault

One-Directional System²

2'x6' Panels

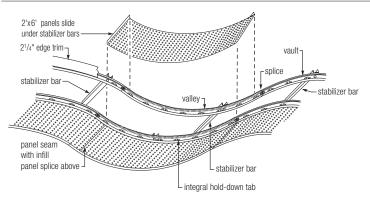

CURVED COMPONENTS

(Available as vaults and valleys)

10' Arc Length	8' Arc Length	6' Arc Length	4' Arc Length
R = 229"	R = 183"	R = 138"	R = 92"
R =153"	R = 122"	R = 92"	R = 61"
R = 115"	R = 92"	R = 69"	R = 46"
R = 77"	R = 61"	R = 46"	R = 31"

FOR MORE INFORMATION

Product literature

System brochure: IC399 Data sheet: IC310 Design selector: IC36109 Perforation selector: IC425

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association

ASTM E84 surface-burning characteristics

(with Acoustibond™ backer) Class A Flame spread: 25 or less Smoke developed: 50 or less

ASTM E84 surface-burning characteristics

(with light diffusing backer) Class A Flame spread: 25 or less Smoke developed: 50 or less

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Recycled content

USG Curvatura™ aluminum panels: ≤ 90% recycled content. Steel panels: 25% recycled content. Suspension: 25% recycled content.

 DiamondFlex™ and Wood Tone panels available for Two-Directional USG Curvatura¹

2. One-Directional USG Curvatura™ Systems shall not be used in seismic design categories C, D, E and F.


Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC310/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS

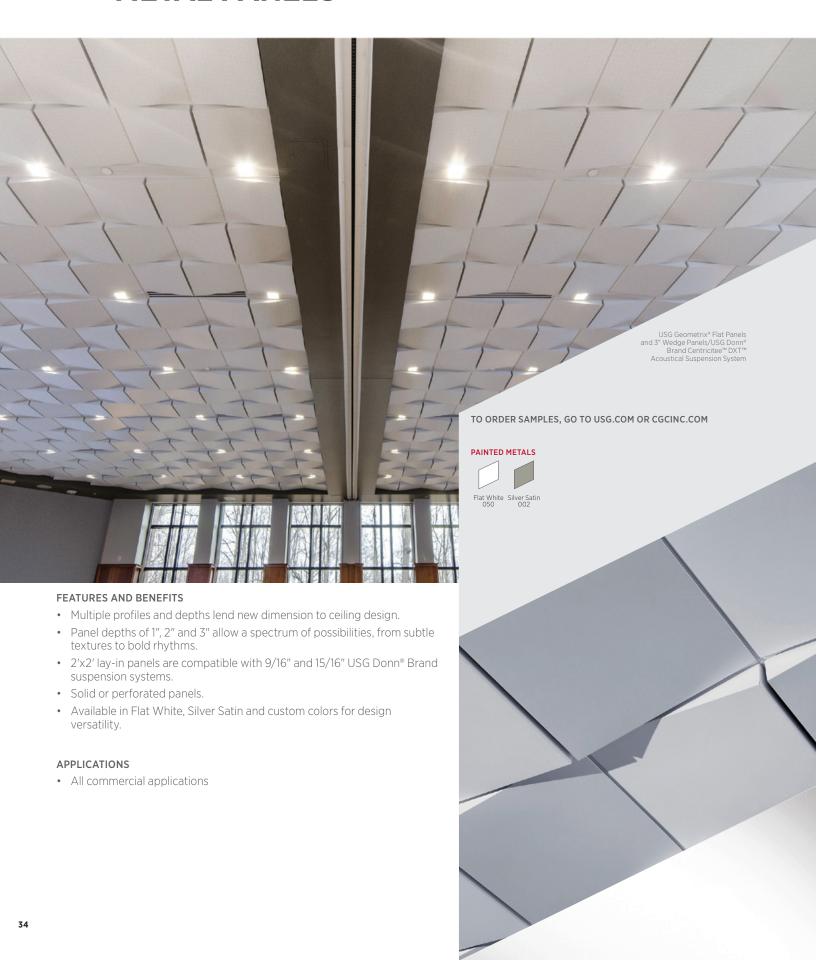

USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

Inside Wedge Corner



PRODUCT INFORMATION

PANELS

ACOUSTICS³

Configurations

Depths

EDGE DETAILS

ASSEMBLY

Pane


Flat1,2


Materials	Size and Weight	Finishes
Panels: Aluminum	Panels 2'x2' Panel weight (for 3" deep flat panel): 0.75 lb./sq. ft.	Panels are available in smooth metal or in a choice of five perforated patterns (C375, D250, D375, C062 and C062A). A black Acoustibond™ backer is included on all perforated panels unless otherwise specified. Acoustibond backer is also available in white.
Description	Optional Acoustical Material	Sound Rating - NRC


Outside Wedge Corner


Description	Optional Acoustical Material	Sound
Perforated panel	Acoustibond™ backer	0.60
Perforated panel	2", 0.75 lb. fiberglass in polybag (by others)	0.85

Wedge¹

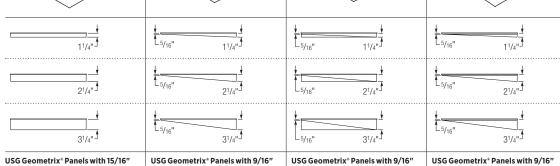

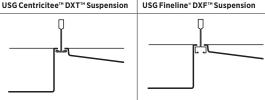



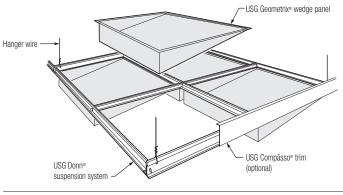

High Recycled Content

USG DX*/DXL™ Suspension

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE Product literature INFORMATION

System brochure: IC437 Data sheet: IC424

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association.

Recycled content
USG Geometrix* aluminum panels: ≤ 90% recycled content.

ASTM F84 surface-burning characteristics (with Acoustibond™ backer) Class A

Flame spread: 25 or less Smoke developed: 50 or less

ASTM E84 surface-burning characteristics

(with light diffusing backer) Class A Flame spread: 15 or less Smoke developed: 30 or less

Online tools

usgdesignstudio.com or cgcdesignstudio.com

- Available pre-engineered utility circles accommodate lighting and utilities.
- 2. Also available with 5/16" depth.
- 3. Refer to IC425 for additional NRC information based on perforation

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC424/rev. 11-16


© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

The trademarks USG, CGC, ACOUSTIBOND, CENTRICITEE, COMPÄSSO, DONN, DX, DXF, DXFF, DXL, DXT, FINELINE, GEOMETRIX, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before



USG GRIDWARE™ OPEN CELL DECORATIVE SYSTEM

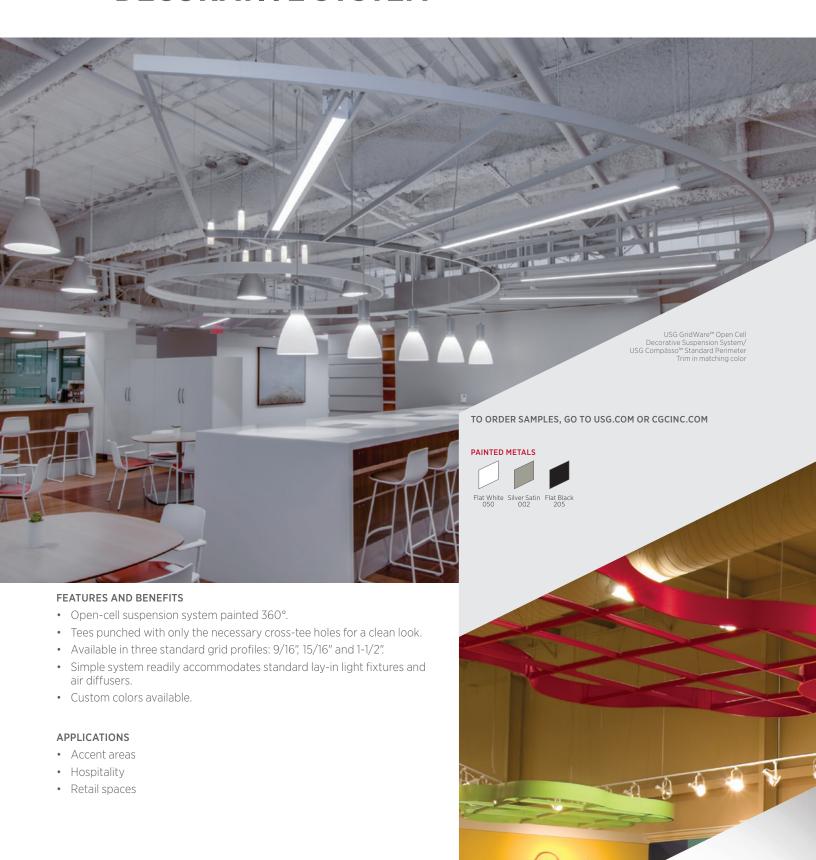

USG GRIDWARE™ OPEN CELL DECORATIVE SYSTEM

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Materials Double-web, hot-dipped galvanized steel body and steel cap with chromated cross-tee clip.

2'x2' module; 2'x2', 2'x4' and 4'x4' cells

Typical Sizes

Other dimensions and configurations available. Contact your local USG Sales Representative for more information.

GWDX stocked in Flat Black, Flat White and Silver Satin prepainted, baked-on polyester paint finishes with exposed chromate cross-tee clips; touch-up paint is available to field-paint cross-tee clips to match the finish. Spray-painted, baked-on polyester finish with 100% tee coverage available as a special order.

GWDXW and GWDXT available as a special order only; finish is spraypainted, baked-on polyester with 100% tee coverage.

FACE OPTIONS

PRODUCT INFORMATION



GWDX




2'x4' Openings

GWDXW





GWDXT


Finishes



DESIGN OPTIONS









USG GRIDWARE™ **COMPONENTS**

24" Cross Tee

48" Cross Tee

12' Main Tee





i -244 12" -12'-0"

FOR MORE INFORMATION

Product literature

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Recycled content

USG GridWare™ suspension: 25% recycled content.


Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC312/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG LIBRETTO® GRIDLESS METAL SYSTEM

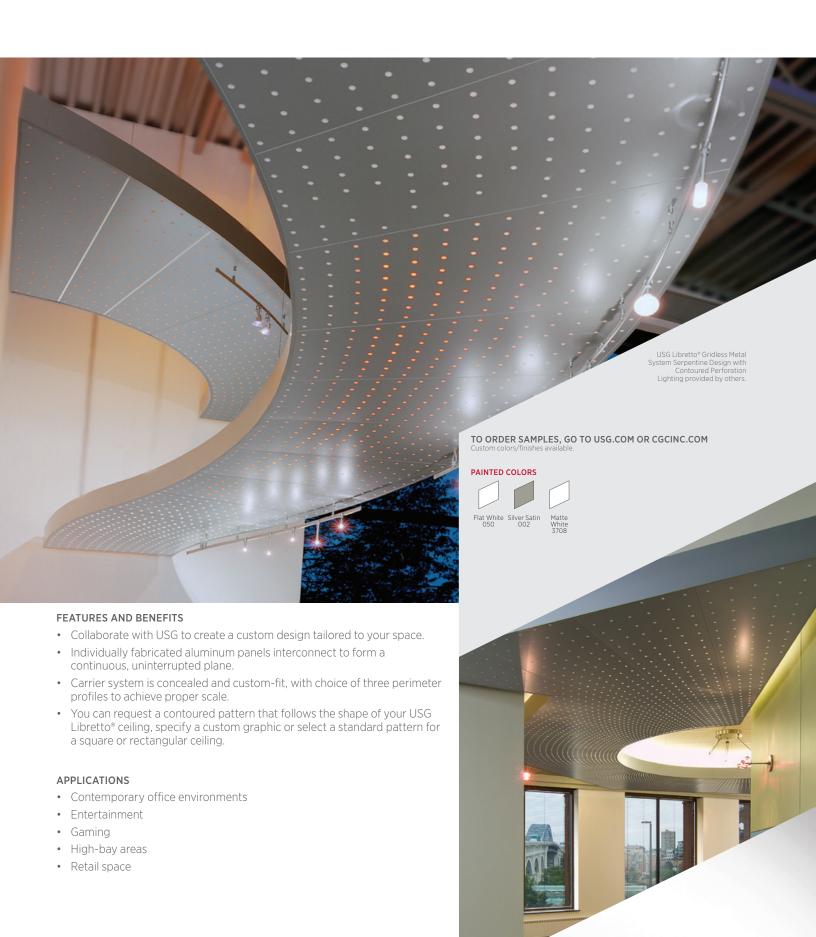

USG LIBRETTO® GRIDLESS METAL SYSTEM

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG.4YOU (874-4968)

> > Finishes

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

PRODUCT INFORMATION

Materials
Panels: Aluminun Carrier system: Cold-rolled steel Edge profile: Cold-rolled steel

4", 6" or 8" in height.

Perimeter Profile

Minimum 12", with 8" clearance above top edge of perimeter profile.


Plenum Depth

Panels available perforated with a contoured pattern that follows the shape of your ceiling, a custom graphic pattern, or a standard pattern for a square or rectangular ceiling. Optional black or white Acoustibond™ backer available. Smooth, unperforated metal also available.


DETAILS

Design Concepts












Four-Sided Polygon




Torus










Assembly

View from above

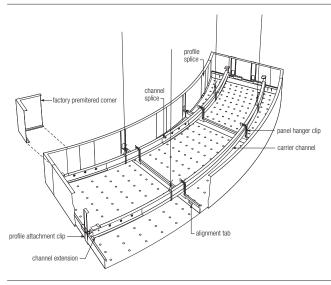

FOR MORE INFORMATION

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC526/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature System brochure: IC525 Data sheet: IC526

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A Flame spread: 25 or less

Smoke developed: 50 or less

ASTM E84 surface-burning characteristics

(with light diffusing backer) Class A Flame spread: 15 or less Smoke developed: 30 or less

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Recycled content

USG Libretto* aluminum panels: ≤ 25% recycled content; USG Libretto* suspension and trim: 25% recycled content.


Manufactured by USG Interiors, LLC 550 West Adams Street Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, LIBRETTO. IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG PANZ® METAL PANELS

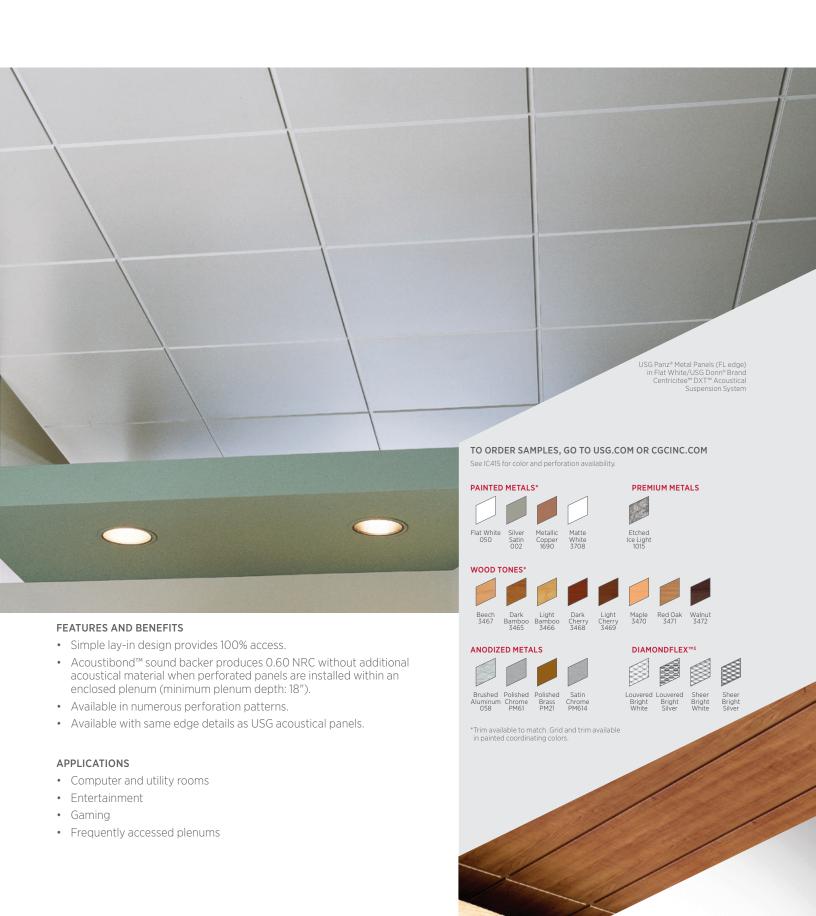

USG PANZ® METAL PANELS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



Smooth Panel

PRODUCT INFORMATION

ACO	UST	ICS ⁴
700	031	163

	ы	





Materials	Available Sizes	Finishes	
Panels: Aluminum	1' x 4', 1' x 5', 2' x 2', 2' x 4', 2' x 6', 2' x 8', 4' x 4', 20" x 60", 30" x 30", 30" x 60"	Painted, powder coated or anodized in a variety of optional perforation patterns. 2' x 2' panels available with perforation and/or embossing option	
Description	Optional Acoustical Material	Sound Rating - NRC	
		Perforation A062	Perforation A116
Perforated panel	Acoustibond™ backer	0.60	0.70
Perforated panel	2", 0.75 lb. fiberglass in polybag (by others)	0.85	0.90


Perforated Panel







Perforated Panel with Acoustibond™1,2 Backer


USG Square Edge with 15/16"	USG Square Edge with 9/16″³
USG DX*/DXL™ Suspension	USG Centricitee™ DXT™ Suspension²
USG Fineline* Edge with 9/16"	USG Fineline* Edge with 9/16"
USG Fineline* DXF™ Suspension	USG Fineline* 1/8 DXFF™ Suspension





USG Shadowline Edge with 15/16"













Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature System brochure: IC415 Data sheet: IC314

Perforation selection guide: IC425

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A

Flame spread: 25 or less Smoke developed: 50 or less

ASTM F84 surface-burning characteristics

(with light diffusing backer)

Class A

Flame spread: 25 or less Smoke developed: 50 or less

Light reflectance

Flat White: LR-0.80 (less with perforations).


- Acoustibond™ standard backer not with DiamondFlex™ panels
- 2. Acoustibond™ backer is not available with DiamondFlex™ option
- 3. Only applicable for 2'x2' panels.
- 4. Refer to IC425 for additional NRC information based on perforation pattern.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC314/rev. 11-16

USG PARALINE® LINEAR METAL SYSTEMS

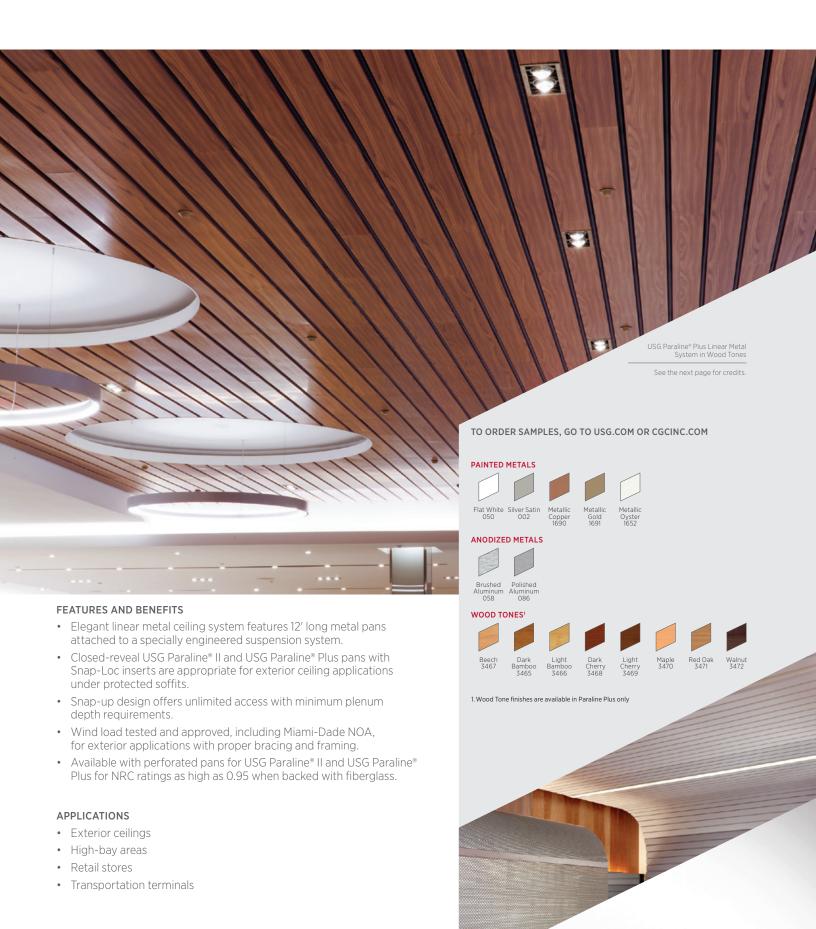

USG PARALINE® LINEAR METAL SYSTEMS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION**

TECHNICAL SERVICES 800 USG,4YOU (874-4968)

3/41

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com CGC: contact Sales Representative



PRODUCT INFORMATION

USG PARALINE® II USG PARALINE® PLUS¹ PERFORATION PATTERN

Materials	Typical Sizes	Finishes
USG Paraline® I, II, and III: Aluminum. USG Paraline® Plus: Aluminum.	3-1/4" x 12', 7-1/4" x 12' USG Paraline* Plus: 3" x 12', 7" x 12'	Painted, anodized or powder coated.
0 0 0 0 0	Perforation Pattern A062	


USG Paraline* III

• .. 0 0 0 0 0 0 0 0 0 0

USG Paraline® I

Round-1/16" perforations 0.235 o.c., 5% open area on face of pan only. Perforation shown 50% actual size.

DETAILS



USG Paraline® I ceilings use 3-1/4" wide pans with roll-finished edges. Once assembled, the pans provide an open reveal for excellent acoustical control (sound is absorbed by acoustical material in the plenum).

USG Paraline® II ceilings maintain the 3-1/4" wide pan dimension, but are constructed with integral flanges that overlap to form a reveal closure that is appropriate for exterior soffit applications. Perforated available


USG Paraline® II


USG Paraline® III ceilings have bolder, 7-1/4" wide pans for larger-scale applications. Pans have a rollfinished edge to provide the same open reveal as USG Paraline® I with similar acoustical control.

USG Paraline® Plus ceilings use 3", and 7" wide pan dimensions. Paraline Plus pans, in 3" and 7" widths, in conjunction with the Snap-Loc Insert (not shown) are appropriate for exterior applications.

USG Paraline® Plus



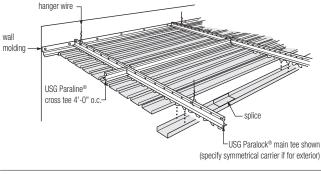

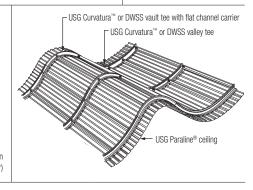

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE **INFORMATION**

Product literature

System brochure: IC463 Data sheet: IC315 Exterior ceiling systems guide: SC2561

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction

Online tools

usadesianstudio.com or cacdesianstudio.com

Code approval

See PER-12055

Carrier systems

The carrier systems for USG Paraline* and Paraline* Plus are not interchangeable and different carrier types may be required for exterior applications. For more information about USG Paraline® system components refer to IC463. For more information about exterior applications with Paraline* refer to SC2561.

ASTM E84 surface-burning characteristics

(with Acoustibond™ backer) Class A Flame spread: 25 or less

Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A Flame spread: 25 or less Smoke developed: 50 or less

Fire-rated designs

UL fire-rated design number D-218 rating for two-hour or three-hour restrained or unrestrained assembly and three-hour unrestrained beam rating.

Light reflectanceFlat White: LR-0.80 (less with perforations and other colors).

 Perforation Pattern A062 is available on USG Paraline* II only. Perforation options for USG Paraline* Plus may be available on request.

Owner: Oxford Properties Designer: JPRA Design, Carrie Architect: Lemay-Michaud architecte, Pierre-Alexandre Davignon GC: Reliance Construction Group, Mathieu Lantaigne Int. Syst. Sub-trade: Daharpro Distributor: Acousti-Plus


The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC315/rev. 3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG PIXELS® METAL CEILING PANELS

PERFORATED IMAGERY

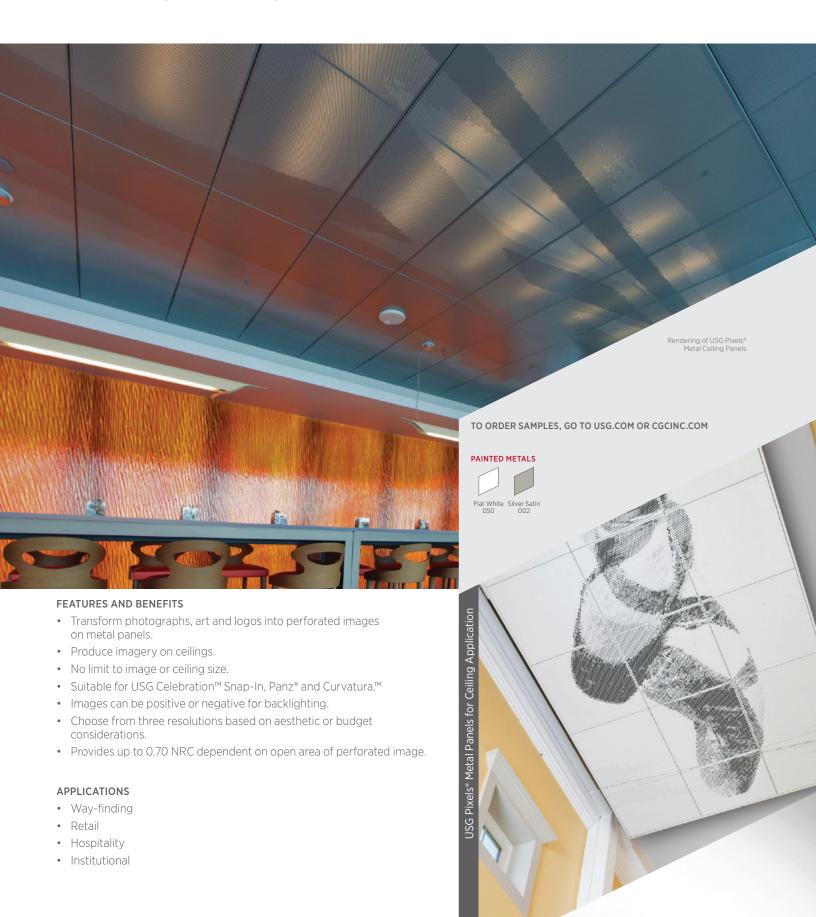

USG PIXELS® METAL CEILING PANELS

PERFORATED IMAGERY

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



PRODUCT INFORMATION

Materials	Systems	Nominal
Aluminum metal panels	USG Celebration™ Snap-In, Panz® Metal Panels	2'x2', 2'x4', 2'x6' Custom Sizes available.
Aluminum metal panels	USG Curvatura™ 3-Dimensional Suspension System	2'x2', 2'x6'
Steel suspension system	USG Donn® Brand DX®, Centricitee™ DXT™, Fineline® DXF™	

ACOUSTICS1 RESOLUTION

Up to 0.70 NRC with >20% Open Area of perforation image with Acoustibond™ backer.










IMAGE SIZE

No limit to image size or canvas size (total ceiling area containing image).



6'x10' canvas (Depicted using 2'x2' panels)

High Recycled Content

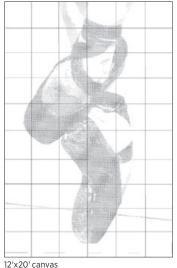

(Depicted using 2'x2' panels)

See USG Pixels® Metal Panels Design Guide (IC566) for design considerations.

preconsumer (postindustrial) recycled content per FTC guidelines. Product literature

FOR MORE

INFORMATION

Data sheet: IC563 Design guide: IC566 Check sheet: IC565

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes. refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and

Class A Flame spread: 25 or less Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A Flame spread: 25 or less Smoke developed: 50 or less

usadesianstudio.com or cacdesianstudio.com

1. Refer to IC425 for additional NRC information based on perforation pattern

Notice


The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC563/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG PIXELS® WALL MOUNTED PANELS

PERFORATED IMAGERY

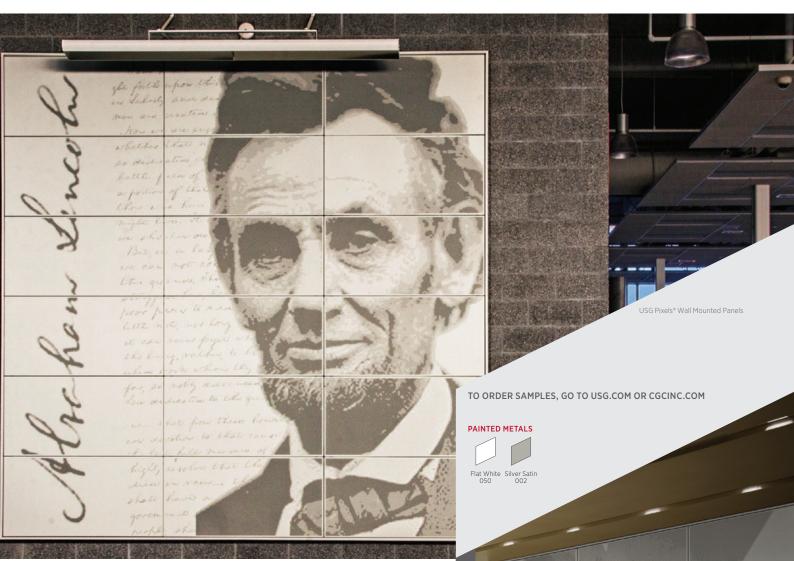

FEATURES AND BENEFITS

- Transform photographs, art and logos into perforated panels.
- Produce dramatic imagery on walls.
- No limit to image or mural size.
- Suitable for USG Celebration™ Snap-In Metal Panels.
- · Images can be positive or negative for backlighting.
- Choose from three resolutions based on aesthetic or budget considerations.

APPLICATIONS

- Retail
- Hospitality
- Institutional
- Government
- Education



USG PIXELS® WALL MOUNTED PANELS

PERFORATED IMAGERY

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG,4YOU (874-4968)






PRODUCT INFORMATION


Frame-Mounted Application (Backlit)

Surface-Mounted Application (Nonbacklit)


Materials	System	Available Sizes
Aluminum Metal Panels	USG Celebration™ Snap-In Metal Panels USG Pixels® Metal Panels	2'x2', 2'x4', 2'x6'
Aluminum Frame	USG Compässo™ Elite	4", 6"
Steel Grid	USG Donn® Brand Fineline® DXF™	Main Tees, Cross Tees
MDF	Wall Mount Backerboard	2'x2', 2'x4', 2'x6'
Extruded Aluminum	Aluminum Trim	Per design
	•	


Frame-Mounted Application (Backlit)

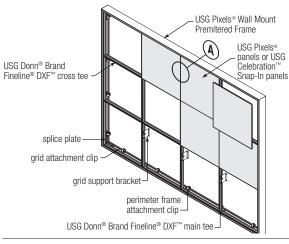

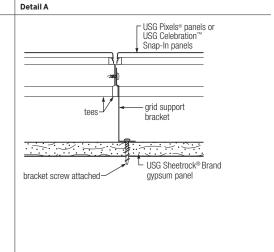

Surface-Mounted Application (Nonbacklit)





See USG Pixels® Wall Mounted Design & Installation Guide (IC606)

High Recycled Content

 $Classified as containing \ greater \ than 50\% \ total \ recycled \ content. \ Total \ recycled \ content \ is \ based \ on \ product \ composition \ of \ postconsumer \ and \ content \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ product \ composition \ of \ postconsumer \ and \ product \$ preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE Product literature INFORMATION

Data sheet: IC605 Wall mounted design and installation guide: IC606 USG Pixels* perforated imagery for ceilings: IC563 USG Pixels* design guide: IC566 USG Pixels® check sheet: IC565

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A Flame spread: 25 or less Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A Flame spread: 25 or less Smoke developed: 50 or less

Online tools

usgdesignstudio.com or cgcdesignstudio.com

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC605/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

The trademarks USG, CGC, ACOUSTIBOND, CELEBRATION, COMPÄSSO, DONN, DXF, FINELINE, PIXELS, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation



USG TOPO™ 3-DIMENSIONAL SYSTEM



USG TOPO 3-DIMENSIONAL SYSTEM

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

PRODUCT INFORMATION1


Materials	Size and Weight	Module Size
	Panels: 2'x2' System weight approximately: 0.5 lb./sq. ft.	Full 2'x 2' modules only

FINISHES

Color	Light Transmission	USG Donn® Brand Topo™ Suspension System Coordinating Colors		
White Translucent	26%	Flat White		
White Opaque	8%	Flat White		
Color Gallery	Varies per color	Flat White or Custom as Specified by	y Architect	


DETAILS

System Profile



ASSEMBLY

(View From Below)

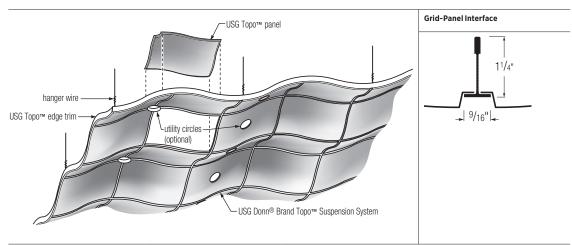

Exposed Hanger Solutions
For ceiling islands and other installations with exposed hanger wires, USG offers stainless steel wire and rope wire with a variety of connectors for an attractive alternative to standard 12-gauge wire. See installation guide IC453 for more information.

FOR MORE INFORMATION

Product literature

System brochure: IC438 Data sheet: IC422

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Code approval

Code approval Infill panels meet Class B requirements for flame spread and smoke developed as defined by ASTM E1264, NFPA and IBC (UBC) as tested in accordance with ASTM E84 and CAN/ULC S102 surface-burning characteristics.

 For Canadian product needs, please contact your local sales representative


Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC422/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG TRANSLUCENTS™ LUMINOUS INFILL PANELS

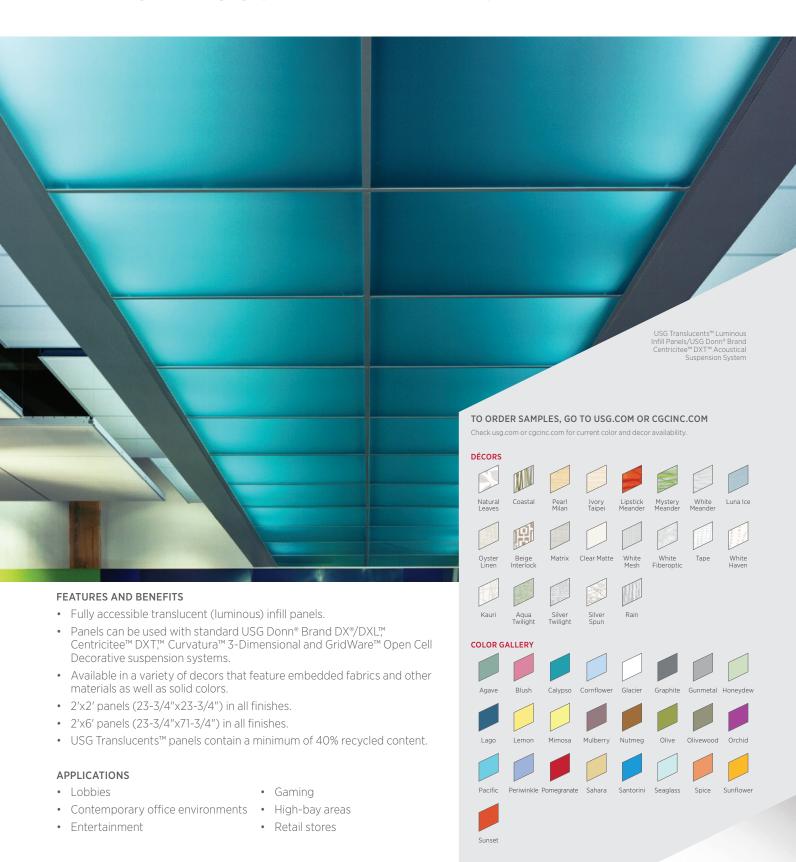

USG TRANSLUCENTS LUMINOUS INFILL PANELS

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

PRODUCT INFORMATION

Product	Typical Sizes		System Weight
	Nominal	Actual	
Clear Mat Polycarbonate	2'x2'	23-3/4"x23-3/4"	Approximately 0.9 lb./sq. ft.
Standard Décors – 0.118" PETG	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 0.9 lb./sq. ft.
Rain Acrylic	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 0.9 lb./sq. ft.
Color Gallery – 0.118" PETG	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 0.9 lb./sq. ft.

Acoustics

Lighting

Suspension Systems

FOR MORE INFORMATION This product does not offer any acoustical properties.

For USG Translucents™ panels, fluorescent strip fixtures should be placed a minimum of 18" above the ceiling and 18" o.c. for best results.

Lays into standard USG Donn® Brand DX®/DXL™, Centricitee™ DXT™ Curvatura™ 3-Dimensional and GridWare™ suspension systems.

Product literature Data sheet: IC406

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Limitations

This product is produced to order and will vary from batch-to-batch – panels ordered at the same time will be produced together and will be identical. USG cannot guarantee batch-to-batch consistency.

flame spread and smoke developed as defined by ASTM 1264 and as tested in accordance with ASTM E84 and CAN/ULC S102 surface-burning characteristics. USG Translucents™ panels also meet Class A requirements of NFPA and IBC (UBC) as interior finishes, not to be part of an air supply/return system. Designers and installers are advised to consult a fire protection engineer, NFPA 13 and their local codes for guidance where automatic fire detection and suppression systems are present.


Weight 0.374 lb./sq. ft. (Clear Matte) 0.90 lb./sq. ft. (All other decors)

Recycled content Decors: min. 40% recycled content. 100% recyclable. Rain: 50% recycled content. 100% recyclable. Color Gallery: Up to 40% recycled content.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

USG TRANSLUCENTS™ CANOPIES

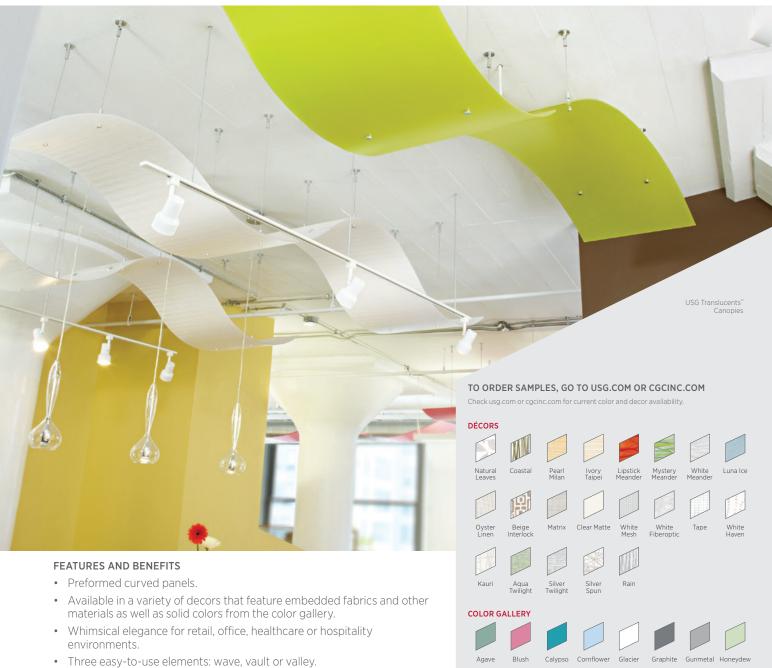

- Individual suspension or connected groupings for ribbons or larger spaces.
- Four simple connection/suspension points for fast, trouble-free installation.
- 100% recyclable material; may contribute toward LEED credits in MR 2.1, 2.2, 4.1 and 4.2.
- USG Translucents™ Canopies meet Class B flame spread requirements, except Rain™ which is Class C.

APPLICATIONS

- Gaming
- Retail
- Hospitality
- · General office
- Healthcare



USG TRANSLUCENTS™ CANOPIES

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

PRODUCT INFORMATION

Shape	Typical Sizes		System Weight
	Nominal	Actual (in plan)	
Wave	2'x6'	23-3/8"x65-3/8"	Approximately 2 lb./sq. ft.
Vault	2'x6'	23-3/8"x68-1/2"	Approximately 2 lb./sq. ft.
Valley	2'x6'	23-3/8"x68-1/2"	Approximately 2 lb./sq. ft.


Acoustics

This product does not offer any acoustical properties.

Vault

Elements


USG Translucents™ Canopies Panels can be suspended under the standard troffers normally located in a suspended ceiling or can be lit from above with point-source lighting such as halogen PAR lamps or newer LED technology.

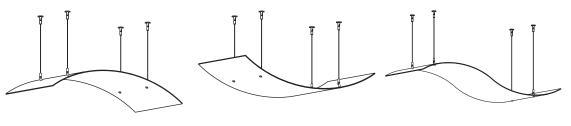

Valley

Wave

Perspective

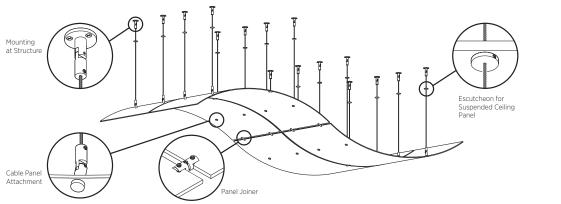

FOR MORE INFORMATION

Product literature

Data sheet: IC596

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Limitation

This product is produced to order and will vary from batch-to-batch — panels ordered at the same time will be produced together and will be $identical. \ USG \ cannot \ guarantee \ batch-to-batch$

Code approval
USG Translucents™ Canopies panels meet
Class B requirements for flame spread and smoke developed as defined by ASTM 1264 and as tested in accordance with ASTM
E84 and CAN/ULC S102 surface-burning
characteristics. USG Translucents™ Canopies Panels also meet Class A requirements of NFPA and IBC (UBC) as interior finishes, not to be part of an air supply/return system. Designers and installers are advised to consult a fire protection engineer, NFPA 13 and their local codes for guidance where automatic fire detection and suppression systems are present.

Seismic applications

For installations on projects designated seismic design category C-F, suspension wires that are a minimum of no. 12 gauge galvanized, soft-annealed, mild steel wire shall be used. Please refer to SC2494 for more information about the seismic guidelines for specialty and decorative ceilings. Because codes continue to evolve, check with a local official prior to designing and installing a ceiling system. Other restrictions and exemptions may apply

Weight

Approximately 2 lb./sq. ft.

Recycled content

100% recyclable. Décors: min. 40% recycled content, 100% recyclable. Color Gallery: Up to 40% recycled content.


Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC596/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG TRUE™ WOOD PANELS

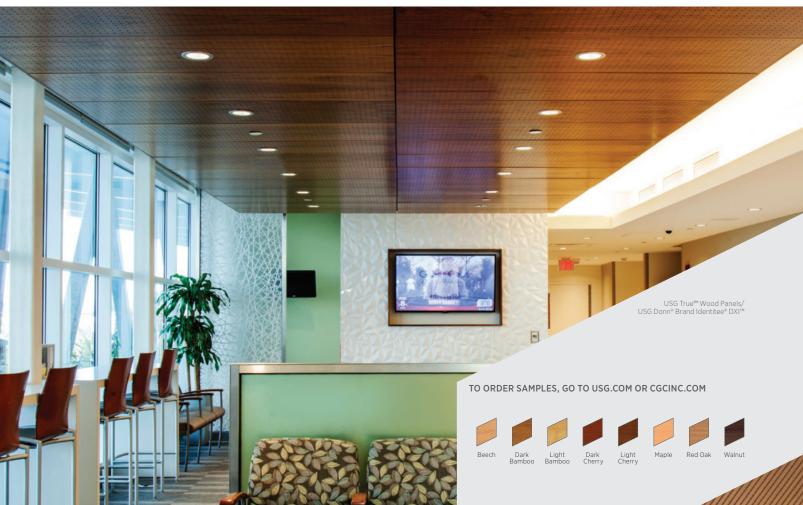

FEATURES AND BENEFITS

- The elegance, warmth and majesty of true wood.
- Natural wood veneers.
- Standard panel sizes of 2'x2', 2'x4' and linear.
- Plank sizes: 1'x4', 1'x5', 2'x6', 2'x8', 20"x60", 30"x60."
- Acoustical options, with an integrated acoustical backer.
- FSC® certified.
- Class A fire rating.

APPLICATIONS

- Schools
- Healthcare
- Conference rooms
- Restaurants
- · Retail stores



USG TRUE WOOD PANELS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

 $USG\,Identitee^*\,DXI^{\scriptscriptstyle TM}$

٦llr

TECHNICAL SERVICES 800 USG,4YOU (874-4968)









USG TRUE™ WOOD LAY-IN PANELS

	Lay-In Panels		Planks					
FL	2'x2'x3/4"	2'x4'x3/4"	1'x4'x3/4"	1'x5'x3/4"	2'x6'x3/4"	2'x8'x3/4"	20"x60"x3/4"	30"x60"x3/4"
SL								
AR	2'x2'x3/4"	2'x4'x3/4"						

 $All\, USG\, True^{\text{$M$}}\, Wood\, perforated\, and\, channel\, panels\, include\, an\, integrated\, acoustical\, backer\, to\, provide\, a\, high \, level\, of\, sound\, performance\, without\, the\, provide\, a\, high \, level\, backer\, to\, provide\, backer to\, provide\, backer\, to\, pr$ expense and additional labor of acoustical blankets.

Note: All USG True™ Wood Plank Panels must be installed with stabilizer bars. See form # IC592.

USG TRUE™ WOOD LINEAR PANELS

Panel Size	Fire Rating	Grid Options	NRC	CAC
	Ø	ø	NRC	CAC
Nominal 4-1/2" Module 3-3/4"x8'	Class A	DWSS	0.40	_
Nominal 6" Module 5-1/4"x8'	Class A	DWSS	0.35	_

Linear panels are screw-attached to heavy duty DWSS drywall grid. They have a black fabric backing that overlaps panel-to-panel to create a clean black look in the reveal.

TRIM OPTIONS

4" Nominal (3-3/4"x8')

GRID PROFILE OPTIONS

6" Nominal (5-1/4"x8')

Pattern Number

D	E	F	G
USG DX*/DXL™	USG Centricitee™ DXT™	USG Fineline® DXF™	USG Fineline* 1/8 DXFF™

Spacing (mm)

Note: Heavy duty suspension systems shall be used.

Hole (mm)


PERFORATION OPTIONS*

CHANNEL OPTIONS*

W100	6	16	10	0.60	
W200	6	32	3	0.30	
W300	8	16	20	0.70	
W400	8	32	5	0.40	
Pattern Number	Channel Width (mm)	Channel Depth (mm)	Spacing (mm centers)	Border (mm)	NRC
W500	2	3.8	10	_	N/A
W500 (border)	2	3.8	10	25.4	N/A
W600	2	3.8	5	_	N/A
W600 (border)	2	3.8	5	25.4	N/A

% Open Area

*Not available in linear panels



 $Classified as containing \ greater \ than 50\% \ total \ recycled \ content. \ Total \ recycled \ content \ is \ based \ on \ product \ composition \ of \ postconsumer \ and \ content \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ composition \ of \ postconsumer \ and \ product \ product \ composition \ of \ postconsumer \ and \ product \$ preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature Data sheet: IC558

Finishes sheet: IC559 Tech guide: IC561

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Flame spread: 25 or less Smoke developed: 50 or less

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ASTM E1264 classification

Composite—Class A Fire Perfo ASHRAE Standard 62.1, 2013

Weight 3 lb./sq. ft.

Material
No added urea-formaldehyde core, with face cut veneers

 Color Disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.

NRC

- Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats.
- These representations should not be used to finalize color selection(s).
- Building environmental conditions should be maintained in accordance with ASHRAE Standard 62.1, 2013.
- Refer to CISCA Wood Ceilings Technical Guidelines for best practices on installing wood ceilings.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC558/rev. 11-16


© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, IDENTITEE, TRUE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG TRUE™ WOOD RENDITIONS™ PANELS

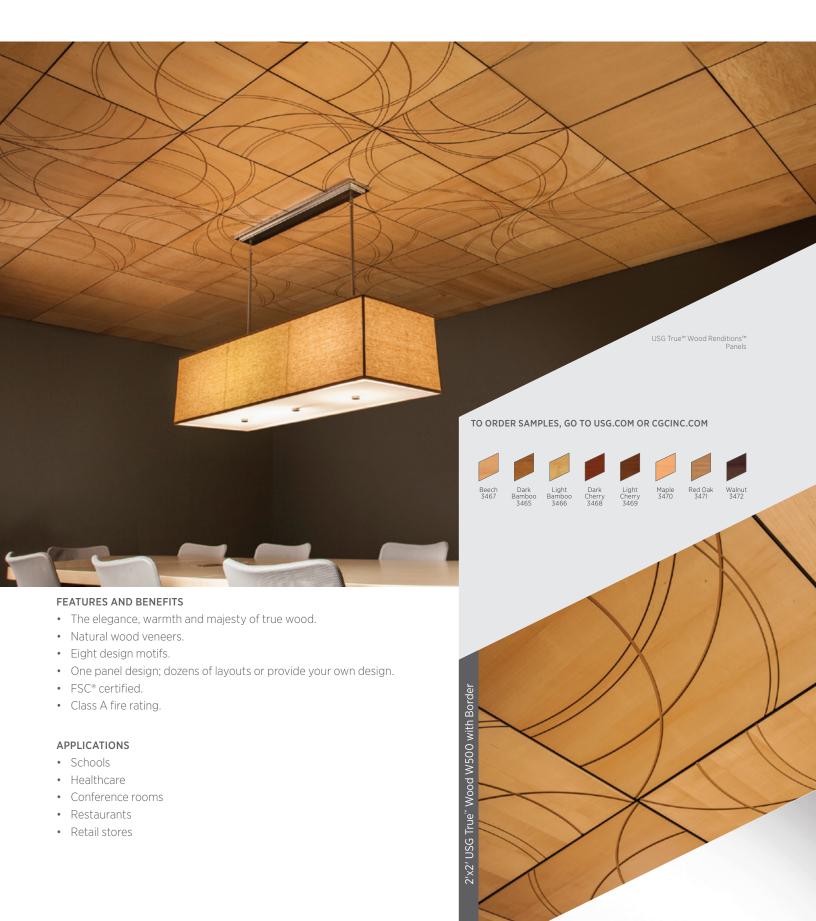

USG TRUE™ WOOD RENDITIONS™ PANELS

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG,4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com



2'x2' Lay-In Panels






Rosettes





ACCENTS PANEL OPTIONS






















GRID PROFILE OPTIONS

Panel edge detail





USG DX*/DXL™ only





EXAMPLE OF CEILING LAYOUT BOXES





Design using 24 panels

See IC652 for more ceiling layouts.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature Data sheet: IC650 Finishes sheet: IC559 Tech guide: IC561

Design guide: IC652

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

3 lb./sq. ft.

No added urea-formaldehyde core, with face-cut veneers

- ${\it Color \, Disclaimer: \, Printed \, and/or \, online \, color \, swatches \, are \, only \, reproductions \, of \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \, actual \, standards \, and \, will \, vary \, in \, actual \, standards \,$ appearance due to differences in monitor and printer output.
- Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats
- These representations should not be used to finalize color selection(s).
- Building environmental conditions should be maintained in accordance with ASHRAE Standard 62.1, 2013.
- Refer to CISCA Wood Ceilings Technical Guidelines for best practices on installing wood ceilings
- For Canadian product needs, please contact your local sales representative.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC650/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG WIREWORKS™ OPEN CELL CEILING PANELS



USG WIREWORKS™ OPEN CELL CEILING PANELS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



PRODUCT INFORMATION

USG WIREWORKS™ OPEN CELL **CEILING PANELS** 2'X2' 1/8" WIRE

Materials	Typical Size	es	Wire Thickness		
Robotically welded steel wire	2'x2'		Panels are 1/8" Forms are 3/16"		
1"x1" Cells	2"x2" Cells		3"x3" Cells		4"x4" Cells
				<u></u>	
Pattern		Front Profile		Side Profile	

USG WIREWORKS™ OPEN CELL FORMS 2'X2' 3/16" WIRE

Weave

Ripple

Small Wave

Big Wave



→ 2" |



FOR MORE Product literature Data sheet: IC325 INFORMATION

usgdesignstudio.com or cgcdesignstudio.com

Metric equivalents
Contact Technical Service for additional information.

High Recycled ContentClassified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.


Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC325/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG ASPEN™ BASIC ACOUSTICAL PANELS

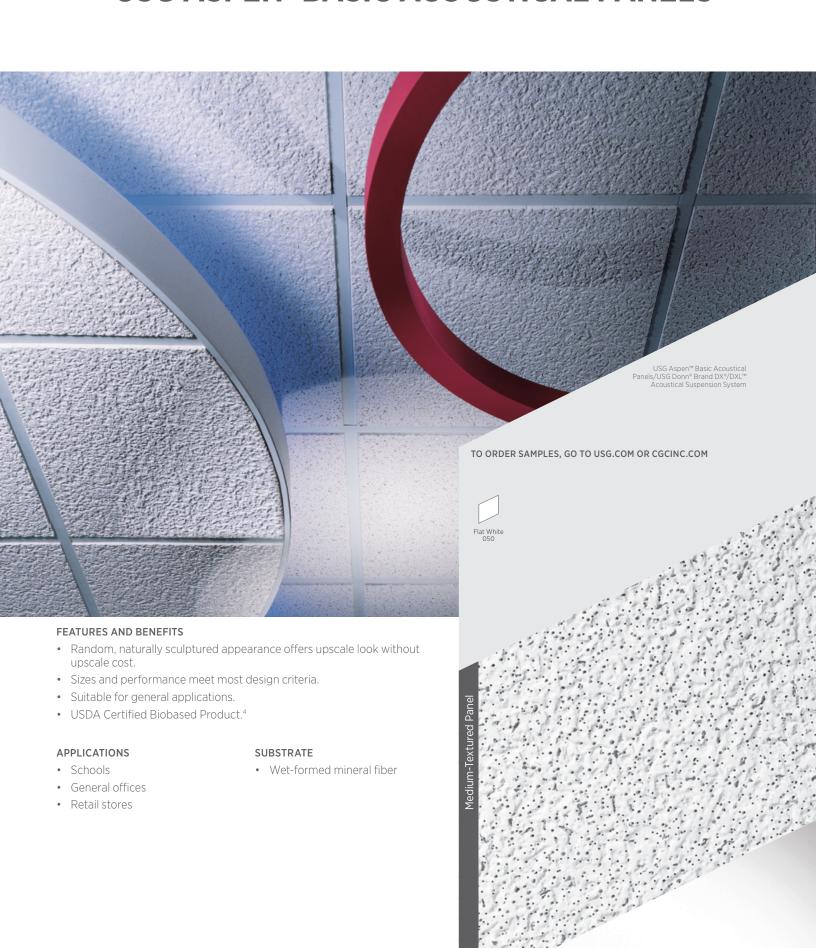

USG ASPEN™ BASIC ACOUSTICAL PANELS

Fire

Rating

0

Class A

Class A

Class A

Item No.

650

651

652

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

voc

Low

Low

Low

Emissions

3

TECHNICAL SERVICES 800 USG,4YOU (874-4968)

Recycled Content¹

42%

42%

42%

3

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION**

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Panel Cost

\$

\$\$

\$\$

\$\$





Panel Size

2'x2'x3/4"

2'x4'x3/4"

2'x4'x3/4"

Edge

SLT

SLT³

USG ASPEN"	1
BASIC PANELS	

USG ASPEN™ **BASIC ILLUSION™ TWO/24 PANELS**

FACE-CUT PATTERNS

USG Aspen™ Basic Illusion™ Two/24

The look of 2'x2' panels

Low Emissions (VOC)

 $Third\ party\ (GREENGUARD\ Gold)\ certified\ for\ low-emitting\ performance, meets\ California\ Department\ of\ Public\ Health's\ (CDPH)\ Standard\ Department\ of\ Public\ Health's\ (CDPH)\ Standard\ Department\ Department\ of\ Public\ Health's\ (CDPH)\ Standard\ Department\ Depa$ $Method\,vI.1-2010\,(CA\,Section\,01350).\,'Certificates\,of\,Compliance'\,for\,Low\,VOC\,Emissions\,are\,available\,at\,product guide.ulenvironment.com.$

(U) UL Classified CAC Min.

35

35

35

LR²

Ø

0.87

0.87

0.87

Color

White

White

White

Grid

Α

Α

Α

Options

ø

NRC

0.55

0.55

0.55

GRID PROFILE OPTIONS

USG DX*/DXL™



PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC1809

Pattern CDFIK

ASTM E1264 classification

USG Aspen™ Basic: Type III, Form 2, Pattern CDFI USG Aspen™ Basic Illusion™: Type III, Form 2,

ASTM E84 and CAN/ULC S102

surface-burning characteristics Class A Flame spread: 25 or less Smoke developed: 50 or less

Online tools usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-1.7 (3/4" panels)

Weight

1.43 lb./sq. ft. (Class A) 1.67 lb./sq. ft. (Illusion)

Maximum backloading See *USG 30-Year Limited System Warranty* Commercial Applications (SC2102).

Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times


- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. LR values are shown as averages.
- 3. Panels have a 15/16" routing.
- 4. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

USG ASTRO® ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

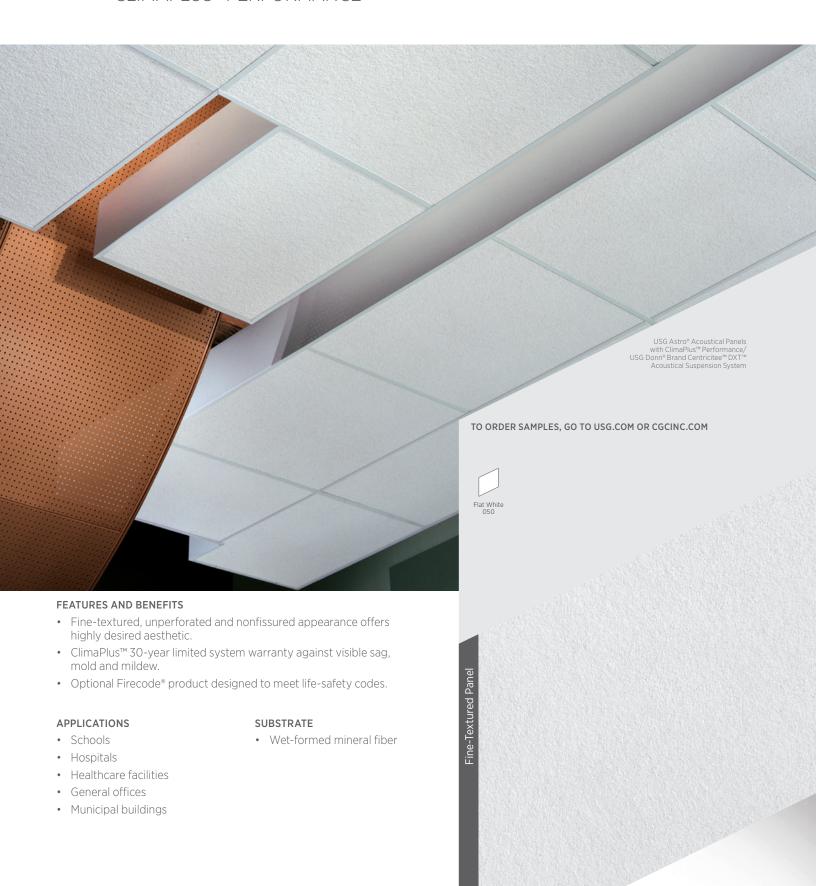

USG ASTRO® ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

800 USG,4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES







(U) UL Classified

USG	ASTRO®	PANFI	S

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		Ħ	B		HRC	\$
SQ	2'x2'x5/8"	Class A	8221	0.55	35	0.86	White	A,B,C	Low		68%	\$\$
	2'x2'x3/4"	Ø	8122	0.50	35	0.86	White	A,D	Low		68%	\$\$
	2'x4'x5/8"	Class A	8241	0.55	35	0.86	White	A,B	Low		68%	\$\$
SLT	2'x2'x5/8"	Class A	8223	0.55	35	0.86	White	E	Low		68%	\$\$
	2'x2'x3/4"	0	8322	0.50	35	0.86	White	E	Low		68%	\$\$
	2'x4'x5/8"	Class A	8243	0.55	35	0.86	White	E	Low		68%	\$\$
FLB	2'x2'x5/8"	Class A	8227	0.55	35	0.86	White	F,H,I,K	Low		68%	\$\$
	2'x2'x3/4"		8722	0.50	35	0.86	White	G,J	Low		68%	\$\$
	2'x4'x5/8"	Class A	8247	0.55	35	0.86	White	F,H,I,K	Low		68%	\$\$
SLT ⁵	2'x4'x3/4"	Class A	8742	0.55	35	0.86	White	E	Low		69%	\$\$
ILT 6	2'x4'x3/4"	Class A	8744	0.55	35	0.86	White	L	Low		69%	\$\$

USG ASTRO® ILLUSION™ **TWO/24 PANELS**

PATTERNS

USG Astro® Illusion™ Two/24

The look of 2'x2' panels

USG

DX*/DXL™

Low Emissions (VOC)

USG

DXW™

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

USG

DXT

Centricitee™

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

USG

DXLT

Centricitee¹

USG

DXT™

Centricitee

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG USG USG USG USG Fineline* Fineline* Fineline* Identitee* Centricitee" DXF 1/8 DXFFT DXLF DXI™ DXT™

GRID PROFILE OPTIONS

PHYSICAL DATA/ **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2321/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature Data sheet: SC2321

ASTM E1264 classification

USG Astro*: Type III, Form 1 and 2, Pattern G; USG Astro® Illusion™: Type III, Form 1. Pattern GK

ASTM E84 and CAN/ULC S102

surface-burning characteristics Class A Flame spread: 25 or less Smoke developed: 50 or less

UL Type Astro-FR

usgdesignstudio.com or cgcdesignstudio.com

Weight

Centricitee¹¹

USG

DXLT™

0.85 lb./sq. ft. (Class A) 1.10 lb./sq. ft. (Firecode*)

USG

DX*/DXL™

Thermal resistance

R-2.0 (Class A 5/8") R-2.4 (Class A 3/4") R-2.4 (Firecode* 3/4")

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum

Texture

Because the manufacturing process for USG Astro* ceiling panels can potentially create subtle texture variations, we recommend ordering and installing this product by production lot number.

Metric sizes available

Contact sales for minimum quantities and lead times.

- 1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com
- 2. Fire-rated items: see UL design details.
- 3. LR values are shown as averages.
- 4. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 6. Panels have a 9/16" routing
- 7. Maximum 2'x2' with SQ Edge panels.



Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate persona protective equipment. Read SDS and literature before specification and installation

USG CLEAN ROOM™ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG CLEAN ROOM™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE

FOR MOST UP-TO-DATE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

YEAR LIMITED SYSTEM WARRANTY No Visible Sag





UL Classified

			<u></u>							
Edge⁵	Panel Size	Fire Rating ²	Item No.	NRC⁴	CAC Min.	LR ³	Color	Grid Options	Recycled Content ¹	Panel Cost
		Ø		NRC	CAC	Ø		ø	HRC	\$
SQ	2'x2'x5/8" Unperforated	Ø	56099	_	35	0.79	White	A,B,C,D,E	55%	\$\$\$
	2'x4'x5/8" Unperforated	Ø	56091	_	35	0.79	White	A,B,C,D,E	55%	\$\$\$
SQ	2'x2'x5/8" Perforated		56060	0.55	35	0.79	White	A,B,C,D, E	55%	\$\$\$
	2'x4'x5/8" Perforated	Ø	56090	0.55	35	0.79	White	A,B,C,D,E	55%	\$\$\$

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG ZXLA™

Firecode®

USG CET

GRID PROFILE OPTIONS

USG CLEAN ROOM™ CLASS 100 (ISO 5) PANELS

USG CLEAN ROOM™ CLASS 10M-100M (ISO 7) PANELS7

PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC1811

USG DX*/DXL™

ASTM E1264 classification

Class 100: Type X, Pattern GI Class 10M-100M: Type X, Pattern CGI

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A Flame spread: 25 or less Smoke developed: 50 or less

UL Type

Weight
1.1 lb./sq. ft. (Class 100 panels)
1.2 lb./sq. ft. (Class 10M-100M panels)

USG DXLA™

Online tools usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a damp sponge, mild detergent and water. Do not use acetate, ammonia, or highly concentrated chlorine. bromide or other harsh chemicals

Metric sizes available

Contact sales for minimum quantities and lead times.

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. Fire-rated items: see UL design details.

USG AX™

- 3. LR values are shown as averages
- NRC rating for USG Clean Room™ ClimaPlus™ Class 100 panels is 0.10. USG does not consider a ceiling panel to be acoustically rated if NRC is less than 0.50.
- 5. Field-cut edges of USG Clean Room™ panels may be sealed with white latex paint.
- 6. Clean Room-rated applications require a suspension system with gasketed tee flanges such as USG Donn® Brand CE.™
- 7. Not intended for kitchen/food prep applications. Use unperforated product (Class 100) item numbers 56099 and 56091
- 8. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1811/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG ECLIPSE™/ECLIPSE™ HIGH-NRC ACOUSTICAL PANELS



USG ECLIPSE /ECLIPSE HIGH-NRC

CLIMAPLUS™ PERFORMANCE









ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

800 USG,4YOU (874-4968)

FOR MOST UP-TO-DATE CGC: contact Sales Representative TECHNICAL SERVICES

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

PRODUCT CERTIFIED FOR LOW CHEMICAL

USG ECLIPSE™ PANELS

USG ECLIPSE™ **HIGH-NRC PANELS**

USG ECLIPSE™ TILE6,7

GRID PROFILE OPTIONS

PHYSICAL DATA/ **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document

SC1812/rev. 3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

ACOUSTICAL PANELS

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF. Safety First! Follow good safety/industrial hygiene DXI, DXLF, DXLF, DXT, DXW, ECLIPSE, FINELINE, FIRECODE, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

protective equipment. Read SDS and literature before specification and installation.



(U) UL Classified

dge	Panel Size	Fire Rating ²	Item No.	NRC	CAC	LR ³	Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Pane
				4	4	4						
				NRC	CAC	P		Ø	B	O	HRC	\$
Q	2'x2'x3/4"	Class A	76575	0.70	35	0.86	White	A, B, C	Low		79%	\$\$
	2'x2'x3/4"	Class A	76575HRC	0.70	35	0.85	White	A, B, C	Low		83%	\$\$
	2'x4'x3/4"	Class A	78575	0.70	35	0.86	White	A,B	Low		79%	\$\$
	2'x4'x3/4"	Class A	78575HRC	0.70	35	0.85	White	A,B	Low		83%	\$\$
 LT ———	2'x2'x3/4"	Class A	76775	0.70	35	0.86	White⁵/ Colors	D	Low		79%	\$\$
	2'x2'x3/4"	Class A	76775HRC	0.70	35	0.85	White	D	Low		83%	\$\$
	600x600x19	Class A	ME76775	0.70	35	0.86	White	D	Low		79%	\$\$
	2'x2'x3/4"	0	76779	0.60	35	0.86	White	D	Low		64%	\$\$
	2'x4'x3/4"	Class A	78775	0.70	35	0.86	White	D	Low		79%	\$\$
	2'x4'x3/4"	Class A	78775HRC	0.70	35	0.85	White	D	Low		83%	\$\$
FL	2'x2'x3/4"	Class A	76975	0.70	35	0.86	White ⁵ /	E, G, H, J	Low		79%	\$\$
	2'x2'x3/4"	Class A	76975HRC	0.70	35	0.85	White	E, G, H, J	Low		83%	\$\$
	600x600x19	Class A	ME76975	0.70	35	0.86	White	E, G, H, J	Low		79%	\$\$
	2'x2'x3/4"	0	76979	0.60	35	0.86	White	F, I	Low		64%	\$\$
	2'x4'x3/4"	Class A	78975	0.70	35	0.86	White	E, G, H, J	Low		79%	\$\$
	2'x4'x3/4"	Class A	78975HRC	0.70	35	0.85	White	E, G, H, J	Low		83%	\$\$
Q	2'x2'x7/8"	Class A	76520	0.75	35	0.86	White	A, B, C	Low		81%	\$\$\$
	2'x4'x7/8"	Class A	76521	0.75	35	0.86	White	A,B	Low		81%	\$\$\$
LT	2'x2'x7/8"	Class A	76522	0.75	35	0.86	White	D	Low		81%	\$\$\$
	2'x4'x7/8"	Class A	76523	0.75	35	0.86	White	D	Low		81%	\$\$\$
L	2'x2'x7/8"	Class A	76524	0.75	35	0.86	White	E,G,H,J	Low		81%	\$\$\$
	2'x4'x7/8"	Class A	76525	0.75	35	0.86	White	E,G,H,J	Low		81%	\$\$\$
ESK	12"x12"x3/4"	Class A	70073	0.60	40	0.86	White	К	Low		76%	\$\$\$\$

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the Method v1.1 - 2010 (CA Section 01350). 'Certificates of panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

A USG DX DXL™	B USG DXW™	C ⁸ USG Centricitee™ DXT™	D USG DX*/ DXL™	E USG Centricitee™ DXT™	F USG Centricitee™ DXLT™	G USG Fineline* DXF™	H USG Fineline® 1/8 DXFF™	I USG Fineline* DXLF™	J USG Identitee® DXI™	K USG DX*/ DXL™ Concealed

Third party (GREENGUARD Gold) certified for

Compliance' for Low VOC Emissions are available on

usg.com and at productguide.ulenvironment.com.

low-emitting performance, meets California

Department of Public Health's (CDPH) Standard

Imperial weight 1.00-1.15 lb./sq. ft. (Class A panels and tile) 1.12 lb./sq. ft. (Firecode* panels)

Metric weight 5.07 kg/m2 (Class A panels)

Thermal resistance R-2.0 (Class A), R-1.9 (Firecode*)

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available Contact sales for minimum quantities and lead times.

1. For details, see LEED report at usgdesignstudio.com

- or cgcdesignstudio.com.
- 2. Fire-rated items: see UL design details. 3. LR values shown as averages.
- 4. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 5. See Colors selector for more information Metric: white only
- 6. Contact USG for adhesive recommendations for 12"x12" glue-up applications
- 7. Not UL Classified for acoustics.
- 8. Maximum 2'x2' with SQ edge panels

Product literature Data sheet: SC1812

Class A

UL Type

ASTM E1264 classification

Type III, Form 1, Pattern El

Flame spread: 25 or less

Smoke developed: 50 or less

ASTM E84 and CAN/ULC S102

surface-burning characteristics

USG ECLIPSE™ ILLUSION™ & PEDESTALS™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG ECLIPSE™ ILLUSION™ & PEDESTALS™ **ACOUSTICAL PANELS**

Fire

Rating

0

Class A

CLIMAPLUS™ PERFORMANCE

Panel Size

2'x4'x3/4"

2'x4'x3/4"

2'x4'x3/4"

2'x4'x3/4"

2'x2'x3/4"

2'x2'x3/4"

2'x2'x3/4"

2'x2'x3/4"



Edge

SLT³

ILT⁴

SLT³

ILT4

PE/SLT³

PE/ILT⁴

PE/SLT³

PE/ILT⁴



Item No.

78785

78085

78711

78011

72715

72015

72716

72215



UL Classified

CAC

Min.

35

35

35

35

35

35

35

35

NRC

0.70

0.70

0.70

0.70

0.65

0.65

0.65

0.65



Color

White

White

White

White

White

White

White

White

Grid

Α

B.C.

Α

B.C.

D

FF

D

E.F

Options

VOC

Low

Low

Low

Low

Low

Iow

Low

Low

Emissions

LR²

0.84

0.84

0.84

0.84

0.84

0.84

0.84

0.84

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

TECHNICAL SERVICES

Anti-Mold

0

& Mildew

800 USG,4YOU (874-4968)

FOR MOST UP-TO-DATE CGC: contact Sales Representative

Recycled

Content¹

79%

79%

79%

79%

79%

79%

79%

79%

Panel

Cost \$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

PRODUCT CERTIFIED FOR LOW CHEMICAL

USG ECLIPSE™ ILLUSION™ **TWO/24 PANELS**

USG ECLIPSE™ ILLUSION™ **FOUR/48 PANELS**

> **USG ECLIPSE™** PEDESTALS™ I PANELS

USG ECLIPSE™ PEDESTALS™ IV PANELS

PATTERNS

USG Eclipse™ Illusion™ Two/24 USG Eclipse™ Illusion™ Four/48 USG Eclipse™ Pedestals™ I USG Eclipse™ Pedestals™ IV The look of 2'x2' panels The look of 48"x6" linear strips Triple-step scoring Triple-step scoring in 12"x12" modules

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350), 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁵


Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG Identitee® DXI™

GRID PROFILE OPTIONS



PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC1846

ASTM E1264 classification
Type III, Form 1, Pattern EIK (USG Eclipse[†] Illusion™) or Pattern EI (USG Eclipse™ Pedestals™)

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Flame spread: 25 or less Smoke developed: 50 or less

Weight 1.13 lb./sq. ft.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance

Maximum backloading See *USG 30-Year Limited System Warranty*

Commercial Applications (SC2102).

Can be cleaned easily with a soft brush or vacuum.

Contact sales for minimum quantities and lead times.

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. LR values are shown as averages.
- 3. Panels have a 15/16" routing.
- Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial additive that inhibits and retards the growth of mold/mildew. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1846/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG "F" FISSURED™ BASIC ACOUSTICAL PANELS



USG "F" FISSURED™ BASIC **ACOUSTICAL PANELS**

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG,4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL

usgdesignstudio.com cgcdesignstudio.com











(UL) UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ø	Ø	1	HRC	\$
SQ	2'x2'x3/4" Paper-Back	Class A	131	0.70	35	0.79	White	A,B,C	Zero	K	69%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	135	0.70	35	0.79	White	A,B	Zero	K	69%	\$\$\$
SL	2'x2'x3/4" Paper-Back	Class A	132	0.70	35	0.79	White	D	Zero	A	69%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	136	0.70	35	0.79	White	D	Zero	Ø	69%	\$\$\$
FL	2'x2'x3/4" Paper-Back	Class A	133	0.70	35	0.79	White	E,F,G,H	Zero	Ø	69%	\$\$\$
BESK	12"x12"x3/4"	Class A	102	0.70	25	0.79	White	1	Zero	K	69%	\$\$\$\$
SESK	12"x12"x3/4"	Class A	101	0.70	25	0.79	White	J	Zero	ß	69%	\$\$\$\$

USG "F" FISSURED™ BASIC TILE^{3, 4}

USG "F" FISSURED™ **BASIC PANELS**

Zero Emissions (VOC)


Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.


High Recycled Content


Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.


Abuse Resistant

GRID PROFILE OPTIONS

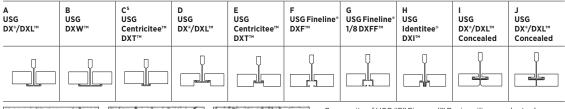







Composite of USG "F" Fissured™ Basic ceiling products shows range to be expected in a production lot and possibly in the same panel or tile. Ranges are random and cannot be specified. Texture appearance will vary based on ceiling height, installation methods and natural variations of the product.

PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC1816

ASTM E1264 classification

Flame spread: 25 or less

Type III, Form 4, Pattern D

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Smoke developed: 50 or less

Weight 1.70 lb./sq. ft.

Online tools usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-1.7

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Texture

The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

- 1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. LR values are shown as averages.
- 3. Contact USG for adhesive recommendations for 12"x12" glue-up applications.
- 4. Not UL Classified for acoustics.
- 5. Maximum 2'x2' with SQ edge panels.
- This product has achieved both BioPreferred initiatives: Federal Procurement
 Preference and Certified Product Labeling. See the complete listing of all USG
 ceiling panels on biopreferred.gov website.


Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1816/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG FISSURED™ BASIC ACOUSTICAL PANELS

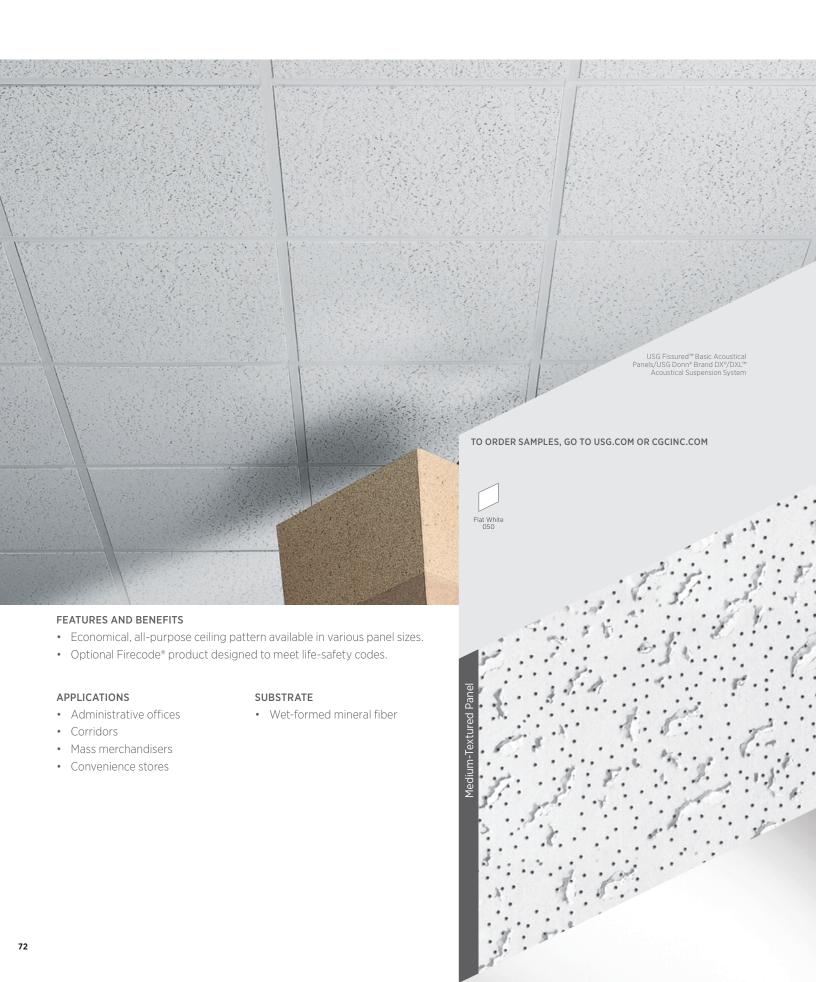

USG FISSURED BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION**

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)





USG FISSURED™ BASIC **PANELS**

				Ŵ ULC	Classified						
Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost
		Ø		NRC	CAC	Ø		Ħ	\$	3	\$
SQ	2'x2'x5/8"	Class A	560	0.55	33	0.81	White	A,B,C	Low	25%	\$
	2'x2'x5/8"	Ø	585	0.55	35	0.81	White	A, C	Low	48-51%	\$
	2'x4'x5/8"	Class A	562	0.55	35	0.81	White	A, B	Low	25%	\$
	2'x4'x5/8"	Ø	586	0.55	35	0.81	White	А	Low	48-51%	\$

Low Emissions (VOC)

SLT

2'x2'x5/8"

2'x4'x5/8"

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

Class A

Class A

506

507

0.55

0.55

33

35

High Recycled Content

0.81

0.81

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG Centricitee™ DXT™/DXLT™

White

White

D

D

Low

Iow



\$

\$

25%

25%

GRID PROFILE OPTIONS



Product literature Data sheet: SC1815

USG DX®/DXL™

ASTM E1264 classification Type III, Form 2, Pattern CD

ASTM E84 and CAN/ULC S102

surface-burning characteristics Class A Flame spread: 25 or less Smoke developed: 50 or less

UL Type

FR-83

USG DXW"

Online tools usgdesignstudio.com or cgcdesignstudio.com

Weight 0.61–1.2 lb./sq. ft. (Class A) 1.14–1.22 lb./sq. ft. (Firecode*)

Thermal resistance

R-1.4 (Class A) R-1.6 (Firecode*)

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Metric sizes available

Contact sales for minimum quantities and lead times.

USG DX*/DXL™

For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com


- 2. Fire-rated items: see UL design details.
- 3. LR values are shown as averages.
- 4. Maximum 2'x2' with SQ edge panels

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1815/rev. 11-16

USG FROST™ BASIC ACOUSTICAL PANELS

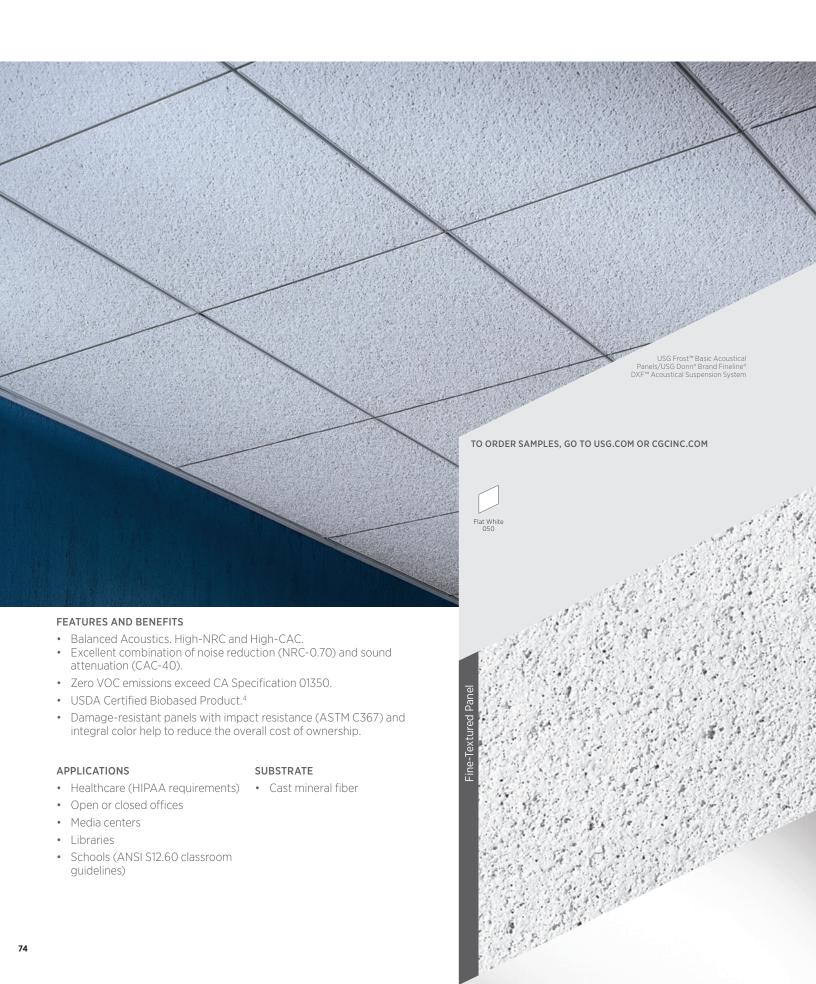


USG FROST BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

CGC: contact Sales Representative TECHNICAL SERVICES













USG FROST™ BASIC PANELS

				િંUL C	lassified							
Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	Ø	K	HRC	\$
SLB	2'x2'x7/8" Foil-Back	Class A	440	0.70	40	0.84	White	А	Zero	K	72%	\$\$\$
	2'x2'x3/4" Paper-Back	0	415	0.55	35	0.84	White	А	Zero	Ø	73%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	450	0.70	38	0.84	White	А	Zero	Ø	72%	\$\$\$
FL	2'x4'x3/4" Paper-Back	Class A	460	0.70	38	0.84	White	B,C,D,E	Zero	K	72%	\$\$\$

Zero Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG Identitee® DXI™



GRID PROFILE OPTIONS

PHYSICAL DATA/ FOOTNOTES

Product literature Data sheet: SC1817

USG DX*/DXL™

ASTM E1264 classification Type III, Form 4, Pattern E

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

UL Type AP, AP-1, AP-2, AP-3

Weight 1.65-1.85 lb./sq. ft.

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-1.1 (Firecode®)

USG Centricitee™ DXT™

Maximum backloading See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

USG Fineline® DXF™

Can be cleaned easily with a soft brush or vacuum.

Impact resistance ASTM C367—tested to min. 190 lb./sq. ft. for 1/4" depression by a 2" steel ball.

The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Environmental conditions

USG Fineline® 1/8 DXFF™

All USG limited warranties are subject to use under normal conditions. Abnormal conditions include exposure to chemical fumes, vibrations, moisture from conditions such as leaks or condensation, excessive humidity due to shutoff of HVAC system, or excessive dirt or dust buildup.

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com
- 2. Fire-rated items: see UL design details
- 3. LR values are shown as averages
- 4. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice


The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1817/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG FROST™/USG FROST™ HIGH-NRC/ **HIGH-CAC ACOUSTICAL PANELS**

CLIMAPLUS™ PERFORMANCE

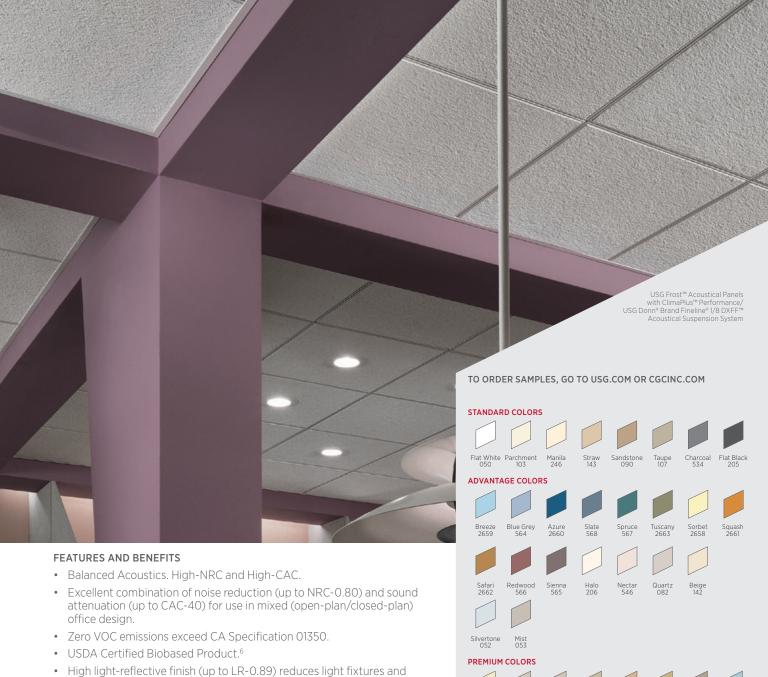

- energy use.
- Damage-resistant panels with impact resistance (ASTM C367) and integral color help to reduce the overall cost of ownership.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Healthcare (HIPAA requirements)
- Schools (ANSI S12.60 classroom quidelines)
- Government projects (ACOE performance requirements)
- · Mixed office design

- Closed- or open-plan offices
- Media centers/libraries

SUBSTRATE

· Cast mineral fiber



USG FROST / USG FROST HIGH-NRC/ **HIGH-CAC ACOUSTICAL PANELS**

CLIMAPLUS™ PERFORMANCE











ORDER SAMPLES/LITERATURE FOR MOST UP-TO-DATE USG: samplit@usg.com fax: 888 874-2348 | usg.com

CGC: contact Sales Representative TECHNICAL SERVICES

800 USG,4YOU (874-4968)

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com





USG FROST™ PANELS



				(<u>.</u>)	Ciassilleu								
Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min. ²	LR ³	Color ⁴	Grid Options	VOC Emissions	Anti-Mold & Mildew	Abuse Resistant	Recycled Content ¹	Pane Cost
				NRC	CAC	Ø		Ħ	B			HRC	\$
SLB	2'x2'x3/4" Paper-Back	Class A	414	0.70	36	0.84	White Standard Advantage Premium	A	Zero		R	72%	\$\$\$
FL	2'x2'x3/4" Paper-Back	Class A	418	0.70	38/40	0.84	White Standard Advantage Premium	B,C,D,E	Zero		K	72%	\$\$\$
FLB	2'x2'x3/4" Paper-Back	Class A	419	0.70	38/40	0.84	White Standard Advantage Premium	F,G,H,I	Zero		K	72%	\$\$\$
SLB	2'x2'x7/8" Paper-Back	Class A	484	0.80	38	0.89	White	А	Zero		K	73%	\$\$\$
FL	2'x2'x7/8" Paper-Back	Class A	488	0.80	38/40	0.89	White	B,C,D,E	Zero		Ø	73%	\$\$\$
FLB	2'x2'x7/8" Paper-Back	Class A	489	0.80	38/40	0.89	White	F,G,H,I	Zero		Ø	73%	\$\$\$
SLB	2'x2'x3/4" Paper-Back	Class A	490	0.75	36	0.89	White	A	Zero		Ø	72%	\$\$\$
FLB	2'x2'x3/4" Paper-Back	Class A	491	0.75	36	0.89	White	F,G,H,I	Zero		Ø	72%	\$\$\$
	Emissions (VO						Varranti			lad Cantant		Abusa Da	<u> </u>

USG FROST™ HIGH-LR **PANELS**

USG FROST™ HIGH-NRC/ HIGH-CAC PANELS

Zero Emissions (VOC) Third party (GREENGUARD Gold)

certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

USG

DXT™

Centricitee¹

ClimaPlus™ Warranty Performance⁵

USG Fineline®

1/8 DXFF¹

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sagresistance performance.

DXI™

USG Identitee®

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG Fineline

DXF



USG Identitee*

DXI"

GRID PROFILE OPTIONS

PHYSICAL DATA/

FOOTNOTES

Product literature

IISG

DX®/DXL™

ASTM F1264 classification Type III, Form 4, Pattern E

ASTM E84 and CAN/ULC S102

Flame spread: 25 or less Smoke developed: 50 or less

Weight 1.60-1.85 lb./sq. ft.

Thermal resistance

Online tools

usgdesignstudio.com or cgcdesignstudio.com

USG Fineline®

DXF

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum.

The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

USG

DXT™

Centricitee"

1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com

USG Fineline®

1/8 DXFF

- 2 Item Nos 418 419 488 and 489 achieve 40 CAC when installed with USG Donn® Brand Fineline* or Fineline 1/8 suspension system.
- 3. LR values are shown as averages
- 4. See Colors selector for more information.
- 5. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- 6. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.


Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1968/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG GLACIER™ BASIC ACOUSTICAL PANELS

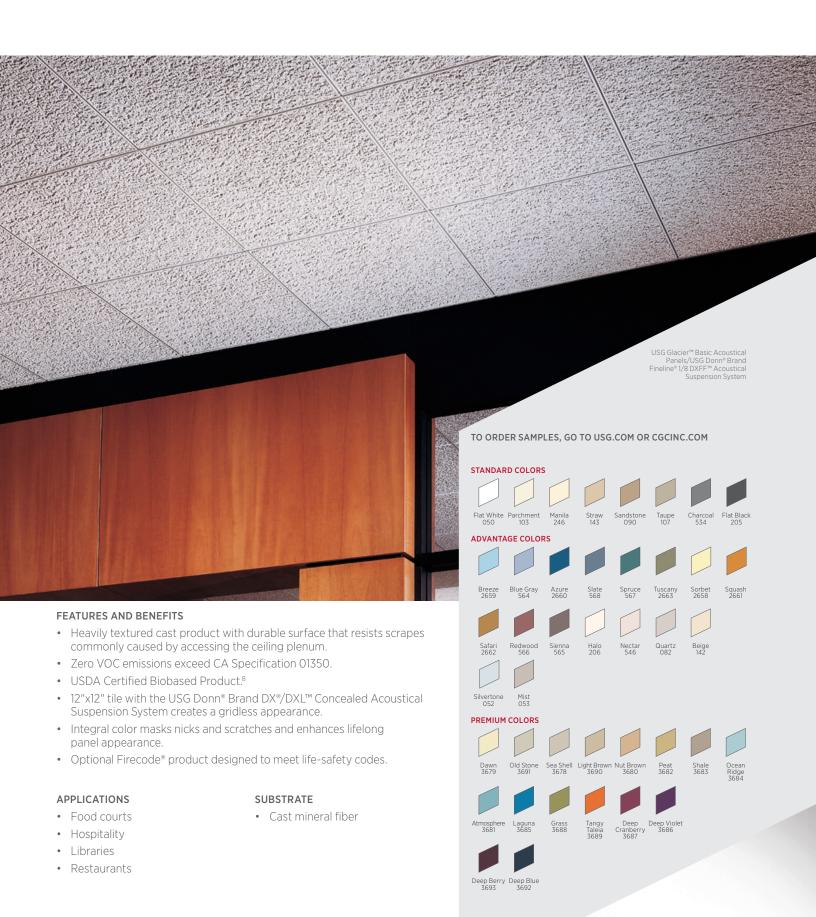

USG GLACIER BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

800 USG,4YOU (874-4968)

FOR MOST UP-TO-DATE AND LEED REPORT TOOL

usgdesignstudio.com cgcdesignstudio.com TECHNICAL SERVICES









UL Classified

USG	GLACIE	R™	BAS	SIC
		P	ANE	LS

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color ⁴	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		Ħ	4	K	HRC	5
SL	2'x2'x3/4" Paper-Back	Class A	707	0.65	35	0.70	White Standard Advantage Premium	А	Zero	K	72%	\$\$\$
	2'x2'x3/4" Paper-Back	0	715	0.65	35	0.70	White	А	Zero	K	73%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	711	0.65	35	0.70	White	А	Zero	K	72%	\$\$\$
FL	2'x2'x3/4" Paper-Back	Class A	708	0.65	35	0.70	White Standard Advantage Premium	B, C, D, F	Zero	K	72%	\$\$\$
SESK	12'x12"x3/4"	Class A	701	0.65	25	0.70	White	E	Zero	K	72%	\$\$\$\$

USG GLACIER™ BASIC TILE 5, 6, 7

Zero Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.




Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



Firecode®

Resistant





PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC1819

ASTM E1264 classification

Type III, Form 4, Pattern F

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

UL Type AP, AP-1, AP-2, AP-3

Weight

1.45 lb./sq. ft. (12"x12" tile) 1.50 lb./sq. ft. (Class A panels) 1.60 lb./sq. ft. (Firecode* panel)

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance

R-1.7 (Class A) R-1.3 (Firecode*)

Maximum backloading See *USG 30-Year Limited System Warranty Commercial* Applications (SC2102).

Can be cleaned easily with a soft brush or vacuum.

The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. Fire-rated items; see UL design details.
- 3. LR values are shown as averages
- 4. See Colors selector for more information
- 5. Texture appearance will vary based on ceiling height, installation methods and natural variation of the product.
- 6. Contact USG for adhesive recommendation for 12"x12" glue-up applications.
- 7. Not UL Classified for acoustics.
- 8. This product has achieved both BioPreferred initiatives; Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1819/rev. 11-16

USG HALCYON™ ACOUSTICAL PANELS

CLIMAPI US™ PERFORMANCE



USG HALCYON ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)







USG HALCYON™	
ACOUSTICAL PANELS	

				(UL) UL	Classified						
Edge	Panel Size ²	Fire Rating	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		ø	Ø	3	\$
SQ	2'x2'x3/4"	Class A	97221	0.90	20	0.90	White	A, B, C,		38%	\$\$\$\$
	2'x4'x3/4"	Class A	97241	0.90	20	0.90	White	A,B	D	38%	\$\$\$\$
	2'x2'x1"	Class A	98221	0.95	20	0.90	White	A, B, C	D	40%	\$\$\$\$
	2'x2'x1" Foil-Back	Class A	88221	0.90	30	0.90	White	A, B, C	D	40%	\$\$\$\$
	2'x4'x1"	Class A	98241	0.95	20	0.90	White	A, B	D	40%	\$\$\$\$
	2'x4'x1" Foil-Back	Class A	88223	0.90	30	0.90	White	A, B	D	40%	\$\$\$\$
	30"x30"x1"	Class A	98331	0.95	20	0.90	White	A, B	D	40%	\$\$\$\$
	30"x60"x1"	Class A	97266	0.95	20	0.90	White	A, B		40%	\$\$\$\$
	2'x4'x1-1/2"	Class A	99241	1.00	25	0.90	White	A, B	D	42%	\$\$\$\$
	2'x4'x1-1/2" Foil-Back	Class A	88224	0.95	30	0.90	White	A, B	D	42%	\$\$\$\$
	2'x2'x1-1/2"	Class A	99221	1.00	25	0.90	White	A, B, C	D	42%	\$\$\$\$
	2'x2'x1-1/2" Foil-Back	Class A	97356	0.95	30	0.90	White	A,B,C		42%	\$\$\$\$\$

ClimaPlus[™] Warranty Performance⁴
Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

USG HALCYON ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative



USG HALCYON™ ACOUSTICAL PANELS





(UL Classified

Edge	Panel Size ²	Fire Rating	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		Ħ	Ø	4	5
SL	2'x2'x1"	Class A	98223	0.95	20	0.90	White	D		40%	\$\$\$\$
	2'x2'x1" Foil-Back	Class A	88225	0.90	30	0.90	White	D	D	40%	\$\$\$\$
	2'x4'x1"	Class A	98243	0.95	20	0.90	White	D	D	40%	\$\$\$\$
	2'x4'x1" Foil-Back	Class A	88226	0.90	30	0.90	White	D	D	40%	\$\$\$\$
	30"x30"x1"	Class A	98333	0.95	20	0.90	White	D	D	40%	\$\$\$\$
	30″x60″x1″	Class A	99270	0.95	20	0.90	White	D	D	40%	\$\$\$\$
	2'x2'x1-1/2"	Class A	99223	1.00	25	0.90	White	D	D	42%	\$\$\$\$
	2'x2'x1-1/2" Foil-Back	Class A	97357	0.95	30	0.90	White	D	D	42%	\$\$\$\$
	2'x4'x1-1/2" Foil-Back	Class A	97358	0.95	30	0.90	White	D	D	42%	\$\$\$\$

ClimaPlus™ Warranty Performance⁴
Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.



USG HALCYON ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

CGC: contact Sales Representative

usgdesignstudio.com cgcdesignstudio.com







(UL) UL Classified

USG HALCYON™ ACOUSTICAL PANELS

Edge	Panel Size ²	Fire Rating	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	0	(3)	\$
FL	2'x2'x1"	Class A	98225	0.95	20	0.90	White	E, F, G, H		40%	\$\$\$\$
	2'x2'x1" Foil-Back	Class A	88227	0.90	30	0.90	White	E, F, G, H		37%	\$\$\$\$
	2'x4'x1"	Class A	98245	0.95	20	0.90	White	E, F, G, H		40%	\$\$\$\$
	2'x4'x1" Foil-Back	Class A	97368	0.90	30	0.90	White	E, F, G, H	D	37%	\$\$\$\$
	30"x30"x1"	Class A	98335	0.95	20	0.90	White	E, F, G, H	D	40%	\$\$\$\$
	30"x60"x1"	Class A	98336	0.95	20	0.90	White	E, F, G, H	D	40%	\$\$\$\$
	2'x2'x1-1/2"	Class A	99225	1.00	25	0.90	White	E, F, G, H	D	42%	\$\$\$\$
	2'x2'x1-1/2" Foil-Back	Class A	97359	0.95	30	0.90	White	E, F, G, H		42%	\$\$\$\$\$

ClimaPlus™ Warranty Performance⁴

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

A USG DX*/ DXL™	B USG DXW™	C ⁵ USG Centricitee™ DXT™	D USG DX*/DXL™	E USG Centricitee™ DXT™	F USG Fineline* DXF™	G USG Fineline*1/8 DXFF™	H USG Identitee* DXI™

PHYSICAL DATA/ **FOOTNOTES**

Product literature

Data sheet: SC2365

ASTM E1264 classification Type XII, Form 2, Pattern E & G

ASTM F84 and CAN/ULC \$102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Weight

0.38 lb./sq. ft. (3/4" panels) 0.47 lb./sq. ft. (1" panels) 0.68 lb./sq. ft. (1-1/2" panels)

Thermal resistance

R-3.3 (3/4" panels), R-4.4 (1" panels) R-6.6 (1-1/2" panels)

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

Treating field-cut reveal edges

Treating field-cut reveal edges
All field-cut edges "exposed to view" should be
colored to match the factory finish. USG Halcyon™
Touch-up Edge Paint is recommended when
perimeter field cuts expose the yellow substrate.

Metric sizes available

Contact sales for minimum quantities and lead times.

- 1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
 2. Custom-size panels available. Please contact your USG or CGC sales representative for details.
- your ose or Cdc sales representative for details.

 3. LR values are shown as averages.

 4. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlua™ Ceilings Certification of Performance
- (SC2451).

 5. Maximum 2'x2' with SQ edge panels.

Notice


Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2365/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG HALCYON™ HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

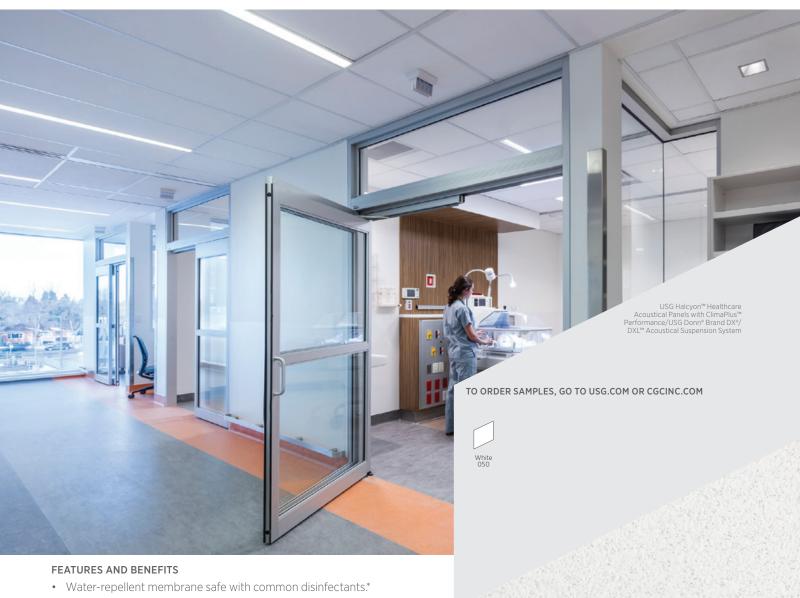

- Washable, scrubbable, soil-resistant finish. Impact and scratch resistant.
- Acoustics and cleanability exceed FGI guidelines for healthcare.
- Meets USDA/FSIS guidelines for use in food-processing areas.
- Achieves FDA standards for smoothness, durability and cleanability.
- Meets requirements of California Building Code table 1224.1, level 2.
- Coordinates visually with USG Mars™ and USG Halcyon.™
- High light-reflective finish (LR-0.90) reduces light fixtures and energy use.
- High sound absorption NRC (0.95-1.00) AC 190 helps address HIPAA standards.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- High postconsumer recycled content.

APPLICATIONS

- Patient rooms
- Nurses' stations
- Laboratories/ Clean Rooms
- Lavatories/ restrooms
- Kitchen/food-prep areas

SUBSTRATE

• Fiberglass



USG HALCYON™ HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		ø	Ø	4	\$
SQ	2'x2'x1"	Class A	98232	0.95	20	0.90	White	A, B, C, D, E, F		40%	\$\$\$\$
	2'x4'x1"	Class A	98233	0.95	20	0.90	White	A, B, D, E, F	D	40%	\$\$\$\$
	2'x2'x1-1/2"	Class A	98234	1.00	25	0.90	White	A, B, C, D, E, F	D	42%	\$\$\$\$
	2'x4'x 1-1/2"	Class A	98235	1.00	25	0.90	White	A, B, D, E, F	D	42%	\$\$\$\$
SL	2'x2'x1"	Class A	98238	0.95	20	0.90	White	G, H, I, J	D	40%	\$\$\$\$
	2'x4'x1"	Class A	98239	0.95	20	0.90	White	G, H, I, J	D	40%	\$\$\$\$
	2'x2'x 1-1/2"	Class A	98217	1.00	25	0.90	White	G, H, I, J	D	42%	\$\$\$\$
	2'x4'x 1-1/2"	Class A	98218	1.00	25	0.90	White	G, H, I, J	D	42%	\$\$\$\$
FL	2'x2'x1"	Class A	98236	0.95	20	0.90	White	K, L, M, N		40%	\$\$\$\$
	2'x4'x1"	Class A	98237	0.95	20	0.90	White	K, L, M, N	D	40%	\$\$\$\$


(UL) U L Classified

ClimaPlus™ Warranty Performance³

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

USG HALCYON™ HEALTHCARE PANELS

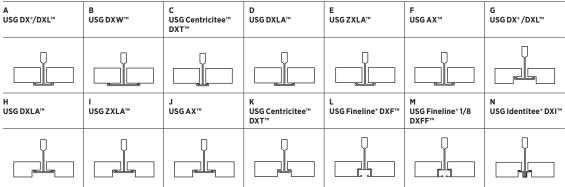

PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC2652

ASTM F1264 classification

Type XII, Form 2, Pattern E, G

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

Weight

0.47 lb./sq. ft. (1" panels) 0.68 lb./sq. ft. (1-1/2" panels)

Thermal resistance

R-4.4 (1" panels) R-6.6 (1-1/2" panels)

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ASTM D2486 scrubbability test (standard test)

ASTM D4828 washability test (modified test)

Water renellency

Cobb method (Tappi T441 om-84) Water Drop Test

*Maintenance

To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth. Acceptable colorless disinfectants include:
- Hydrogen peroxide

- Isopropyl alcohol

- Quaternary ammonium
- Sodium hypochlorite
Do not mix cleaners. Follow cleaner manufacturer's recommendations.

Metric sizes available
Contact sales for minimum quantities and lead times.

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. LR values are shown as averages.
- 3. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Cellings Certification of Performance (SC2451).

Treating field-cut reveal edges
All field-cut edges "exposed to view" should be colored to match the factory finish. USG Halcyon™ Ceiling Touch-up Paint is recommended when perimeter field cuts expose the yellow substrate.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document

SC2652/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

The trademarks USG, CGC, AX, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXLA, DXT, DXW, FINELINE, HALCYON, IDENTITEE, MARS, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG HALCYON™ PLANKS AND LARGE SIZE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



Reception and lobby areas

Libraries

USG HALCYON™ PLANKS AND LARGE SIZE ACOUSTICAL PANELS

(U) UL Classified

CAC Min.

CAC

20

20

20

20

20

30

20

30

20

30

20

30

20

30

20

30

20

30

20

30

LR

0

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

0.90

USG Centricitee™ DXT

ASB24

ASB30

ASB48

Color

White

Grid

A,B

A,B

A.B

A,B

C

С

C

C

D,E,F,G

D.E.F.G

D,E,F,G

D.E.F.G

A.B

A.B

A,B

A.B

C

C.

USG Fineline® DXF™

D.E.F.G

D.E.F.G

Options

ø

NRC

NRC

0.90

0.90

0.90

0.90

0.95

0.90

0.95

0.90

0.95

0.90

0.95

0.90

0.95

0.90

0.95

0.90

0.95

0.90

0.95

0.90

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

Item No.

99282

97262

97263

99262

99268

97360

99269

97361

98348

97362

98197

97367

98441

97363

98481

97364

98443

97365

98445

97366

USG DX®/DXL™

Use to stabilize grid installation

without cross tees. Use in large

module applications.

CLIMAPLUS™ PERFORMANCE

Panel Size²

2'x5'x3/4"

2'x6'x3/4"

2'x8'x3/4"

2'x5'x1"

2'x6'x1"

2'x6'x1"

2'x8'x1

Foil-Back 2'x6'x1'

2'x6'x1"

2'x8'x1"

4'x4'x1"

4'x4'x1"

4'x8'x1'

Foil-Back 4'x4'x1"

4'x4'x1"

Foil-Back 4'x4'x1"

4'x4'x1"

Foil-Back ClimaPlus™ Warranty Performance4

USG DX*/DXL™

Foil-Back 4'x8'x1"

Foil-Back

Foil-Back 2'x8'x1"

Foil-Back 2'x8'x1'



Edge

SQ

SL



Fire

Rating

0

Class A

USG DXW™

0

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Panel Cost

\$

\$\$\$\$

\$\$\$\$

\$\$\$\$

\$\$\$\$

\$\$\$\$

\$\$\$\$\$

\$\$\$\$

\$\$\$\$\$

\$\$\$\$

\$\$\$\$\$

\$\$\$\$

SSSSS

\$\$\$\$

\$\$\$\$\$

\$\$\$\$

\$\$\$\$\$

\$\$\$\$

\$\$\$\$\$

\$\$\$\$

\$\$\$\$\$

USG Identitee® DXI™

Recycled

(3)

38%

38%

38%

40%

40%

40%

40%

40%

40%

40%

40%

40%

40%

40%

40%

40%

40%

40%

40%

40%

Content

TECHNICAL SERVICES 800 USG,4YOU (874-4968)

Anti-Mold

& Mildew/Sag Resistance

0

D

O

D

Ø

O

O

O

O

O

D

D

Ø

O

O

D

D

D

D

Ø

USG Fineline® 1/8

24" Stabilizer Bar

30" Stabilizer Bar

48" Stabilizer Bar

DXFF™

USG HALCYON™ ACOUSTICAL PLANKS

USG HALCYON™ LARGE SIZE ACOUSTICAL PANELS

SQ

GRID PROFILE OPTIONS

STABILIZER BARS

PHYSICAL DATA/ **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2483/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature Data sheet: SC2483

0

ASTM E1264 classification Type XII, Form 2, Pattern E & G

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less Weight

0.38 lb./sq. ft. (3/4" panels) 0.47 lb./sq. ft. (1" panels)

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-3.3 (3/4" panels) R-4.4 (1" panels)

Maximum backloading See USG 30-Year Limited Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF.

DXFF, DXI, DXL, DXT, DXW, FINELINE, HALCYON, IDENTITEE, LOGIX, MARS,

IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and

colors, and related marks are trademarks of USG Corporation or its affiliates.

Metric sizes available

Contact sales for minimum quantities and lead times.

Treating field-cut reveal edges
All field-cut edges "exposed to view" should be colored to match the factory finish. USG Halcyon™
Touch-up Edge Paint is recommended when perimeter field cuts expose the yellow substrate.

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com
- Custom-size panels available. Please contact your USG sales representative for details. Stabilizer bar recommended if opening >/= 48" and required if opening >/= 60". For more information about stabilizer bars, please refer to Plank and Large Panel Stabilizer Bars Application Guide (IC592).
- For details, see USG 30-Year Limited Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).


Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before



Manufactured by USG Interiors, LLC 550 West Adams Street Chicago, IL 60661

USG HALCYON™ CANOPIES

CLIMAPLUS™ PERFORMANCE

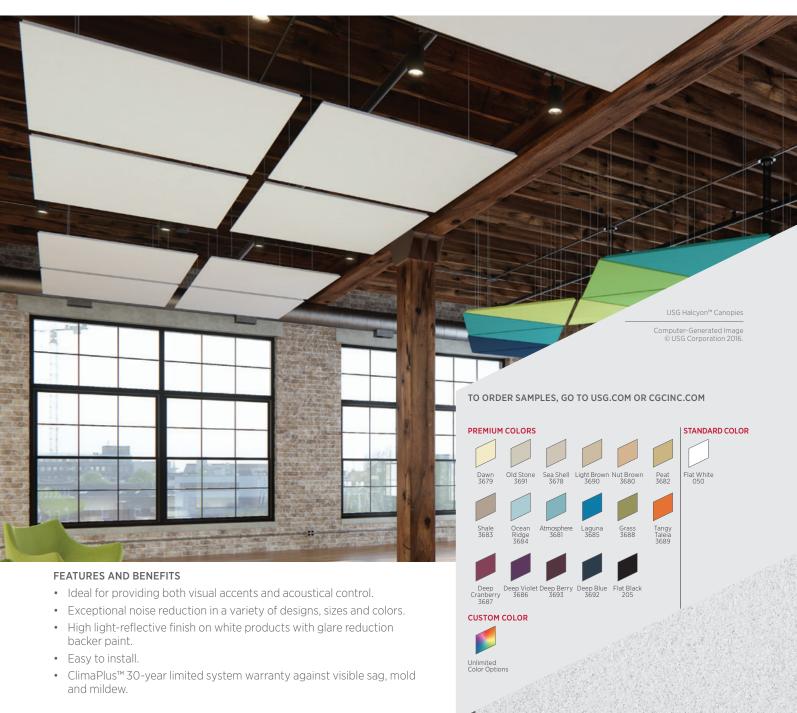

APPLICATIONS

• Open-plenum areas

- Convention halls and concourses
- Reception and lobby areas
- Libraries
- Restaurants
- Retail
- Hospitality

SUBSTRATE

Fiberglass



USG HALCYON CANOPIES

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative


FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG,4YOU (874-4968)





SIZES AND **CONFIGURATIONS**

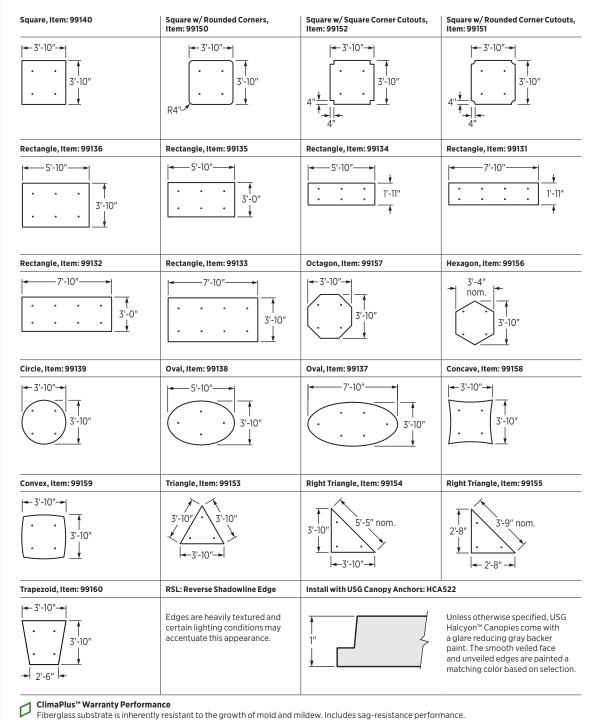

PHYSICAL DATA **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2797/11-16

its affiliates. All rights reserved. Printed in U.S.A.

usgdesignstudio.com or Data sheet: SC2797

ASTM E1264 classification

Type XII, Form 2, Pattern E & G

Weight 0.47 lb./sq. ft. (1" panels)

Recycled Content: 40%

Manufactured by

USG Interiors, LLC

Chicago, IL 60661

550 West Adams Street

ASTM E84 and CAN/ULC S102

surface-burning characteristics Class A Flame spread: 25 or less

Smoke developed: 50 or less

cgcdesignstudio.com

Thermal resistance R-4.4 (1" panels)

Maintenance

Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

The trademarks USG, CGC, CLIMAPLUS, HALCYON, IT'S

YOUR WORLD. BUILD IT., the USG/CGC logo, the design

elements and colors, and related marks are trademarks

of USG Corporation or its affiliates.

Seismic applications Refer to Seismic Technical Guide, Specialty Decorative Ceilings (SC2494) for more information on architectural components.

- USG Halcyon™ Canopies are flat, however will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 1/8". However local environmental conditions may increase this variance.
- Care should be taken to minimize movement due to air flow within a space.
- USG Halcyon™ Canopy Anchors (HCA522) are included with each panel. Dots represent anchor points.
- Hanger wire (12 ga) or clear acrylic rod (max 1/8" diameter) to be used as horizontal spacer when
- Panels must be ordered in multiples of two.
- Custom size, shape and color options are available. Consult your USG sales associate.
- Acoustical Performance: 1.20 Sabins per square foot (white).
- Do not backload.





USG MARS™ ACOUSTICAL PANELS

CLIMAPI US™ PERFORMANCE WITH NEW CLEAN ROOM OPTIONS



USG MARS™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH NEW CLEAN ROOM OPTIONS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com





USG MARS™ PANELS









(UL) UL Classified

				<u> </u>								
Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Par Cos
		Ø		NRC	CAC			Ħ	3		HRC	F
SQ	2'x2'x3/4"	Class A	86185	0.75	35	0.90	White	A,B,C	Low		69%	\$\$
	2'x2'x3/4"	Class A	86185HRC	0.70	35	0.90	White	A,B,C	Low		81%	\$\$
	2'x4'x3/4"	Class A	88185	0.75	35	0.90	White	A,B	Low		69%	\$\$
	2'x4'x3/4"	Class A	88185HRC	0.70	35	0.90	White	A,B	Low		81%	\$\$
LT	2'x2'x3/4"	Class A	86785	0.75	35	0.90	White	D	Low		69%	\$\$
	2'x2'x3/4"	Class A	86785HRC	0.70	35	0.90	White	D	Low		81%	\$\$
	2'x4'x3/4"	Class A	88785	0.75	35	0.90	White	D	Low		69%	\$\$
	2'x4'x3/4"	Class A	88785HRC	0.70	35	0.90	White	D	Low		81%	\$\$
	30"x30"x3/4"	Class A	86875	0.75	35	0.90	White	D	Low		69%	\$\$
_B	2'x2'x3/4"	Class A	86985	0.75	35	0.90	White	E,F,G,H	Low		69%	\$\$
	2'x2'x3/4"	Class A	86985HRC	0.70	35	0.90	White	E,F,G,H	Low		81%	\$\$
	2'x4'x3/4"	Class A	88985	0.75	35	0.90	White	E,F,G,H	Low		69%	\$5
	2'x4'x3/4"	Class A	88985HRC	0.70	35	0.90	White	E,F,G,H	Low		81%	\$\$
	30"x30"x3/4"	Class A	86830	0.75	35	0.90	White	E,F,G,H	Low		69%	\$\$
Q	2'x2'x3/4"	Class A	86185CR ⁵	0.75	35	0.90	White	1	Low		69%	\$\$
	2'x4'x3/4"	Class A	88185CR5	0.75	35	0.90	White	1	Low		69%	\$\$

USG MARS™ CLEAN ROOM PANELS ISO 5 (CLASS 100)

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

USG

DXW

ClimaPlus™ Warranty Performance3 Contains a broad-spectrum antimicrobial

USG Centricitee

DXT"

additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG Identitee®

DXI

GRID PROFILE OPTIONS

PHYSICAL DATA/ **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1966/rev. 3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-2.2

Type IV, Form 1 and 2, Pattern E, G ASTM E84 and CAN/ULC S102 surface-burning characteristics

Flame spread: 25 or less Smoke developed: 50 or less

ASTM E1264 classification

Weight 1.03 lb./sq. ft. Manufactured by

Product literature

USG

DX®/DXL™

Maximum backloading

USG Centricitee

DXT"

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

USG

DX*/DXL™

Maintenance

Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

Metric sizes available

USG Fineline

DXF

Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. LR values are shown as averages.
 3. Panel face and back surfaces treated with a proprietary, broad-spectrum.

USG Fineline®

1/8 DXFF1

- antimicrobial additive that inhibits and retards the growth of mold, mildew and bacteria. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451). 4. Maximum 2'x2' with SQ edge panels.
- 5. Clean Room ISO 5 (Class 100).

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before



USG Clean

Room™ CE™

USG MARS™ HEALTHCARE ACOUSTICAL PANELS CLIMAPLUS™ PERFORMANCE



Laboratories

rooms

USG MARS™ HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE — NEW HIGH-NRC AND AIRCARE™ **COATING OPTIONS**

BALANCED ACOUSTICS

YEAR LIMITED SYSTEM WARRANTY

No Visible Sag

30



AIRCARE™

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

ORDER SAMPLES/LITERATURE

CGC: contact Sales Representative

USG: samplit@usg.com fax: 888 874-2348 | usg.com



USG MARS™ HEALTHCARE HIGH-NRC PANELS 85/35

Plant-Based Binder

USG MARS™ HEALTHCARE HIGH-NRC PANELS 80/35

Plant-Based Binder

USG MARS™ HEALTHCARE PANELS 75/35

USG MARS™ HEALTHCARE **HIGH-CAC PANELS** 60/40

				ℚ UL	Classifie	d						
Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		ø	B	0	HRC	\$
SQ	2'x2'x7/8"	Class A	86256	0.85	35	0.90	White	A,B,C,D,E,F	Low		66%	\$\$
	2'x4'x7/8"	Class A	88256	0.85	35	0.90	White	A,B,D,E,F	Low		66%	\$\$
SLT	2'x2'x7/8"	Class A	86257	0.85	35	0.90	White	G,H,I,J	Low		66%	\$\$
FLB	2'x2'x7/8"	Class A	86258	0.85	35	0.90	White	K,L,M,N	Low		66%	\$\$
SQ	2'x2'x7/8"	Class A	86152	0.80	35	0.90	White	A,B,C,D,E,F	Low		69%	\$\$
	2'x4'x7/8"	Class A	86340	0.80	35	0.90	White	A,B,D,E,F	Low		69%	\$\$
SLT	2'x2'x7/8"	Class A	86470	0.80	35	0.90	White	G,H,I,J	Low		69%	\$\$
FLB	2'x2'x7/8"	Class A	86750	0.80	35	0.90	White	K,L,M,N	Low		69%	\$\$
SQ	2'x2'x3/4"	Class A	86169	0.75	35	0.90	White	A,B,C,D,E,F	Low		69%	\$\$
	2'x4'x3/4"	Class A	88189	0.75	35	0.90	White	A,B,D,E,F	Low		69%	\$\$
SLT	2'x2'x3/4"	Class A	86684	0.75	35	0.90	White	G,H,I,J	Low		69%	\$\$
	2'x4'x3/4"	Class A	88683	0.75	35	0.90	White	G,H,I,J	Low		69%	\$\$
FLB	2'x2'x3/4"	Class A	86984	0.75	35	0.90	White	K,L,M,N	Low		69%	\$\$
	2'x4'x3/4"	Class A	88983	0.75	35	0.90	White	K,L,M,N	Low		69%	\$\$
SQ	2'x2'x3/4"	Class A	86270	0.60	40	0.90	White	A,B,C,D,E,F	Low		71%	\$\$
	2'x4'x3/4"	Class A	88271	0.60	40	0.90	White	A,B,D,E,F	Low		71%	\$\$
SLT	2'x2'x3/4"	Class A	86272	0.60	40	0.90	White	G,H,I,J	Low		71%	\$\$
FLB	2'x2'x3/4"	Class A	86273	0.60	40	0.90	White	K,L,M,N	Low		71%	\$\$
	2'x4'x3/4"	Class A	88273	0.60	40	0.90	White	K,L,M,N	Low		71%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\, and\, at\, product guide. ulen vironment.com.$

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the $\,$ panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is $based \, on \, product \, composition \, of \, postconsumer \,$ and preconsumer (postindustrial) recycled content per FTC guidelines.



USG MARS HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE — NEW HIGH-NRC AND AIRCARE™ **COATING OPTIONS**



FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



USG MARS™ HEALTHCARE WITH AIRCARE™ COATING 75/35

YEAR LIMITED SYSTEM WARRANTY 30 No Visible Sag







UL Classified





Edge	Panel Size	Fire Rating	Item No.4	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	Ø	Ø	HRC	\$
SQ	2'x2'x3/4"	Class A	86169AIR	0.75	35	0.90	White	A,B,C,D,E,F	Low		68%	\$\$
	2'x4'x3/4"	Class A	88189AIR	0.75	35	0.90	White	A,B,D,E,F	Low		68%	\$\$
SLT	2'x2'x3/4"	Class A	86684AIR	0.75	35	0.90	White	G,H,I,J	Low		68%	\$\$
	2'x4'x3/4"	Class A	88683AIR	0.75	35	0.90	White	G,H,I,J	Low		68%	\$\$
FLB	2'x2'x3/4"	Class A	86984AIR	0.75	35	0.90	White	K,L,M,N	Low		68%	\$\$
	2'x4'x3/4"	Class A	88983AIR	0.75	35	0.90	White	K,L,M,N	Low		68%	\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide. ulen vironment.com.$

ClimaPlus™ Warranty Performance³

 $Contains\,a\,broad-spectrum\,antimic robial$ additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG MARS HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE - NEW HIGH-NRC AND AIRCARE™ **COATING OPTIONS**









AIRCARE™




FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL

usgdesignstudio.com cgcdesignstudio.com

GRID PROFILE OPTIONS

PRODUCT CERTIFIED FOR LOW CHEMICAL

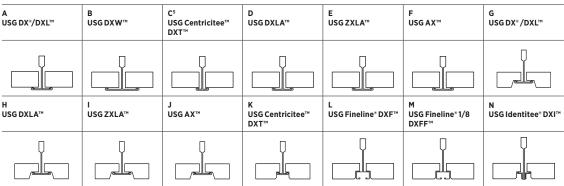

PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC2585

ASTM E1264 classification Type IV, Form 1 and 2, Pattern E, G

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A Flame spread: 25 or less Smoke developed: 50 or less

Weight 1.03-1.24 lb./sq. ft.

Thermal resistance

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

usgdesignstudio.com or cgcdesignstudio.com

ASTM D2486 scrubbability test

ASTM D4828 washability test

Water repellency Cobb method (Tappi T441 om-84) Water Drop Test

**Maintenance

To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth. Acceptable colorless disinfectants include: - Hydrogen peroxide

- Isopropyl alcohol
- Quaternary ammonium Sodium hypochlorite

Do not mix cleaners. Follow cleaner manufacturer's recommendations

Metric sizes available

Contact sales for minimum quantities and lead times.

 For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com

2. LR values are shown as averages.

ORDER SAMPLES/LITERATURE

CGC: contact Sales Representative

USG: samplit@usg.com fax: 888 874-2348 | usg.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)


- 3. Panel face and back surfaces treated with a proprietary broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold and mildew. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. AirCare™ coating removes formaldehyde by an average of 75% over 10 years at an average indoor concentration of
- 5. Maximum 2'x2' with SQ edge panels.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

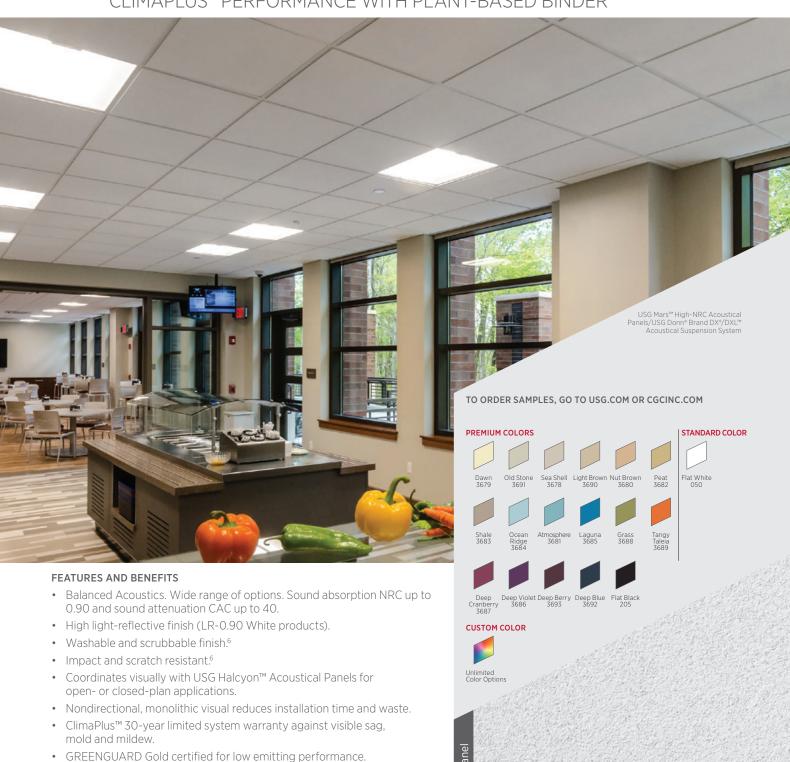

APPLICATIONS

- Offices
- Healthcare
- Classrooms and corridors
- · Department stores and retail
- Restaurants and hospitality

· Wet-formed mineral fiber

USG MARS™ **HIGH-NRC PANELS**

USG MARS™ **HIGH-NRC PANELS**

Plant-Based Binder

85/35

Plant-Based Binder

90/30

USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER













FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES

ORDER SAMPLES/LITERATURE

800 USG.4YOU (874-4968)

(Ų) UL Classified⁵

				Classif	ieu							
Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	B	Ø	HRC	\$
SQ	2'x2'x1"	Class A	88137	0.90	30	0.90	White, color ⁷	A,B,C	Low		66%	\$\$\$
	2'x4'x1"	Class A	89137	0.90	30	0.90	White	A,B	Low		66%	\$\$\$
	30"x30"x1"	Class A	80213	0.90	30	0.90	White	A,B	Low		66%	\$\$\$
	30"x60"x1"	Class A	89143	0.90	30	0.90	White	A,B	Low		66%	\$\$\$
SLT	2'x2'x1"	Class A	88138	0.90	30	0.90	White, color ⁷	D	Low		66%	\$\$\$
	2'x4'x1"	Class A	89138	0.90	30	0.90	White	D	Low		66%	\$\$\$
	30"x30"x1"	Class A	80239	0.90	30	0.90	White	D	Low		66%	\$\$\$
	30"x60"x1"	Class A	89144	0.90	30	0.90	White	D	Low		66%	\$\$\$
FLB	2'x2'x1"	Class A	88139	0.90	30	0.90	White, color ⁷	E,F,G,H	Low		66%	\$\$\$
	2'x4'x1"	Class A	89139	0.90	30	0.90	White	E,F,G,H	Low		66%	\$\$\$
	30"x30"x1"	Class A	80265	0.90	30	0.90	White	E,F,G,H	Low		66%	\$\$\$
	30"x60"x1"	Class A	89145	0.90	30	0.90	White	E,F,G,H	Low		66%	\$\$\$
SQ	2'x2'x7/8"	Class A	88134	0.85	35	0.90	White, color ⁷	A,B,C	Low		66%	\$\$\$
	2'x4'x7/8"	Class A	89134	0.85	35	0.90	White	A,B	Low		66%	\$\$\$
	30"x30"x7/8"	Class A	80113	0.85	35	0.90	White	A,B	Low		66%	\$\$\$
	30"x60"x7/8"	Class A	89140	0.85	35	0.90	White	A,B	Low		66%	\$\$\$
SLT	2'x2'x7/8"	Class A	88135	0.85	35	0.90	White, color ⁷	D	Low		66%	\$\$\$
	2'x4'x7/8"	Class A	89135	0.85	35	0.90	White	D	Low		66%	\$\$\$
	30"x30"x7/8"	Class A	80139	0.85	35	0.90	White	D	Low		66%	\$\$\$
	30"x60"x7/8"	Class A	89141	0.85	30	0.90	White	D	Low		66%	\$\$\$
FLB	2'x2'x7/8"	Class A	88136	0.85	35	0.90	White, color ⁷	E,F,G,H	Low		66%	\$\$\$
	2'x4'x7/8"	Class A	89136	0.85	35	0.90	White	E,F,G,H	Low		66%	\$\$\$
	30"x30"x7/8"	Class A	80165	0.85	35	0.90	White	E,F,G,H	Low		66%	\$\$\$
	30"x60"x7/8"	Class A	89142	0.85	35	0.90	White	E,F,G,H	Low		66%	\$\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER











FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

ORDER SAMPLES/LITERATURE

CGC: contact Sales Representative

USG: samplit@usg.com fax: 888 874-2348 | usg.com



USG MARS™ **HIGH-NRC PANELS** 80/35

Plant-Based Binder

USG MARS™ **HIGH-CAC PANELS** 60/40

			U UL Classif	ied	_						
Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Pane Cost
			NRC	CAC	Ø		Ø	B	Ø	HRC	\$
2'x2'x7/8"	Class A	86100	0.80	35	0.90	White	A,B,C	Low		69%	\$\$
2'x4'x7/8"	Class A	86300	0.80	35	0.90	White	A,B	Low		69%	\$\$
30"x30"x7/8"	Class A	86426	0.80	35	0.90	White	A,B	Low		69%	\$\$
30"x60"x7/8"	Class A	86429	0.80	35	0.90	White	A,B	Low		69%	\$\$
2'x2'x7/8"	Class A	87200	0.80	35	0.90	White	D	Low		69%	\$\$
2'x4'x7/8"	Class A	89600	0.80	35	0.90	White	D	Low		69%	\$\$
30"x30"x7/8"	Class A	86500	0.80	35	0.90	White	D	Low		69%	\$\$
30"x60"x7/8"	Class A	86466	0.80	35	0.90	White	D	Low		69%	\$\$
2'x2'x7/8"	Class A	87100	0.80	35	0.90	White	E,F,G,H	Low		69%	\$\$
2'x4'x7/8"	Class A	89500	0.80	35	0.90	White	E,F,G,H	Low		69%	\$\$
30"x30"x7/8"	Class A	86400	0.80	35	0.90	White	E,F,G,H	Low		69%	\$\$
30"x60"x7/8"	Class A	86497	0.80	35	0.90	White	E,F,G,H	Low		69%	\$\$
2'x2'x3/4"	Class A	86186	0.60	40	0.90	White,	A,B,C	Low		71%	\$\$\$
2'x4'x3/4"	Class A	87187	0.60	40	0.90	White	A,B	Low		71%	\$\$\$
2'x2'x3/4"	Class A	86786	0.60	40	0.90	White,	D	Low		71%	\$\$\$
2'x4'x3/4"	Class A	88786	0.60	40	0.90	White	D	Low		71%	\$\$\$
2'x2'x3/4"	Class A	86986	0.60	40	0.90	White,	E,F,G,H	Low		71%	\$\$\$
2'x4'x3/4"	Class A	88986	0.60	40	0.90	White	E,F,G,H	Low		71%	\$\$\$
	2'x2'x7/8" 2'x4'x7/8" 30"x50"x7/8" 2'x2'x7/8" 2'x2'x7/8" 30"x50"x7/8" 30"x50"x7/8" 2'x2'x7/8" 2'x4'x7/8" 30"x50"x7/8" 2'x4'x3/4" 2'x4'x3/4" 2'x2'x3/4" 2'x2'x3/4"	2'x2'x7/8" Class A 2'x4'x7/8" Class A 30"x30"x7/8" Class A 2'x2'x7/8" Class A 2'x2'x7/8" Class A 2'x4'x7/8" Class A 30"x30"x7/8" Class A 30"x30"x7/8" Class A 2'x2'x7/8" Class A 2'x2'x7/8" Class A 2'x2'x7/8" Class A 2'x2'x7/8" Class A 2'x4'x7/8" Class A 2'x4'x7/8" Class A 2'x4'x7/8" Class A 2'x4'x3/4" Class A 2'x2'x3/4" Class A	Rating No. 2'x2'x7/8" Class A 86100 2'x4'x7/8" Class A 86300 30"x30"x7/8" Class A 86426 30"x60"x7/8" Class A 86429 2'x2'x7/8" Class A 87200 2'x4'x7/8" Class A 86500 30"x30"x7/8" Class A 86500 30"x60"x7/8" Class A 87100 2'x2'x7/8" Class A 87100 2'x4'x7/8" Class A 86400 30"x30"x7/8" Class A 86400 30"x60"x7/8" Class A 86497 2'x2'x3/4" Class A 86186 2'x4'x3/4" Class A 86786 2'x4'x3/4" Class A 86786 2'x2'x3/4" Class A 86986	Panel Size Fire Rating Item No. NRC 2'x2'x7/8" Class A 86100 0.80 2'x4'x7/8" Class A 86300 0.80 30"x30"x7/8" Class A 86426 0.80 30"x60"x7/8" Class A 86429 0.80 2'x2'x7/8" Class A 87200 0.80 30"x30"x7/8" Class A 86500 0.80 30"x60"x7/8" Class A 86466 0.80 2'x2'x7/8" Class A 87100 0.80 2'x2'x7/8" Class A 87100 0.80 30"x30"x7/8" Class A 86400 0.80 30"x30"x7/8" Class A 86497 0.80 30"x30"x7/8" Class A 86497 0.80 2'x2'x3/4" Class A 86186 0.60 2'x2'x3/4" Class A 86786 0.60 2'x2'x3/4" Class A 86786 0.60 2'x2'x3/4" Class A 86986 0.60	Panel Size Fire Rating Item No. NRC CAC Min. 2'x2'x7/8" Class A 86100 0.80 35 2'x4'x7/8" Class A 86300 0.80 35 30"x30"x7/8" Class A 86426 0.80 35 30"x60"x7/8" Class A 87200 0.80 35 2'x4'x7/8" Class A 89600 0.80 35 30"x30"x7/8" Class A 86500 0.80 35 30"x60"x7/8" Class A 86466 0.80 35 2'x2'x7/8" Class A 86466 0.80 35 2'x4'x7/8" Class A 87100 0.80 35 2'x4'x7/8" Class A 89500 0.80 35 30"x30"x7/8" Class A 86400 0.80 35 30"x30"x7/8" Class A 86490 0.80 35 2'x4'x3/4" Class A 86490 0.80 35 2'x2'x3/4" Class A 86497 0.80	Panel Size Fire Rating Item No. NRC CAC Min. LR² 2'x2'x7/8" Class A 86100 0.80 35 0.90 2'x4'x7/8" Class A 86300 0.80 35 0.90 30"x30"x7/8" Class A 86426 0.80 35 0.90 30"x60"x7/8" Class A 87200 0.80 35 0.90 2'x4'x7/8" Class A 89600 0.80 35 0.90 30"x30"x7/8" Class A 86500 0.80 35 0.90 30"x60"x7/8" Class A 86466 0.80 35 0.90 2'x2'x7/8" Class A 87100 0.80 35 0.90 2'x2'x7/8" Class A 89500 0.80 35 0.90 30"x60"x7/8" Class A 86400 0.80 35 0.90 2'x2'x3/4" Class A 86400 0.80 35 0.90 30"x60"x7/8" Class A 86497 0.80	Panel Size Fire Rating Item No. NRC CAC Min. LR² Color 2'x2'x7/8" Class A 86100 0.80 35 0.90 White 2'x4'x7/8" Class A 86300 0.80 35 0.90 White 30"x30"x7/8" Class A 86426 0.80 35 0.90 White 30"x60"x7/8" Class A 86429 0.80 35 0.90 White 2'x2'x7/8" Class A 87200 0.80 35 0.90 White 2'x4'x7/8" Class A 89600 0.80 35 0.90 White 30"x30"x7/8" Class A 86500 0.80 35 0.90 White 2'x2'x7/8" Class A 86466 0.80 35 0.90 White 2'x2'x7/8" Class A 87100 0.80 35 0.90 White 2'x4'x3/8" Class A 86400 0.80 35 0.90 White 30"x60"x7/8"	Panel Size Fire Rating Item No. NRC CMIA. LR² Color Grid Options 2*x2*x7/8" Class A 86100 0.80 35 0.90 White A,B,C 2*x4*x7/8" Class A 86300 0.80 35 0.90 White A,B,C 30"x30"x7/8" Class A 86426 0.80 35 0.90 White A,B 30"x60"x7/8" Class A 86429 0.80 35 0.90 White A,B 2"x2*x7/8" Class A 87200 0.80 35 0.90 White D 2"x4*x7/8" Class A 86500 0.80 35 0.90 White D 30"x60"x7/8" Class A 86500 0.80 35 0.90 White D 2"x2"x1/8" Class A 86466 0.80 35 0.90 White E,F,G,H 2"x2"x1/8" Class A 89500 0.80 35 0.90 White E,F,G,H	Panel Size Fire Rating Item No. NRC CAL LR² Color Grid Options VOC Emissions 2*x²*x7/8" Class A 86100 0.80 35 0.90 White A,B,C Low 2*x⁴*x7/8" Class A 86300 0.80 35 0.90 White A,B Low 30"x30"x7/8" Class A 86426 0.80 35 0.90 White A,B Low 30"x60"x7/8" Class A 86429 0.80 35 0.90 White A,B Low 2*x2*x7/8" Class A 87200 0.80 35 0.90 White D Low 30"x50"x7/8" Class A 86500 0.80 35 0.90 White D Low 2*x2*x7/8" Class A 86466 0.80 35 0.90 White E,F.G.H Low 2*x2*x7/8" Class A 87100 0.80 35 0.90 White E,F.G.H Low	Panel Size Rating New New Casc CaC CaC CaC Color Options Cemissions Anti-Mold & Anti-Mold	Panel Size Fire Rating Res. Res.

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide.ulen vironment.com.$

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



PRODUCT CERTIFIED FOR LOW CHEMICAL

GRID PROFILE OPTIONS

USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER













FOR MOST UP-TO-DATE AND LEED REPORT TOOL

usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

ORDER SAMPLES/LITERATURE

CGC: contact Sales Representative

USG: samplit@usg.com fax: 888 874-2348 | usg.com

A USG DX*/DXL™	B USG DXW™	C ⁴ USG Centricitee™ DXT™	D USG DX*/DXL™	E USG Centricitee™ DXT™	F USG Fineline* DXF™	G ⁸ USG Fineline ⁸ 1/8 DXFF™	H USG Identitee* DXI™

PHYSICAL DATA/ **FOOTNOTES**

Product literature

ASTM E1264 classification

Type IV, Form 1 and 2, Pattern E, G

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A Flame spread: 25 or less Smoke developed: 50 or less

Weight 1.05-1.26 lb./sq. ft.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance

R-2 2

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum. To clean white panels, use a clean, white cloth with water or a mild detergent and wine surface.

Metric sizes available

Contact sales for minimum quantities and lead

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. LR values are shown as averages.
 3. Panel face and back surfaces treated with a proprietary, broad-spectrum. antimicrobial additive that inhibits and retards the growth of mold, mildew and bacteria. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *Ceilings Certification of Performance* (SC2451).

 4. Maximum 2'x2' with SQ edge panels.
- 5. Acoustic values are for white only. Colored values are lower depending on specific color selected.

 6. White panels only.
- Available in Premium and Custom Colors
- 8. Not available in Premium or Custom Colors.

Notice


Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2487/rev. 3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG MARS™ PLANKS/USG MARS™ HIGH-NRC PLANKS AND LARGE SIZES

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

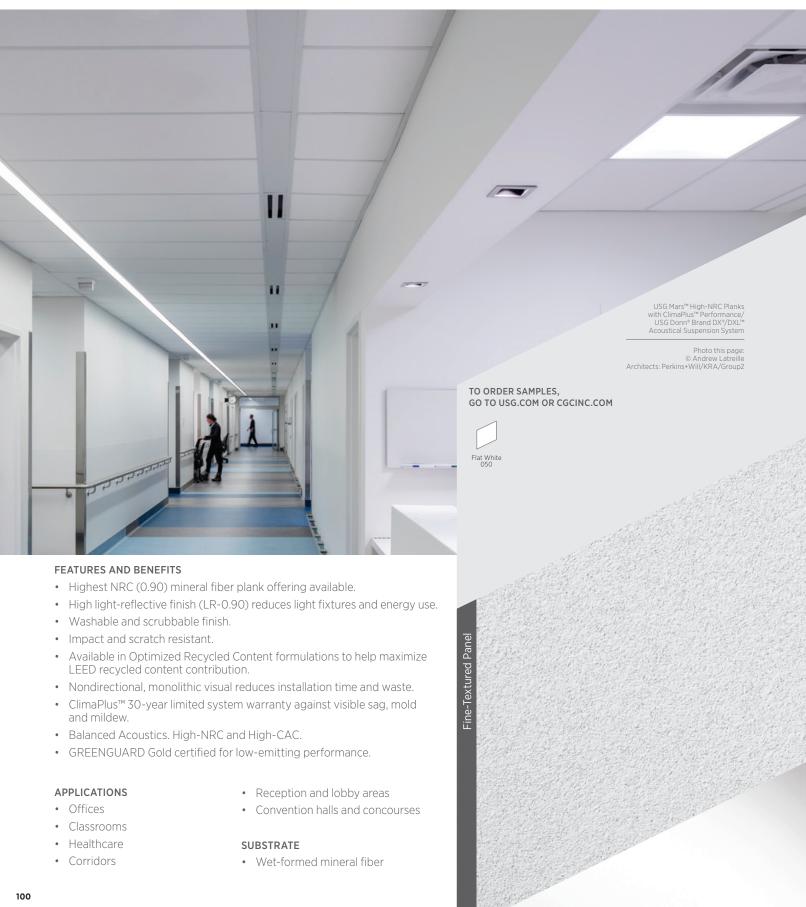

USG MARS™ **PLANKS**

USG MARS PLANKS/USG MARS HIGH-NRC PLANKS AND LARGE SIZES

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

U UL Classified

Edge	Panel Size⁴	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ø	3	O	HRC	\$
SQ	2'x5'x3/4"	Class A	86221	0.75	35	0.90	White	A,B	Low		69%	\$\$
	2'x6'x3/4"	Class A	86223	0.75	35	0.90	White	A,B	Low		69%	\$\$
SLT	2'x5'x3/4"	Class A	86161	0.75	35	0.90	White	С	Low		69%	\$\$
	2'x6'x3/4"	Class A	86166	0.75	35	0.90	White	С	Low		69%	\$\$
	2'x6'x3/4"	Class A	86166HRC	0.70	35	0.90	White	С	Low		81%	\$\$
FLB	2'x5'x3/4"	Class A	88984	0.75	35	0.90	White	D,E,F,G	Low		69%	\$\$
	2'x6'x3/4"	Class A	88996	0.75	35	0.90	White	D,E,F,G	Low		69%	\$\$
	2'x6'x3/4"	Class A	88996HRC	0.70	35	0.90	White	D,E,F,G	Low		81%	\$\$
SQ	2'x5'x1"	Class A	89673	0.90	30	0.90	White	A,B	Low		66%	\$\$
	2'x6'x1"	Class A	89674	0.90	30	0.90	White	A,B	Low		66%	\$\$
	2'x5'x7/8"	Class A	89662	0.85	35	0.90	White	A,B	Low		65%	\$\$
	2'x6'x7/8"	Class A	89663	0.85	35	0.90	White	A,B	Low		65%	\$\$
	2'x5'x7/8"	Class A	86350	0.80	35	0.90	White	A,B	Low		65%	\$\$
	2'x6'x7/8"	Class A	86360	0.80	35	0.90	White	A,B	Low		65%	\$\$

HIGH-NRC PLANKS Plant-Based Binder

USG MARS™

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide.ulen vironment.com.$

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content Classified as containing greater than 50%total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.





HIGH-NRC PLANKS CONT. Plant-Based Binder

USG MARS™

USG MARS PLANKS/USG MARS HIGH-NRC PLANKS AND LARGE SIZES

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

UL Classified

Edge	Panel Size ⁴	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		ø	[3]	Ø	HRC	\$
SLT	2'x5'x1"	Class A	89675	0.90	30	0.90	White	С	Low		66%	\$\$
	2'x6'x1"	Class A	89676	0.90	30	0.90	White	С	Low		66%	\$\$
	2'x5'x7/8"	Class A	89664	0.85	35	0.90	White	С	Low		65%	\$\$
	2'x6'x7/8"	Class A	89665	0.85	35	0.90	White	С	Low		65%	\$\$
	2'x5'x7/8"	Class A	89650	0.80	35	0.90	White	С	Low		65%	\$\$
	2'x6'x7/8"	Class A	89660	0.80	35	0.90	White	С	Low		65%	\$\$
FLB	2'x5'x1"	Class A	89677	0.90	30	0.90	White	D,E, F,G	Low		66%	\$\$
	2'x6'x1"	Class A	89678	0.90	30	0.90	White	D,E, F,G	Low		66%	\$\$
	2'x5'x7/8"	Class A	89667	0.85	35	0.90	White	D,E, F,G	Low		65%	\$\$
	2'x6'x7/8"	Class A	89668	0.85	35	0.90	White	D,E, F,G	Low		65%	\$\$
	2'x5'x7/8"	Class A	89550	0.80	35	0.90	White	D,E, F,G	Low		70%	\$\$
	2'x6'x7/8"	Class A	89670	0.80	35	0.90	White	D,E, F,G	Low		70%	\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide.ulen vironment.com.$

ClimaPlus™ Warranty Performance³

 $Contains\,a\,broad-spectrum\,antimic robial$ additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



PRODUCT CERTIFIED FOR LOW CHEMICAL

GRID PROFILE OPTIONS

USG MARS" PLANKS/USG MARS" HIGH-NRC PLANKS AND LARGE SIZES

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

TECHNICAL SERVICES

800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE CGC: contact Sales Representative

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

A USG DX*/DXL™	B USG DXW™	C USG DX*/DXL™	D USG Centricitee™ DXT™	E USG Fineline* DXF™	F USG Fineline® 1/8 DXFF™	G USG Identitee* DXI™

PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC2509

ASTM F1264 classification Type IV, Form 1 and 2, Pattern E, G

ASTM E84 and CAN/ULC S102

Flame spread: 25 or less Smoke developed: 50 or less

Weight

1.03 lb./sq ft. (3/4" panels) 1.05-1.12 lb./sq. ft. (7/8" panels) 1.26 lb./sq. ft. (1" panels)

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-2.2 (3/4" panel)

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth.

Metric sizes available
Contact sales for minimum quantities and lead times.

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. LR values are shown as averages.
- 3. Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial additive that inhibits and retards the growth of mold and mildew. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. Stabilizer bar required if opening ≥ 60". For more information about stabilizer bars, please refer to Plank and Large Panel Stabilizer Bars Application Guide (IC592).

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2509/rev. 3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved.

USG MILLENNIA®/USG MILLENNIA® HIGH-NRC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG MILLENNIA®/USG MILLENNIA® HIGH-NRC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

Panel Size

2'x2'x3/4"

2'x4'x3/4"

2'x2'x3/4"

2'x4'x3/4"

2'x2'x3/4"

2'x4'x3/4"

2'x2'x3/4"

2'x2'x3/4"

12"x12"x3/4"

2'x4'x3/4"

2'x4'x3/4"





Item No.

76505

78505

76705

78705

76907

76901

76201

76302

70003

78780

78080

Fire

Rating

0

Class A



NRC

0.70

0.70

0.70

0.70

0.70

0.70

0.75

0.75

0.60

0.70

0.70



LR²

0.85

0.85

0.85

0.85

0.85

0.85

0.85

0.85

0.85

0.85

0.85

Color

White

Grid

Options

Ø

A,B,C

A, B

D

D

E,F,G,H

FFGH

E.F.G.H

Α

D

J.K

VOC

Emissions

B

Low

Low

Iow

Low

Low

Iow

Low

Low

Low

Low

Low

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

800 USG,4YOU (874-4968)

Anti-Mold

0

& Mildew

TECHNICAL SERVICES

Recycled

Content¹

79%

79%

79%

79%

79%

79%

80%

80%

79%

79%

79%

Panel

Cost \$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$\$\$

\$\$

\$\$

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Edge

SQ

SLT

FLB

SLT

FLB

BESK

SLT⁵

ILT6

AVAILABILITY

(UL) UL Classified

CAC

Min.

35

35

35

35

35

35

30

30

40

35

35

USG MILLENNIA® PANELS

PRODUCT CERTIFIED FOR LOW CHEMICAL

USG MILLENNIA®
HIGH-NRC PANELS

USG MILLENNIA® TILE 3,4

USG MILLENNIA® ILLUSION" TWO/24 PANELS

PATTERNS

$\neg \Gamma$	

Illusion™ Two/24

The look of 2'x2' panels

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁷

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

GRID PROFILE OPTIONS

A USG DX*/DXL™	B USG DXW™	C ⁸ USG Centricitee [™] DXT [™]	D USG DX*/DXL™	E USG Centricitee™ DXT™	F USG Fineline® DXF™	G USG Fineline* 1/8 DXFF™	H USG Identitee* DXI™	I USG DX®/DXL™ Concealed	J USG Centricitee™ DXT™	K USG Identitee* DXI™

PHYSICAL DATA **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1824/rev. 3-17

2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature Data sheet: SC1824

ASTM E1264 classification Type III, Form 1, Pattern E, G

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A Flame spread: 25 or less Smoke developed: 50 or less

Weight 1.02-1.05 lb./sq. ft. (panels and tile)

Thermal resistance

Manufactured by

USG Interiors, LLC

Chicago, IL 60661

550 West Adams Street

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Proprietary technology

This product's unique combination of sag resistance and sound performance results from a proprietary technology.

usadesianstudio.com or cacdesianstudio.com

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF,

DXFF, DXI, DXL, DXT, DXW, FINELINE, IDENTITEE, ILLUSION, MILLENNIA

IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and

colors, and related marks are trademarks of USG Corporation or its affiliates.

Metric sizes available

Contact sales for minimum quantities and lead times.

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- . LR values are shown as averages. . Contact USG for adhesive recommendations for 12"x12" glue-up applications.
- Not UL Classified for acoustics.
- Panels have a 15/16" routing.
- Panels have a 9/16" routing.

 Panel shave a 9/16" routing.


 Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial addition that inhibits and retards the growth of mold and mildew. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of
- Performance (SC2451).

 8. Maximum 2'x2' with SQ edge panels.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before



USG OLYMPIA™ MICRO™ACOUSTICAL PANELS

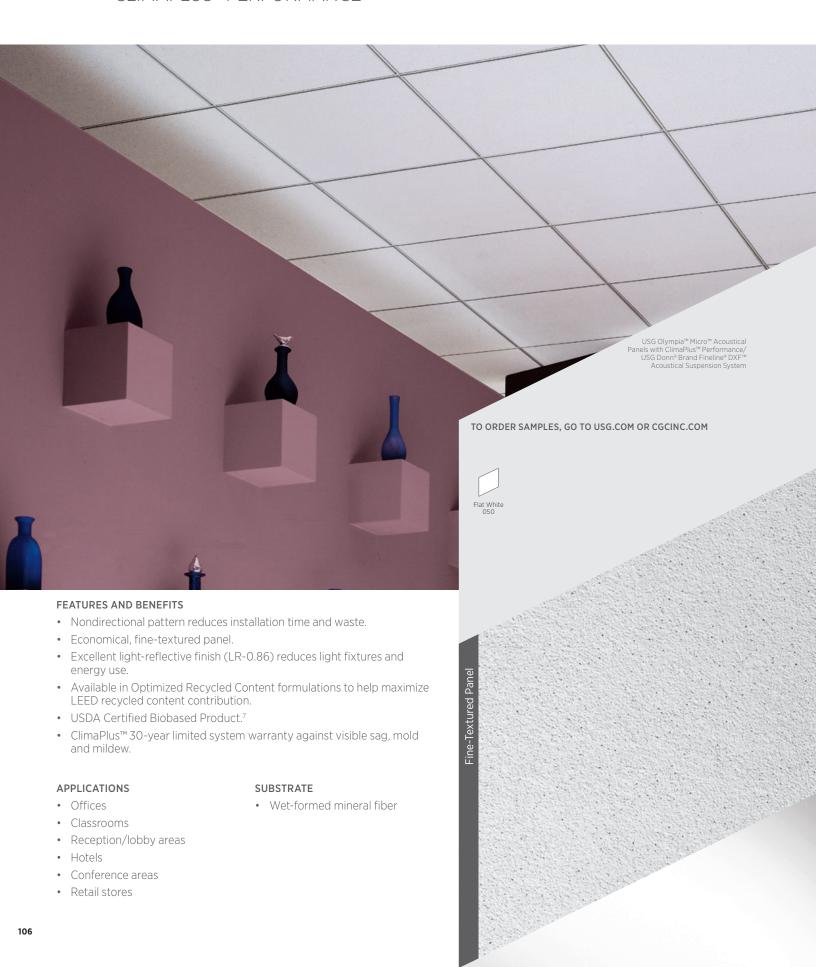

USG OLYMPIA™ MICRO™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

800 USG,4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

CGC: contact Sales Representative TECHNICAL SERVICES



USG OLYMPIA™ MICRO™ **PANELS UNPERFORATED**

USG OLYMPIA™ MICRO™ PANELS 50 NRC⁶

USG OLYMPIA™ MICRO™ PANELS 60 NRC6 YEAR LIMITED SYSTEM WARRANTY No Visible Sag





(U) UL Classified



dge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Pane Cost
				NRC	CAC	Ø		Ø	3	D	E	\$
Q	2'x2'x5/8"	Class A	4210	_	35	0.86	White	A,B,C	Low		44%	\$\$
	2'x4'x5/8"	Class A	4913	_	35	0.86	White	A,B	Low		44%	\$\$
Q	2'x2'x5/8"	Class A	4211	0.50	30	0.86	White	A,B,C	Low		44%	\$\$
	2'x4'x5/8"	Class A	4411	0.50	30	0.86	White	A,B	Low		44%	\$\$
	2'x4'x5/8"	Class A	4411HRC	0.50	30	0.86	White	A,B	Low		53%	\$\$
.T	2'x2'x5/8"	Class A	4221	0.50	35	0.86	White	D	Low		44%	\$\$
	2'x2'x5/8"	Class A	4221HRC	0.50	35	0.86	White	D	Low		53%	\$\$
	2'x4'x5/8"	Class A	4421	0.50	35	0.86	White	D	Low		44%	\$\$
	2'x4'x5/8"	Class A	4421HRC	0.50	35	0.86	White	D	Low		53%	\$\$
В	2'x2'x5/8"	Class A	4231	0.50	35	0.86	White	E,F,G,H	Low		44%	\$\$
	2'x2'x5/8"	Class A	4231HRC	0.50	35	0.86	White	E,F,G,H	Low		53%	\$\$
	2'x4'x5/8"	Class A	4431	0.50	35	0.86	White	E,F,G,H	Low		44%	\$\$
2	2'x2'x3/4"	Class A	4750	0.60	33	0.86	White	A,B,C	Low		61%	\$\$
	2'x4'x3/4"	Class A	4751	0.60	33	0.86	White	A,B	Low		61%	\$\$
.T	2'x2'x3/4"	Class A	4752	0.60	35	0.86	White	D	Low		61%	\$\$
	2'x4'x3/4"	Class A	4753	0.60	35	0.86	White	D	Low		61%	\$\$
_B	2'x2'x3/4"	Class A	4754	0.60	35	0.86	White	E,F,G,H	Low		61%	\$\$
	2'x4'x3/4"	Class A	4755	0.60	35	0.86	White	E,F,G,H	Low		61%	\$\$
.T ⁴	2'x4'x3/4"	Class A	4742	0.50	35	0.86	White	D	Low		61%	\$\$
 T⁵	2'x4'x3/4"	Class A	4744	0.50	35	0.86	White	I,J	Low		61%	\$\$

USG OLYMPIA™ MICRO™ ILLUSION™ **TWO/24 PANELS**

PATTERNS

The look of 2'x2' panels

USG

DXT

Centricitee"

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

USG DXW™

ClimaPlus™ Warranty Performance³

USG

DXT

Centricitee™

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew, Includes sag-resistance performance.

USG

DXIT

Identitee⁶

High Recycled Content

USG Fineline

1/8 DXFF

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC quidelines.

USG

DXT

Centricitee"

GRID PROFILE OPTIONS

PHYSICAL DATA/

FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2180/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature Data sheet: SC2180

USG

DX®/DXL™

ASTM F1264 classification Type III, Form 2, Pattern CE

ASTM F84 and CAN/ULC \$102 surface-burning characteristics

Class A Flame spread: 25 or less Smoke developed: 50 or less

Online tools

usgdesignstudio.com or cgcdesignstudio.com

(SC2102)

Weight 0.78-1.03 lb./sq. ft.

USG

DX®/DXL™

Thermal resistance R-1.4 (5/8" panels) R-1.7 (3/4" panels)

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications

Maintenance Can be cleaned easily with a soft brush or vacuum.

- **Notes**1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com
- 2. LR values are shown as averages.
- 3. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. Panels have 15/16" routing.
- 5. Panels have 9/16" routing.

- 6. Mixing 0.50 and 0.60 NRC panels in the same ceiling plane is not recommended.
- This product has achieved both BioPreferred initiatives: Federal
 Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.



The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF. DXI, DXL, DXT, DXW, FINELINE, IDENTITEE, ILLUSION, MICRO, OLYMPIA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG Fineline

DXF"



USG

DXI

Identitee*

USG ORION™ ACOUSTICAL PANELS



USG ORION ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

Panel Size

2'x2'x1/2"

2'x4'x1/2"

2'x2'x5/8"

2'x4'x5/8"

2'x2'x5/8"

2'x4'x5/8"

2'x2'x5/8"

2'x4'x5/8"

2'x2'x5/8"

2'x4'x5/8"

2'x2'x5/8"

2'x4'x5/8"

2'x2'x5/8"

2'x4'x5/8"

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Recycled Content¹

Panel

Cost

\$

\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

USG Identitee®

\$

Total RC

67%

67%

65%

65%

65%

65%

65%

65%

67%

67%

67%

67%

67%

67%

TECHNICAL SERVICES 800 USG,4YOU (874-4968)

Anti-Mold

0

& Mildew

CGC: contact Sales Representative





Edge

SQ

SQ

SLT

FLB

SQ

SLT

FLB



Fire

Rating

0

Class A

(UL) UL Classified

CAC

CAC

23

23

24

24

24

24

24

24

24

24

24

24

24

24

LR²

Ø

0.87

0.87

0.87

0.87

0.87

0.87

0.87

0.87

0.87

0.87

0.87

0.87

0.87

0.87

Color

White

Grid

Options

ø

A,B,C

A,B

A,B,C

A,B

D

D

E,F,G,H

E.F.G.H

A,B,C

A,B

D

D

E,F,G,H

E,F,G,H

USG Fineline®

DXF™

VOC

Low

Emissions

B

NRC

0.60

0.60

0.75

0.75

0.75

0.75

0.75

0.75

0.85

0.85

0.85

0.85

0.85

0.85

Item No.

62156

62157

62150

62151

62152

62153

62154

62155

62162

62163

62164

62165

62166

62167

USG ORION™ 60

USG ORION™ 75

USG ORION™ 85

Low Emissions

1 Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com

USG DXW

ClimaPlus™ Warranty Performance3

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

USG Centricitee™

High Recycled Content HRC

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC quidelines.

GRID PROFILE OPTIONS

PHYSICAL DATA

FOOTNOTES

Product literat	ure

USG DX*/DXL™

Data sheet: SC2648

ASTM E1264 classification Mineral Fiber: Type IV, Form 1 and 2, Pattern E.G

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

Weight 0.71 lb./sq. ft. 1/2" Mineral Fiber 0.64 lb./sq. ft. 5/8" Mineral Fiber

Online tools

usadesianstudio.com or cacdesianstudio.com

Thermal resistance

USG Centricitee"

DXT™

R-1.8

Maximum backloading See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

USG DX*/

DXL™

Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe

Metric sizes available

Contact sales for minimum quantities and lead times

 For details, see LEED report tool at usgdesignstudio.com or cacdesianstudio.com.

USG Fineline®

1/8 DXFF™

- 2. LR values are shown as averages.
- 3. Panel face and back surfaces treated with a proprietary, broad-spectrum $\,$ antimicrobial additive that inhibits and retards the growth of mold, mildew and bacteria. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. Maximum 2'x2' with SQ edge panels

Notice


The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2648/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF DXFF, DXI, DXL, DXT, DXW, FINELINE, IDENTITEE, ORION, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

USG PEBBLED™ ACOUSTICAL PANELS

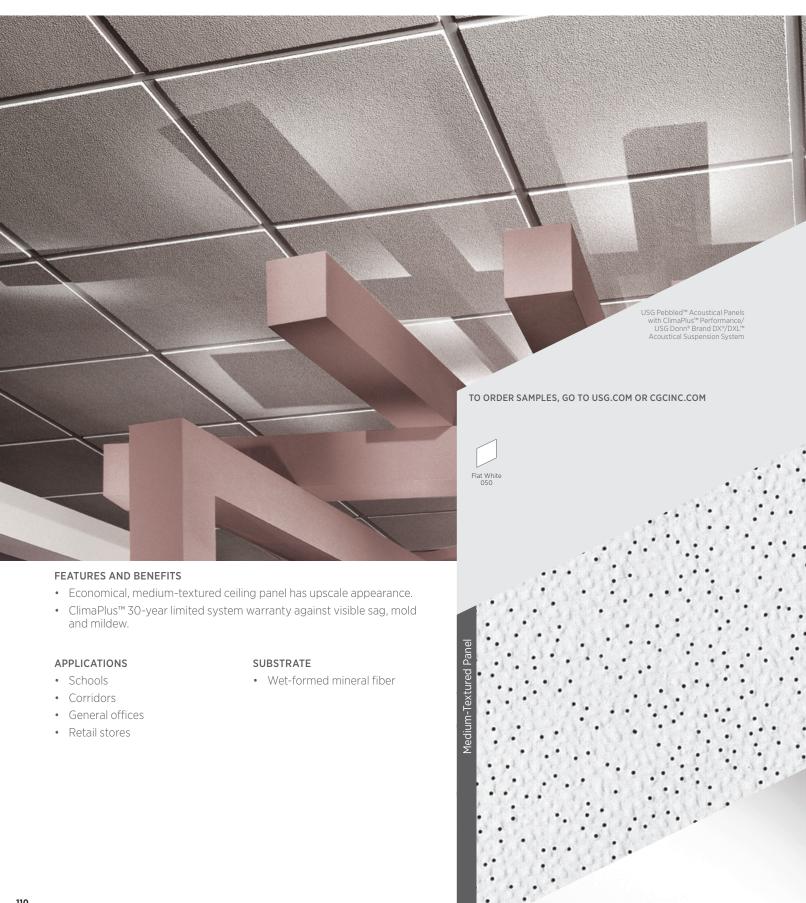

USG PEBBLED™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL

usgdesignstudio.com cgcdesignstudio.com



USG PEBBLED™ PANELS



(UL) UI	Classified
---------	------------

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		Ħ	Ø	Ø	Ø	\$
SQ	2'x2'x5/8"	Class A	4801	0.55	35	0.86	White	A,B,C	Low		44%	\$\$
	2'x4'x5/8"	Class A	4800	0.55	35	0.86	White	A,B	Low		44%	\$\$
SLT	2'x2'x5/8"	Class A	4805	0.55	35	0.86	White	D	Low		44%	\$\$
FLB	2'x2'x5/8"	Class A	4867	0.55	35	0.86	White	E,F,G,H	Low		44%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method vi.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

USG Centricitee

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

USG Fineline®

1/8 DXFF™

USG Identitee*

DXI™

GRID PROFILE OPTIONS



USG DX*/DXL™

PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC1836

USG DX*/DXL™

ASTM E1264 classification

Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

Weight 0.70-0.79 lb./sq. ft.

Online tools

USG DXW™

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-1.4

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or

Metric sizes available

Contact sales for minimum quantities and lead times.

1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

USG Fineline

DXF™

2. LR values are shown as averages.

USG Centricitee


- 3. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. Maximum 2'x2' with SQ edge panels.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1836/rev. 11-16

USG PREMIER HI-LITE™ ACOUSTICAL PANELS

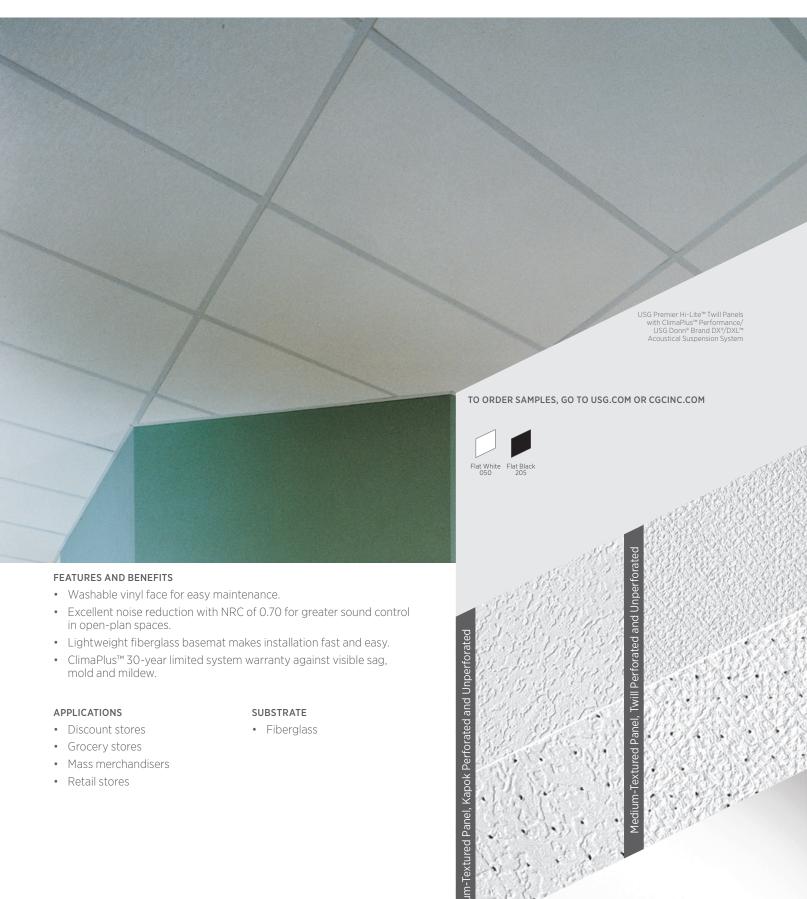

USG PREMIER HI-LITE ACOUSTICAL PANELS

(UL) UL Classified

CAC Min.

CAC

20

20

20

20

20

20

20

20

LR²

Ø

0.76

0.76

0.76

0.76

0.76

0.76

0.76

0.76

Color4

White

White

White

White

Black

Black

Black

Black

White and

White and

White and

White and

NRC

0.70

0.50

0.70

0.50

0.70

0.50

0.70

0.50

Item No.

7050G

7052G

7051G

7053G

7054G

7056G

7055G

7057G

CLIMAPLUS™ PERFORMANCE

Panel Size

2'x2'x5/8"

Perforated 2'x2'x5/8"

Unperforated 2'x4'x5/8"

Perforated 2'x4'x5/8"

Unperforated

2'x2'x5/8"

Perforated

2'x2'x5/8"

2'x4'x5/8"

Perforated

2'x4'x5/8"

Unperforated

Unperforated

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

Grid

Options

∄

A, B, C, D

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Recycled

Content¹

64%

64%

64%

64%

64%

64%

64%

64%

Panel

Cost

\$

\$

\$

\$

\$

\$

\$

\$

\$

TECHNICAL SERVICES 800 USG,4YOU (874-4968)

Anti-Mold

Resistance

& Mildew/Sag

0

YEAR LIMITED SYSTEM WARRANTY 30 No Visible Sag

Edge

SQ

SQ



Fire

Rating

0

Class A

USG PREMIER HI-LITE' TWILL PANEL:	

USG PREMIER HI-LITE™ **KAPOK PANELS**

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG DXW™



USG AX™

to the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

PHYSICAL DATA/

FOOTNOTES



Product literature

A USG DX*/DXL™

Data sheet: SC1838

ASTM E1264 classification
Type XII, Form 1, Pattern CE (Perforated), Pattern F (Unperforated)

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A Flame spread: 25 or less

Smoke developed: 50 or less

Online tools usgdesignstudio.com or cgcdesignstudio.com

Weight 0.20 lb./sq. ft.

Thermal resistance

Maximum backloading See *USG 30-Year Limited System Warranty* Commercial Applications (SC2102).

Can be cleaned easily with a damp sponge.

Metric sizes available

Contact sales for minimum quantities and lead times.

USG ZXLAT

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com
- 2. LR values are shown as averages.
- 3. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. See Colors selector for more information.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document

SC1838/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG PREMIER NUBBY™ ACOUSTICAL PANELS



USG PREMIER NUBBY™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

TECHNICAL INFORMATION AND LEED REPORT TOOL

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE usgdesignstudio.com cgcdesignstudio.com

YEAR LIMITED SYSTEM WARRANTY No Visible Sag Mold/Mildew Protection

				⊕ urc	lassified						
Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	Ø	3	\$
SQ	2'x2'x3/4"	Class A	7000G	0.85	_	0.87	White	A,B,C		30%	\$\$\$
	2'x2'x1"	Class A	7002G	0.90	_	0.87	White	A,B,C		33%	\$\$\$
	2'x2'x1" Foil-Back	Class A	7012G	0.90	25	0.87	White	A,B,C		33%	\$\$\$
	2'x4'x1"	Class A	7003G	0.90	_	0.87	White	A,B		33%	\$\$\$
	2'x4'x1" Foil-Back	Class A	7013G	0.90	25	0.87	White	A,B	D	33%	\$\$\$

GRID PROFILE OPTIONS

USG PREMIER NUBBY™

PANELS

PHYSICAL DATA/ **FOOTNOTES**

Product literature

USG DX*/DXL™

ASTM E1264 classification Type XII, Form 2, Pattern E

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

ClimaPlus™ Warranty Performance³

Flame spread: 25 or less Smoke developed: 50 or less

Weight 0.29-0.36 lb./sq. ft.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

B USG DXW™

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

AC information 170 for item #7003G. 190 for item #7013G

Thermal resistance R-3.3 (3/4" panels) R-4.4 (1" panels)

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Metric sizes available

Contact sales for minimum quantities and lead times.

For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

USG Centricitee™ DXT™

2. LR values are shown as averages.

3. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).


4. Maximum 2'x2' with SQ edge panels.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1839/rev. 11-16

USG RADAR™ BASIC ACOUSTICAL PANELS

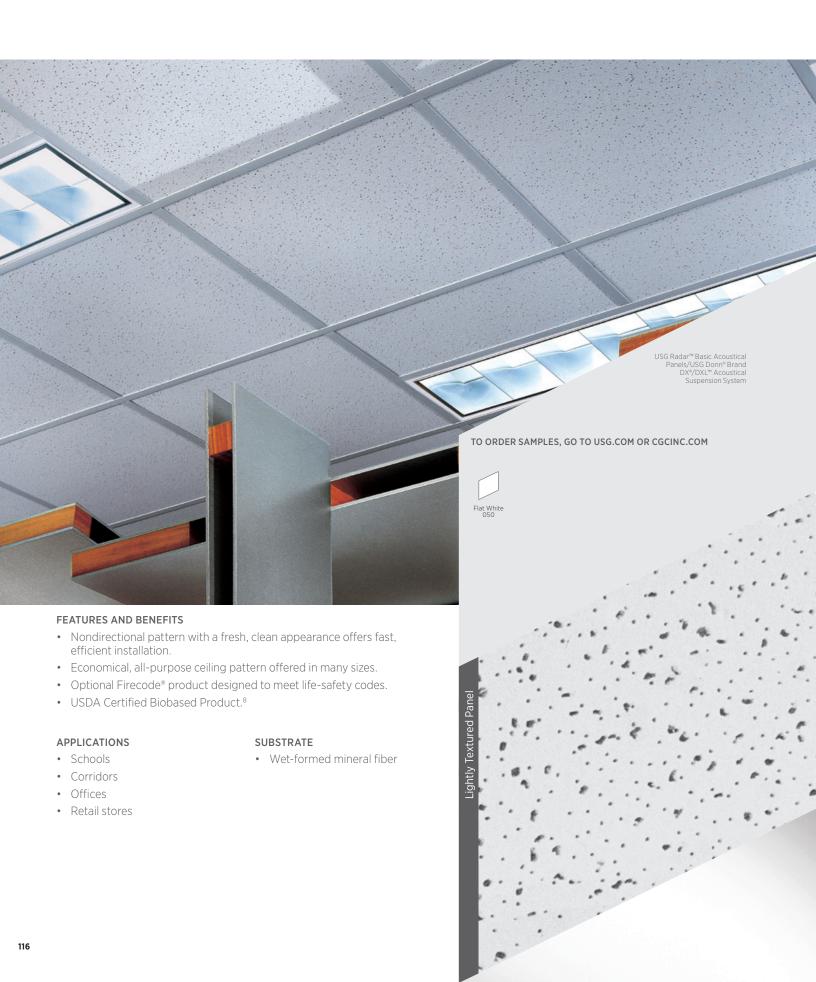

USG RADAR BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG,4YOU (874-4968)



USG RADAR™ **BASIC PANEL**







Edge	Panel Size Imperial Metric (mm)	Fire Rating ²	Item No. Imperial Metric (mm)	NRC	CAC Min.	LR ³	Color ⁶	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost
		Ø		NRC	CAC	Ø		ø	1	3	\$
SQ	2'x2'x5/8" 600x600x15	Class A	2110 ME2110	0.55	33	0.83	White	A,B	Low	25%	\$
	2'x2'x5/8"		2115	0.55	35	0.83	White	А	Low	48-51%	\$
	2'x4'x5/8" 600x1200x15	Class A	2310 ME2310	0.55	35	0.83	White	A,B	Low	25%	\$
	2'x4'x5/8"		2315	0.55	35	0.83	White	А	Low	48-51%	\$
	2'x5'x5/8"	Class A	2619	0.55	35	0.83	White	A,B	Low	25%	\$
	20"x60"x5/8" 500x1500x15	Class A	2617 ME2617	0.55	35	0.83	White	A,B	Low	25%	\$
	30"x60"x3/4"	Class A	2618	0.60	35	0.83	White	A,B	Low	26%	\$
SLT	2'x2'x5/8" 600x600x15	Class A	2120 ME2120	0.55	33	0.83	White	С	Low	25%	\$
	2'x2'x5/8"		2125	0.55	35	0.83	White	С	Low	51-59%7	\$
	2'x4'x5/8"	Class A	2320	0.55	35	0.83	White	С	Low	25%	\$
	20"x60"x5/8"	Class A	2627	0.55	35	0.83	White	С	Low	25%	\$
FLB	2'x2'x5/8"	Class A	2130	0.55	33	0.83	White	D,E,F,G	Low	25%	\$
BESK	12"x12"x5/8"	Class A	2990	0.50⁵	405	0.83	White	Н	Low	44%	\$\$\$
SLT	2'x4'x3/4"	Class A	2742	0.55	35	0.83	White	С	Low	25-26%	\$\$

(UL) UL Classified

USG RADAR™ BASIC TILE4,5

USG RADAR™ ILLUSION **BASIC TWO/24 PANEL**

PATTERNS

Illusion™ Two/24




The look of 2'x2' panels

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

High Recycled Content



Firecode®

GRID PROFILE OPTIONS

USG DX*/DXL™	USG DXW™	USG DX*/DXL™	USG Centricitee™ DXT™	USG Fineline* DXF™	F USG Fineline® 1/8 DXFF™	USG Identitee* DXI™	USG DX*/DXL™ Concealed

PHYSICAL DATA/ **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2288/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature Data sheet: SC2288

ASTM E1264 classification Type III, Form 2, Pattern C, E

and C, E, K

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

UL Type FR-83

550 West Adams Street

Chicago, IL 60661

Weight 0.61-1.15 lb./sq. ft. Manufactured by

Online tools usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance

R-1.4 (Class A, 5/8" panels and tile) R-1.7 (Class A, 3/4" panels) R-1.4 (Class A, 15 mm panels) R-1.6 (Firecode*, 5/8" panels)

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Metric sizes available

marks are trademarks of USG Corporation or its affiliates.

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL,

DXT, DXW, FINELINE, FIRECODE, IDENTITEE, RADAR, IT'S YOUR WORLD.

BUILD IT., the USG/CGC logo, the design elements and colors, and related

Contact sales for minimum quantities and lead times.


Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG CGC

For details, see LEED report tool at usadesignstudio.com or cacdesignstudio.com.

- 2. Fire-rated items: see UL design details. 3. LR values are shown as averages.
- 4. Contact USG for adhesive recommendation for 12"x12" glue-up applications.
- 5. Not UL Classified for acoustics.
- 6. No Flat Black or 'Deeptones' are available on any reveal edge or USG Radar™ Firecode* panel.
- 7. Recycled content not available at all plants.
- 8. This product has achieved both BioPreferred initiatives; Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

USG RADAR™CERAMIC ACOUSTICAL PANELS

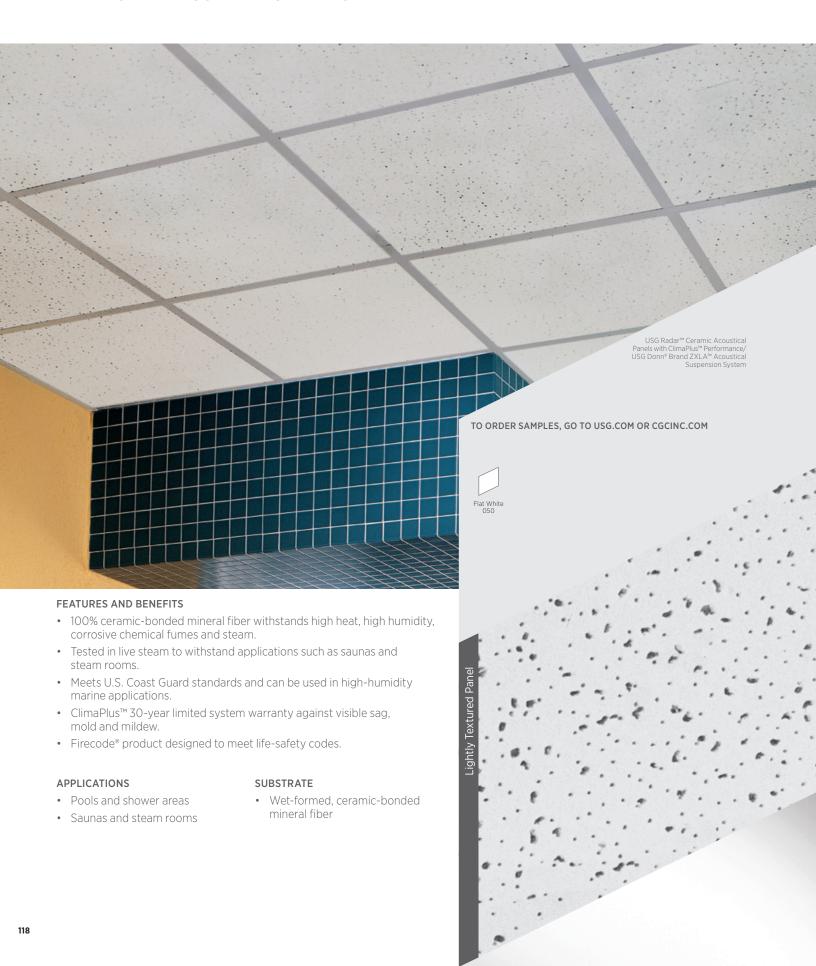

USG RADAR™ CERAMIC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL

usgdesignstudio.com cgcdesignstudio.com







USG RADAR™ CERAMIC
DEDECIDATED DANELS

				ી UL	Classified							
Edge	Panel Size	Fire Rating ⁴	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		Ø		NRC	CAC	Ø		Ħ	3	Ø	(3)	\$
SQ	2'x2'x5/8"		56644	0.50	40	0.82	White	A,B	Low		44%	\$\$\$\$
	2'x4'x5/8"	Ø	56645	0.50	40	0.82	White	A,B	Low	D	44%	\$\$\$\$

Low Emissions (VOC)


Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Totally inorganic product; resistant to the growth of mold and mildew. Includes sag-resistance performance.



GRID PROFILE OPTIONS



PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC2293

ASTM E1264 classification

Perforated: Type XX, Pattern CEG ASTM E84 and CAN/ULC S102

surface-burning characteristics Class A Flame spread: 0 Smoke developed: 0

UL Type

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Weight 1.6-1.7 lb./sq. ft.

Thermal resistance R-1.3

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a damp sponge

U.S. Coast Guard acceptanceApproved for use on merchant ships (No. 164.009/212/0).

Metric sizes available

Contact sales for minimum quantities and lead times

1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.


- 2. LR values are shown as averages.
- 3. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- 4. Fire-rated items: see UL design details.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2293/rev. 11-16

USG RADAR™ ACOUSTICAL PANELS

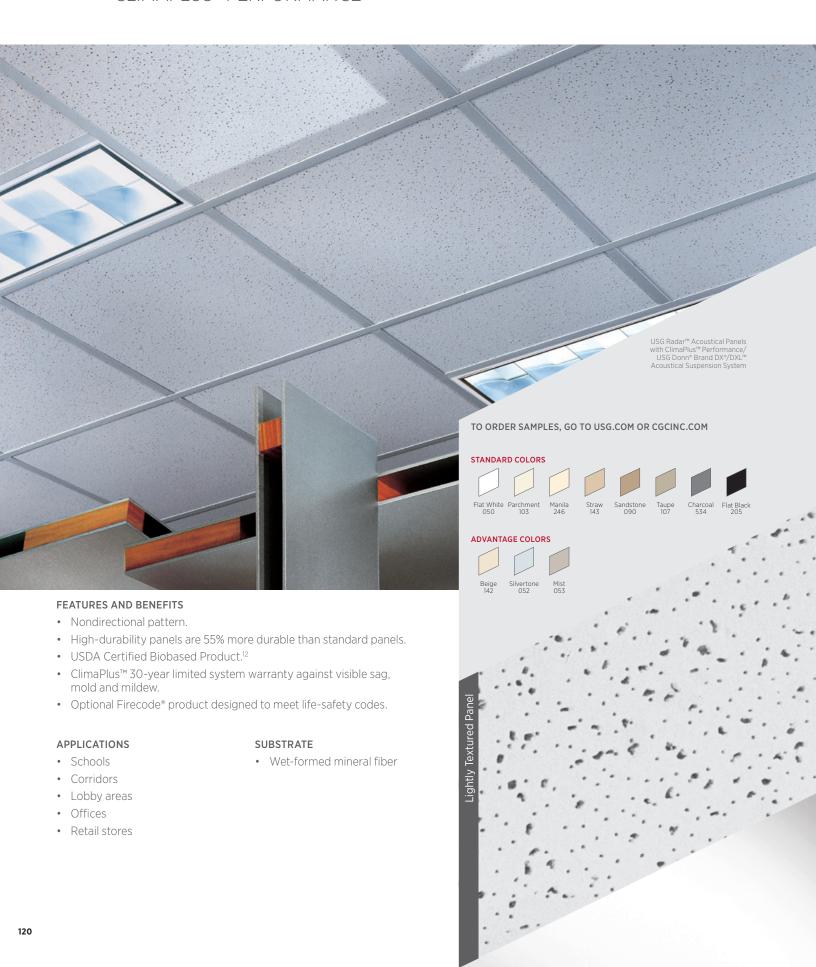

USG RADAR™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG,4YOU (874-4968)









U UL Classified



USG RADAR™ PANELS

Edge	Panel Size Imperial Metric (mm)	Fire Rating ²	Item No. Imperial Metric (mm)	NRC	CAC Min.	LR ³	Color ^{5,6}	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ø	S		K	3	\$
SQ	2'x2'x5/8"	Class A	2210	0.55	33	0.84	White, Standard Beige, Mist, Silvertone	A,B, J	Low			25-34%	\$
	2'x2'x5/8"	Ø	2215	0.55	35	0.84	White	А	Low			48-51%	\$
	2'x4'x5/8" 600x1200x15	Class A	2410 ME2410	0.55	35	0.84	White, Standard Beige, Mist, Silvertone	A, J	Low			25-34%	\$
	2'x4'x5/8"	Ø	2415	0.55	35	0.84	White	Α	Low			48-51%	\$
	2'x4'x5/8"	Class A	2410P ⁷	0.55	35	0.85	White	A, J	Low			25-34%	\$
SLT	2'x2'x5/8" 600x600x15	Class A	2220 ME2220	0.55	33	0.84	White, Standard Beige, Mist, Silvertone (Flat Black or Charcoal Not Available)	С	Low			25-34%	\$
	2'x2'x5/8"		2225	0.55	35	0.84	White	С	Low			51-59%10	\$
	2'x4'x5/8"	Class A	2420	0.55	35	0.84	White	С	Low			25-34%	\$
	2'x4'x5/8"	Ø	2425	0.55	35	0.84	White	С	Low			51-59%10	\$
FLB	2'x2'x5/8"	Class A	2230	0.55	33	0.84	White	D,F,G,I	Low			26-34%	\$
	2'x2'x5/8"	Ø	2235	0.55	35	0.84	White	E,H	Low			51-59%10	\$
SQ	2'x2'x5/8"	Class A	2207	0.55	35	0.84	White	A,B, J	Low		K	42%	\$
	2'x4'x5/8"	Class A	2407	0.55	35	0.84	White	A, J	Low		K	42%	\$
SLT	2'x2'x5/8"	Class A	2227	0.55	35	0.84	White	С	Low		S	42%	\$
SF	12'x12'x5/8"	Class A	2570	0.45	35	0.84	White	Adhesive Staple	Low			34-44%	\$\$\$
	F											4 Eiro	

USG RADAR™ **HIGH-DURABILITY PANELS**

USG RADAR™ TILE8,9

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350), 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productauide.ulenvironment.com.

Centricitee™

B11

USG

DXT™

ClimaPlus™ Warranty Performance⁴

USG

DXLT™

Centricitee

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

USG

DXF™

Fineline*

High Recycled Content Classified as containing

USG

Fineline⁶

DXLF"

greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.





USG

DXW™

GRID PROFILE OPTIONS

PHYSICAL DATA/ **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2127/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature Data sheet: SC2127

USG

DX*/DXL™

ASTM E1264 classification Type III, Form 2, Pattern C,E

ASTM E84 and CAN/ULC

S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

UL Type FR-83

Weight 0.61-1.15 lb./sq. ft.

Online tools usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-1.4 (5/8" Class A panels and tile) R-1.6 (Firecode* panels)

USG

DX*/DXL™

USG

DXT

Centricitee™

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Can be cleaned easily with a soft brush or vacuum.

High-durability panelsASTM D1037—falling-ball impact test.

Metric sizes available

Contact sales for minimum quantities and lead times.

For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

USG

DXI™

Identitee*

- Fire-rated items: see UL design details.
- The Falce (leth)'s eo't casign decides.

 For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- Metric available in White only.

 See Colors selector for more information.
 Includes plastic coating. Gardner Scrubbability tested to 3,000 cycles (ASTM D246).
- SF = staple flange.

USG

DXFF**


Fineline® 1/8

- Not III Classified for acoustics
- High recycled content not available at all plants.

 Maximum 2'x2' with SQ edge panels.
- 12.
- This product has achieved both BioPreferred initiatives; Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.



USG RADAR™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

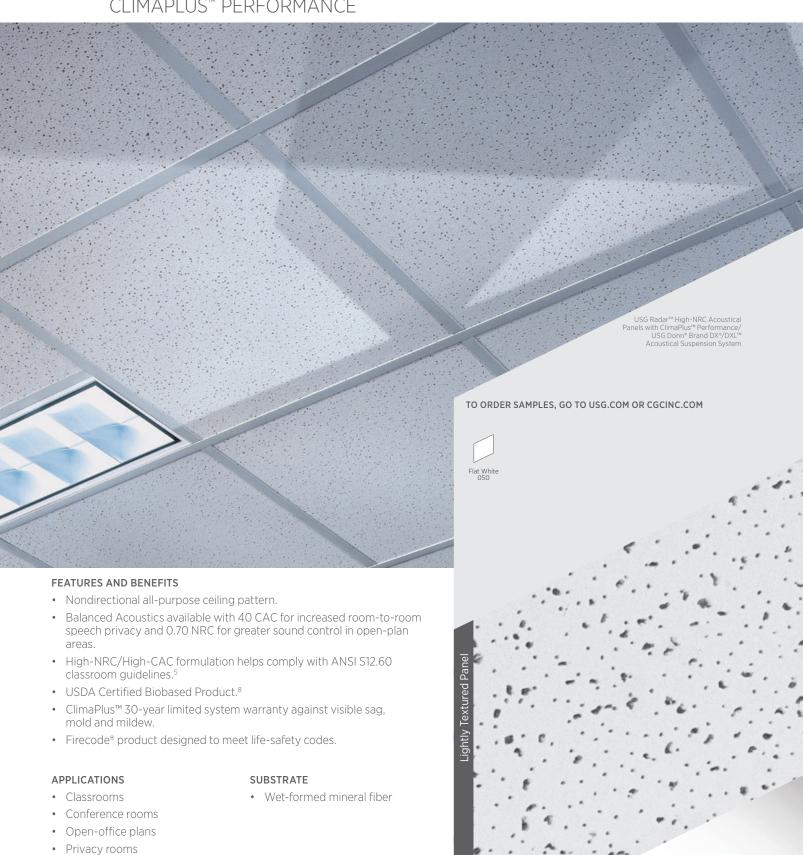

USG RADAR HIGH-NRC/HIGH-CAC **ACOUSTICAL PANELS**

Fire

Rating

0

0

Class A

0

Class A

Class A

Class A

Class A

CLIMAPLUS™ PERFORMANCE

Panel Size

2'x4'x5/8"

2'x2'x7/8"

2'x2'x3/4"

2'x4'x3/4"

2'x2'x7/8"

2'x2'x3/4"

2'x4'x3/4"

2'x2'x7/8"

2'x2'x3/4"

2'x2'x3/4"

2'x4'x7/8"

2'x4'x3/4"

2'x2'x3/4"

2'x4'x7/8"

2'x2'x3/4"



Edge

SQ

SQ

SLT

FLB

SQ

SLT

FLB

USG

DX*/DXL™

Product literature

ASTM E1264 classification

Flame spread: 25 or less

UL Type

FR-83

Smoke developed: 50 or less

Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102

surface-burning characteristics Class A



Item No.

22310

22421

22111

22311

22350

22121

22122

22370

22127

22521

22441

22541

22523

22360

22527



UL Classified

CAC

Min.

40

35

35

35

35

35

35

35

35

40

40

40

40

40

40

CAC

NRC

0.55

0.70

0.70

0.70

0.70

0.70

0.70

0.70

0.70

0.70

0.70

0.70

0.70

0.70

0.70

USG

DX*/DXL™



LR³

Ø

0.84

0.84

0.84

0.84

0.84

0.84

0.84

0.84

0.84

0.84

0.84

0.84

0.84

0.84

0.84

HIGH RECYCLED

Color⁶

White

Grid

A,C

A,B,C

A.B

Α

D

D

D

E,F,H,I

E.G

A.B

A.C

D

D

E,G

Options

B

voc

Low

Emissions

ORDER SAMPLES/LITERATURE FOR MOST UP-TO-DATE USG: samplit@usg.com fax: 888 874-2348 | usg.com **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Panel

Cost

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$\$

\$

\$\$

\$\$

Firecode®

\$

CGC: contact Sales Representative TECHNICAL SERVICES 800 USG,4YOU (874-4968)

Anti-Mold &

Mildew

Recycled

Content¹

48%

43%

57%

57%

43%

57%

57%

43%

57%

57%

43%

57%

57%

43%

57%

3

USG RADAR™ **HIGH-CAC PANEL**

PRODUCT CERTIFIED FOR LOW CHEMICAL

IISG PADAP™ HIGH-NRC PANEL⁵

USG RADAR™ HIGH-NRC/HIGH-CAC PANFI S

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350), 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productauide.ulenvironment.com.

USG

Centricitee™

DXT"/DXLT

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content Classified as containing greater than 50% total recycled postconsumer and preconsumer

content. Total recycled content is based on product composition of (postindustrial) recycled content

per FT	C guidelines.		
Fineline®	G USG Fineline® DXLF™	H USG Fineline® 1/8 DXFF™	I USG Identitee DXI™

PHYSICAL DATA/ **FOOTNOTES**

GRID PROFILE OPTIONS

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2290/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Online tools

ŪSG

DXW

usgdesignstudio.com or cgcdesignstudio.com

Weight 1.15-1.36 lb./sq. ft.

Thermal resistance R-1.6 (5/8" panels) R-1.9 (3/4" panels) R-1.8 (7/8" panels)

(SC2102).

Maximum backloading See USG 30-Year Limited System

Warranty Commercial Applications

Maintenance

USG

Centricitee™

DXT™/DXLT[™]

Panels can be cleaned easily with a soft brush or vacuum.

USG

DXF

 For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

- 2. Fire-rated items: see UL design details
- 3. LR values are shown as averages.
- 4. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™* Ceilings Certification of Performance (SC2451).
- 5. Helps comply with ANSI S12.60 classroom
- 6. No Flat Black or "Deeptones" are available on reveal edge or USG Radar™ Firecode® panel
- 7. Maximum 2'x2' with SQ edge panels.
- 8. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling, See the complete listing of all USG ceiling panels on biopreferred.gov website.




The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF. DXI, DXL, DXLF, DXLT, DXT, DXW, FINELINE, FIRECODE, IDENTITEE, RADAR, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before



USG RADAR™ ILLUSION™ ACOUSTICAL PANELS

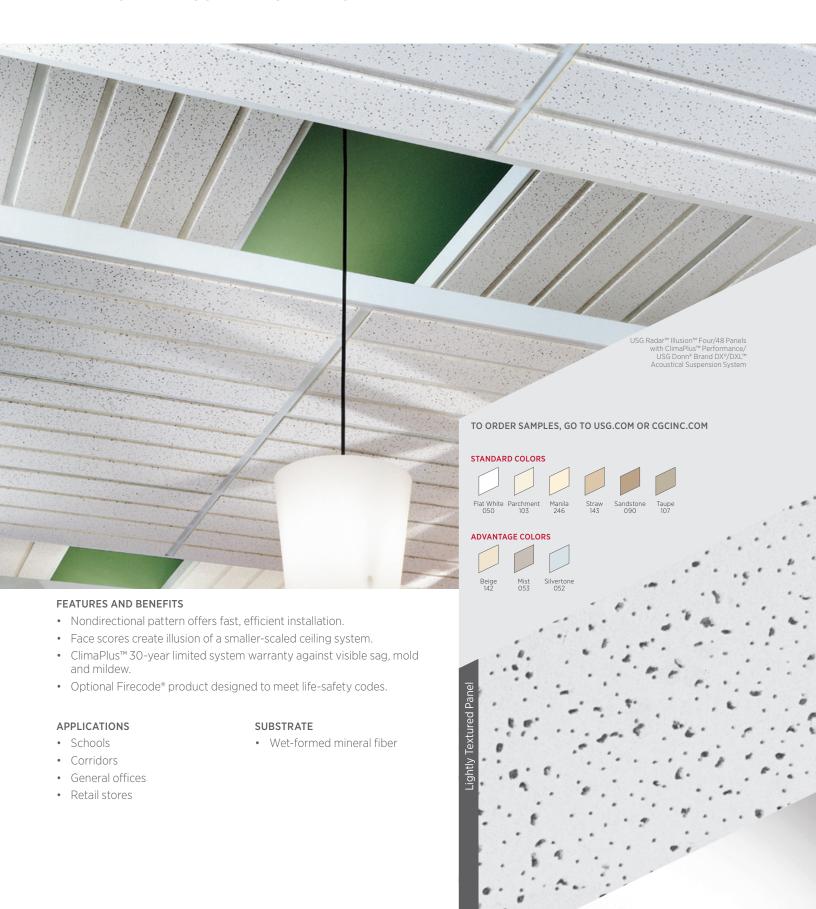

USG RADAR ILLUSION ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)



USG RADAR™ ILLUSION™ **TWO/24 PANELS**

USG RADAR™ ILLUSION™ **FOUR/48 PANELS**

USG RADAR™ ILLUSION™ **EIGHT/12 PANELS**







(U) UL Classified

				(1) 01	Ciassilie	4						
Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew/ Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		Ħ	S	O	Ø.	\$
SLT ⁶	2'x4'x3/4"	Class A	2842	0.55	35	0.84	Standard colors (Flat Black and Charcoal not available) Advantage: Beige, Mist and Silvertone only.	А	Low		31-44%	\$\$
	2'x4'x3/4"	Ø	2846	0.55	35	0.84	White	А	Low		57%	\$\$
ILT ⁷	2'x4'x3/4"	Class A	2844	0.55	35	0.84	White	В,С	Low		44%	\$\$
SLT ⁶	2'x4'x3/4"	Class A	2882	0.50	35	0.84	White	А	Low		44%	\$\$
ILT ⁷	2'x4'x3/4"	Class A	2884	0.50	35	0.84	White	B,C	Low		44%	\$\$
SLT ⁶	2'x4'x3/4"	Class A	2852	0.55	35	0.84	White	А	Low		44%	\$\$
ILT ⁷	2'x4'x3/4"	Class A	2854	0.55	35	0.84	White	B,C	Low		44%	\$\$
SLT ⁶	2'x4'x3/4"	Class A	2862	0.50	35	0.84	White	А	Low		44%	\$\$
ILT ⁷	2'x4'x3/4"	Class A	2864	0.50	35	0.84	White	В,С	Low		44%	\$\$
Illusion™	Two/24		Illusio	n™ Four/4	8		Illusion™ Eight/12		Illusion	™32/6		

USG RADAR™ ILLUSION™ 32/6 PANELS

PATTERNS

		2 x2 paneis	
1	Low Emiss	ions (VOC)	
	Third party	(GREENGUARD Gold)
ert	ified for low	-emitting performanc	e, meets

The look of

California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productquide.ulenvironment.com.

ClimaPlus™ Warranty Performance4

The look

of 48"x6'

linear strips

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance

High Recycled Content

The look of

12"x12" tile

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG Identitee® DXI™



The look of

6"x6" tile

GRID PROFILE OPTIONS

PHYSICAL DATA/

FOOTNOTES

Product literature Data sheet: SC2126

USG DX*/DXL™

ASTM E1264 classification Type III, Form 2, Pattern CEK

Smoke developed: 50 or less

ASTM E84 and CAN/ULC S102 surface-burning

characteristics Class A Flame spread: 25 or less

UL Type

Weight 0.87-1.2 lb./sq. ft.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

USG Centricitee™ DXT™

Thermal resistance R-1.7 (Class A) R-1.9 (Firecode*)

Maximum backloading
See USG 30-Year Limited System Warranty Commercial
Applications (SC2102).

Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

- **Notes**1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com
- Fire-rated items: see UL design details.
- I. IR values are shown as averages.
 For details, see *USG 30-Year Limited System Warranty Commercial* Applications (SC2102) and ClimaPlus™ Ceilings Certification of
- Performance (SC2451).

 See Colors selector for more information. No Flat Black or "Deeptones" are available on reveal edge or USG Radar™
- Firecode* panel.
 Panels have a 15/16" routing.
 Panels have a 9/16" routing.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document

SC2126/rev. 11-16


© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXI, DXL, DXT, FIRECODE, IDENTITEE, ILLUSION, RADAR, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation



USG RADAR™ EDUCATION ACOUSTICAL PANELS

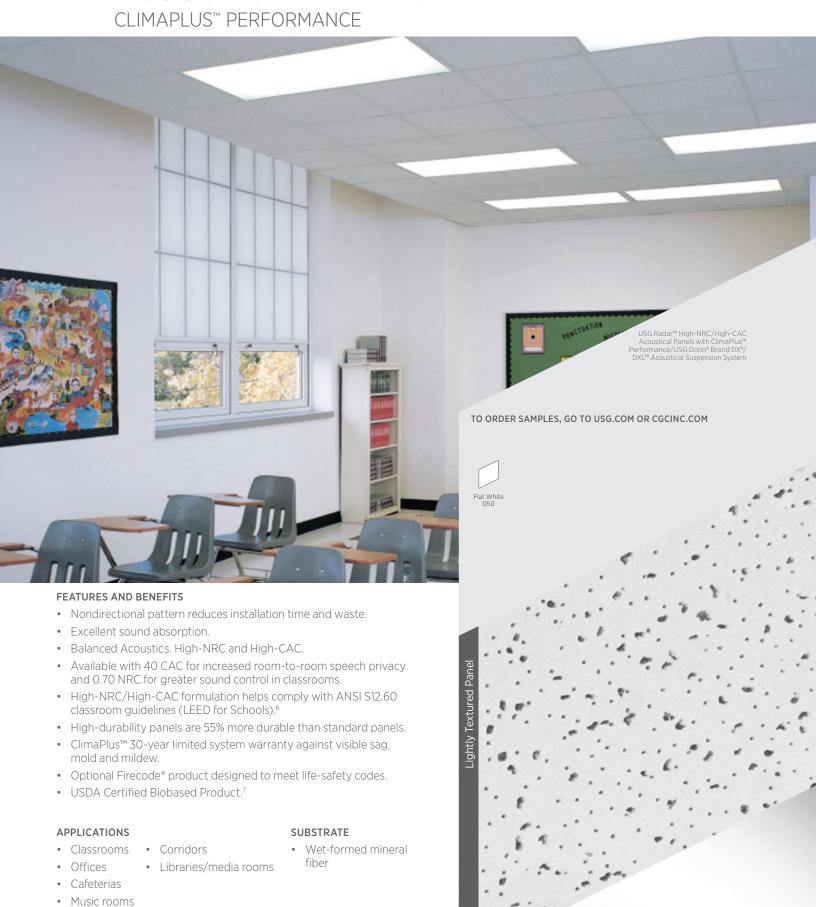

USG RADAR™ EDUCATION ACOUSTICAL PANELS









HIGH RECYCLED

ORDER SAMPLES/LITERATURE FOR MOST UP-TO-DATE USG: samplit@usg.com fax: 888 874-2348 | usg.com **TECHNICAL INFORMATION** CGC: contact Sales Representative

TECHNICAL SERVICES

800 USG,4YOU (874-4968)

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

USG RADAR™ HIGH DURABILITY

PRODUCT CERTIFIED FOR LOW CHEMICAL

(High-traffic areas, corridors and cafeterias)

USG RADAR™ HIGH-NRC6,7

(Libraries, offices and classrooms)

USG RADAR™ HIGH-NRC/HIGH-CAC6,7

(Classrooms and other core learning spaces)

GRID PROFILE OPTIONS

PHYSICAL DATA **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2514/rev. 11-16

2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

CLIMAPLUS™ PERFORMANCE

HRC



(UL) U	L Classified
--------	--------------

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		Ħ	Ø	Ø	3	4	\$
SQ	2'x2'x5/8"	Class A	2207	0.55	35	0.84	White	A,B,C	Low		K	42%	\$\$
	2'x4'x5/8"	Class A	2407	0.55	35	0.84	White	A,C	Low		K	42%	\$\$
SLT	2'x2'x5/8"	Class A	2227	0.55	35	0.84	White	D	Low		K	42%	\$\$
SQ	2'x2'x7/8"	Class A	22421	0.70	35	0.84	White	A,B,C	Low		_	43%	\$\$
	2'x2'x3/4"	Ø	22111	0.70	35	0.84	White	A,B	Low		_	57%	\$\$
SLT	2'x2'x7/8"	Class A	22350	0.70	35	0.84	White	D	Low		_	43%	\$\$
	2'x2'x3/4"	Ø	22121	0.70	35	0.84	White	D	Low		_	57%	\$\$
	2'x4'x3/4"	Ø	22122	0.70	35	0.84	White	D	Low		_	57%	\$\$
FLB	2'x2'x7/8"	Class A	22370	0.70	35	0.84	White	E,F,G,H	Low		_	43%	\$\$
	2'x2'x3/4"	Ø	22127	0.70	35	0.84	White	E,I	Low		_	57%	\$\$
SQ	2'x4'x7/8"	Class A	22441	0.70	40	0.84	White	A,C	Low		_	43%	\$\$
	2'x4'x3/4"	Ø	22541	0.70	40	0.84	White	А	Low		_	57%	\$\$
SLT	2'x2'x3/4"		22523	0.70	40	0.84	White	D	Low		_	57%	\$\$
	2'x4'x7/8"	Class A	22360	0.70	40	0.84	White	D	Low		_	43%	\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350), 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productquide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode*

Abuse Resistant

A USG DX*/DXL™	B ⁸ USG Centricitee™ DXLT™	C USG DXW™	D USG DX*/DXL™	E USG Centricitee™ DXT™/DXLT™	F USG Fineline* DXF™	G USG Fineline*1/8 DXFF™	H USG Identitee* DXI™	I USG Fineline® DXLF™

Data sheet: SC2514

ASTM E1264 classification

Type III, Form 2, Pattern CE ASTM E84 and CAN/ULC S102

surface-burning characteristics Class A Flame spread: 25 or less Smoke developed: 50 or less

UL Type FR-83

Weight 1.15–1.36 lb./sq. ft.

Online tools usadesianstudio.com or cacdesianstudio.com

Thermal resistance R-1.6 (5/8" panels) R-1.9 (3/4" panels)

R-1.8 (7/8" panels)

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance Panels can be cleaned easily with a soft brush or vacuum.

High-durability panels Ball hardness as tested per ASTM C367.

Contact sales for minimum quantities and lead times

- 1. For details, see LEED report tool at
- usgdesignstudio.com or cgcdesignstudio.com . Fire-rated items: see UL design details.
- 3. LR values are shown as averages.
- Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold and mildew. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 5. No Flat Black or "Deeptones" are available on reveal edge or USG Radar™ Firecode® panel
- Helps comply with ANSI S12.60 classroom guidelines and LEED for Schools EQ prerequisite 3: Min. Acoustical Performance
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov wehsite
- 8. Maximum 2'x2' with SQ edge panels.

Manufactured by USG Interiors, LLC 550 West Adams Street Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF. DXI, DXL, DXLF, DXLT, DXT, DXW, FINELINE, FIRECODE, IDENTITEE, RADAR, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG RADAR™ OPEN PLAN ACOUSTICAL PANELS



PRODUCT CERTIFIED FOR LOW CHEMICAL

USG RADAR™ OPEN **PLAN PANELS**

USG RADAR™ OPEN PLAN ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE





ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

(UL) UL Classified

				GI OLC	iussiiicu	_						
Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color ⁴	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		Ø		NRC	CAC	Ø		ø	B	O	HRC	\$
SQ	2'x2'x7/8"	Class A	22320	0.75	35	0.84	White	A,B,C	Low		43%	\$\$
	2'x4'x7/8"	Class A	22325	0.75	35	0.84	White	A,C	Low		43%	\$\$
SLT	2'x2'x7/8"	Class A	22340	0.75	35	0.84	White	D	Low		43%	\$\$
	2'x4'x7/8"	Class A	22345	0.75	35	0.84	White	D	Low		43%	\$\$
FLB	2'x2'x7/8"	Class A	22330	0.75	35	0.84	White	E,F,G,H	Low		43%	\$\$
	2'x4'x7/8"	Class A	22335	0.75	35	0.84	White	E,F,G,H	Low		43%	\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

USG DXW™

ClimaPlus™ Warranty Performance3

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sagresistance performance.

USG Fineline®

1/8 DXFF™

USG Identitee*

DXI™

GRID PROFILE OPTIONS

PHYSICAL DATA/ **FOOTNOTES**

Product literature

Data sheet: SC2565

A USG

DX®/DXL™

ASTM F1264 classification Type III, Form 2, Pattern C, E

ASTM E84 and CAN/ULC S102 surface-burning characteristics

DXT™

USG Centricitee™

Flame spread: 25 or less Smoke developed: 50 or less

Weight 0.97 lb./sq. ft.

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-1.8 (7/8" panels)

USG

DX*/DXL™

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Panels can be cleaned easily with a soft brush

Metric sizes available

or vacuum.

Contact sales for minimum quantities and lead times.

Notes

USG Centricitee

DXT™

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com
- 2. LR values are shown as averages.

USG Fineline®

DXF"

- 3. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. No Flat Black or "Deeptones" are available on any reveal edge USG Radar™ panel
- 5. Maximum 2'x2' with SQ edge panels.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2565/rev. 11-16

USG RENDITIONS™ ANIMATIONS ACOUSTICAL PANELS



USG RENDITIONS ANIMATIONS **ACOUSTICAL PANELS**

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative


FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

PRODUCT
INFORMATION

Fire Rating	Color ²	Typical Sizes	Available Panels a	ind Edges				
Class A	All panels available in Flat White. USG Frost™	2'x2'		SQ	SLT	SLB	FL	FLB
	panels available in Standard, Advantage, Premium and custom colors.		USG Eclipse™	•	•	_	•	_
			USG Frost™	_	_	•	•	•
			USG Millennia®	•	•	_	_	•

PATTERNS1

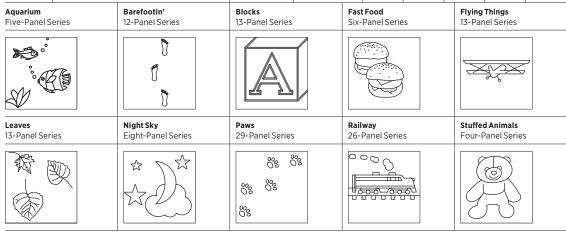

PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: IC327

usadesianstudio.com or cacdesianstudio.com


- For all panels in each of the series in PDF. AutoCAD* or Revit.* visit usgdesignstudio.com or cgcdesignstudio.com.
- 2. See Colors selector for more information.

Panels with USG Renditions[™] face routing do not carry USG ClimaPlus[™] nonsag limited system warranty. Refer to standard commercial ceilings systems warranty.

trademarks of Autodesk Inc.

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

USG RENDITIONS™ BOUNDARIES ACOUSTICAL PANELS

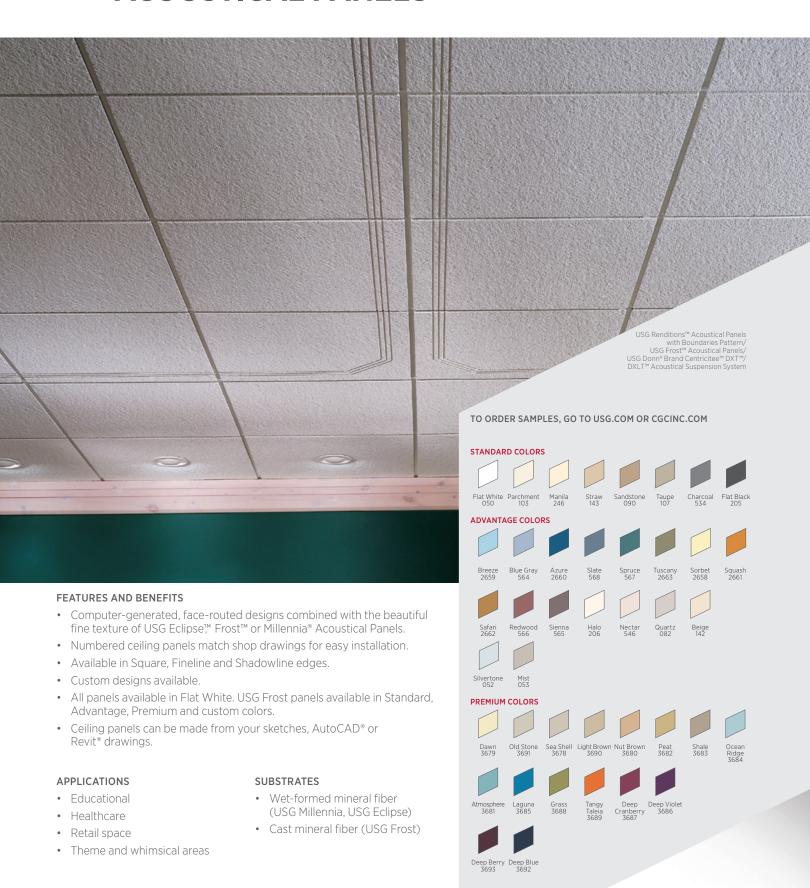

USG RENDITIONS™ BOUNDARIES ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative


TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

PRODUCT INFORMATION

Fire Rating	Color ²	Typical Sizes	Available Panels and Edges								
Class A	All panels available in Flat White. USG	2'x2'		SQ	SLT	SLB	FL	FLB			
	Frost [™] panels available in Standard, Advantage, Premium and custom colors.		USG Eclipse™	•	•	_	•	_			
			USG Frost™	_	_	•	•	•			
			USG Millennia®	•	•	_	_	•			

PATTERNS1

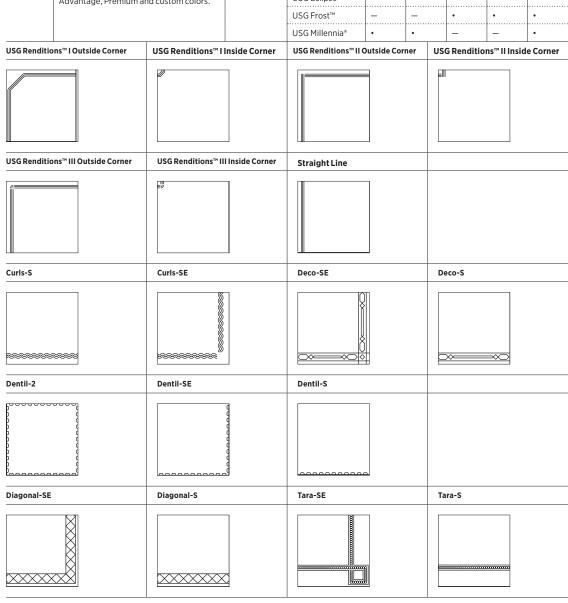

PHYSICAL DATA/ **FOOTNOTES**

Product literature

Online tools

usadesianstudio.com or cacdesianstudio.com

1. For all panels in each of the series in PDF, AutoCAD* or Revit*, visit usgdesignstudio.com or cgcdesignstudio.com.

2. See Colors selector for more information.

Panels with USG Renditions™ face routing do not carry the USG ClimaPlus™ nonsag limited system warranty. Refer to standard commercial ceilings systems warranty.


trademarks of Autodesk Inc.

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC332/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG RENDITIONS™ CUSTOM ACOUSTICAL PANELS

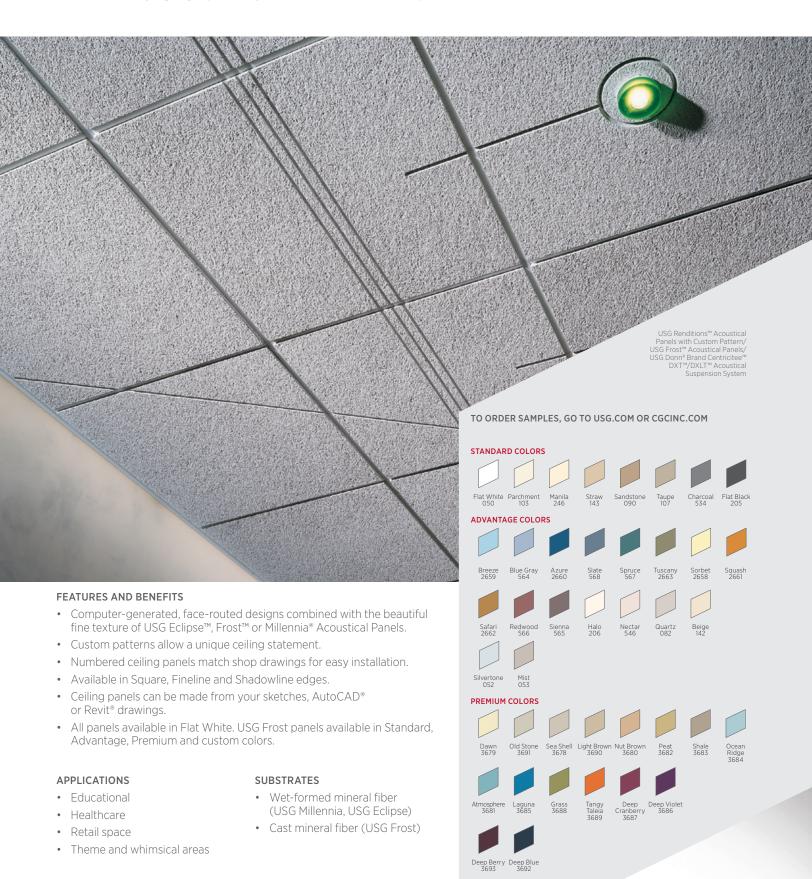

USG RENDITIONS™ CUSTOM ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

PRODUCT INFORMATION

Fire Rating	ating Color ²	Typical Sizes	Available Panels and Edges								
Class A	All panels are available in Flat White.	2'x2'		SQ	SLT	SLB	FL	FLB			
	USG Frost™ panels are available in Standard, Advantage, Premium and		USG Eclipse™	•	•	_	•	_			
	custom colors.		USG Frost™	_	_	•	•	•			
			USG Millennia®	•	•	_	_	•			

PATTERNS¹

Crystal	Square to Square	USG Millennia®	•	• Custom Lo	ogo	-	•
Crystal				Customic	790		

PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: IC356

Online tools usgdesignstudio.com or cgcdesignstudio.com

Notes
1. For all panels in each of the series in PDF, AutoCAD* or Revit*, visit usgdesignstudio.com or cgcdesignstudio.com.

2. See Colors selector for more information.


Panels with USG Renditions™ face routing do not carry the USG ClimaPlus™ nonsag limited system warranty. Refer to standard commercial ceilings systems warranty.

trademarks of Autodesk Inc.

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC356/rev. 11-16

USG ROCK FACE® ACOUSTICAL PANELS

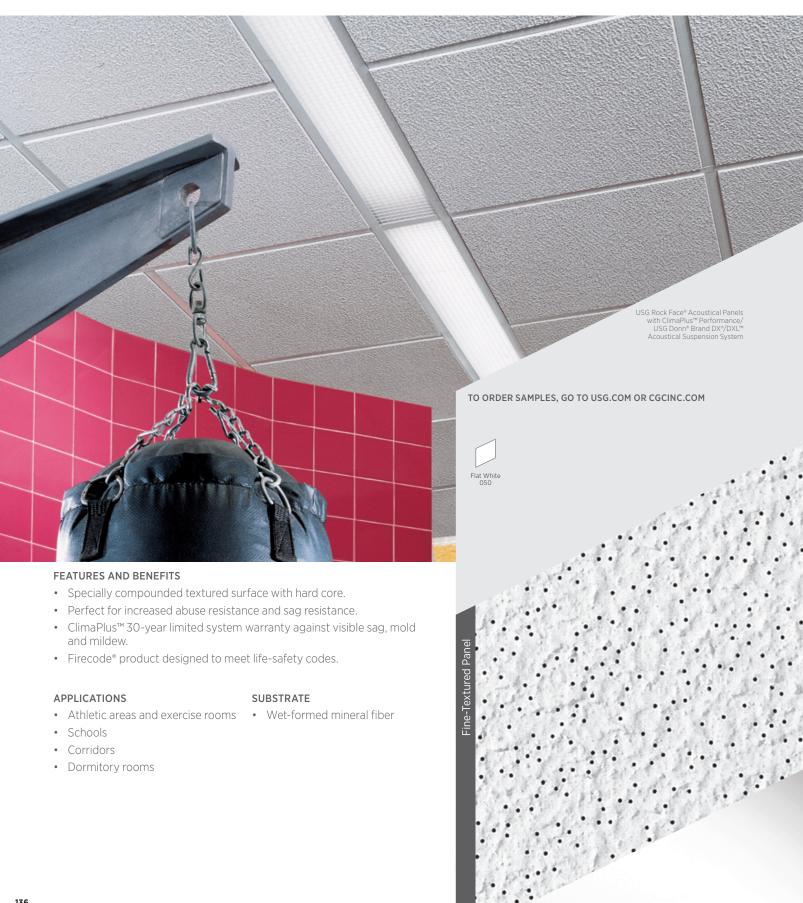

USG ROCK FACE® ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

800 USG,4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** CGC: contact Sales Representative TECHNICAL SERVICES

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com







USG	ROCK	FACE	PANEL	S

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
		Ø		NRC	CAC			Ħ	Ø	O	K	3	\$
SQ	2'x2'x5/8"	Ø	56335	0.55	35	0.86	White	A,B,C	Low		K	50%	\$\$
	2'x4'x5/8"	Ø	56380	0.55	35	0.86	White	A,B,C	Low		K	50%	\$\$
SLT	2'x2'x3/4"	Ø	55483	0.55	35	0.86	White	D,E,F	Low		K	50%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productquide.ulenvironment.com.

ClimaPlus™ Warranty Performance4

(I) III Classified

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.


High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.






GRID PROFILE OPTIONS



PANEL RETENTION CLIP 20428

Attaches to 1-1/2" main tees and cross tees behind lay-in ceilings. The retention clips help prevent panel displacement from incidental contact. Recommended with USG Rock Face® ceiling panels for impaction-resistant systems.



See this clip and other accessories in the Accessory Guide AC2396.

PHYSICAL DATA/ **FOOTNOTES**

Product literature

Data sheet: SC1840

ASTM E1264 classification Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

UL Type

Weight 1.0-1.3 lb./sq. ft.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-1.6 (5/8" panels) R-1.9 (3/4" panels)

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Durability testsASTM D1037: Tested to 45 lbf. for a 1/4" depression by a Janka ball ASTM D5420: Tested to 3.5 in./lbf. for impaction.

Metric sizes available
Contact sales for minimum quantities and lead times.

- 1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.co
- 2. Fire-rated items: see UL design details.
- 3. LR values are shown as averages.
- 4. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).

Notice


The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1840/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG SANDRIFT™ ACOUSTICAL PANELS

CLIMAPI US™ PERFORMANCE

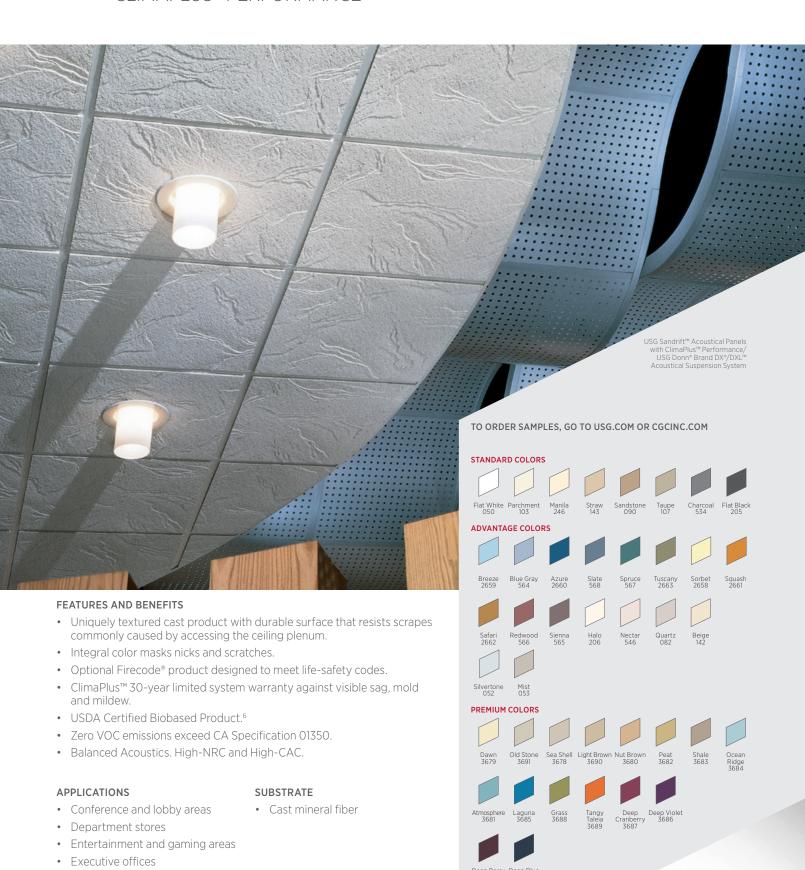

Restaurants

USG SANDRIFT ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG,4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL

usgdesignstudio.com cgcdesignstudio.com



USG SANDRIFT™ PANELS









Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
		Ø		NRC	CAC	Ø		Ħ	Ø	Ø	K	HRC	\$
SL	2'x2'x3/4" Paper-Back	Class A	808	0.70	38	0.83	White Standard Advantage Premium	А	Zero		K	72%	\$\$\$
FL	2'x2'x3/4" Paper-Back	Class A	809	0.70	38	0.83	White Standard Advantage Premium	B,C,D,E	Zero		K	72%	\$\$\$
SL	2'x2'x3/4" Paper-Back	Ø	815	0.55	35	0.83	White	А	Zero	_	K	73%	\$\$\$

USG SANDRIFT™ **BASIC PANELS**

Zero Emissions (VOC)

Third party (GREENGUARD Gold) $certified \ for \ low-emitting \ performance, \ meets$ California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350), 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sagresistance performance.

USG Fineline® DXF™

High Recycled Content

USG Fineline® 1/8 DXFF™

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.





USG Identitee® DXI™

GRID PROFILE OPTIONS

PHYSICAL DATA/

FOOTNOTES

Product literature Data sheet: SC1841

USG DX*/DXL™

ASTM F1264 classification

Type III, Form 4, Pattern Z

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

UL Type AP, AP-1, AP-2, AP-3

Weight

1.60 lb./sq. ft. (Class A) 1.75 lb./sq. ft. (Firecode® weight)

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance

R-1.7 (Class A) R-1.3 (Firecode*)

USG Centricitee™ DXT™

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number

Maintenance

Can be cleaned easily with a soft brush or vacuum

For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

2. Fire-rated items: see UL design details.

- 3. LR values are shown as averages.
- 4. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- 5. To highlight the unique texture of USG Sandrift™ Acoustical Panels with ClimaPlus™ Performance, choose light colors. See Colors selector for more information
- 6. This product has achieved both BioPreferred initiatives; Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1841/rev. 11-16

USG SHEETROCK® BRAND LAY-IN GYPSUM CEILING PANELS

CLIMAPLUS™ PERFORMANCE



- USG Clean Room[™] panels have a vinyl-laminated face with sealed back and edges for use in Clean Room environments up to Class 100/ISO 5.
- Washable and scrubbable finish-impact and scratch resistant.
- USDA Certified Biobased Product.⁷
- Panels meet USDA/FSIS requirements for food processing areas.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Kitchens and food preparation areas
- · Restrooms and utility areas
- Locker rooms
- · Parking garages
- Exterior protected soffits

SUBSTRATE

• Gypsum panel

Smooth-Textured Panel – Vinyl

PRODUCT CERTIFIED FOR LOW CHEMICAL

USG SHEETROCK® BRAND LAY-IN CEILING PANEL

USG SHEETROCK® BRAND LAY-IN CEILING

USG SHEETROCK® BRAND LAY-IN GYPSUM CEILING PANELS

CLIMAPLUS™ PERFORMANCE









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES

800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

(UL) UL Classified

						_						
Edge	Panel Size	Fire Rating ²	Item No.	NRC ⁴	CAC Min.	LR ³	Color	Abuse Resistant	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		B	ø	Ø	HRC	\$
SQ	2'x2'x1/2"	0	3260	-	35	0.77	White	K	A,B,C,D	Low	80%	\$
	2'x4'x1/2"	Ø	3270	-	40	0.77	White	S.	A,B,C,D	Low	80%	\$
SQ	2'x4'x1/2"	Ø	3200	-	40	0.77	White	S	A,B,C,D	Low	80%	\$\$

PANEL CLEAN ROOM™5

Low Emissions (VOC) Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



Abuse Resistant

GRID PROFILE OPTIONS

USG DX*/DXL™ USG DXLA™ USG ZXLA™ USG CE™

PHYSICAL DATA/ **FOOTNOTES**

Product literature Data sheet: SC1820

ASTM E1264 classification

Type XX, Pattern G

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A Flame spread: 25 or less Smoke developed: 50 or less

UL Type FC-CB

Weight 1/2" = 2.00 lb./sq. ft.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance 1/2" = R-0.45

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a damp sponge. Use mild detergent and water—do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

Application considerations

Product is directional. Install with all manufactured edges parallel and in the same direction

- 1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- 2. Fire-rated items: see UL design details.
- 4. NRC rating is 0.10. USG does not consider a ceiling panel to be acoustically rated if NRC is less than 0.50.
- 5. Field-cut edges of USG Clean Room™ panels must be sealed with white latex paint.
- 6. Clean Room-rated applications require a suspension system with gasketed tee flanges such as USG Donn® Brand CE™.
- 7. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document

SC1820/rev. 11-16

USG TOUCHSTONE™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG TOUCHSTONE™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION**

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com







USG	TOUCHSTONE™
	DANEIS

				(U) UL C	lassified								
Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	B		K	HRC	\$
SQ	2'x2'x5/8"		5893	0.55	35	0.86	White	A,B	Low		K	51%	\$\$
	2'x4'x5/8"	Ø	5894	0.55	35	0.86	White	А	Low		K	51%	\$\$
SLT	2'x2'x5/8"	Ø	5896	0.55	35	0.86	White	С	Low		K	51%	\$\$
FLB	2'x2'x5/8"	Ø	5899	0.55	35	0.86	White	D,E	Low		K	51%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg. com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sagresistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.





GRID PROFILE OPTIONS

A	B ⁵ USG Centricitee™ DXT™/DXLT™	C	D	E
USG DX*/DXL™		USG DX*/DXL™	USG Centricitee™ DXLT™	USG Fineline* DXLF™

PHYSICAL DATA/ **FOOTNOTES**

Product literature

Data sheet: SC2214

ASTM E1264 classification Type III, Form 2, Pattern CEI

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Flame spread: 25 or less Smoke developed: 50 or less

UL Type

Weight 1.0-1.3 lb./sq. ft.

Online tools

usadesianstudio.com or cacdesianstudio.com

Thermal resistance R-1.6

Maximum backloading See *USG 30-Year Limited System Warranty* Commercial Applications (SC2102).

Maintenance

Can be cleaned easily with a soft brush

Metric sizes available

Contact sales for minimum quantities and lead times.

Notes

For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

- 2. Fire-rated items: see UL design details.
- 3. LR values are shown as averages.
- 4. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceillings Certification of Performance (SC2451).
- 5. Maximum 2'x2' with SQ edge panels.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2214/rev. 11-16



MODERN DESIGN MEETS FORWARD THINKING

The inventive USG Logix™ Integrated Ceiling System combines the best of aesthetics and performance by transforming the ceiling plane into a dramatic design element. Giving you the freedom to create elegant, modern and sophisticated ceilings that match your vision without the constraints of traditional acoustical ceiling designs.

To learn more, visit usg.com/logix

Computer-Generated Image © USG Corporation 2016.

USG HALCYON™ LOGIX™ ACOUSTICAL PANELS

CLIMAPI US™ PERFORMANCE



USG HALCYON LOGIX ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



				િ UL C	lassified						
dge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	D		Ħ		3	\$
2	20"x54"x1"	Class A	97407	0.95	20	0.90	White	А		40%	\$\$\$\$
	20"x56"x1"	Class A	97408	0.95	20	0.90	White	A		40%	\$\$\$\$
	20"x60"x1"	Class A	98261	0.95	20	0.90	White	Α		40%	\$\$\$\$
	21"x24"x1"	Class A	97411	0.95	20	0.90	White	A, B	D	40%	\$\$\$\$
	21"x48"x1"	Class A	97412	0.95	20	0.90	White	A	D	40%	\$\$\$\$
	22"x24"x1"	Class A	97413	0.95	20	0.90	White	A, B	D	40%	\$\$\$\$
	22"x48"x1"	Class A	97414	0.95	20	0.90	White	А	D	40%	\$\$\$\$
	24"x24"x1"	Class A	98221	0.95	20	0.90	White	A, B	D	40%	\$\$\$\$
	24"x42"x1"	Class A	97277	0.95	20	0.90	White	A	D	40%	\$\$\$\$
	24"x44"x1"	Class A	97416	0.95	20	0.90	White	А	D	40%	\$\$\$\$
	24"x48"x1"	Class A	98241	0.95	20	0.90	White	A	D	40%	\$\$\$\$
	24"x72"x1"	Class A	99234	0.95	20	0.90	White	Α	٥	40%	\$\$\$\$
	24"x96"x1"	Class A	98351	0.95	20	0.90	White	Α		40%	\$\$\$\$
	24"x120"x1"	Class A	98368	0.95	20	0.90	White	Α	٥	40%	\$\$\$\$
	27"x30"x1"	Class A	97417	0.95	20	0.90	White	Α		40%	\$\$\$\$
	27"x60"x1"	Class A	97418	0.95	20	0.90	White	Α		40%	\$\$\$\$
	28"x30"x1"	Class A	97419	0.95	20	0.90	White	A		40%	\$\$\$\$
	28"x60"x1"	Class A	97420	0.95	20	0.90	White	Α		40%	\$\$\$\$
	30"x30"x1"	Class A	98331	0.95	20	0.90	White	Α		40%	\$\$\$\$
	30"x54"x1"	Class A	97422	0.95	20	0.90	White	Α	٥	40%	\$\$\$\$
	30"x56"x1"	Class A	97423	0.95	20	0.90	White	Α		40%	\$\$\$\$
	30"x60"x1"	Class A	97266	0.95	20	0.90	White	Α	٥	40%	\$\$\$\$
	48"x42"x1"	Class A	97424	0.95	20	0.90	White	A	D	40%	\$\$\$\$
	48"x44"x1"	Class A	97425	0.95	20	0.90	White	A	D	40%	\$\$\$\$
	48"x45"x1"	Class A	97426	0.95	20	0.90	White	Α	D	40%	\$\$\$\$
	48"x46"x1"	Class A	97427	0.95	20	0.90	White	A	D	40%	\$\$\$\$
	48"x48"x1"	Class A	98441	0.95	20	0.90	White	А	D	40%	\$\$\$\$
	48"x54"x1"	Class A	97428	0.95	20	0.90	White	А	D	40%	\$\$\$\$
	48"x96"x1"	Class A	98481	0.95	20	0.90	White	А	D	40%	\$\$\$\$
)	4"x48"x1"	Class A	97402	0.95	20	0.90	White	А		40%	\$\$\$\$
	4"x60"x1"	Class A	97403	0.95	20	0.90	White	A	D	40%	\$\$\$\$
	4"x72"x1"	Class A	97404	0.95	20	0.90	White	А	D	40%	\$\$\$\$
	6"x48"x1"	Class A	97227	0.95	20	0.90	White	Α	D	40%	\$\$\$\$
	6"x60"x1"	Class A	97228	0.95	20	0.90	White	A		40%	\$\$\$\$
	6"x72"x1"	Class A	97405	0.95	20	0.90	White	Α		40%	\$\$\$\$
	12"x48"x1"	Class A	97491	0.95	20	0.90	White	Α		40%	\$\$\$\$
	12"x60"x1"	Class A	97492	0.95	20	0.90	White	A		40%	\$\$\$\$
	12"x72"x1"	Class A	97406	0.95	20	0.90	White	A		40%	\$\$\$\$
. ,	20"x54"x1"	Class A	97436	0.95	20	0.90	White	С		40%	\$\$\$\$
	L		ļ						.	ļ	ļ

USG HALCYON™ LOGIX™ **CHANNEL PANELS**

USG HALCYON™ LOGIX™ **FIELD PANELS**

USG HALCYON™ LOGIX™ **FIELD PANELS**

20"x60"x1"

ClimaPlus™ Warranty Performance³
Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

20

0.90

С

White

0.95

99267

 $\mathsf{Class}\,\mathsf{A}$

\$\$\$\$

40%

USG HALCYON" LOGIX" ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



 $\stackrel{\text{$(I_L)$}}{\text{$U_L$ Classified}}$

Fire Rating Item No. NRC CAC Anti-Mold Recycled Panel Cost LR² Color Grid Panel Size⁵ Edge

USG HALCYON™ LOGIX™ FIELD PANELS CONT.

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ø		3	\$
SL	21"x24"x1"	Class A	98220	0.95	20	0.90	White	С		40%	\$\$\$\$
	21"x48"x1"	Class A	97439	0.95	20	0.90	White	С		40%	\$\$\$\$
	22"x24"x1"	Class A	97440	0.95	20	0.90	White	С		40%	\$\$\$\$
	22"x48"x1"	Class A	97441	0.95	20	0.90	White	С		40%	\$\$\$\$
	24"x24"x1"	Class A	98223	0.95	20	0.90	White	С		40%	\$\$\$\$
	24"x42"x1"	Class A	97443	0.95	20	0.90	White	С		40%	\$\$\$\$
	24"x44"x1"	Class A	97444	0.95	20	0.90	White	С	D	40%	\$\$\$\$
	24"x48"x1"	Class A	98243	0.95	20	0.90	White	С		40%	\$\$\$\$
	24"x72"x1"	Class A	99268	0.95	20	0.90	White	С		40%	\$\$\$\$
	24"x96"x1"	Class A	99269	0.95	20	0.90	White	С		40%	\$\$\$\$
	24"x120"x1"	Class A	97446	0.95	20	0.90	White	С		40%	\$\$\$\$
	27"x30"x1"	Class A	97447	0.95	20	0.90	White	С		40%	\$\$\$\$
	27"x60"x1"	Class A	97448	0.95	20	0.90	White	С	D	40%	\$\$\$\$
	28"x30"x1"	Class A	97449	0.95	20	0.90	White	С		40%	\$\$\$\$
	28"x60"x1"	Class A	97450	0.95	20	0.90	White	С		40%	\$\$\$\$
	30"x30"x1"	Class A	98333	0.95	20	0.90	White	С		40%	\$\$\$\$
	30"x54"x1"	Class A	98337	0.95	20	0.90	White	С		40%	\$\$\$\$
	30"x56"x1"	Class A	97453	0.95	20	0.90	White	С		40%	\$\$\$\$
	30"x60"x1"	Class A	99270	0.95	20	0.90	White	С	D	40%	\$\$\$\$
	48"x42"x1"	Class A	97454	0.95	20	0.90	White	С	D	40%	\$\$\$\$
	48"x44"x1"	Class A	97455	0.95	20	0.90	White	С		40%	\$\$\$\$
	48"x45"x1"	Class A	97456	0.95	20	0.90	White	С		40%	\$\$\$\$
	48"x46"x1"	Class A	97457	0.95	20	0.90	White	С		40%	\$\$\$\$
	48"x48"x1"	Class A	98443	0.95	20	0.90	White	С		40%	\$\$\$\$
	48"x54"x1"	Class A	97458	0.95	20	0.90	White	С	D	40%	\$\$\$\$
	48"x96"x1"	Class A	98483	0.95	20	0.90	White	С		40%	\$\$\$\$
SL	4"x48"x1"	Class A	97430	0.95	20	0.90	White	С	0	40%	\$\$\$\$
	4"x60"x1"	Class A	97431	0.95	20	0.90	White	С		40%	\$\$\$\$
	4"x72"x1"	Class A	97432	0.95	20	0.90	White	С		40%	\$\$\$\$
	6"x48"x1"	Class A	99271	0.95	20	0.90	White	С	D	40%	\$\$\$\$
	6"x60"x1"	Class A	99272	0.95	20	0.90	White	С		40%	\$\$\$\$
	6"x72"x1"	Class A	97433	0.95	20	0.90	White	С		40%	\$\$\$\$
	12"x24"x1"	Class A	99263	0.95	20	0.90	White	С		40%	\$\$\$\$
	12"x48"x1"	Class A	97571	0.95	20	0.90	White	С		40%	\$\$\$\$
	12"x60"x1"	Class A	97434	0.95	20	0.90	White	С		40%	\$\$\$\$
	12"x72"x1"	Class A	97435	0.95	20	0.90	White	С		40%	\$\$\$\$
FL	20"x54"x1"	Class A	98360	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	20"x56"x1"	Class A	97464	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	20"x60"x1"	Class A	98194	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	21"x24"x1"	Class A	98195	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$

USG HALCYON™ LOGIX™ FIELD PANELS

USG HALCYON™ LOGIX™ CHANNEL PANELS

21"x48"x1"

ClimaPlus™ Warranty Performance³
Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

20

0.90

White

D,E,F

D

0.95

97466

Class A



\$\$\$\$

40%

USG HALCYON LOGIX ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)



(U) UL Classified

				ル UL Cla	ssified	_					
Edge	Panel Size⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		Ø	Ø	E	\$
FL	22"x24"x1"	Class A	97467	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	22"x48"x1"	Class A	97468	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x24"x1"	Class A	98225	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x42"x1"	Class A	98196	0.95	20	0.90	White	D,E,F	D	40%	\$\$\$\$
	24"x44"x1"	Class A	97470	0.95	20	0.90	White	D,E,F	D	40%	\$\$\$\$
	24"x48"x1"	Class A	98245	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x57"x1"	Class A	98341	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x60"x1"	Class A	96271	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x72"x1"	Class A	98348	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x96"x1"	Class A	98197	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x120"x1"	Class A	99213	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	27"x30"x1"	Class A	97333	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	27"x60"x1"	Class A	98440	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	28"x30"x1"	Class A	97335	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	28"x60"x1"	Class A	97355	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	30"x30"x1"	Class A	98335	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	30"x54"x1"	Class A	98359	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	30"x56"x1"	Class A	97473	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	30"x60"x1"	Class A	98336	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x42"x1"	Class A	98343	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x44"x1"	Class A	97475	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x45"x1"	Class A	97476	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x46"x1"	Class A	97477	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x48"x1"	Class A	98445	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x54"x1"	Class A	98344	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
FL	4"x48"x1"	Class A	97460	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	4"x60"x1"	Class A	97461	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	4"x72"x1"	Class A	97462	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x42"x1"	Class A	99197	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x48"x1"	Class A	98198	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x54"x1"	Class A	98131	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x60"x1"	Class A	98199	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x72"x1"	Class A	97574	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x96"x1"	Class A	98216	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x24"x1"	Class A	98191	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x48"x1"	Class A	98192	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x60"x1"	Class A	97576	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x72"x1"	Class A	97463	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x96"x1"	Class A	99265	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$

USG HALCYON™ LOGIX™ **CHANNEL PANELS**

USG HALCYON™ LOGIX™ FIELD PANELS CONT.

GRID PROFILE OPTIONS

PHYSICAL DATA/ **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IS272/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature Data sheet: IS272 System guide: IS268

USG DX*/DXL™

ASTM E1264 classification Type XII, Form 2, Pattern E, G

ASTM E84 and CAN/ULC S102 surface burning characteristics

Flame spread: 25 or less Smoke developed: 50 or less

Manufactured by

USG Interiors, LLC

Chicago, IL 60661

550 West Adams Street

Online tools

USG Centricitee¹

usgdesignstudio.com or cgcdesignstudio.com

USG DX*/DXLT

USG Centricitee¹¹

USG Fineline®

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Weight 0.47 lb./sa. ft.

Thermal resistance

R-4.4

Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean white cloth with water or a mild detergent and wipe surface.

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, ${\sf DXI}, {\sf DXL}, {\sf DXT}, {\sf FINELINE}, {\sf HALCYON}, {\sf IDENTITEE}, {\sf LOGIX}, {\sf MARS}, {\sf IT'S} \ {\sf YOUR}$ WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

Treating field-cut reveal edges
All field-cut edges "exposed to view" should be colored to match the factory

finish. USG Halcyon™ Ceiling Touch-Up

Paint is recommended when perimeter field cuts expose the yellow substrate.

USG Identitee®

DXI™

 For details, see I FFD report tool at usgdesignstudio.com or cgcdesignstudio.com.
LR values are shown as averages.
For details, see *USG 30-Year Limited System*

ClimaPlus™ Warranty

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sagresistance performance.


Performance³

- Warranty Commercial Applications (SC2102) and USG ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. Maximum 2'x2' with SQ edge panels Stabilizer bar required if opening ≥ 60".



USG MARS™/MARS™ HIGH-NRC LOGIX™ **ACOUSTICAL PANELS**

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

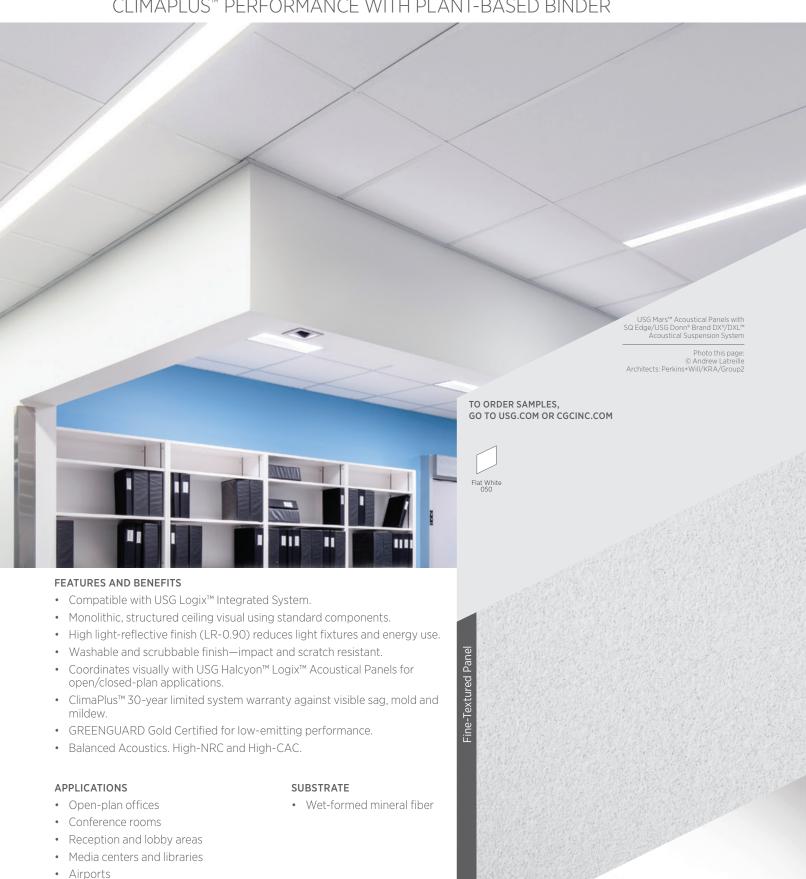

· Spaces with indirect or natural lighting

USG MARS™ LOGIX™ **FIELD PANELS** 75/35

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 75/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

TECHNICAL SERVICES

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

પિ IJL Classified

				Մ⊪ ∪∟ 0	Classified							
Edge	Panel Size⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		Ø	[3]		HRC	\$
SQ	20"x54"x3/4"	Class A	86519	0.75	35	0.90	White	А	Low		69%	\$\$
	20"x56"x3/4"	Class A	86520	0.75	35	0.90	White	Α	Low		69%	\$\$
	20"x60"x3/4"	Class A	86160	0.75	35	0.90	White	Α	Low		69%	\$\$
	21"x24"x3/4"	Class A	86522	0.75	35	0.90	White	A, B	Low		69%	\$\$
	21"x48"x3/4"	Class A	86523	0.75	35	0.90	White	Α	Low		69%	\$\$
	22"x24"x3/4"	Class A	86524	0.75	35	0.90	White	A,B	Low		69%	\$\$
	22"x48"x3/4"	Class A	86525	0.75	35	0.90	White	Α	Low		69%	\$\$
	24"x24"x3/4"	Class A	86185	0.75	35	0.90	White	A,B	Low		69%	\$\$
	24"x42"x3/4"	Class A	86527	0.75	35	0.90	White	А	Low		69%	\$\$
	24"x44"x3/4"	Class A	86528	0.75	35	0.90	White	А	Low		69%	\$\$
	24"x48"x3/4"	Class A	88185	0.75	35	0.90	White	А	Low		69%	\$\$
	24"x72"x3/4"	Class A	86223	0.75	35	0.90	White	Α	Low		69%	\$\$
	27"x30"x3/4"	Class A	86530	0.75	35	0.90	White	А	Low		69%	\$\$
	27"x60"x3/4"	Class A	86531	0.75	35	0.90	White	A	Low		69%	\$\$
	28"x30"x3/4"	Class A	86532	0.75	35	0.90	White	А	Low		69%	\$\$
	28"x60"x3/4"	Class A	86533	0.75	35	0.90	White	А	Low		69%	\$\$
	30"x30"x3/4"	Class A	86815	0.75	35	0.90	White	А	Low		69%	\$\$
	30"x54"x3/4"	Class A	86503	0.75	35	0.90	White	А	Low		69%	\$\$
	30"x56"x3/4"	Class A	86535	0.75	35	0.90	White	А	Low		69%	\$\$
	30"x60"x3/4"	Class A	86536	0.75	35	0.90	White	А	Low		69%	\$\$
SQ	4"x48"x3/4"	Class A	86514	0.75	35	0.90	White	А	Low		69%	\$\$
	4"x60"x3/4"	Class A	86515	0.75	35	0.90	White	А	Low		69%	\$\$
	4"x72"x3/4"	Class A	86537	0.75	35	0.90	White	А	Low		69%	\$\$
	6"x48"x3/4"	Class A	86325	0.75	35	0.90	White	А	Low		69%	\$\$
	6"x60"x3/4"	Class A	86507	0.75	35	0.90	White	A	Low		69%	\$\$
	6"x72"x3/4"	Class A	86538	0.75	35	0.90	White	А	Low		69%	\$\$
	12"x12"x3/4"	Class A	86134	0.75	35	0.90	White	Α	Low		69%	\$\$
	12"x24"x3/4"	Class A	86289	0.75	35	0.90	White	Α	Low		69%	\$\$
	12"x48"x3/4"	Class A	86516	0.75	35	0.90	White	Α	Low		69%	\$\$
	12"x60"x3/4"	Class A	86517	0.75	35	0.90	White	Α	Low		69%	\$\$
	12"x72"x3/4"	Class A	86518	0.75	35	0.90	White	Α	Low		69%	\$\$

USG MARS™ LOGIX™ **CHANNEL PANELS** 75/35



Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide. ulenvironment.com.$

ClimaPlus™ Warranty Performance³

 $Contains\ a\ broad-spectrum\ antimic robial$ additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG MARS™ LOGIX™ **FIELD PANELS** 75/35

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 75/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

	ı		ı	(N) OF C	Classified	_				i.		
dge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Pa Co
				NRC	CAC	D		Ħ	B		HRC	F
LT	20"x54"x3/4"	Class A	86547	0.75	35	0.90	White	С	Low		69%	\$\$
	20"x56"x3/4"	Class A	86548	0.75	35	0.90	White	С	Low		69%	\$\$
	20"x60"x3/4"	Class A	86905	0.75	35	0.90	White	С	Low		69%	\$5
	21"x24"x3/4"	Class A	86550	0.75	35	0.90	White	С	Low		69%	\$5
	21"x48"x3/4"	Class A	86551	0.75	35	0.90	White	С	Low		69%	\$5
	22"x24"x3/4"	Class A	86552	0.75	35	0.90	White	С	Low		69%	\$5
	22"x48"x3/4"	Class A	86553	0.75	35	0.90	White	С	Low		69%	\$5
	24"x24"x3/4"	Class A	86785	0.75	35	0.90	White	С	Low		69%	\$5
	24"x42"x3/4"	Class A	86555	0.75	35	0.90	White	С	Low		69%	\$5
	24"x44"x3/4"	Class A	86556	0.75	35	0.90	White	С	Low		69%	\$5
	24"x48"x3/4"	Class A	88785	0.75	35	0.90	White	С	Low		69%	\$
	24"x72"x3/4"	Class A	86166	0.75	35	0.90	White	С	Low		69%	\$
	27"x30"x3/4"	Class A	86557	0.75	35	0.90	White	С	Low		69%	\$
	27"x60"x3/4"	Class A	86558	0.75	35	0.90	White	С	Low		69%	\$
	28"x30"x3/4"	Class A	86559	0.75	35	0.90	White	С	Low		69%	\$5
	28"x60"x3/4"	Class A	86560	0.75	35	0.90	White	С	Low		69%	\$
	30"x30"x3/4"	Class A	86875	0.75	35	0.90	White	С	Low		69%	\$
	30"x54"x3/4"	Class A	88686	0.75	35	0.90	White	С	Low		69%	\$
	30"x56"x3/4"	Class A	86563	0.75	35	0.90	White	С	Low		69%	\$
	30"x60"x3/4"	Class A	86564	0.75	35	0.90	White	С	Low		69%	\$
.T	4"x48"x3/4"	Class A	86540	0.75	35	0.90	White	С	Low		69%	\$5
	4"x60"x3/4"	Class A	86541	0.75	35	0.90	White	С	Low		69%	\$
	4"x72"x3/4"	Class A	86565	0.75	35	0.90	White	С	Low		69%	\$
	6"x48"x3/4"	Class A	86542	0.75	35	0.90	White	С	Low		69%	\$5
	6"x60"x3/4"	Class A	86543	0.75	35	0.90	White	С	Low		69%	\$
	6"x72"x3/4"	Class A	86566	0.75	35	0.90	White	С	Low		69%	\$5
	12"x12"x3/4"	Class A	86135	0.75	35	0.90	White	С	Low		69%	\$5
	12"x24"x3/4"	Class A	86245	0.75	35	0.90	White	С	Low		69%	\$5
	12"x48"x3/4"	Class A	86544	0.75	35	0.90	White	С	Low		69%	\$5
	12"x60"x3/4"	Class A	86545	0.75	35	0.90	White	С	Low		69%	\$\$
	12"x72"x3/4"	Class A	86546	0.75	35	0.90	White	С	Low		69%	\$\$

75/35

USG MARS™ LOGIX™ **CHANNEL PANELS**

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide. ulenvironment.com.$

ClimaPlus™ Warranty Performance³

 $Contains\ a\ broad-spectrum\ antimic robial$ additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG MARS™ LOGIX™ **FIELD PANELS** 75/35

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 75/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER










ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

				િંUL (Classified							
Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC	1		Ø	3	0	HRC	\$
FLB	20"x54"x3/4"	Class A	88845	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	20"x56"x3/4"	Class A	86571	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	20"x60"x3/4"	Class A	86164	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	21"x24"x3/4"	Class A	88840	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	21"x48"x3/4"	Class A	86573	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	22"x24"x3/4"	Class A	86574	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	22"x48"x3/4"	Class A	86575	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x24"x3/4"	Class A	86985	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x42"x3/4"	Class A	86577	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x44"x3/4"	Class A	86578	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x48"x3/4"	Class A	88985	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x72"x3/4"	Class A	88996	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	27"x30"x3/4"	Class A	86850	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	27"x60"x3/4"	Class A	86579	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	28"x30"x3/4"	Class A	86834	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	28"x60"x3/4"	Class A	86580	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x30"x3/4"	Class A	86830	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x54"x3/4"	Class A	86831	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x56"x3/4"	Class A	86583	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x60"x3/4"	Class A	86267	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
FLB	4"x48"x3/4"	Class A	86568	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	4"x60"x3/4"	Class A	86569	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	4"x72"x3/4"	Class A	86584	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	6"x48"x3/4"	Class A	88887	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	6"x60"x3/4"	Class A	86835	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	6"x72"x3/4"	Class A	86567	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x12"x3/4"	Class A	86136	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x24"x3/4"	Class A	86242	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x48"x3/4"	Class A	86321	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x60"x3/4"	Class A	88885	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x72"x3/4"	Class A	86570	0.75	35	0.90	White	D,E,F	Low		69%	\$\$

USG MARS™ LOGIX™ **CHANNEL PANELS** 75/35



Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50%total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



> 80/35 Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 80/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

TECHNICAL SERVICES

800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

પિ IIL Classified

				₩ ULC	lassified	_						
Edge	Panel Size⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	1		ø	3	0	HRC	\$
SQ	20"x54"x7/8"	Class A	86410	0.80	35	0.90	White	А	Low		70%	\$\$
	20"x56"x7/8"	Class A	86411	0.80	35	0.90	White	Α	Low		70%	\$\$
	20"x60"x7/8"	Class A	89501	0.80	35	0.90	White	Α	Low		70%	\$\$
	21"x24"x7/8"	Class A	86414	0.80	35	0.90	White	A, B	Low		70%	\$\$
	21"x48"x7/8"	Class A	86415	0.80	35	0.90	White	A	Low		70%	\$\$
	22"x24"x7/8"	Class A	86416	0.80	35	0.90	White	A, B	Low		70%	\$\$
	22"x48"x7/8"	Class A	86417	0.80	35	0.90	White	Α	Low		70%	\$\$
	24"x24"x7/8"	Class A	86100	0.80	35	0.90	White	A, B	Low		70%	\$\$
	24"x42"x7/8"	Class A	86419	0.80	35	0.90	White	Α	Low		70%	\$\$
	24"x44"x7/8"	Class A	86420	0.80	35	0.90	White	A	Low		70%	\$\$
	24"x48"x7/8"	Class A	86300	0.80	35	0.90	White	Α	Low		70%	\$\$
	24"x72"x7/8"	Class A	86360	0.80	35	0.90	White	Α	Low		70%	\$\$
	27"x30"x7/8"	Class A	86421	0.80	35	0.90	White	Α	Low		70%	\$\$
	27"x60"x7/8"	Class A	86422	0.80	35	0.90	White	Α	Low		70%	\$\$
	28"x30"x7/8"	Class A	86423	0.80	35	0.90	White	Α	Low		70%	\$\$
	28"x60"x7/8"	Class A	86424	0.80	35	0.90	White	Α	Low		70%	\$\$
	30"x30"x7/8"	Class A	86426	0.80	35	0.90	White	Α	Low		70%	\$\$
	30"x54"x7/8"	Class A	86427	0.80	35	0.90	White	Α	Low		70%	\$\$
	30"x56"x7/8"	Class A	86428	0.80	35	0.90	White	Α	Low		70%	\$\$
	30"x60"x7/8"	Class A	86429	0.80	35	0.90	White	Α	Low		70%	\$\$
SQ	4"x60"x7/8"	Class A	86403	0.80	35	0.90	White	А	Low		70%	\$\$
	4"x72"x7/8"	Class A	86405	0.80	35	0.90	White	А	Low		70%	\$\$
	6"x48"x7/8"	Class A	86404	0.80	35	0.90	White	Α	Low		70%	\$\$
	6"x60"x7/8"	Class A	86145	0.80	35	0.90	White	А	Low		70%	\$\$
	6"x72"x7/8"	Class A	86406	0.80	35	0.90	White	Α	Low		70%	\$\$
	12"x48"x7/8"	Class A	86407	0.80	35	0.90	White	А	Low		70%	\$\$
	12"x60"x7/8"	Class A	86408	0.80	35	0.90	White	Α	Low		70%	\$\$
	12"x72"x7/8"	Class A	86409	0.80	35	0.90	White	Α	Low		70%	\$\$

USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 80/35

Plant-Based Binder

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



80/35 Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 80/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES

800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

U UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	B		HRC	\$
SLT	20"x54"x7/8"	Class A	86447	0.80	35	0.90	White	С	Low		70%	\$\$
	20"x56"x7/8"	Class A	86448	0.80	35	0.90	White	С	Low		70%	\$\$
	20"x60"x7/8"	Class A	86449	0.80	35	0.90	White	С	Low		70%	\$\$
	21"x24"x7/8"	Class A	86451	0.80	35	0.90	White	С	Low		70%	\$\$
	21"x48"x7/8"	Class A	86452	0.80	35	0.90	White	С	Low		70%	\$\$
	22"x24"x7/8"	Class A	86453	0.80	35	0.90	White	С	Low		70%	\$\$
	22"x48"x7/8"	Class A	86454	0.80	35	0.90	White	С	Low		70%	\$\$
	24"x24"x7/8"	Class A	87200	0.80	35	0.90	White	С	Low		70%	\$\$
	24"x42"x7/8"	Class A	86456	0.80	35	0.90	White	С	Low		70%	\$\$
	24"x44"x7/8"	Class A	86457	0.80	35	0.90	White	С	Low		70%	\$\$
	24"x48"x7/8"	Class A	89600	0.80	35	0.90	White	С	Low		70%	\$\$
	24"x72"x7/8"	Class A	89660	0.80	35	0.90	White	С	Low		70%	\$\$
	27"x30"x7/8"	Class A	86458	0.80	35	0.90	White	С	Low		70%	\$\$
	27"x60"x7/8"	Class A	86460	0.80	35	0.90	White	С	Low		70%	\$\$
	28"x30"x7/8"	Class A	86459	0.80	35	0.90	White	С	Low		70%	\$\$
	28"x60"x7/8"	Class A	86461	0.80	35	0.90	White	С	Low		70%	\$\$
	30"x30"x7/8"	Class A	86500	0.80	35	0.90	White	С	Low		70%	\$\$
	30"x54"x7/8"	Class A	86464	0.80	35	0.90	White	С	Low		70%	\$\$
	30"x56"x7/8"	Class A	86465	0.80	35	0.90	White	С	Low		70%	\$\$
	30"x60"x7/8"	Class A	86466	0.80	35	0.90	White	С	Low		70%	\$\$
SLT	4"x48"x7/8"	Class A	86440	0.80	35	0.90	White	С	Low		70%	\$\$
	4"x60"x7/8"	Class A	86441	0.80	35	0.90	White	С	Low		70%	\$\$
	4"x72"x7/8"	Class A	86467	0.80	35	0.90	White	С	Low		70%	\$\$
	6"x48"x7/8"	Class A	86442	0.80	35	0.90	White	С	Low		70%	\$\$
	6"x60"x7/8"	Class A	86443	0.80	35	0.90	White	С	Low		70%	\$\$
	6"x72"x7/8"	Class A	86468	0.80	35	0.90	White	С	Low		70%	\$\$
	12"x48"x7/8"	Class A	86444	0.80	35	0.90	White	С	Low		70%	\$\$
	12"x60"x7/8"	Class A	86445	0.80	35	0.90	White	С	Low		70%	\$\$
	12"x72"x7/8"	Class A	86446	0.80	35	0.90	White	С	Low		70%	\$\$

USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 80/35

Plant-Based Binder

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50%total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS

Plant-Based Binder

80/35

80/35 Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 80/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

(UL Classified

dge	Panel Size ⁵	Fire	Item No.	NRC	CAC	LR ²	Color	Grid	voc	Anti-Mold	Recycled	Pane
		Rating			Min.			Options	Emissions	& Mildew/Sag Resistance	Content ¹	Cost
		Ø		NRC	CAC			Ħ	B	Ø	HRC	\$
LB	20"x54"x7/8"	Class A	86479	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	20"x56"x7/8"	Class A	86480	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	20"x60"x7/8"	Class A	86481	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	21"x24"x7/8"	Class A	86483	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	21"x48"x7/8"	Class A	86484	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	22"x24"x7/8"	Class A	86485	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	22"x48"x7/8"	Class A	86486	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x24"x7/8"	Class A	87100	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x42"x7/8"	Class A	86488	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x44"x7/8"	Class A	86489	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x48"x7/8"	Class A	89500	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x72"x7/8"	Class A	89670	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	27"x30"x7/8"	Class A	86490	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	27"x60"x7/8"	Class A	86491	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	28"x30"x7/8"	Class A	86492	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	28"x60"x7/8"	Class A	86493	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	30"x30"x7/8"	Class A	86400	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	30"x54"x7/8"	Class A	86501	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	30"x56"x7/8"	Class A	86496	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	30"x60"x7/8"	Class A	86497	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
LB	4"x48"x7/8"	Class A	86475	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	4"x60"x7/8"	Class A	86476	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	4"x72"x7/8"	Class A	86473	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	6"x48"x7/8"	Class A	86331	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	6"x48"x7/8"	Class A	86333	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	6"x72"x7/8"	Class A	86474	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	12"x48"x7/8"	Class A	86505	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	12"x60"x7/8"	Class A	86477	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	12"x72"x7/8"	Class A	86478	0.80	35	0.90	White	D, E, F	Low		70%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



85/35 Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 85/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

TECHNICAL SERVICES

800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

U UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	B		HRC	\$
SQ	20"x54"x7/8"	Class A	80100	0.85	35	0.90	White	А	Low		65%	\$\$
	20"x56"x7/8"	Class A	80101	0.85	35	0.90	White	Α	Low		65%	\$\$
	20"x60"x7/8"	Class A	80102	0.85	35	0.90	White	Α	Low		65%	\$\$
	21"x24"x7/8"	Class A	80103	0.85	35	0.90	White	A,B	Low		65%	\$\$
	21"x48"x7/8"	Class A	80104	0.85	35	0.90	White	Α	Low		65%	\$\$
	22"x24"x7/8"	Class A	80105	0.85	35	0.90	White	A,B	Low		65%	\$\$
	22"x48"x7/8"	Class A	80106	0.85	35	0.90	White	Α	Low		65%	\$\$
	24"x24"x7/8"	Class A	88134	0.85	35	0.90	White	A,B	Low		65%	\$\$
	24"x42"x7/8"	Class A	80107	0.85	35	0.90	White	A	Low		65%	\$\$
	24"x44"x7/8"	Class A	80108	0.85	35	0.90	White	Α	Low		65%	\$\$
	24"x48"x7/8"	Class A	89134	0.85	35	0.90	White	А	Low		65%	\$\$
	24"x72"x7/8"	Class A	89663	0.85	35	0.90	White	Α	Low		65%	\$\$
	27"x30"x7/8"	Class A	80109	0.85	35	0.90	White	Α	Low		65%	\$\$
	27"x60"x7/8"	Class A	80110	0.85	35	0.90	White	Α	Low		65%	\$\$
	28"x30"x7/8"	Class A	80111	0.85	35	0.90	White	Α	Low		65%	\$\$
	28"x60"x7/8"	Class A	80112	0.85	35	0.90	White	А	Low		65%	\$\$
	30"x30"x7/8"	Class A	80113	0.85	35	0.90	White	А	Low		65%	\$\$
	30"x54"x7/8"	Class A	80114	0.85	35	0.90	White	Α	Low		65%	\$\$
	30"x56x7/8"	Class A	80115	0.85	35	0.90	White	А	Low		65%	\$\$
	30"x60"x7/8"	Class A	89140	0.85	35	0.90	White	Α	Low		65%	\$\$
SQ	4"x48"x7/8"	Class A	80116	0.85	35	0.90	White	А	Low		65%	\$\$
	4"x60"x7/8"	Class A	80117	0.85	35	0.90	White	А	Low		65%	\$\$
	4"x72"x7/8"	Class A	80118	0.85	35	0.90	White	Α	Low		65%	\$\$
	6"x48"x7/8"	Class A	80119	0.85	35	0.90	White	А	Low		65%	\$\$
	6"x60"x7/8"	Class A	80120	0.85	35	0.90	White	Α	Low		65%	\$\$
	6"x72"x7/8"	Class A	80121	0.85	35	0.90	White	А	Low		65%	_
	12"x12"x7/8"	Class A	80122	0.85	35	0.90	White	Α	Low		65%	\$\$
	12"x24"x7/8"	Class A	86665	0.85	35	0.90	White	Α	Low		65%	\$\$
	12"x48"x7/8"	Class A	80123	0.85	35	0.90	White	Α	Low		65%	\$\$
	12"x60"x7/8"	Class A	80124	0.85	35	0.90	White	А	Low		65%	\$\$
	12"x72"x7/8"	Class A	80125	0.85	35	0.90	White	А	Low		65%	\$\$

USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 85/35

Plant-Based Binder

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide. ulenvironment.com.$

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



85/35 Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 85/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)

TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

FOR MOST UP-TO-DATE

(I) UL Classified

				WI OLC	lassified	_						
Edge	Panel Size⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	B	0	HRC	\$
SLT	20"x54"x7/8"	Class A	80126	0.85	35	0.90	White	С	Low		65%	\$\$
	20"x56"x7/8"	Class A	80127	0.85	35	0.90	White	С	Low		65%	\$\$
	20"x60"x7/8"	Class A	80128	0.85	35	0.90	White	С	Low		65%	\$\$
	21"x24"x7/8"	Class A	80129	0.85	35	0.90	White	С	Low		65%	\$\$
	21"x48"x7/8"	Class A	80130	0.85	35	0.90	White	С	Low		65%	\$\$
	22"x24"x7/8"	Class A	80131	0.85	35	0.90	White	С	Low		65%	\$\$
	22"x48"x7/8"	Class A	80132	0.85	35	0.90	White	С	Low		65%	\$\$
	24"x24"x7/8"	Class A	88135	0.85	35	0.90	White	С	Low		65%	\$\$
	24"x42"x7/8"	Class A	80133	0.85	35	0.90	White	С	Low		65%	\$\$
	24"x44"x7/8"	Class A	80134	0.85	35	0.90	White	С	Low		65%	\$\$
	24"x48"x7/8"	Class A	89135	0.85	35	0.90	White	С	Low		65%	\$\$
	24"x72"x7/8"	Class A	89665	0.85	35	0.90	White	С	Low		65%	\$\$
	27"x30"x7/8"	Class A	80135	0.85	35	0.90	White	С	Low		65%	\$\$
	27"x60"x7/8"	Class A	80136	0.85	35	0.90	White	С	Low		65%	\$\$
	28"x30"x7/8"	Class A	80137	0.85	35	0.90	White	С	Low		65%	\$\$
	28"x60"x7/8"	Class A	80138	0.85	35	0.90	White	С	Low		65%	\$\$
	30"x30"x7/8"	Class A	80139	0.85	35	0.90	White	С	Low		65%	\$\$
	30"x54"x7/8"	Class A	80140	0.85	35	0.90	White	С	Low		65%	\$\$
	30"x56x7/8"	Class A	80141	0.85	35	0.90	White	С	Low		65%	\$\$
	30"x60"x7/8"	Class A	89141	0.85	35	0.90	White	С	Low		65%	\$\$
SLT	4"x48"x7/8"	Class A	80142	0.85	35	0.90	White	С	Low		65%	\$\$
	4"x60"x7/8"	Class A	80143	0.85	35	0.90	White	С	Low		65%	\$\$
	4"x72"x7/8"	Class A	80144	0.85	35	0.90	White	С	Low		65%	\$\$
	6"x48"x7/8"	Class A	80145	0.85	35	0.90	White	С	Low		65%	\$\$
	6"x60"x7/8"	Class A	80146	0.85	35	0.90	White	С	Low		65%	\$\$
	6"x72"x7/8"	Class A	80147	0.85	35	0.90	White	С	Low		65%	\$\$
	12"x12"x7/8"	Class A	80148	0.85	35	0.90	White	С	Low		65%	\$\$
	12"x24"x7/8"	Class A	86664	0.85	35	0.90	White	С	Low		65%	\$\$
	12"x48"x7/8"	Class A	80149	0.85	35	0.90	White	С	Low		65%	\$\$
	12"x60"x7/8"	Class A	80150	0.85	35	0.90	White	С	Low		65%	\$\$
	12"x72"x7/8"	Class A	80151	0.85	35	0.90	White	С	Low		65%	\$\$
	-											

USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS

Plant-Based Binder

85/35

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide. ulenvironment.com.$

ClimaPlus™ Warranty Performance³

 $Contains\ a\ broad-spectrum\ antimic robial$ additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



85/35 Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 85/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES

800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

U UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	B		HRC	\$
FLB	20"x54"x7/8"	Class A	80152	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	20"x56"x7/8"	Class A	80153	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	20"x60"x7/8"	Class A	80154	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	21"x24"x7/8"	Class A	80155	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	21"x48"x7/8"	Class A	80156	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	22"x24"x7/8"	Class A	80157	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	22"x48"x7/8"	Class A	80158	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x24"x7/8"	Class A	88136	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x42"x7/8"	Class A	80159	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x44"x7/8"	Class A	80160	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x48"x7/8"	Class A	89136	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x72"x7/8"	Class A	89668	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	27"x30"x7/8"	Class A	80161	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	27"x60"x7/8"	Class A	80162	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	28"x30"x7/8"	Class A	80163	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	28"x60"x7/8"	Class A	80164	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	30"x30"x7/8"	Class A	80165	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	30"x54"x7/8"	Class A	80166	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	30"x56x7/8"	Class A	80167	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	30"x60"x7/8"	Class A	89142	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
FLB	4"x48"x7/8"	Class A	80168	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	4"x60"x7/8"	Class A	80169	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	4"x72"x7/8"	Class A	80170	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	6"x48"x7/8"	Class A	80171	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	6"x60"x7/8"	Class A	80172	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	6"x72"x7/8"	Class A	80173	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	12"x12"x7/8"	Class A	80174	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	12"x24"x7/8"	Class A	86663	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	12"x48"x7/8"	Class A	80175	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	12"x60"x7/8"	Class A	80176	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	12"x72"x7/8"	Class A	80177	0.85	35	0.90	White	D,E,F	Low		65%	\$\$

USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 85/35

Plant-Based Binder

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ productguide.ulenvironment.com.$

ClimaPlus™ Warranty Performance³

 $Contains\ a\ broad-spectrum\ antimic robial$ additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 90/30

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS

Plant-Based Binder

90/30


USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 90/30

Plant-Based Binder

SQ 20"x54"x1" Class A 80200 0.90 30 0.90 White A Low 66% 5 20"x56"x1" Class A 80201 0.90 30 0.90 White A Low 66% 5 20"x54"x1" Class A 80202 0.90 30 0.90 White A Low 66% 5 20"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 20"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 20"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 5 20"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 5 20"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 5 20"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 5 20"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 22"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 22"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 22"x54"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 22"x52"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 22"x52"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 22"x52"x1" Class A 80205 0.90 30 0.90 White A Low 66% 5 22"x52"x1" Class A 80210 0.90 30 0.90 White A Low 66% 5 5 22"x50"x1" Class A 80211 0.90 30 0.90 White A Low 66% 5 5 22"x50"x1" Class A 80215 0.90 30 0.90 White A Low 66% 5 5 5 5 5 5 5 5 5					(Մ) UL C	Classified	_						
SQ 20"%54"*I" Class A 80200 0.90 30 0.90 White A Low 66% \$ \$ \$ \$ \$ \$ \$ \$ \$	Edge	Panel Size⁵		Item No.	NRC		LR ²	Color			& Mildew/Sag		Panel Cost
20"x56"x1" Class					NRC	CAC	Ø		ø	3		HRC	\$
20"s60"x1" Class A 80202 0.90 30 0.90 White A Low 66% 5	SQ	20"x54"x1"	Class A	80200	0.90	30	0.90	White	А	Low		66%	\$\$
21"x24"x1" Class A 80203 0.90 30 0.90 White AB Low 66% \$ 21"x48"x1" Class A 80204 0.90 30 0.90 White A Low 66% \$ 22"x24"x1" Class A 80205 0.90 30 0.90 White A Low 66% \$ 22"x48"x1" Class A 80206 0.90 30 0.90 White A Low 66% \$ 24"x24"x1" Class A 88137 0.90 30 0.90 White A Low 66% \$ 24"x42"x1" Class A 80207 0.90 30 0.90 White A Low 66% \$ 24"x42"x1" Class A 80207 0.90 30 0.90 White A Low 66% \$ 24"x48"x1" Class A 89137 0.90 30 0.90 White A Low 66% \$ 24"x48"x1" Class A 89137 0.90 30 0.90 White A Low 66% \$ 24"x48"x1" Class A 89674 0.90 30 0.90 White A Low 66% \$ 22"x40"x1" Class A 89210 0.90 30 0.90 White A Low 66% \$ 22"x40"x1" Class A 80210 0.90 30 0.90 White A Low 66% \$ 22"x40"x1" Class A 80211 0.90 30 0.90 White A Low 66% \$ 22"x40"x1" Class A 80212 0.90 30 0.90 White A Low 66% \$ 30"x50"x1" Class A 80213 0.90 30 0.90 White A Low 66% \$ 30"x50"x1" Class A 80213 0.90 30 0.90 White A Low 66% \$ 30"x50"x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x50"x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x50"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 4"x60"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A		20"x56"x1"	Class A	80201	0.90	30	0.90	White	Α	Low		66%	\$\$
21"x48"x1" Class A 80204 0.90 30 0.90 White A Low 66% \$ 22"x24"x1" Class A 80205 0.90 30 0.90 White A Low 66% \$ 22"x48"x1" Class A 80206 0.90 30 0.90 White A Low 66% \$ 24"x24"x1" Class A 88137 0.90 30 0.90 White A Low 66% \$ 24"x44"x1" Class A 80207 0.90 30 0.90 White A Low 66% \$ 24"x44"x1" Class A 80208 0.90 30 0.90 White A Low 66% \$ 24"x48"x1" Class A 89137 0.90 30 0.90 White A Low 66% \$ 24"x48"x1" Class A 89574 0.90 30 0.90 White A Low 66% \$ 22"x30"x1" Class A 80209 0.90 30 0.90 White A Low 66% \$ 22"x30"x1" Class A 80210 0.90 30 0.90 White A Low 66% \$ 22"x30"x1" Class A 80211 0.90 30 0.90 White A Low 66% \$ 28"x30"x1" Class A 80212 0.90 30 0.90 White A Low 66% \$ 30"x30"x1" Class A 80213 0.90 30 0.90 White A Low 66% \$ 30"x54"x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80217 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 4"x60"x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 6"x22"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 6"x22"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 6"x22"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 6"x22"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 6"x22"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80		20"x60"x1"	Class A	80202	0.90	30	0.90	White	A	Low		66%	\$\$
22"x24"x1" Class A 80205 0.90 30 0.90 White A,B Low 66% \$		21"x24"x1"	Class A	80203	0.90	30	0.90	White	A,B	Low		66%	\$\$
22"x24"x1" Class A 80205 0.90 30 0.90 White A, B Low 66% 5			Class A	80204	0.90	30	0.90	White	Α	Low		66%	\$\$
24"x24"x1" Class A 88137 0.90 30 0.90 White A,B Low 66% \$			Class A	80205	0.90	30	0.90	White	A,B	Low		66%	\$\$
24"x42"x1" Class A 80207 0.90 30 0.90 White A Low 66% \$		22"x48"x1"	Class A	80206	0.90	30	0.90	White	Α	Low		66%	\$\$
24"x44"x1" Class A 80208 0.90 30 0.90 White A Low 66% \$		24"x24"x1"	Class A	88137	0.90	30	0.90	White	A,B	Low		66%	\$\$
24"x48"x1" Class A 89137 0.90 30 0.90 White A Low 66% \$ 24"x72"x1" Class A 89674 0.90 30 0.90 White A Low 66% \$ 27"x30"x1" Class A 80209 0.90 30 0.90 White A Low 66% \$ 27"x60"x1" Class A 80210 0.90 30 0.90 White A Low 66% \$ 28"x30"x1" Class A 80211 0.90 30 0.90 White A Low 66% \$ 28"x60"x1" Class A 80212 0.90 30 0.90 White A Low 66% \$ 30"x30"x1" Class A 80213 0.90 30 0.90 White A Low 66% \$ 30"x30"x1" Class A 80214 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x60"x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x60"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 30"x60"x1" Class A 80217 0.90 30 0.90 White A Low 66% \$ 4"x80"x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 4"x72"x1" Class A 80219 0.90 30 0.90 White A Low 66% \$ 6"x48"x1" Class A 80220 0.90 30 0.90 White A Low 66% \$ 6"x2"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$		24"x42"x1"	Class A	80207	0.90	30	0.90	White	Α	Low		66%	\$\$
24"x72"x1" Class A 89674 0.90 30 0.90 White A Low 66% \$		24"x44"x1"	Class A	80208	0.90	30	0.90	White	Α	Low		66%	\$\$
27"x30"x1" Class A 80209 0.90 30 0.90 White A Low 66% \$ 27"x60"x1" Class A 80210 0.90 30 0.90 White A Low 66% \$ 28"x30"x1" Class A 80211 0.90 30 0.90 White A Low 66% \$ 28"x60"x1" Class A 80212 0.90 30 0.90 White A Low 66% \$ 30"x30"x1" Class A 80213 0.90 30 0.90 White A Low 66% \$ 30"x54"x1" Class A 80214 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 4"x48"x1" Class A 80217 0.90 30 0.90 White A Low 66% \$ 4"x60"x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 6"x6x4"x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80		24"x48"x1"	Class A	89137	0.90	30	0.90	White	Α	Low		66%	\$\$
27"x60"x1" Class A 80210 0.90 30 0.90 White A Low 66% \$ 28"x30"x1" Class A 80211 0.90 30 0.90 White A Low 66% \$ 28"x60"x1" Class A 80212 0.90 30 0.90 White A Low 66% \$ 30"x50"x1" Class A 80213 0.90 30 0.90 White A Low 66% \$ 30"x54"x1" Class A 80214 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x60"x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x60"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 30"x60"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 4"x48"x1" Class A 80217 0.90 30 0.90 White A Low 66% \$ 4"x72"x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 6"x48"x1" Class A 80220 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A		24"x72"x1"	Class A	89674	0.90	30	0.90	White	Α	Low		66%	\$\$
28"x30"x1" Class A 80211 0.90 30 0.90 White A Low 66% \$ 28"x60"x1" Class A 80212 0.90 30 0.90 White A Low 66% \$ 30"x30"x1" Class A 80213 0.90 30 0.90 White A Low 66% \$ 30"x30"x1" Class A 80214 0.90 30 0.90 White A Low 66% \$ 30"x54"x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 89143 0.90 30 0.90 White A Low 66% \$ 30"x60"x1" Class A 89143 0.90 30 0.90 White A Low 66% \$ 4"x48"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 4"x60"x1" Class A 80217 0.90 30 0.90 White A Low 66% \$ 4"x72"x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 6"x48"x1" Class A 80219 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80220 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x12"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A		27"x30"x1"	Class A	80209	0.90	30	0.90	White	Α	Low		66%	\$\$
28"x60"x1" Class A 80212 0.90 30 0.90 White A Low 66% \$ 30"x30"x1" Class A 80213 0.90 30 0.90 White A Low 66% \$ 30"x54"x1" Class A 80214 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ 30"x60"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 4"x48"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$ 4"x72"x1" Class A 80217 0.90 30 0.90 White A Low 66% \$ 6"x48"x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80220 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x260"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x260"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x260"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x260"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$ 12"x260"x1" Class		27"x60"x1"	Class A	80210	0.90	30	0.90	White	Α	Low		66%	\$\$
30"x30"x1" Class A 80213 0.90 30 0.90 White A Low 66% \$ \$ 30"x54"x1" Class A 80214 0.90 30 0.90 White A Low 66% \$ \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ \$ 30"x56x1" Class A 89143 0.90 30 0.90 White A Low 66% \$ \$ \$ \$ \$ \$ \$ \$ \$		28"x30"x1"	Class A	80211	0.90	30	0.90	White	Α	Low		66%	\$\$
30"x54"x1" Class A 80214 0.90 30 0.90 White A Low 66% \$ 30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ \$ 30"x60"x1" Class A 89143 0.90 30 0.90 White A Low 66% \$ \$ \$ \$ \$ \$ \$ \$ \$		28"x60"x1"	Class A	80212	0.90	30	0.90	White	А	Low		66%	\$\$
30"x56x1" Class A 80215 0.90 30 0.90 White A Low 66% \$ \$ 30"x60"x1" Class A 89143 0.90 30 0.90 White A Low 66% \$ \$ \$ \$ \$ \$ \$ \$ \$		30"x30"x1"	Class A	80213	0.90	30	0.90	White	А	Low		66%	\$\$
30"x60"x1" Class A 89143 0.90 30 0.90 White A Low 66% \$ 50		30"x54"x1"	Class A	80214	0.90	30	0.90	White	А	Low		66%	\$\$
A"x48"x1" Class A 80216 0.90 30 0.90 White A Low 66% \$		30"x56x1"	Class A	80215	0.90	30	0.90	White	А	Low		66%	\$\$
4"x60"x1" Class A 80217 0.90 30 0.90 White A Low 66% \$ 4"x72"x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 6"x48"x1" Class A 80219 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80220 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x12"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low		30"x60"x1"	Class A	89143	0.90	30	0.90	White	А	Low		66%	\$\$
4"x72"x1" Class A 80218 0.90 30 0.90 White A Low 66% \$ 6"x48"x1" Class A 80219 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80220 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x12"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 86137 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$	SQ	4"x48"x1"	Class A	80216	0.90	30	0.90	White	А	Low		66%	\$\$
6"x48"x1" Class A 80219 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80220 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x12"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 86137 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$		4"x60"x1"	Class A	80217	0.90	30	0.90	White	Α	Low		66%	\$\$
6"x48"x1" Class A 80219 0.90 30 0.90 White A Low 66% \$ 6"x60"x1" Class A 80220 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x12"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 86137 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$			Class A	80218	0.90	30	0.90	White	А	Low		66%	\$\$
6"x60"x1" Class A 80220 0.90 30 0.90 White A Low 66% \$ 6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x12"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 86137 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$		6"x48"x1"		80219	0.90	30	0.90	White	А	Low		66%	\$\$
6"x72"x1" Class A 80221 0.90 30 0.90 White A Low 66% \$ 12"x12"x1" Class A 80222 0.90 30 0.90 White A Low 66% \$ 12"x24"x1" Class A 86137 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$		6"x60"x1"		80220	0.90	30	0.90	White	Α	Low		66%	\$\$
12"x24"x1" Class A 86137 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$			Class A	80221	0.90	30	0.90	White	А	Low		66%	\$\$
12"x24"x1" Class A 86137 0.90 30 0.90 White A Low 66% \$ 12"x48"x1" Class A 80223 0.90 30 0.90 White A Low 66% \$ 12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$			Class A	80222	0.90	30	0.90	White	А	Low		66%	\$\$
12"x60"x1" Class A 80224 0.90 30 0.90 White A Low 66% \$			Class A	86137	0.90	30	0.90	White	А	Low		66%	\$\$
12/1/20/1/4/ Cl. A 2022		12"x48"x1"	Class A	80223	0.90	30	0.90	White	А	Low		66%	\$\$
1911-1911 Clark 1999F 0.00 70 0.00 Militia A CCCC #			Class A	80224	0.90	30	0.90	White	А	Low		66%	\$\$
			Class A	80225	0.90	30	0.90	White	А	Low		66%	\$\$



Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide. ulenvironment.com.$



 $Contains\ a\ broad-spectrum\ antimic robial$ additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS

90/30 Plant-Based Binder

90/30 Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 90/30

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

				⊕ UL (Classified	_						
Edge	Panel Size⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	B		HRC	\$
SLT	20"x54"x1"	Class A	80226	0.90	30	0.90	White	С	Low		66%	\$\$
	20"x56"x1"	Class A	80227	0.90	30	0.90	White	С	Low		66%	\$\$
	20"x60"x1"	Class A	80228	0.90	30	0.90	White	С	Low		66%	\$\$
	21"x24"x1"	Class A	80229	0.90	30	0.90	White	С	Low		66%	\$\$
	21"x48"x1"	Class A	80230	0.90	30	0.90	White	С	Low		66%	\$\$
	22"x24"x1"	Class A	80231	0.90	30	0.90	White	С	Low		66%	\$\$
	22"x48"x1"	Class A	80232	0.90	30	0.90	White	С	Low		66%	\$\$
	24"x24"x1"	Class A	88138	0.90	30	0.90	White	С	Low		66%	\$\$
	24"x42"x1"	Class A	80233	0.90	30	0.90	White	С	Low		66%	\$\$
	24"x44"x1"	Class A	80234	0.90	30	0.90	White	С	Low		66%	\$\$
	24"x48"x1"	Class A	89138	0.90	30	0.90	White	С	Low		66%	\$\$
	24"x72"x1"	Class A	89675	0.90	30	0.90	White	С	Low		66%	\$\$
	27"x30"x1"	Class A	80235	0.90	30	0.90	White	С	Low		66%	\$\$
	27"x60"x1"	Class A	80236	0.90	30	0.90	White	С	Low		66%	\$\$
	28"x30"x1"	Class A	80237	0.90	30	0.90	White	С	Low		66%	\$\$
	28"x60"x1"	Class A	80238	0.90	30	0.90	White	С	Low		66%	\$\$
	30"x30"x1"	Class A	80239	0.90	30	0.90	White	С	Low		66%	\$\$
	30"x54"x1"	Class A	80240	0.90	30	0.90	White	С	Low		66%	\$\$
	30"x56x1"	Class A	80241	0.90	30	0.90	White	С	Low		66%	\$\$
	30"x60"x1"	Class A	89144	0.90	30	0.90	White	С	Low		66%	\$\$
SLT	4"x48"x1"	Class A	80242	0.90	30	0.90	White	С	Low		66%	\$\$
	4"x60"x1"	Class A	80243	0.90	30	0.90	White	С	Low		66%	\$\$
	4"x72"x1"	Class A	80244	0.90	30	0.90	White	С	Low		66%	\$\$
	6"x48"x1"	Class A	80245	0.90	30	0.90	White	С	Low		66%	\$\$
	6"x60"x1"	Class A	80246	0.90	30	0.90	White	С	Low		66%	\$\$
	6"x72"x1"	Class A	80247	0.90	30	0.90	White	С	Low		66%	\$\$
	12"x12"x1"	Class A	80248	0.90	30	0.90	White	С	Low		66%	\$\$
	12"x24"x1"	Class A	86138	0.90	30	0.90	White	С	Low		66%	\$\$
	12"x48"x1"	Class A	80249	0.90	30	0.90	White	С	Low		66%	\$\$
	12"x60"x1"	Class A	80250	0.90	30	0.90	White	С	Low		66%	\$\$
	L											

12"x72"x1"

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide. ulenvironment.com.$

Class A

80251

0.90

ClimaPlus™ Warranty Performance³

0.90

30

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

С

Low

White

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

66%

\$\$





90/30 Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 90/30

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

(U) UL Classified

	1	1	I	_	Classified	\neg	1	ı	1	ĺ	İ	ı
Edge	Panel Size⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC			Ħ	B	Ø	HRC	\$
LB	20"x54"x1"	Class A	80252	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	20"x56"x1"	Class A	80253	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	20"x60"x1"	Class A	80254	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	21"x24"x1"	Class A	80255	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	21"x48"x1"	Class A	80256	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	22"x24"x1"	Class A	80257	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	22"x48"x1"	Class A	80258	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	24"x24"x1"	Class A	88139	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	24"x42"x1"	Class A	80259	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	24"x44"x1"	Class A	80260	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	24"x48"x1"	Class A	89139	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	24"x72"x1"	Class A	89678	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	27"x30"x1"	Class A	80261	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	27"x60"x1"	Class A	80262	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	28"x30"x1"	Class A	80263	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	28"x60"x1"	Class A	80264	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	30"x30"x1"	Class A	80265	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	30"x54"x1"	Class A	80266	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	30"x56x1"	Class A	80267	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	30"x60"x1"	Class A	89145	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
LB	4"x48"x1"	Class A	80268	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	4"x60"x1"	Class A	80269	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	4"x72"x1"	Class A	80270	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	6"x48"x1"	Class A	80271	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	6"x60"x1"	Class A	80272	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	6"x72"x1"	Class A	80273	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	12"x12"x1"	Class A	80274	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	12"x24"x1"	Class A	86139	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	12"x48"x1"	Class A	80275	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	12"x60"x1"	Class A	80276	0.90	30	0.90	White	D,E,F	Low		66%	\$\$
	12"x72"x1"	Class A	80277	0.90	30	0.90	White	D,E,F	Low		66%	\$\$

LOGIX™ CHANNEL PANELS 90/30 Plant-Based Binder

USG MARS™ HIGH-NRC

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on $usg.com\ and\ at\ product guide. ulenvironment.com.$

ClimaPlus™ Warranty Performance³

 $Contains\ a\ broad-spectrum\ antimic robial$ additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



PRODUCT CERTIFIED FOR LOW CHEMICAL

GRID PROFILE OPTIONS

PHYSICAL DATA/ **FOOTNOTES**

USG MARS MARS HIGH-NRC LOGIX **ACOUSTICAL PANELS**

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER









ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

A USG DX*/DXL™	B ⁴ USG Centricitee™ DXT™	C USG DX*/DXL™	D USG Centricitee™ DXT™	E USG Fineline® DXF™	F USG Identitee® DXI™

Product literature Data sheet: IS274 System guide: IS268

ASTM E1264 classification

Type IV, Form 1 and 2, Pattern E, G ASTM E84 and CAN/ULC S102

surface-burning characteristics Flame spread: 25 or less Smoke developed: 50 or less

Weight 0.73 lb./sq. ft. (3/4")

usadesianstudio.com or cacdesianstudio.com

Thermal resistance R-2.2 (3/4")

MaintenanceCan be cleaned easily with a soft brush or vacuum. To clean panel, use a clean white cloth with water or a mild detergent and wipe surface.

Maximum backloading See *USG 30-Year Limited System Warranty Commercial* Applications (SC2102).

- For details see LEED report tool at usgdesignstudio.com or
- cgcdesignstudio.com.

 2. LR values are shown as averages.

 3. Panel face and back surfaces treated with a proprietary broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold and mildew. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and USG ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. Maximum 2'x2' with SQ edge panels.
- Stabilizer bar required if opening ≥ 60".

Notice


Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IS274/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG LOGIX™

SUSPENSION SYSTEMS, ACCESSORIES, USG PANZ® METAL PANELS AND CONNECTOR PANELS

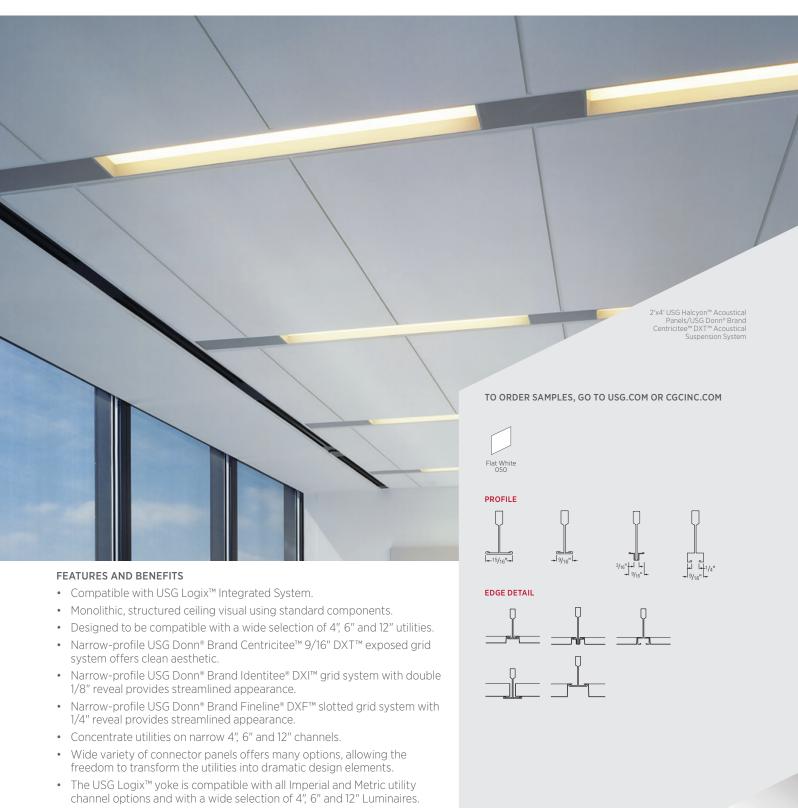

APPLICATIONS

- Interior general-use areas
- Open-plan offices
- Conference rooms
- · Reception and lobby areas
- · Media centers and libraries
- Airports

USG LOGIX "SUSPENSION SYSTEMS

USG DONN® BRAND DX® AND CENTRICITEE™ DXT™ SYSTEMS (IMPERIAL)

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)









USG DONN® BRAND CENTRICITEE™ DXT™ 9/16" TEE SYSTEM

Main Tee





ASTM Class	Length	Height	Item No.	Post- consumer RC	Total RC	Description
				3	3	
ntermediate Duty	144"	1.64"	DX/DXL24 DX24SP101 DX24SP104 DX24SP106 DX24SP110	up to 40%	up to 47%	USG Donn* Brand DX* Main Tee with CT hole, 6" o.c. USG Donn* Brand DX* Main Tee with 4" paired CT holes, 48" o.c. USG Donn* Brand DX* Main Tee with 4" paired CT holes, for 46", 48", 4! Large Panels USG Donn* Brand DX* Main Tee with 6" paired CT holes, for 46", 48", 4! Large Panels USG Donn* Brand DX* Main Tee with 4" paired CT holes, for 72" Large Panels
	120"	1.64"	DX24SP102 DX24SP109	up to 40%	up to 47%	USG Donn* Brand DX* Main Tee with 4" paired CT holes, 30" o.c. USG Donn* Brand DX* Main Tee with 6" paired CT holes, 60" o.c.
	104"	1.64"	DX24SP103	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 4" paired CT holes, 52" o.c.
	128"	1.64"	DX24SP107	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 4" paired CT holes, 64" o.c.
	100"	1.64"	DX24SP108	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 4" paired CT holes, 100" o.c.
	96"	1.64"	DX24SP105	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 6" paired CT holes, 21" o.c.
	21"	1-1/2"	DX2116	up to 26%	up to 33%	21" USG Donn® Brand DX® Cross Tee
	24"	1-1/2"	DX216	up to 26%	up to 33%	24" USG Donn® Brand DX® Cross Tee
	22"	1-1/2"	DX2216	up to 26%	up to 33%	22" USG Donn® Brand DX® Cross Tee
	28"	1-1/2"	DX2816	up to 26%	up to 33%	28" USG Donn* Brand DX* Cross Tee
	30"	1-1/2"	DX3016	up to 26%	up to 33%	30" USG Donn® Brand DX® Cross Tee
	48"	1-1/2"	DX422	up to 26%		48" USG Donn® Brand DX® Cross Tee
	44"				up to 33%	
		1-1/2"	DX4416	up to 26%	up to 33%	44" USG Donn® Brand DX® Cross Tee
	60"	1-1/2"	DX524	up to 26%	up to 33%	60" USG Donn® Brand DX® Cross Tee
	56"	1-1/2"	DX5616	up to 26%	up to 33%	56" USG Donn® Brand DX® Cross Tee
	72"	1-1/2"	DX624	up to 26%	up to 33%	72" USG Donn® Brand DX® Cross Tee
	96"	1-1/2"	DX824	up to 26%	up to 33%	96" USG Donn® Brand DX® Cross Tee
Intermediate Duty	144"	1-1/2"	DXT24 DXT24SP101 DXT24SP104 DXT24SP106 DXT24SP110	up to 40%	up to 47%	USG Donn* Brand Centricitee™ DXT™ Main Tee with CT hole, 6" o.c. USG Donn* Brand Centricitee™ DXT™ Main Tee with 4" paired CT hole; 48" o.c. USG Donn* Brand Centricitee™ DXT™ Main Tee with 4" paired CT hole; for 46", 48", 46" Large Panels USG Donn* Brand Centricitee™ DXT™ Main Tee with 6" paired CT hole; for 46", 48", 46" Large Panels USG Donn* Brand Centricitee™ DXT™ Main Tee with 4" paired CT hole; for 72" Large Panels
	120"	1-1/2"	DXT24SP102 DXT24SP109	up to 40%	up to 47%	USG Donn* Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes 30" o.c. USG Donn* Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes 60" o.c.
	104"	1-1/2"	DXT24SP103	up to 40%	up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes 52″ o.c.
	128"	1-1/2"	DXT24SP107	up to 40%	up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes
						64" o.c.
	100"	1-1/2"	DXT24SP108	up to 40%	up to 47%	
	100"	1-1/2"	DXT24SP108 DXT24SP105	up to 40% up to 40%	up to 47% up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes 100″ o.c.
						USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes 100″ o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6″ paired CT holes
	96"	1-1/2"	DXT24SP105	up to 40%	up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes 100″ o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6″ paired CT holes 21″ o.c.
	96"	1-1/2"	DXT24SP105	up to 40% up to 26%	up to 47% up to 33%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes 100" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes 21" o.c. 21" USG Donn® Brand Centricitee™ DXT™ Cross Tee
	96" 21" 24"	1-1/2" 1-1/2" 1-1/2"	DXT24SP105 DXT2122 DXT222	up to 40% up to 26% up to 26%	up to 47% up to 33% up to 33%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes 100" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes 21" o.c. 21" USG Donn® Brand Centricitee™ DXT™ Cross Tee 24" USG Donn® Brand Centricitee™ DXT™ Cross Tee
	96" 21" 24" 22"	1-1/2" 1-1/2" 1-1/2" 1-1/2"	DXT24SP105 DXT2122 DXT222 DXT2222	up to 40% up to 26% up to 26% up to 26%	up to 47% up to 33% up to 33% up to 33%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes 100″ o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6″ paired CT holes 21″ o.c. 21″ USG Donn® Brand Centricitee™ DXT™ Cross Tee 24″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	96" 21" 24" 22" 28"	1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2"	DXT24SP105 DXT2122 DXT222 DXT2222 DXT2822	up to 40% up to 26% up to 26% up to 26% up to 26%	up to 47% up to 33% up to 33% up to 33% up to 33%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes 100" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes 21" o.c. 21" USG Donn® Brand Centricitee™ DXT™ Cross Tee 24" USG Donn® Brand Centricitee™ DXT™ Cross Tee 22" USG Donn® Brand Centricitee™ DXT™ Cross Tee
	96" 21" 24" 22" 28" 30"	1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2"	DXT24SP105 DXT2122 DXT222 DXT2222 DXT2822 DXT3022 DXT424 DXT4422	up to 40% up to 26%	up to 47% up to 33%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes 100" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes 21" o.c. 21" USG Donn® Brand Centricitee™ DXT™ Cross Tee 24" USG Donn® Brand Centricitee™ DXT™ Cross Tee 22" USG Donn® Brand Centricitee™ DXT™ Cross Tee 28" USG Donn® Brand Centricitee™ DXT™ Cross Tee 30" USG Donn® Brand Centricitee™ DXT™ Cross Tee
	96" 21" 24" 22" 28" 30" 48"	1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2"	DXT24SP105 DXT2122 DXT222 DXT2222 DXT2222 DXT2822 DXT3022 DXT424	up to 40% up to 26%	up to 47% up to 33%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes 100" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes 21" o.c. 21" USG Donn® Brand Centricitee™ DXT™ Cross Tee 24" USG Donn® Brand Centricitee™ DXT™ Cross Tee 22" USG Donn® Brand Centricitee™ DXT™ Cross Tee 28" USG Donn® Brand Centricitee™ DXT™ Cross Tee 30" USG Donn® Brand Centricitee™ DXT™ Cross Tee 48" USG Donn® Brand Centricitee™ DXT™ Cross Tee
	96" 21" 24" 22" 28" 30" 48"	1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2"	DXT24SP105 DXT2122 DXT222 DXT2222 DXT2822 DXT3022 DXT424 DXT4422	up to 40% up to 26%	up to 47% up to 33%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes 100" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes. 21" USG Donn® Brand Centricitee™ DXT™ Cross Tee 24" USG Donn® Brand Centricitee™ DXT™ Cross Tee 22" USG Donn® Brand Centricitee™ DXT™ Cross Tee 28" USG Donn® Brand Centricitee™ DXT™ Cross Tee 30" USG Donn® Brand Centricitee™ DXT™ Cross Tee 48" USG Donn® Brand Centricitee™ DXT™ Cross Tee 48" USG Donn® Brand Centricitee™ DXT™ Cross Tee
	96" 21" 24" 22" 28" 30" 48" 44"	1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2" 1-1/2"	DXT24SP105 DXT2122 DXT222 DXT2222 DXT2822 DXT3022 DXT424 DXT4422 DXT524	up to 40% up to 26% up to 47% up to 33% USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes, 100" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes, 21" o.c. 21" USG Donn® Brand Centricitee™ DXT™ Cross Tee 24" USG Donn® Brand Centricitee™ DXT™ Cross Tee 22" USG Donn® Brand Centricitee™ DXT™ Cross Tee 28" USG Donn® Brand Centricitee™ DXT™ Cross Tee 30" USG Donn® Brand Centricitee™ DXT™ Cross Tee 48" USG Donn® Brand Centricitee™ DXT™ Cross Tee 44" USG Donn® Brand Centricitee™ DXT™ Cross Tee 44" USG Donn® Brand Centricitee™ DXT™ Cross Tee		

USG LOGIX "SUSPENSION SYSTEMS

USG DONN® BRAND IDENTITEE® DXI® (IMPERIAL) AND DX® (METRIC) SYSTEMS

fax: 888874-2348 | usg.c.
ccc: contact Sales Representat

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



USG LOGIX™ SUSPENSION SYSTEMS - IMPERIAL

USG DONN® BRAND IDENTITEE® DXI™ 9/16" TEE SYSTEM





USG LOGIX™ SUSPENSION SYSTEMS - METRIC

USG DONN® BRAND DX® 24 MM TEE SYSTEM





ASTM Class	Length	Height	Item No.	Post- consumer RC	Total RC	Description
				3	3	
Intermediate Duty	144"	1-13/16"	DXI24 DXI24SP101 DXI24SP104 DXI24SP106 DXI24SP110	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with CT hole, 6" o.c. USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 48" o.c. USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, for 46", 48", 46" Large Panels USG Donn® Brand Identitee® DXI™ Main Tee with 6" paired CT holes, for 46", 48", 46" Large Panels USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, for 46", 48", 46" Large Panels
	120"	1-13/16"	DXI24SP102 DXI24SP109	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 4″ paired CT holes, 30″ o.c. USG Donn® Brand Identitee® DXI™ Main Tee with 6″ paired CT holes, 60″ o.c.
	104"	1-13/16"	DXI24SP103	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 4″ paired CT holes, 52″ o.c.
	128"	1-13/16"	DXI24SP107	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 4″ paired CT holes, 64″ o.c.
	100"	1-13/16"	DXI24SP108	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 4″ paired CT holes, 100″ o.c.
	96"	1-13/16"	DXI24SP105	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 6″ paired CT holes, 21″ o.c.
	21"	1-13/16"	DXI2124	up to 50.4%	up to 33%	21" USG Donn® Brand Identitee® DXI™ Cross Tee
	22"	1-13/16"	DXI2224	up to 50.4%	up to 33%	22" USG Donn® Brand Identitee® DXI™ Cross Tee
	24"	1-13/16"	DXI224	up to 50.4%	up to 33%	24" USG Donn® Brand Identitee® DXI™ Cross Tee
	28"	1-13/16"	DXI2824	up to 50.4%	up to 33%	28" USG Donn® Brand Identitee® DXI™ Cross Tee
	30"	1-13/16"	DXI3024	up to 50.4%	up to 33%	30" USG Donn® Brand Identitee® DXI™ Cross Tee
	48"	1-13/16"	DXI424	up to 50.4%	up to 33%	48" USG Donn® Brand Identitee® DXI™ Cross Tee
	44"	1-13/16"	DXI4424	up to 50.4%	up to 33%	44" USG Donn® Brand Identitee® DXI™ Cross Tee
	60"	1-13/16"	DXI524	up to 50.4%	up to 33%	60" USG Donn® Brand Identitee® DXI™ Cross Tee
	56"	1-13/16"	DXI5624	up to 50.4%	up to 33%	56" USG Donn® Brand Identitee® DXI™ Cross Tee
	72"	1-13/16"	DXI624	up to 50.4%	up to 33%	72" USG Donn® Brand Identitee® DXI™ Cross Tee
	96"	1-13/16"	DXI824	up to 50.4%	up to 33%	96" USG Donn® Brand Identitee® DXI™ Cross Tee

ASTM Class	Length	Height	Item No.	Post- consumer RC	Total RC	Description
				3	3	
Intermediate	3600 mm	42 mm	MEDX3600	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with CT hole, 150 mm o.c.
Duty	2400 mm	42 mm	MEDX24SP201 MEDX24SP204	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 100 mm paired CT holes, 1200 mm o.c. USG Donn® Brand DX® Main Tee with 150 mm paired CT holes, 1200 mm o.c.
	2600 mm	42 mm	MEDX24SP203	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 100 mm paired CT holes, 1300 mm o.c.
	3000 mm	42 mm	MEDX24SP205 MEDX24SP206	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 100 mm paired CT holes, 1500 mm o.c USG Donn® Brand DX® Main Tee with 150 mm paired CT holes, 1500 mm o.c
	1000 mm	38 mm	MEDX1000	up to 26%	up to 33%	1000 mm USG Donn® Brand DX® Cross Tee
	1050 mm	38 mm	MEDX1050	up to 26%	up to 33%	1050 mm USG Donn® Brand DX® Cross Tee
	1100 mm	38 mm	MEDX1100	up to 26%	up to 33%	1100 mm USG Donn® Brand DX® Cross Tee
	1200 mm	38 mm	MEDX1200	up to 26%	up to 33%	1200 mm USG Donn® Brand DX® Cross Tee
	1350 mm	38 mm	MEDX1350	up to 26%	up to 33%	1350 mm USG Donn® Brand DX® Cross Tee
	1400 mm	38 mm	MEDX1400	up to 26%	up to 33%	1400 mm USG Donn® Brand DX® Cross Tee
	1500 mm	38 mm	MEDX1500	up to 26%	up to 33%	1500 mm USG Donn® Brand DX® Cross Tee
	1800 mm	38 mm	MEDX1800	up to 26%	up to 33%	1800 mm USG Donn® Brand DX® Cross Tee
	1900 mm	38 mm	MEDX1900	up to 26%	up to 33%	1900 mm USG Donn® Brand DX® Cross Tee
	525 mm	38 mm	MEDX525	up to 26%	up to 33%	525 mm USG Donn® Brand DX® Cross Tee
	550 mm	38 mm	MEDX550	up to 26%	up to 33%	550 mm USG Donn® Brand DX® Cross Tee
	600 mm	38 mm	MEDX600	up to 26%	up to 33%	600 mm USG Donn® Brand DX® Cross Tee
	675 mm	38 mm	MEDX675	up to 26%	up to 33%	675 mm USG Donn® Brand DX® Cross Tee
	700 mm	38 mm	MEDX700	up to 26%	up to 33%	700 mm USG Donn® Brand DX® Cross Tee



USG LOGIX™SUSPENSION SYSTEMS

USG DONN® BRAND CENTRICITEE™ AND IDENTITEE® DXI™ (METRIC) SYSTEMS

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)





USG DONN® BRAND CENTRICITEE™ DXT™ 15 MM TEE SYSTEM	
Main Tee	









ASTM Class	Length	Height	Item No.	Post- consumer RC	Total RC	Description
				3	(4)	
Intermediate	3600 mm	46 mm	MEDX3600	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with CT hole, 150 mm o.c.
Duty	2400 mm	46 mm	MEDXT24SP201 MEDXT24SP204	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with 100 mm paired CT holes, 1200 mm o.c. USG Donn® Brand Centricitee™ Main Tee with 150 mm paired CT holes, 1200 mm o.c.
	2600 mm	46 mm	MEDXT24SP203	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with 100 mm paired CT holes, 1300 mm o.c.
	3000 mm	46 mm	MEDXT24SP205 MEDXT24SP206	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with 100 mm paired CT holes, 1500 mm o.c. USG Donn® Brand Centricitee™ Main Tee with 150 mm paired CT holes, 1500 mm o.c.
	1000 mm	38 mm	MEDXT1000	up to 26%	up to 33%	1000 mm USG Donn® Brand Centricitee™ Cross Tee
	1050 mm	38 mm	MEDXT1050	up to 26%	up to 33%	1050 mm USG Donn® Brand Centricitee™ Cross Tee
	1100 mm	38 mm	MEDXT1100	up to 26%	up to 33%	1100 mm USG Donn® Brand Centricitee™ Cross Tee
	1200 mm	38 mm	MEDXT1200	up to 26%	up to 33%	1200 mm USG Donn® Brand Centricitee™ Cross Tee
	1350 mm	38 mm	MEDXT1350	up to 26%	up to 33%	1350 mm USG Donn® Brand Centricitee™ Cross Tee
	1400 mm	38 mm	MEDXT1400	up to 26%	up to 33%	1400 mm USG Donn® Brand Centricitee™ Cross Tee
	1500 mm	38 mm	MEDXT1500	up to 26%	up to 33%	1500 mm USG Donn® Brand Centricitee™ Cross Tee
	1800 mm	38 mm	MEDXT1800	up to 26%	up to 33%	1800 mm USG Donn® Brand Centricitee™ Cross Tee
	1900 mm	38 mm	MEDXT1900	up to 26%	up to 33%	1900 mm USG Donn® Brand Centricitee™ Cross Tee
	525 mm	38 mm	MEDXT525	up to 26%	up to 33%	525 mm USG Donn® Brand Centricitee™ Cross Tee
	550 mm	38 mm	MEDXT550	up to 26%	up to 33%	550 mm USG Donn* Brand Centricitee™ Cross Tee
	600 mm	38 mm	MEDXT600	up to 26%	up to 33%	
		38 mm	MEDXT675		····	600 mm USG Donn® Brand Centricitee™ Cross Tee
	700 mm	38 mm	MEDXT700	up to 26%	up to 33%	675 mm USG Donn® Brand Centricitee™ Cross Tee
Intermediate	3600 mm	46 mm	MEDXI3600	up to 26% up to 50.4%	up to 33%	700 mm USG Donn® Brand Centricitee™ Cross Tee USG Donn® Brand Identitee® Main Tee with CT hole, 150 mm o.c.
Duty	3000		TIEDAI3000	up to 30.4%	up to 0170	030 Dollar Brand (dentated France With Criticity, 130 minro.c.)
	2400 mm	46 mm	MEDXI24SP201 MEDXI24SP204	up to 50.4%	up to 61%	USG Donn* Brand Identitee* Main Tee with 100 mm paired CT holes, 1200 mm o.c. USG Donn* Brand Identitee* Main Tee with 150 mm paired CT holes, 1200 mm o.c.
	2600 mm	46 mm	MEDXI24SP203	up to 50.4%	up to 61%	USG Donn® Brand Identitee® Main Tee with 100 mm paired CT holes, 1300 mm o.c.
	3000 mm	46 mm	MEDXI24SP205 MEDXI24SP206	up to 50.4%	up to 61%	USG Donn® Brand Identitee® Main Tee with 100 mm paired CT holes, 1500 mm o.c. USG Donn® Brand Identitee® Main Tee with 150 mm paired CT holes, 1500 mm o.c.
	1000 mm	46 mm	MEDXI1000	up to 50.4%	up to 61%	1000 mm USG Donn® Brand Identitee® Cross Tee
	1050 mm	46 mm	MEDXI1050	up to 50.4%	up to 61%	1050 mm USG Donn® Brand Identitee® Cross Tee
	1100 mm	46 mm	MEDXI1100	up to 50.4%	up to 61%	1100 mm USG Donn® Brand Identitee® Cross Tee
	1200 mm	46 mm	MEDXI1200	up to 50.4%	up to 61%	1200 mm USG Donn® Brand Identitee® Cross Tee
	1350 mm	46 mm	MEDXI1350	up to 50.4%	up to 61%	1350 mm USG Donn* Brand Identitee* Cross Tee
	1400 mm	46 mm	MEDXI1400	up to 50.4%	up to 61%	1400 mm USG Donn® Brand Identitee® Cross Tee
	1500 mm	46 mm	MEDXI1500	up to 50.4%	up to 61%	1500 mm USG Donn® Brand Identitee® Cross Tee
	1800 mm	46 mm	MEDXI1800	up to 50.4%	up to 61%	1800 mm USG Donn® Brand Identitee® Cross Tee
	1900 mm	46 mm	MEDXI1900	up to 50.4%	up to 61%	1900 mm USG Donn® Brand Identitee® Cross Tee
	525 mm	46 mm	MEDXI1525	up to 50.4%	up to 61%	525 mm USG Donn® Brand Identitee® Cross Tee
	550 mm	46 mm	MEDXI1550	up to 50.4%	up to 61%	550 mm USG Donn® Brand Identitee® Cross Tee
	600 mm	46 mm	MEDXI1600	up to 50.4%	up to 61%	600 mm USG Donn® Brand Identitee® Cross Tee
	675 mm	46 mm	MEDXI1675	up to 50.4%	up to 61%	675 mm USG Donn® Brand Identitee® Cross Tee
	700 mm	46 mm	MEDXI1700	up to 50.4%	up to 61%	700 mm USG Donn® Brand Identitee® Cross Tee

IMPERIAL AND METRIC

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

USG LOGIX™ INTEGRATED **CEILING SYSTEMS**


Yoke and Cross Members

Accessories	Item No.	Description	Color	Accessories	Item No.	Description	Color
	LGXUNVYK	USG Logix™ Universal Yoke 4", 6", 100 mm, 150 mm, HDG, 2-part yoke	N/A		LGXDXT6	USG Logix™6" channel cross member USG Donn® Brand Centricitee™ DXT™ systems	Flat White
	LGXDX4	USG Logix™ 4" channel cross member for USG Donn® Brand DX® systems	Flat White		LGXDXT100	USG Logix™ 100 mm channel cross member USG Donn® Brand Centricitee™ DXT™ systems	Flat White
	LGXDX6	USG Logix™ 6" channel cross member USG Donn® Brand DX® systems	Flat White		LGXDXT150	USG Logix™ 150 mm channel cross member USG Donn® Brand Centricitee™ DXT™ systems	Flat White
	LGXDX100	USG Logix™100 mm channel cross member USG Donn® Brand DX® systems	Flat White		LGXDXT4C	USG Logix™ 4" channel cross member cover for USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT4	Flat White
	LGXDX150	USG Logix™ 150 mm channel cross member USG Donn® Brand DX® systems	Flat White		LGXDXT6C	USG Logix™ 6" channel cross member Cover USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT6	Flat White
	LGXDXT4	USG Logix™ 4" channel cross member for USG Donn® Brand Centricitee™ DXT™ systems	Flat White		LGXDXT100C	USG Logix™ 100 mm channel cross member cover USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT100	Flat White
					LGXDXT150C	USG Logix™ 150 mm channel cross member cover USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT150	Flat White

CROSS MEMBER COVER

To Create a DXI Cross Tee	Use Channel Cross Member (Item No.)	Use Channel Cross Member Cover (Item No.)
USG Logix™ 4″	LGXDXT4	LGXDXT4C
USG Logix™ 6″	LGXDXT6	LGXDXT6C
USG Logix™100 mm	LGXDXT100	LGXDXT100C
USG Logix™150 mm	LGXDXT150	LGXDXT150C

Creating a Channel Cross Member for USG Logix™ DXI™ Systems

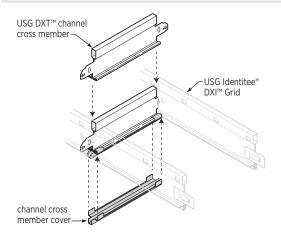



USG LOGIX ACCESSORIES

IMPERIAL AND METRIC

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)


USG LOGIX™ INTEGRATED **CEILING SYSTEMS** STABILIZER BARS

Features

- Versatile engineered design provides support, security and accessibility.
 Factory-engineered solution provides system rigidity in large module applications and offers quick installation reducing field labor time.
 Available in six different dimensions to facilitate fast delivery.
- Durable galvanized steel construction.
- Factory-engineered capture tabs prevent panel detachment and lip out.
- Adjustable stab tabs secure bars onto the panel.
- Bulb tabs hook over the grid to prevent detachment, maintain lateral alignment and provide access.

Products








Item No.	Description	Profile
SB24	24 in. Accessible Stabilizer Bar	2' (24") center to center notch spacing
.SB30	30 in. Accessible Stabilizer Bar	2'-6" (30") center to center notch spacing
ASB48	48 in. Accessible Stabilizer Bar	4 ft. (48") center to center notch spacing
ASB600	600 mm Accessible Stabilizer Bar	600 mm center to center notch spacing
ASB900	900 mm Accessible Stabilizer Bar	900 mm center to center notch spacing
ASB1200	1200 mm Accessible Stabilizer Bar	1200 mm center to center notch spacing

Installation

Panels ≥ 60" Panels ≥ 96"







If opening is \geq 96" then two stabilizer bars are required at the 1/3 and 2/3 points.

USG PANZ® LOGIX™ METAL PANELS

IMPERIAL AND METRIC

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

> TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

PRODUCT INFORMATION Materials **Available Sizes** Panel Edge Profile **USG PANZ®** Aluminum Field Panels FL Edge 20" x 54", 20" x 60", 24" x 24", 24" x 48", 24" x 72", 24" x 96", 27" x 30", 30" x 30", 30" x 54", 30" x 60", 48" x 48" Aluminum FL Edge SQ Edge Channel Panels 4" x 48", 4" x 60", 4" x 72", 6" x 12", 6" x 48", 6" x 60", 6" x 72", 12" x 48", 12" x 60", 12" x 72" SL Edge **Edge Details** Finish USG DXT™ Grid, USG DXI™ Grid, USG DXF™ Grid, USG DX® Grid, USG DX® Grid, FL Edge FL Edge FL Edge SQ Edge SL Edge **USG PANZ®** Materials **Available Sizes** Panel Edge Profile Aluminum Field Panels FL Edge SQ Edge $600 \, \text{mm} \, \text{x} \, 550 \, \text{mm}, 600 \, \text{mm} \, \text{x} \, 600 \, \text{mm}, 675 \, \text{mm} \, \text{x} \, 500 \, \text{mm}, 750 \, \text{mm} \, \text{x} \, 700 \, \text{mm}, 1050 \, \text{mm} \, \text{x} \, 600 \, \text{mm},$ 1100 mm x 600 mm, 1800 mm x 600 mm, 1200 mm x 600 mm, 1350 mm x 750 mm, 1400 mm x 500 mm, SL Edge 1400 mm x 750 mm, 1350 mm x 500 mm Aluminum 1500 mm x 100 mm, 1200 mm x 100 mm, 1000 mm x 100 mm, 1200 mm x 150 mm, 1000 mm x 150 mm, 1800 mm x 300 mm **Edge Details** Finish USG DXT™ Grid, USG DXF™ Grid, USG DX® Grid, USG DXI™ Grid, USG DX® Grid, FL Edge FL Edge FL Edge SQ Edge SL Edge **USG PANZ®** Materials Available Sizes Panel Edge Profile **PERFORATED C116** Channel Panels Aluminum FL Edge 6" x 48" 6" x 60' **Edge Details** Finish USG DXF™ Grid, USG DXT™ Grid, USG DXI™ Grid, 0 0 FL Edge FL Edge FL Edge \bigcirc **USG PANZ®** Materials Available Sizes Panel Edge Profile PERFORATED C116D Aluminum Channel Panels FL Edge 6" x 48", 6" x 60" **Edge Details** Finish USG DXT™ Grid, USG DXI™ Grid, USG DXF™ Grid, 0 0 0 0 FL Edge FL Edge FL Edge 0 0 0 0 0 00000 00000

USG LOGIX CONNECTOR PANELS

IMPERIAL

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

USG Logix™ Connector Panels	Item No.	Description ¹	Color
	LCP412-S-FL	USG Logix™ 4" x 12" FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP412-S-FM	USG Logix™ 4" x 12" FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP412-C116-FL	USG Logix™ 4" x 12" FW Connector Panel with Fineline* (FL) edge, perforated C116	Flat White
	LCP412-C116-FM	USG Logix™ 4" x 12" FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP412-C116D-FL	USG Logix™ 4" x 12" FW Connector Panel with Fineline* (FL) edge, perforated C116D	Flat White
	LCP412-C116D-FM	USG Logix™ 4" x 12" FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP424-S-FL	USG Logix™ 4" x 24" FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP424-S-FM	USG Logix™ 4" x 24" FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP424-C116-FL	USG Logix™ 4" x 24" FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP424-C116-FM	USG Logix™ 4" x 24" FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP424-C116D-FL	USG Logix™ 4" x 24" FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP424-C116D-FM	USG Logix™ 4" x 24" FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP612-S-FL	USG Logix™6" x 12" FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP612-S-FM	USG Logix™6" x 12" FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP612-C116-FL	USG Logix™ 6" x 12" FW Connector Panel with Fineline* (FL) edge, perforated C116	Flat White
	LCP612-C116-FM	USG Logix™ 6" x 12" FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP612-C116D-FL	USG Logix™ 6" x 12" FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP612-C116D-FM	USG Logix™ 6" x 12" FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 3888 874-2348 | usg.com
CGC: contact Sales Representative
TECHNICAL SERVICES

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

USG Logix™ Connector Panels	Item No.	Description ¹	Color
	LCP624-S-FL	USG Logix™6" x 24" FW Connector Panel with Fineline* (FL) edge, smooth, unperforated	Flat White
	LCP624-S-FM	USG Logix™6" x 24" FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP624-C116-FL	USG Logix™ 6" x 24" FW Connector Panel with Fineline* (FL) edge, perforated C116	Flat White
	LCP624-C116-FM	USG Logix™ 6" x 24" FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP624-C116D-FL	USG Logix™ 6" x 24" FW Connector Panel with Fineline* (FL) edge, perforated C116D	Flat White
	LCP624-C116D-FM	USG Logix™ 6" x 24" FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP100300-S-FL	USG Logix™100 mm x 300 mm FW Connector Panel with Fineline* (FL) edge, smooth, unperforated	Flat White
	LCP100300-S-FM	USG Logix™100 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP100300-C116-FL	USG Logix™100 mm x 300 mm FW Connector Panel with Fineline* (FL) edge, perforated C116	Flat White
	LCP100300-C116-FM	USG Logix™100 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP100300-C116D-FL	USG Logix™100 mm x 300 mm FW Connector Panel with Fineline* (FL) edge, perforated C116D	Flat White
	LCP100300-C116D-FM	USG Logix™100 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP100600-S-FL	USG Logix™100 mm x 600 mm FW Connector Panel with Fineline* (FL) edge, smooth, unperforated	Flat White
	LCP100600-S-FM	USG Logix™100 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP100600-C116-FL	USG Logix™100 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP100600-C116-FM	USG Logix™100 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP100600-C116D-FL	USG Logix™ 100 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP100600-C116D-FM	USG Logix™100 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
		1	



FOR MOST UP-TO-DATE

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

USG Logix™ Connector Panels	Item No.	Description ¹	Color
	LCP150300-S-FL	USG Logix™ 150 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP150300-S-FM	USG Logix™ 150 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP150300-C116-FL	USG Logix™ 150 mm x 300 mm FW Connector Panel with Fineline* (FL) edge, perforated C116	Flat White
	LCP150300-C116-FM	USG Logix™ 150 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP150300-C116D-FL	USG Logix™150 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP150300-C116D-FM	USG Logix™ 150 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP150600-S-FL	USG Logix™ 150 mm x 600 mm FW Connector Panel with Fineline* (FL) edge, smooth, unperforated	Flat White
	LCP150600-S-FM	USG Logix™150 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP150600-C116-FL	USG Logix™150 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP150600-C116-FM	USG Logix™150 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP150600-C116D-FL	USG Logix™150 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP150600-C116D-FM	USG Logix™150 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White

PHYSICAL DATA/ FOOTNOTES

Product literature
USG Logix™ systems guide: IS268
USG Logix™ architectural design guide: IS287
USG Logix™ critical system dimensions: IC609

See usg.com or cgcinc.com for the most up-to-date product information.

Min. G30 hot-dipped galvanized steel.

Product Evaluation Report PER-12056

Online tools usgdesignstudio.com or cgcdesignstudio.com

Installation

Must be installed in compliance with ASTM C636, ASTM E580, CISCA and standard industry practices, within all applicable code requirements. Alternative assemblies and installation methods may be utilized when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system.

ICC Evaluation Service, LLC Report Compliance
For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222
for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

NoticeWe shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Note

 The connector panels are unique in size and function. They are designed to link various utilities in the utility channel such as luminaires and channel panels without cross tees. Refer to USG Logix™ Integrated Ceiling Systems Critical System Dimensions (IC609) for actual dimensions, details and layouts.

Notice


Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IS283/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG DONN® BRAND ADVANCESPAN™

USG DONN® BRAND DXAS™ AND DXTAS™ PROFILES

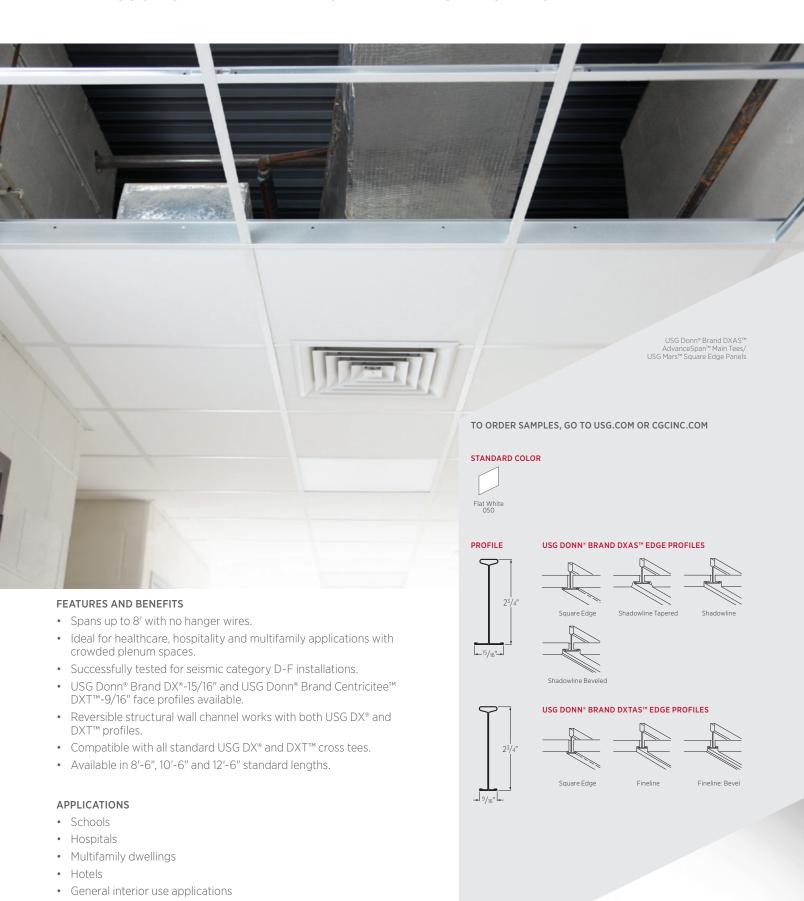

USG DONN® BRAND ADVANCESPAN™

USG DONN® BRAND DXAS™ AND DXTAS™ PROFILES

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



		Max Unsupported	Span at Rated Load					
Item No	Fire Rating	Intermediate Duty (12 lb./LF)	Heavy Duty (16 lb./LF)	Recycled Content	Face Profile	Height	Standard Lengths	Color
				3				
DXAS	Class A	8'-0"	7'-0"	HRC	15/16"	2-3/4"	8'-6" 10'-6" 12'-6"	Flat White 050
DXTAS	Class A	8'-0"	7'-0"	HRC	9/16"	2-3/4"	8'-6" 10'-6" 12'-6"	Flat White 050
US44	Class A	-	-	HRC	Reversible for 15/16" or 9/16"	2-7/8"	10'	Flat White 050
1" -								

^{*}Tested in accordance with ASTM C635 modified.


High Recycled Content

 $Classified\ as\ containing\ greater\ than\ 50\%\ total\ recycled\ content.\ Total\ recycled\ content\ is\ based\ on\ product\ composition\ of\ postconsumer\ and\ postconsumer\ and\ postconsumer\ and\ postconsumer\ and\ postconsumer\ and\ postconsumer\ and\ postconsumer\ postconsum$ preconsumer (postindustrial) recycled content per FTC guidelines.


ACCESSORIES

MAIN TEE

WALL CHANNEL MOLDING

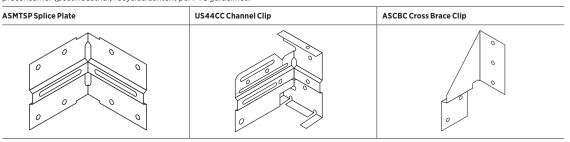

USG DONN® BRAND ADVANCESPAN™ **MAIN TEE DETAILS**

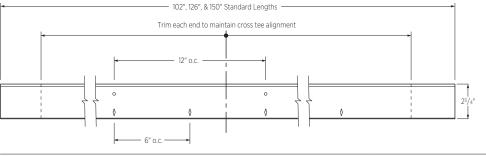

PHYSICAL DATA/ **FOOTNOTES**

Product literature and samples

Data sheet: AC3324
Installation guide: AC3325
USG DXAS™ sample: 259499
USG DXTAS™ sample: 259500

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Third-party tested by Progressive Engineering Inc. in accordance with ASTM C635 (modified). Full-scale seismic testing conducted by University of California, Berkeley, Pacific Earthquake Engineering Research Center. Performance validation - PEI Product Evaluation Report PER-16100. Local building codes may vary; check with code official for compliance prior to installing.

LimitationsInterior applications only.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3324/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG DONN® BRAND AX™/AXCE™ ACOUSTICAL SUSPENSION SYSTEM



and semirestricted areas

Magnetic-free zones

MRI rooms

• Food processing areas

• Certified to meet ISO 14644-1 Class 5

(Fed. Standard 209E Class 100)

USG DONN® BRAND AX®/AXCE® ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

CGC: contact Sales Representative

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com





USG DONN® BRAND AX™ 15/16" TEE SYSTEM⁴



Cross Tee

USG DONN® BRAND AXCE™ 15/16" TEE SYSTEM⁴











PHYSICAL DATA/ **FOOTNOTES**

					Rated Load ¹				
ASTM Class	Length	Height	Item No.	Fire Rating	Color	Recycled Content	2' Hanger Spacing	30" Hanger Spacing	4' Hanger Spacing
						3			
Light Duty	12'	1-1/2" 38 mm	AX26	Class A	Flat White	HRC	49 lb./LF	28 lb./LF	7 lb./LF
	2'	1-1/2" 38 mm	AX224	Class A	Flat White	HRC			
	4'	1-1/2" 38 mm	AX424	Class A	Flat White	HRC			
Light Duty	12'	1-1/2 " 38 mm	AXCE26	Class A	Flat White	HRC	49 lb./LF	28 lb./LF	7 lb./LF
	2'	1-1/2" 38 mm	AXCE224	Class A	Flat White	HRC			
	4'	1-1/2" 38 mm	AXCE424	Class A	Flat White	HRC			

Wall Angle	Length	Item No.	Color	Recycled Content	Wall Angle	Length	Item No.	Color	Recycled Content
- 7/8"→I	12'	М7А	Flat White	up to 65% HRC	19/16"	10'	UA25	Flat White	up to 65% HRC
7/8" - 7/8"	12'	мласе	Flat White	up to 65% HRC	19/16"	10'	UA25CE	Flat White	up to 65% HRC

High Recycled Content

 $Classified as containing \ greater \ than 50\% \ total \ recycled \ content. \ Total \ recycled \ content \ is \ based \ on \ product \ composition \ of \ postconsumer \ and \ content \ is \ based \ on \ product \ composition \ of \ postconsumer \ and \ postconsumer \$ preconsumer (postindustrial) recycled content per FTC guidelines.

Product literature and samples

Data sheet: AC3041 USG Donn* Brand AX™ sample: 272638 USG Donn* Brand AXCE™ sample: 216857

Product information See usg.com for the most up-to-date product

information.

Double-web aluminum tee with aluminum cap and

stainless steel Quick-Release™ clip. Baked-on polvester Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Limitations

Non-fire-rated applications only. Finish is not UV-resistant; should not be installed where direct exposure to sun or weather will occur, such as fascias or facades. Indirect exposure to severe environmental conditions may shorten the lifespan of the product. The gasket face applied to USG Donn* Brand AXCE™ contains a protective strip that must be removed prior to panel installation. The standard gasket is not recommended for installations with metal panels. If metal panels are desired, a special gasket suitable for metal panels may be applied to the USG Donn® Brand DXACE™ suspension system through special order.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Seismic and heavy duty applications

Notes

- 1. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.

 2. Perimeter panels must be trimmed so that the edge extends completely over the gasket
- UA25CE molding and L15 and C8 hold-down clips are required for ISO Class 5 Clean Room applications.
- 4. Metric sizes available by RTQ.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3041/rev. 3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG DONN® BRAND CE™ ACOUSTICAL SUSPENSION SYSTEM



- ICC-ES evaluated for building code compliance and seismic installations (ICC-ESR-1222).
- Meets 2014 Guidelines for Healthcare Facilities.
- Capable of withstanding cleaning and/or disinfecting chemicals as tested in accordance with ASTM D402.

APPLICATIONS

- Clean Rooms
- Hospitals
- Food processing areas
- Healthcare facilities, restricted and semirestricted areas
- Certified to meet ISO 14644-1 Class 5 (Fed. Standard 209E Class 100)

USG DONN® BRAND CE ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

Seismic Design Category

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Rated Load 1,2,3

800 USG,4YOU (874-4968)

CGC: contact Sales Representative

TECHNICAL SERVICES

YEAR LIMITED SYSTEM WARRANTY No Visible Sag



						Seisinic Design Categor		Rated Load		
ASTM Class	Length	Height	Item No.	Fire Rating	Color	IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
							M			
Heavy Duty	12'	1-1/2" 38 mm	DXWCE26	Class A	Flat White	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF
	2'	1-1/2" 38 mm	DXWCE224	Class A	Flat White	_	_	36 lb./LF		
	4'	1-1/2" 38 mm	DXWCE424	Class A	Flat White	_	_	13 lb./LF	•	•••••
Intermediate Duty	12'	1.64" 42 mm	DXCE24	Class A	Flat White	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.1 lb./LF	3.6 lb./LF
Heavy Duty	12'	1.64" 42 mm	DXCE26	Class A	Flat White	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF
	2'	1-1/2" 38 mm	DXCE224	Class A	Flat White				<u>I</u>	I
	4'	1-1/2" 38 mm	DXCE424	Class A	Flat White			•	•	
Wall Angle	Lengt	h	Item No.	Color	Hold-Down	Clips ⁶				
7/8"→ 1 7/8"→ 1 7/8"	12'		М7СЕ нос	Flat White	L15					
111/16"	10'		US28CE	Flat White	C-8					



FOOTNOTES

PHYSICAL DATA/

1-1/2" TEE SYSTEM7

15/16" TEE SYSTEM

Main Tee

Cross Tee 1-1/2'

MOLDING^{4,5,7}

Product literature and samples

High Recycled Content

Online tools Data sheet: AC3129 DXCE sample: 207901

preconsumer (postindustrial) recycled content per FTC guidelines.

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Installation

Must be installed in compliance with ASTM C636, ASTM E580, CISCA and standard industry practices, within all applicable code requirements. Class 5 (Fed. Standard 209E Class 100)
installations require hold-down clips and US28CE
molding. Install a L15 hold-down clip within 3 in. of each panel corner. For a 2' x 4' system install an additional L15 hold-down clip centered on the 4' side. Border panels shall have a C-8 hold-down clip within 3 in, of each panel corner, For a 2' x 4' system install an additional C-8 hold-down clip centered on the 4' side. Alternative assemblies and installation methods may be utilized when approved by the authority having jurisdiction.

usgdesignstudio.com or cgcdesignstudio.com

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and

Limitations

Interior applications only. The gasket face contains a protective strip that must be removed prior to panel installation. The standard gasket is not recommended for installations with metal panels. If metal panels are desired, a special gasket suitable for metal panels may be applied to the USG Donn®

Brand CE™ Acoustical Suspension System through special order.

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are values and continuous of use. Report safe subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current

ASTM Load Compliance Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Healthcare facilities

- No crevice created between suspension system and tile, meets or exceeds requirements for restricted and semirestricted areas.
- Capable of withstanding cleaning and/ or disinfecting chemicals as tested in accordance with ASTM D402-93.

Testing

Tested in accordance with Federal Standard 209E.

- Load test data shows uniform load in Ib./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- in Clean Room ceiling assemblies shall be certified for Clean Room applications.
- 3. HEPA filters must be supported at all four
- corners of grid module.

 4. For more information on moldings, see Perimeter Interface selector.
- 5. Panels must be field-cut to size at the perimeter.

 US28CE molding and L15 and C-8 hold-
- down clips required for Clean Room ISO Class 5 (Fed. Standard 209E Class 100) applications.
 7. Metric sizes available by RTQ.


Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3129/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG DONN® BRAND CENTRICITEE™ DXT™/DXLT™ ACOUSTICAL SUSPENSION SYSTEM

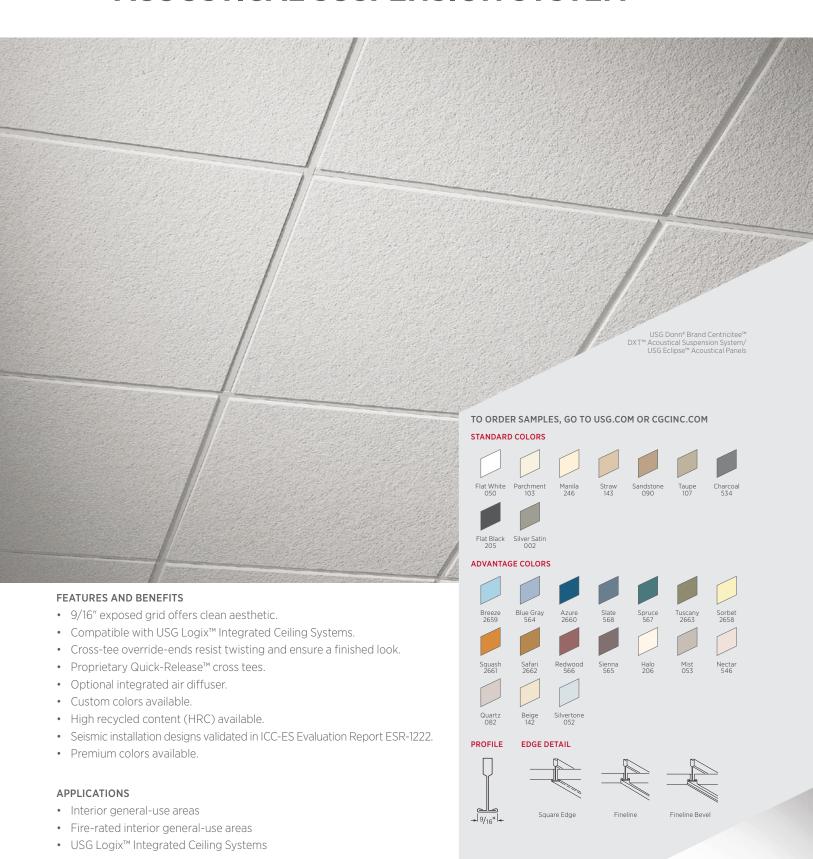

USG DONN® BRAND CENTRICITEE® DXT®/DXLT® **ACOUSTICAL SUSPENSION SYSTEM**

Height

1-1/2"

38 mm

1-1/2"

38 mm

1-5/8"

42 mm

1-1/2"

1-1/2"

1-1/2"

1-1/2"

1-1/2"

1-1/2"

1-1/2"

38 mm

38 mm

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com FOR MOST UP-TO-DATE usgdesignstudio.com cgcdesignstudio.com

Rated Load¹

5' Hanger

Spacing

6.6 lb./LF

6.6 lb./LF

7.3 lb./LF

4' Hanger

Spacing

12 lb./LF

12 lb./LF

16 lb./LF

800 USG,4YOU (874-4968)

CGC: contact Sales Representative TECHNICAL SERVICES

Seismic Design Category

ICC-ES

A, C

A. C

A.C

A.F

Evaluated

Installation

7/8" Molding

7/8" Molding

7/8" Molding

ACM7 Clip 7/8" Molding

ACM7 Clip

ACM7 Clip

ACM7 Clip

TECHNICAL INFORMATION AND LEED REPORT TOOL

YEAR LIMITED SYSTEM WARRANTY No Visible Sag

ASTM Class

Intermediate Duty

Heavy Duty



Length

10'

12'

1′

30'

5′

6'

8'

1200 mm

3600 mm

600 mm

3000 mm

3600 mm

9/16" TEE SYSTEM⁶

Main Tee





Cross Tee 1 -1/2"6



High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



Wall Angle	Length	Item No.	Color		
15/16"	12' 3600 mm	M9 HRC	Flat White, Standard, Advantage		
9/18" -		M9HRC HRC			
3/ _{1/6} " 3/ ₆ "			Flat White, Standard, Advantage		
Shadowline	10'	MS274 HRC 2" shelf for seismic	Flat White		
11/4" 3/4" 1		Z SHEII IOI SEISIIIC			

Fire Rating

0

Class A

Class A

Class A

Class A

Class A

0

Class A

Class A

Class A

Class A

Class A

Class A

Color^{3,4}

Flat White

Flat White

Standard

Advantage

Flat White

Flat White

Flat White

Flat White

Standard Advantage

Flat White

Flat White

Flat White

Flat White

Flat White

Flat White

Flat White Standard Advantage

Flat White

Item No.2

DXT24-10

DXT24HRC HRC DXLT24

DXT24

DXT26

DXT122

DXT222

DXT222HRC HRC DXLT222

DXT3022

DXT524

DXT624

DXT824

DXT422

DXT424

DXT424HRC HRC DXLT424

DXT26HRC HRC

PHYSICAL DATA/ **FOOTNOTES**

MOLDING⁵

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3040/rev. 2-17

2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Product literature and samples

Data sheet: AC3040, USG Logix™ system guide: IS268
USG Logix™ architectural design guide: IS287, USG Logix™
critical system dimensions: IS609, Sample: 206564

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools usgdesignstudio.com or cgcdesignstudio.com

Air diffusers Refer to: AC272

Limitations Refer to specific ceiling panel for limitations with square edge panels

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

USG Donn* Brand suspension systems manufactured by USG Interiors, LLC have been reviewed and are approved by listing in the following L.A. Research Report number: 25764. Refer to usg.com for most current version.

ASTM Load Compliance


Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Notes

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- Metric available-contact customer service
- Color options are for Class A imperial products.
 Custom color available. Upcharges apply to Standard, Advantage and custom colors.
- Panels must be specified to be field-cut to size and field-revealed to provide as wide a lay-on edge as possible.
- 6. Metric sizes shown available with standard lead times. Other metric sizes available by RTQ.

The trademarks USG, CGC, CENTRICITEE, DONN, DXLT, DXT, ECLIPSE, Safety First! Follow good safety/industrial hygiene FIRECODE, LOGIX, QUICK-RELEASE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

USG DONN® BRAND DX®/DXL™ ACOUSTICAL SUSPENSION SYSTEM

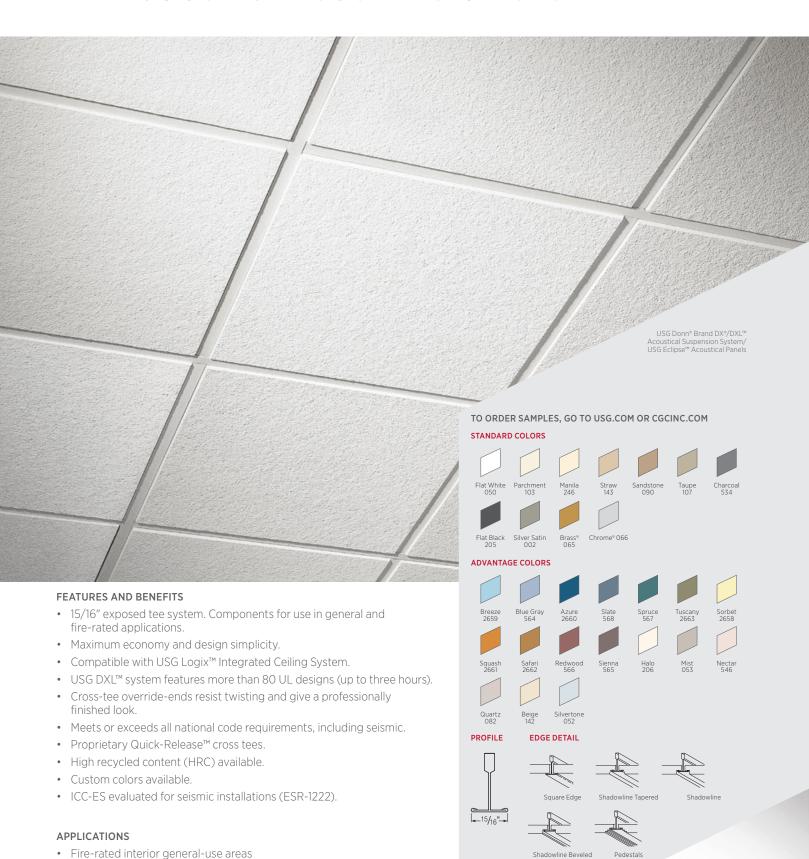

• USG Logix™ Integrated System

USG DONN® BRAND DX®/DXL® ACOUSTICAL SUSPENSION SYSTEM

Height

HIGH RECYCLED

Item No.

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

Seismic Design Category

ICC-ES Evaluated

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Rated Load²

Hanger

6' Hanger

Spacing

800 USG,4YOU (874-4968)

TECHNICAL SERVICES

4' Hanger

Spacing

YEAR LIMITED SYSTEM WARRANTY No Visible Sag

Length

ASTM Class

5/16" TEE SYSTEM ¹⁰
Main Tee







PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3167/rev. 2-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Intermediate Duty 3600 mm 1.64" (42 mm) CGC 1.5" (25 mm) 12' USG Heavy Duty 3600 mm 1.64" (42 mm) CGC 1.5" (25 mm) 600 mm 25 mm 20'

0 DX/DXL24 7/8" Molding Flat White A-C 12 lb./LF 6.1 lb./ 3.6 lb./LF Standard ACM7 Clip Advantage DX/DXL24HRC HRC 7/8" Molding DX/DXL267 Flat White 16 lb./LF 7.3 lb./LF 4.9 lb./LF Δ-F Standard ACM7 Clip DX/DXL26HRC Advantage DX/DXL216 Flat White Standard and Advantage DX/DXL216HRC HRC DX 2016 1" (25 mm) Class A Flat White 30' 1" (25 mm) DX3016 Class A Flat White 3′ 1-1/2" (38 mm) DX324 Class A Flat White 4' 1-1/2" DX/DXL424 Flat White 1200 mm 38 mm Standard and Advantage DX/DXL424HRC HRC DX4225,7,9 Class A Flat White Standard and Advantage DX422HRC5 HRC 4' (1200 mm) 1" (25 mm) DX416 Class A Flat White 4' (1200 mm) DX426 HD Flat White 1-1/2" (38 mm) Class A 5' (1500 mm) 1-1/2" (38 mm) DX/DXL524 Flat White Standard 6' 1-1/2" (38 mm) DX624 Class A Flat White 8′ 1-1/2" (38 mm) DX824 Class A Wall Angle Length Item No. M20SM-2 Flat White 3000 mm

Color^{4,9}

Fire

Rating

12' М7 3600 mm M7HRC 7/8"-MS2745 3000 mm M20⁵

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



Product literature and samples
Data sheet: AC3167
USG Logix™ system guide: IS268
USG Logix™ architectural design guide: IS287
USG Logix™ architectural design guide: IS287
USG Logix™ critical system dimensions: IS609
Sample flat white—seismic: 271370, Sample flat white: 215673,
Sample main tee: 206563, Sample flat black: 205100

Material
Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to

reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764 Refer to usg.com for most current version

ASTM Load Compliance Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

M20HD/Heavy Duty M20SM/Seismic

- All USG DX®/DXL™ main-tee and cross-tee connections meet IBC
- Ani OSG DX YOX. Infaintee and cross-ree connections meet fact requirements for tension and compression strength. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit of L/360.
- UL fire-rated listing, labeling and follow-up applies only to fire-rated
- components.
- Color program for imperial only. Consult Customer Service for custom color
- and metric-tee colors. Upcharges apply to Standard and Advantage colors.

- and metric-tee colors. Upcharges apply to Standard and Advantage colors.

 5. Non-fire-rated only.


 6. Non-fire-rated applications may mix USG DX* and DXL** parts.

 7. Panels must be specified to be field-cut and field-revealed and to provide widest possible lay-on edge.

 8. For USG DXL**, channel moldings are also acceptable in some designs. Check UL Fire Resistance Directory for molding options.

 9. Brass and chrome available on limited items.

 10. Metric sizes listed are available with standard lead times. Other metric cizes available by RTO. sizes available by RTQ.



Standard and Advantage

Flat White

Flat White

Custom

Firecode⁶

Custom

3000 mm

USG DONN® BRAND DX®/DXL™ CONCEALED ACOUSTICAL SUSPENSION SYSTEM



USG DONN® BRAND DX®/DXL® CONCEALED **ACOUSTICAL SUSPENSION SYSTEM**

Item No.2

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

6' Hanger Spacing

3.6 lb./LF

4.9 lb./LF

TECHNICAL SERVICES 800 USG,4YOU (874-4968)

Rated Load¹

5' Hanger Spacing

YEAR LIMITED SYSTEM WARRANTY 30

Lenath

Height

ASTM Class

Color

4' Hanger Spacing

Fire Rating

Main Tee	Intermediate Duty	12'	USG1.64"/ CGC1.5"	DX/DXL24	Ø	Flat White	12 lb./LF	6.1 lb./LF	
	Heavy Duty	12'	USG1.64"/ CGC1.5"	DX/DXL26	Ø	Flat White	16 lb./LF	7.3 lb./LF	
Cross Tee 1-1/2"		4'	1-1/2"	DX/DXL424	Ø	Flat White			
Tee Spline 1"		4'	1"	DT416	Class A				
		4'	1"	DE416	Class A	• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •	
		4'	1"	DEN416	Class A	• • • • • • • • • • • • • • • • • • • •	•		
Access Spline		4'	1-1/2"	BPA 424					
Closing Spline 11' 1" BPC 116									
		23"	1-1/2"	BPC 234	••••	***************************************	•••••	• • • • • • • • • • • • • • • • • • • •	
Flat Spline		11"	_	E10					



Spring Clip

Stabilizer Bar

15/16"

Ø.



Wall Angle

4'

Lenath 10′

Item No.

US28

 $Either \, DE416 \, or \, DT416 \, can \, be \, used \, for \, the \, same \, function \, of \, supporting \, the \, tile. \, DE416 \, is \, a \, roll-formed \, uncapped \, tee \, spline \, with \, the \, tile \, ti$ bulb offset to one side of the profile. It is supported on the ends by an integral tab cut from the web. DT416 is a typical suspensiontee profile. It is supported on the ends by an extended offset face that rests on perpendicular tee flanges.



PHYSICAL DATA/ **FOOTNOTES**

Product literature and samples

Data sheet: AC3035 Sample: 203537

Material

Min. G30 double-web, hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Install according to ASTM C636, ASTM E580, CISCA and USG requirements.
Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

С8

SB48

Color

Flat White

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- 2. Some products are available in metric. Call Customer Service for details
- 3. For more information on moldings and complete section detail, see the Perimeter Interface selector

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3035/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG DONN® BRAND DXLA™/DXACE™ ACOUSTICAL SUSPENSION SYSTEM



USG DXLA[™] for use in UL fire-rated designs

Certified to meet ISO 14644-1 Class 5 (Fed. Standard 209E Class 100)⁶

• Food processing areas

USG DONN® BRAND DXLA®/DXACE® **ACOUSTICAL SUSPENSION SYSTEM**

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE AND LEED REPORT TOOL

TECHNICAL SERVICES

CGC: contact Sales Representative

usgdesignstudio.com cgcdesignstudio.com





USG DONN® BRAND DXLA™ 15/16" TEE SYSTEM7



USG DONN® BRAND DXACE™ 15/16" TEE SYSTEM⁷



WALL ANGLE^{5,7}






PHYSICAL DATA/ **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3036/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

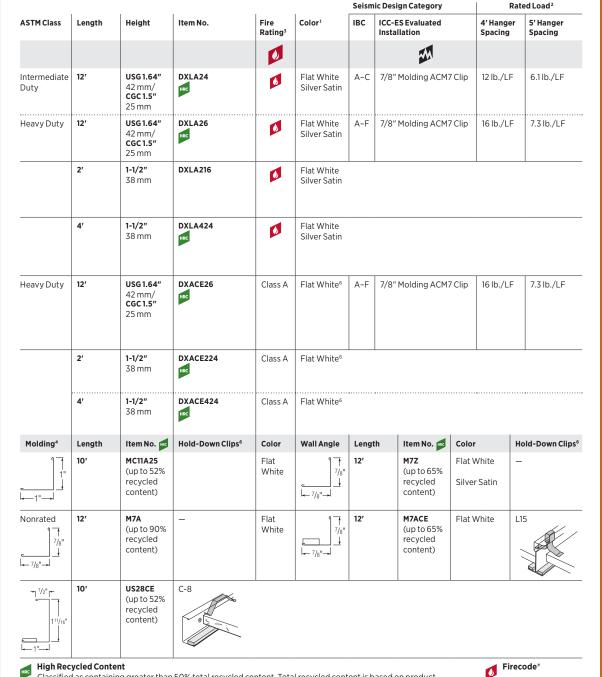

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Product literature and samples

Data sheet: AC3036 USG Donn® Brand DXLA™ sample: 215675

Min. G30 hot-dipped galvanized steel body and aluminum cap. Baked-on polyester paint.

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority

Limitations

Interior applications only. Please refer to SC2561 for more information about exterior ceiling applications. The gasket face applied to USG Donn® Brand DXACE™ contains a protective strip that must be removed prior to panel installation. The standard gasket is not recommended for installations with metal panels. If metal panels are desired, a special gasket suitable for metal panels may be applied to the USG Donn® Brand DXACE™ suspension system through special order.

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Healthcare facilities

- No crevice created between suspension system and tile meets
- or exceeds requirements for restricted and semirestricted areas.

 Capable of withstanding cleaning and/or disinfecting chemicals as tested in accordance with ASTM D5402-06


- Some products available in custom colors.
 USG Donn* Brand DXACE™ available in flat white only.
- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- 3. For fire-rated ceilings, must be installed as stated in UL designs.

 4. Channel moldings also acceptable in some
- UL designs.
- Ot designs.

 5. Panels must be field-cut to size at the perimeter. For Shadowline detail, field-cut edge must be at least as wide as the factory
- 6. US28CE molding and L15 and C-8 hold-down clips required for Clean Room ISO Class 5 (Fed. Standard 209E Class 100) applications. 7. Metric sizes available by RTQ.



USG DONN® BRAND DXSS™ ACOUSTICAL SUSPENSION SYSTEM

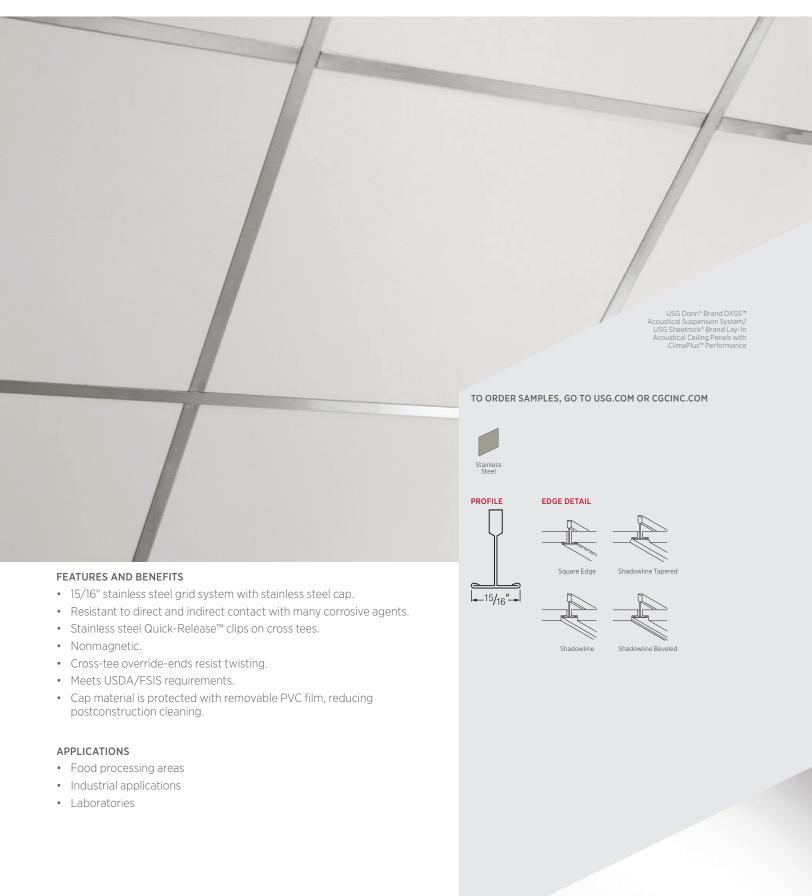

USG DONN' BRAND DXSST **ACOUSTICAL SUSPENSION SYSTEM**

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

Minimum Load

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL

800 USG.4YOU (874-4968)

CGC: contact Sales Representative TECHNICAL SERVICES usgdesignstudio.com cgcdesignstudio.com



							Carrying Capa	bilities—Main te	ee¹	
ASTM Class	Length	Height	Item No.	Fire Rating	Color	Recycled Content	2' Hanger Spacing	3' Hanger Spacing	4' Hanger Spacing	
Light Duty	12'	1-1/2" 38 mm	DXSS24	Class A	Stainless Steel	up to 50%	70 lb./LF	23 lb./LF	10 lb./LF	
	2'	1-1/2" 38 mm	DXSS224	Class A	Stainless Steel	up to 50%				
	4'	1-1/2" 38 mm	DXSS424	Class A	Stainless Steel	up to 50%				
Wall Angle	Length		Item No.		Color	Recycled Content				
7/8"	12'		M7SS		Stainless Steel	up to 50%				
Product literature	and camples		Insta	Ilation		Not				

MOLDING PHYSICAL DATA/

15/16" TEE SYSTEM Main Tee 1-1/2"

Cross Tee 1-1/2"

FOOTNOTES

Data sheet: AC3068

Sample: 215671 Material

Double-web Type 304 chromium-nickel austenitic alloy stainless steel body, cap and clip. This cap material is protected by PVC, which should be removed after installation.

Online tools usgdesignstudio.com or cgcdesignstudio.com

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

ASTM Load ComplianceClassified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

 Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

USG DONN® BRAND DXW™ ACOUSTICAL SUSPENSION SYSTEM



USG DONN® BRAND DXW® **ACOUSTICAL SUSPENSION SYSTEM**

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION**

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

Rated Load

CGC: contact Sales Representative

AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

Seismic Design Category

YEAR LIMITED SYSTEM WARRANTY No Visible Sag Mold/Mildew Protection	HIGH RECYCLED CONTENT
---	-----------------------

	ASTM Class	Lengti	h Height	Item No.	Fire Rating	Color ²	IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
								M			
1-1/2" TEE SYSTEM Main Tee	Heavy Duty	12'	1-1/2" 38 mm	DXW26	Class A	Flat White	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF
Cross Tee 1-1/2"		2'	1-1/2" 38 mm	DXW224	Class A	Flat White	_	_	36.7 lb./LF	_	_
Q.		4'	1-1/2" 38 mm	DXW424	Class A	Flat White	_	_	13.8 lb./LF	_	_
MOLDING ^{3,4}	Wall Angle	Le	ength	Item No.		Color		Wall Angle	Length	Item No.	Color
	7/8"—	1. 8"	2'	M7 HRC		Flat White		2"	10' 3000 mm	M20	Flat White
	11/2"	1"	2'	M12		Flat White			.		

PHYSICAL DATA/ **FOOTNOTES**

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Product literature and samples Data sheet: AC3037 Sample: 219168

Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Installation

Install according to ASTM C636, ASTM E580. CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools usgdesignstudio.com or cgcdesignstudio.com

LA Research Report - RR 25764

Refer to usg.com for most current version.

ICC Evaluation Service, LLC Report Compliance
For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

- Notes
 1. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.

 2. Custom colors available.

 3. For more information on moldings, see Perimeter
- Interface selector.
- 4. Panels must be field-cut to size at the perimeter.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3037/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG DONN® BRAND FINELINE® DXF™/DXLF™ ACOUSTICAL SUSPENSION SYSTEM



USG DONN® BRAND FINELINE® DXF®/DXLF® **ACOUSTICAL SUSPENSION SYSTEM**

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)





9/16" TEE SYSTEM¹³



	1	1	1	1	1	Seismic I	Design Category		Rated Load	1,2				
ASTM Class	Length	Height	Item No. ^{3,6}	Fire Rating	Color ⁴	IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing				
							M							
Duty 1	10'	1-25/32" 45 mm	DXF2924-10	Class A	Flat White	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.6 lb./LF	3.6 lb./LF				
			DXF2930 ¹¹	Class A	Flat White Silver Satin	A-C	7/8" Molding ACM7 Clip							
			DXF292012	Class A	Flat White Silver Satin	A-C	7/8" Molding ACM7 Clip							
	12' 3600 mm	1-25/32" 45 mm	DXF2924 ⁵	Class A	Flat White	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.6 lb./LF	3.6 lb./LF				
			DXF2924HRC ⁵	Class A	Flat White	A-C	7/8" Molding ACM7 Clip							
	12' 3600 mm	1-25/32" 45 mm	DXF2948	Class A	Flat White	A-C	7/8" Molding ACM7 Clip							
			DXLF2924 ⁵	Ø	Flat White	A-C	7/8" Molding ACM7 Clip							
Heavy Duty	12' 3600 mm	1-25/32" 45 mm	DXFH2924 ⁵	Class A	Flat White	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF				
	1′	1-25/32" 45 mm	DXF129	Class A	Flat White	Flat White								
	2' 600 mm	1-25/32" 45 mm	DXF229	Class A	Flat White	Flat White								
			DXF229HRC	Class A	Flat White	•••••								
			DXLF229	Ø	Flat White	***************************************	••••••	•••••	••••••	••••				
	30"	1-25/32" 45 mm	DXF30	Class A	Flat White	Flat White								
	4' 1200 mm	1-25/32" 45 mm	DXF429	Class A	Flat White									
	4' 1200 mm	1-25/32" 45 mm	DXF429NHRC	Class A	Flat White									
			DXF429S8	Class A	Flat White		•		•••••					
			DXF429N ⁷	Class A	Flat White Silver Satin	•••••				•				
			DXLF429N ⁷	Ø	Flat White		•••••			••••				
	57"	1-25/32" 45 mm	DXF57	Class A	Flat White	•••••		•••••		•••••				
	5′ 1500 mm	1-25/32" 45 mm	DXF529N ⁷	Class A	Flat White	•••••								
	6′	1-25/32" 45 mm	DXF624	Class A	Flat White	•••••				•				
	8′	1-25/32" 45 mm	DXF824	Class A	Flat White				•••••	•				

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.





USG DONN® BRAND FINELINE® DXF®/DXLF® ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

Color

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



Wall Angle




Length

MOLDING ^{9,10, 13}	

Shadowline9,10

• • • • • • • • • • • • • • • • • • • •			
7/8"	12' 3600 mm	M7	Flat White, Silver Satin
		M7 HRC	Flat White
15/ ₁₆ "	12' 3600 mm	M9	Flat White, Silver Satin
9/16"		M9 HRC	Flat White, Silver Satin
7/8" 	12'	MS174	Flat White, Silver Satin
7/8" 11/4" 3/4" 19/32"	12'	MS274	Flat White
2" shelf for seismic			

Item No.



High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG DONN® BRAND FINELINE® DXF®/DXLF® **ACOUSTICAL SUSPENSION SYSTEM**

YEAR LIMITED SYSTEM WARRANTY HIGH RECYCLED HRC No Visible Sag

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES

PHYSICAL DATA/ **FOOTNOTES**

Data sheet: AC3034

Technical data: AC272 Sample: 204105

Installation

30

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Limitations

For exposed grids in non-fire-rated, high-humidity applications, use USG Donn® Brand Fineline® DXFEV™ G90 painted or USG Donn® Brand ZXLA^{IM} painted suspension systems. For exterior applications, the suspension system should be reviewed by a structural engineer. Please refer to SC2561 for more information about USG Donn* Brand Fineline® DXFEV™ and exterior ceiling applications.

usadesianstudio.com or cacdesianstudio.com

Min. G30 hot-dipped galvanized steel body. Baked-on polyester

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current version.

ASTM Load ComplianceClassified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Air Diffusers Refer to AC272

- Hanger wire spacing and locations must be per the UL design
- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360. Some products are available in metric. Call Customer Service
- for details.
- Custom color available.
 Standard main tee is notched 24" o.c. but has cross-tee holes 12" o.c.
 Cross-tee hole spacings available for a variety of modules except USG Donn® Brand Fineline® DXLF™
- N = Notch at midpoint.
 Midpoint notch on one side only to accommodate light fixtures. 9. For more information about moldings, see Perimeter Interface
- selector 10. Panels must be field-cut to size at the perimeter.
 11. Notched 30" o.c.
 12. Notched 20" o.c.

- Metric sizes listed available with standard lead times. Other metric sizes available by RTQ.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3034/rev. 11-16

USG DONN® BRAND FINELINE® 1/8 DXFF™ ACOUSTICAL SUSPENSION SYSTEM



USG DONN® BRAND FINELINE® 1/8 DXFF® **ACOUSTICAL SUSPENSION SYSTEM**

Height

HIGH RECYCLED CONTEN

Item No.3

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

6' Hanger

Rated Load

5' Hanger

TECHNICAL SERVICES

800 USG,4YOU (874-4968)

4' Hanger



Seismic Design Category

ICC-ES Evaluated

IBC




Lenath

ASTM Class

9/16" TEE SYSTEM ⁸
Main Tee ³
2 00



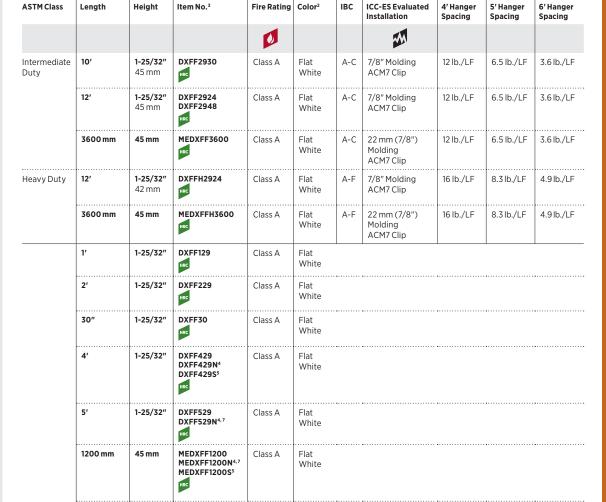

High Recycled Content

600 mm

45 mm

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Flat

White

Class A

Wall Angle	Length	Item No.	Color ²	Wall Angle	Length	Item No.	Color ²
9/16" →	12' 3600 mm	M9 HRC	Flat White	Shadowline 7/8" 3/8" 3/8"	12' 3600 mm	MS174	Flat White

PHYSICAL DATA **FOOTNOTES**

MOLDING8

Data sheet: AC3033 Sample: 270308

Min. G30 hot-dipped galvanized steel tee. Baked-on

Installation

Material

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having iurisdiction.

LA Research Report - RR 25764

Refer to usg.com for most current version

MEDXEF600

HRC

usadesianstudio.com or cacdesianstudio.com

ICC Evaluation Service, LLC Report Compliance
For areas under ICC jurisdiction, see ICC-ES Evaluation
Report ESR-1222 for allowable values and conditions of use.
Reports are subject to reexamination, revision and possible
cancellation. Refer to usg.com for most current version.

ASTM Load Compliance Classified as Light, Intermedia accordance with ASTM C635. ediate or Heavy Duty when tested in

Air diffusers Request AC272.

- 1. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on
- L/360. Custom color available.
- 3. Cross-tee notches available in 24" and 30" modules. Standard
- is 24" o.c. N = Notch at midpoint.
- 5. Midpoint notch on one side only to accommodate light fixtures.

- Repair Section 1. Repair Sect metric sizes available by RTQ.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3033/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG DONN® BRAND FINELINE® DXFEV™ ACOUSTICAL SUSPENSION SYSTEM



• Covered entrances

USG DONN® BRAND FINELINE® DXFEV® ACOUSTICAL SUSPENSION SYSTEM

Height

1-25/32

45 mm

1-25/32"

1-25/32"

1-25/32"

45 mm

1-25/32'

1-25/32"

1-25/32"

1-25/32"

1-25/32"

45 mm

1-25/32"

45 mm

2-3/32"

2-3/32"

1/4"

45 mm

45 mm

45 mm

45 mm

45 mm

45 mm

Item No.

DXFEV2924

DXFEVH2924

DXFEV2912

DXFEVH2912

DXFEV229

DXFFV229

DXFEV429N

DXFEV429N

DXFEV629

DXFEV829

U-23/32

U-23/32HDC

Description

Narrow-profile, slotted grid

Narrow-profile, slotted grid

Narrow-profile, slotted grid

system with G90 galvanization

notched 12" o.c. cross tee hole

Narrow-profile, slotted grid

system with G90 galvanization

notched 12" o.c. cross tee hole

Narrow-profile, slotted grid

Narrow-profile, slotted grid

Narrow-profile slotted grid

Narrow-profile, slotted grid

Narrow-profile, slotted grid

Narrow-profile, slotted grid

12" x 2-3/32" x 7/8" x 1-1/8"

10" x 11/32" x 2-3/32" x 3/4"

Arrowhead reveal spacer

galvanization

galvanization

(100' roll)

system with G90 galvanization

notched at midpoint both sides

system with G90 galvanization

notched at midpoint both sides

system with G90 galvanization

system with G90 galvanization

Aluminum U-Molding with G90

Panel Hold-Down Clip with G90

system with G90 galvanization

system with G90 galvanization

12" o.c.

system with G90 galvanization

notched 24" o.c. cross tee hole

system with G90 galvanization

notched 24" o.c. cross tee hole

ORDER SAMPLES/LITERATURE

Color

Flat White,

Flat White,

Flat White,

Flat White,

Flat White

Flat White

Flat White

Black Reveal

Flat White.

Flat White.

Black Reveal

Flat White,

Flat White

Black Reveal

Fire

Rating

0

Class A

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

800 USG,4YOU (874-4968)

4' Hanger

Spacing

12 lb./LF

16 lb./LF

12 lb./LF

16 lb./LF

TECHNICAL SERVICES

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

6' Hanger

Spacing

3.6 lb./LF

4.9 lb./LF

3.6 lb./LF

4.9 lb./LF

Rated Load 5' Hanger

Spacing

6.6 lb./LF

8.3 lb./LF

6.6 lb./LF

8.3 lb./LF

9/16" TEE SYSTEM⁵ Main Tee⁴

ASTM Class

Intermediate

Heavy Duty

Intermediate

Heavy Duty

Dutv

Duty

Length

12'

12'

12'

12'

2'

2'

4'

4'

6'

8'

12'

10"

100' roll



Cross Tee



PERIMETER MOLDING^{3, 5}

ACCESSORIES



Firecode® 0

PHYSICAL DATA/ **FOOTNOTES**

Product literature and samples

System guide: SC2561

Channel

Molding

Clip

Reveal

Spacer4

Hold-Down

Min. G90 hot-dipped galvanized steel body. Baked-on polyester paint.

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having iurisdiction.

CA1

usgdesignstudio.com or cgcdesignstudio.com

Report PER-12055.

ASTM Load Compliance Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

LA Research Report - RR 25764 Refer to usg.com for most current version.

Progressive Engineering Inc. Evaluation

Report Compliance
Wind load tested and listed in PEI Evaluation

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usa com for most current version.

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with
- ASTM C635 deflection limit on L/360.

 Heavy duty main tees were used in the tested assemblies. If intermediate duty main tees are utilized, hanger wire spacing shall be reduced from 4 ft. o.c. to 3 ft o.c.
- Panels must be field-cut to size at the perimeter.

ICC Evaluation Service, LLC Report Compliance

- CA1 Arrowhead Reveal Spacer available in black or white Metric sizes available by RTQ.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3304/rev. 11-16

2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG DONN® BRAND IDENTITEE® DXI™ ACOUSTICAL SUSPENSION SYSTEM



USG DONN® BRAND IDENTITEE® DXI® **ACOUSTICAL SUSPENSION SYSTEM**

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)





9/16" TEE SYSTEM ⁸
Main Tee
location of
cap lance



		1				Seismic	Design Category	'	Rated Load ^{2,}	4
ASTM Class	Length	Height	Item No.3,6	Fire Rating	Color ¹	IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
							M			
Intermediate Duty	12' 3600 mm	1-13/16 " 46.5 mm	DXI24HRC	Class A	Flat White Standard Advantage	A-C	7/8" Molding ACM7 Clip	12 lb./ LF	7.3 lb./LF	4.2 lb./LF
Heavy Duty	12' 3600 mm	1-13/16" 46.5 mm	DXI26HRC	Class A	Flat White Standard Advantage	A-F	7/8" Molding ACM7 Clip	16 lb./ LF	9.1 lb./ LF	5.2 lb./LF
Heavy Duty	USG Logix™	1-13/16 " 46.5 mm	See USG Logix™ Guide IS268	Class A	Flat White	A-F	7/8" Molding ACM7 Clip	16 lb./ LF	9.1 lb./ LF	5.2 lb./LF
_	21"	1-13/16" 46.5 mm	DXI2124	Class A	Flat White Standard Advantage	_	_	_	_	_
_	27"	1-13/16" 46.5 mm	DXI2724	Class A	Flat White Standard Advantage	_	_	_	_	_
_	30"	1-13/16" 46.5 mm	DXI3024	Class A	Flat White Standard Advantage	_	_	_	_	_
_	42"	1-13/16 " 46.5 mm	DX14224	Class A	Flat White Standard Advantage	_	_	_	_	_
_	54"	1-13/16" 46.5 mm	DXI5424	Class A	Flat White Standard Advantage	_	_	_	_	_
_	57"	1-13/16 " 46.5 mm	DXI5724	Class A	Flat White Standard Advantage	_	_	_	_	_
_	1'	1-13/16 " 46.5 mm	DX124	Class A	Flat White Standard Advantage	_	_	_	_	-
_	2' 600 mm	1-13/16 " 46.5 mm	DXI224HRC	Class A	Flat White Standard Advantage	_	_	_	_	_
_	4' 1200 mm	1-13/16" 46.5 mm	DXI424HRC	Class A	Flat White Standard Advantage	_	_	_	_	_
_	5′ 1500 mm	1-13/16 " 46.5 mm	DXI524HRC	Class A	Flat White Standard Advantage	_	_	_	_	_
_	6′	1-13/16 " 46.5 mm	DXI624	Class A	Flat White Standard Advantage	_	_	_	_	_
_	8′	1-13/16" 46.5 mm	DXI 824	Class A	Flat White Standard Advantage	_	_	_	_	_
_	USG Logix™	1-13/16" 46.5 mm	See USG Logix™ Guide IS268	Class A	Flat White	_	_	_	_	_
			HRC							

High Recycled ContentClassified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)









Shadowline

Face Sleeve

Wall Angle	Length	Item No.	Color	
7/8" - 7/8" →	12' 3600 mm	M7	Flat White Standard Advantage	
l← //8"→l		M7HRC	Flat White	
15/ ₁₆ "	12' 3600 mm	M9	Flat White Standard Advantage	
9/16"		M9HRC	Flat White	
7/8" 13/11	12'	MS174	Flat White Silver Satin	
3/8" → 3/8"		MS174HRC	Flat White	
hanger wire — tee-face sleeve USG Donn® Brand Identitee® DXI™ grid	_	TFS-5 ⁶	_	
	_	TFS-5 DXI FC ⁷	_	

Intersection Sleeve

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)





PHYSICAL DATA/ **FOOTNOTES**

Product literature and samples Data sheet: AC3281

USG Logix™ system guide: IS268 USG Logix™ architectural design guide: IS287 Sample: 216276

Material
G30 hot-dipped galvanized steel body and cap, Baked-on polyester paint.

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report

Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Limitations

Please refer to USG Donn® Brand AX™ or ZXLA™ for exposed suspension systems in non-fire-rated, high-humidity applications, Interior applications only. Please refer to SC2561 for more information about exterior ceiling applications.

LA Research Report - RR 25764 Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Air diffusers

Request AC272-290.

Additional accessories

- Load transfer bracket—use DXI/ DXT26LTB.
- 2. Partition attachment-use PAC9-6.
- 3. Lift fixture clip—use LFC.

- Custom color available. Upcharges apply to
- 2. Load test data shows uniform load in lb,/LF based on simple span tests in accordance with ASTM C635 deflection limit of L/360.
- Available in metric.
 Hanger wire spacing and location must be per the UL design.
- 5. Panels must be field-cut to size at the
- perimeter.

 6. For seismic expansion joints.
- 7. For off-module intersections.
- Netric items listed available with standard lead times. Other metric items available by RTQ.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

USG INDEXED SUPPORT BAR

ISB109



APPLICATIONS

are installed.

· Cuts easily with snips.

- Hospitals
- Dormitories
- Hotels
- Multifamily residential

• Unique, nesting design allows splicing before or after hanger wires

• Notch friction fits against main tee keeping ISB in place during installation.

USG INDEXED SUPPORT BAR

ISB109

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com


TECHNICAL SERVICES 800 USG.4YOU (874-4968)



PROPERTIES

- Support spacing 48" o.c. (hanger wires or other types such as steel studs or main tees).
- Main tee bulb notches spaced 8" o.c.
- Index notch to main tee pullout strength 300 lb.
- · Min. G40 hot-dipped galvanized steel.

PROFILE ISB109

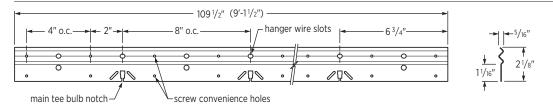


TYPICAL INSTALLATION




Use pliers to open tab on stabilizer bar, once in place close tab to lock in place.

Installation with Overlap

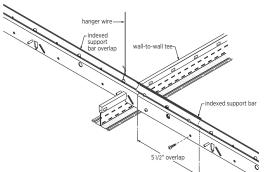


Hanger Wire Elevation



Main tees must be supported at both ends when hanger wires are used


RECOMMENDED SUPPORT METHOD



No blub means flush attachment when framing members are used for vertical support.


Vertical Support with Main Tees or Studs (Recommended)

- Bracing 48" o.c.
- Wall-to-wall tee 16" o.c. (typ.)

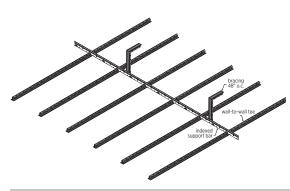

Vertical Support with Hanger Wires

- Hanger wire 48" o.c.
- Wall-to-wall tee 16" o.c. (typ.)
- Main tees must be supported at both ends when hanger wires are used.

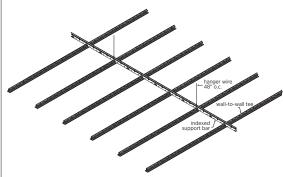

PHYSICAL DATA/ FOOTNOTES

Product literature and samples Data sheet: AC3312

System brochure: AC3152 Sample: 200075

Material

Min. G40 hot-dipped galvanized steel.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Recycled contentFor details, see RC tables or the LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

Code compliance

The information presented is correct to the best of our knowledge at the date of issuance. Because codes continue to evolve, check with a local official prior to designing and installing a ceiling system. Other restrictions and exemptions may apply.

Limitations

- For use with DGW Wall-to-Wall main tees only.
- ISB109 must not be used to cantilever main tees.
- Main tees must be supported at each end when hanger wires are used.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3312/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

The trademarks USG, CGC, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate persona protective equipment. Read SDS and literature before specification and installation.

USG DONN® BRAND ZXLA™ ACOUSTICAL SUSPENSION SYSTEM



APPLICATIONS

- Exterior soffits
- Food processing
- Healthcare
- Industrial applications

· Tested for exterior wind-uplift applications.

- Laboratories
- · Parking garages
- · Locker rooms

USG DONN® BRAND ZXLA® ACOUSTICAL SUSPENSION SYSTEM

Height

USG

1.64"

USG

1.64"

42 mm CGC 1.5" 25 mm

1-1/2"

38 mm

1-1/2"

38 mm

42 mm CGC 1.5" 25 mm ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

Seismic Design Category

ICC-ES

Evaluated

Installation

7/8" Molding

7/8" Molding

ACM7 Clip

ACM7 Clip

IBC

A-C

A-F

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL

Rated Load 1,2

5' Hanger

6.1 lb./LF

7.3 lb./LF

Spacing

TECHNICAL SERVICES 800 USG,4YOU (874-4968)

4' Hanger

Spacing

12 lb./LF

16 lb./LF

CGC: contact Sales Representative

usgdesignstudio.com cgcdesignstudio.com

6' Hanger

3.6 lb./LF

4.9 lb./LF

Spacing

YEAR LIMITED SYSTEM WARRANTY No Visible Sag

Length

12'

12'

2'

4'

ASTM Class

Intermediate

Heavy Duty

Duty²



Item No.

ZXLA24

ZXLA26

7XLA224

ZXLA424

HRC

HRC

15/16"	TEE	SYSTEM ⁴
		Main Tan



Cross Tee 1-1/2"







Fire

Rating

0

0

0

0

0

Color

Flat White

Flat White

Flat White

Flat White

Firecode®



PHYSICAL DATA **FOOTNOTES**



Wall Angle

Length Item No. 12' M7Z (up to 65% recycled content) HRC

Flat White

Color

Product literature and samples Data sheet: AC3029 Exterior systems guide: SC2561

Material

G90 hot-dipped galvanized steel tee and cap; stainless

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

LA Research Report - RR 25764

Refer to usg.com for most current version.

Online tools usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Finish is not UV-resistant; should not be installed where direct exposure to sun or weather will occur, such as fascias or facades. Not suitable for areas subject to high concentrations of acid rain. Indirect exposure to severe environmental conditions may shorten the life span of the product. The specific design of exterior ceiling installations requires the review and approval of the architect or engineer of record. Please refer to SC2561 for more information about exterior ceiling applications

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

1. Hanger wire spacing and locations must be per the UL design.

- 2. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- 3. Panels must be specified to be field-cut to size and field-revealed to provide as wide a lay-on edge as possible.
- 4. Metric sizes available by RTQ.


Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3029/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

CURVED CEILINGS

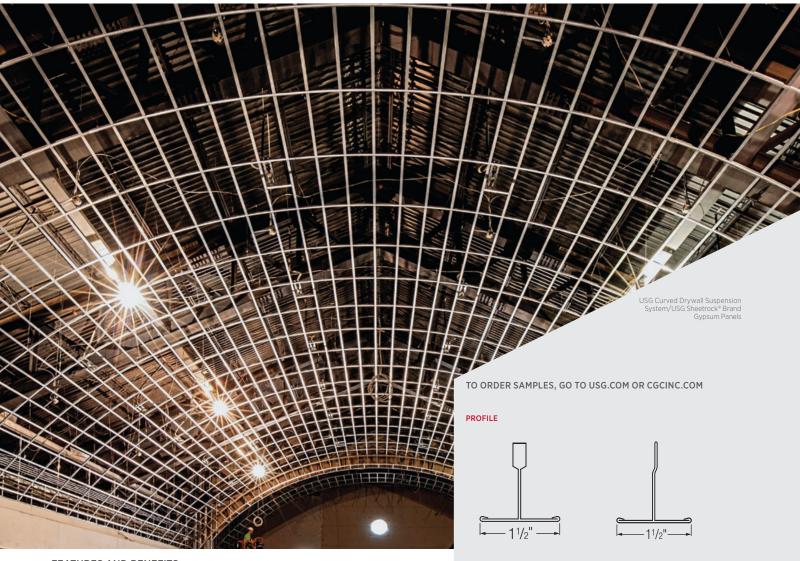

FEATURES AND BENEFITS

- USG Curved Drywall Suspension System simplifies the design and construction of curved drywall ceilings.
- Pre-engineered, factory curved main tees for consistent, uniform radii.
- G30 hot-dipped galvanized system suitable for most interior and exterior applications.

APPLICATIONS

- Domes, vaults and valleys
- Groin vaults
- · Curved soffits


CURVED CEILINGS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

TECHNICAL INFORMATION AND LEED REPORT TOOL

Rated Load¹

800 USG,4YOU (874-4968)




FOR MOST UP-TO-DATE usgdesignstudio.com cgcdesignstudio.com



SYSTEM COMPONENTS






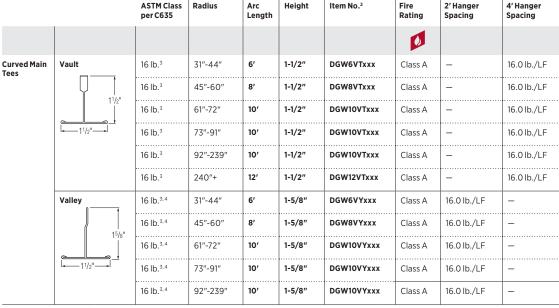


See Flat Ceilings (AC3117) for information on straight cross tees, cross channels and moldings.

ACCESSORIES


Cross Tees

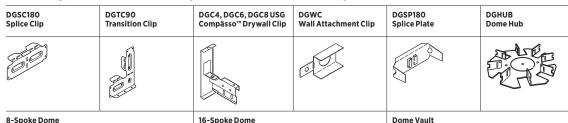

TYPICAL ASSEMBLIES







DESIGN SUPPORT

usgdesignstudio.com or cgcdesignstudio.com

- Online design and specification tools.
- · Installation videos.
- Domes and barrel-vault estimator. Additional support available through USG Ceiling Solutions Group for design and estimation of nontypical applications.

PHYSICAL DATA **FOOTNOTES**

Product literature and samples Data sheet: AC3118

System brochure: AC3152

Material

Min. G30 hot-dipped galvanized steel body and cap.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Limitations

For exterior applications, the suspension system should be reviewed by a structural engineer.

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

- For detailing and module loading, request AC3152.
- 1. For extending an involute loading, request AC3752.
 2. "xxx" is a placeholder for a custom radius, in inches.
 3. As tested per independent testing agency, both vault and valley main trees can carry 16 lb. per lineal foot.
 4. As tested per independent testing agency, valleys require
- nanger wire spacing of 2' o.c.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document

AC3118/rev. 4-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

FLAT CEILINGS



- Installs faster than traditional framing methods.
- More than 60 UL fire-resistive designs.
- Assemblies available to meet STC and IIC requirements.
- Easily frames openings for Type F and Type G light fixtures.
- Evaluated for building code compliance according to ICC ESR-1222.
- G90 galvanization available for a variety of environmental conditions including exterior ceiling systems.
- Wind load tested and approved, including Miami-Dade NOA, for exterior applications with proper bracing and framing.

APPLICATIONS

- Exterior ceilings
- Fire-rated and non-fire-rated interior gypsum board ceilings

FLAT CEILINGS

SYSTEM COMPONENTS Straight Main Tees

> Wall-to-Wall System Straight Tee**

> > Cross Tees

Moldings

Accessories

PHYSICAL DATA/

FOOTNOTES

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

FOR MOST UP-TO-DATE AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

CGC: contact Sales Representative



								oad 1				
	ASTM	Length		IBC Seismic	Hanger Spacing-lb./LF							
	Class				Rating Design 2	24"		36"		48"		
							L/240	L/360	L/240	L/360	L/240	L/360
DGLW 15/6" nom.	Heavy Duty	12'	1.617"	DGLW26 ¹ DGLW26E(G90) ¹	Ø	A-F	129	86	57	38	24	16
DGW	Heavy Duty	6' to 14'	1.617"	DGW26s	Class A	A-F	131	86	62	41	30	20

Span L/360 lb./LF

							Span	Value
DGLW	_	2'	1-1/2"	DGLW224	Ø	A-F	24"	99.9
11/2"	_	26"	1-1/2"	DGLW2624 ¹	Ø	A-F	26"	93.1
11/2"	_	4'	1-1/2"	DGLW424 DGLW424E (G90)	Ø	A-F	48"	15.9
	_	50"	1-1/2"	DGLW501	0	_	50"	14.1
	_	72"	1-1/2"	DGLW624	Ø	_	72"	4.7
11/2"	_	12'	-	DGWM24	_	A-F	_	-
15/8"	-	12'	_	DGCM27	_	A-F	_	_

DGSC180 Splice Clip*	DGTC90 Transition Clip	DGC4, DGC6, DGC8 USG Compässo™ Drywall Clip	DGWC Wall Attachment Clip

^{*} See AC3152 for alternative splice details ** See AC3230 for expanded wall-to-wall data

Firecode

Product literature and samples

Data sheet: AC3117 Data sheet wall-to-wall: AC3230 Samples: 257202

Material
Min. G40 hot-dipped galvanized steel.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Limitations

For exterior applications, the suspension system should be reviewed by a structural engineer. Please refer to SC2561 for more information about exterior ceiling applications.

LA Research Report - RR 25764

ICC Evaluation Services, LLC. Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Manufactured and tested in accordance with ASTM C635.

Revit is the trademark of Autodesk Inc.

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3117/rev. 3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

WALL-TO-WALL



USG DRYWALL SUSPENSION SYSTEM

WALL-TO-WALL

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com







Load Test Data

	Length	Height	Face Width	Item No.	Fire Rating	Simple Span L/240 Uniform Load (lb./LF)					
						4'	5′	6'	7'	7'-6"	8′
					0						
19/a* nom.	6' 8' 10' 12' 14' Custom	1.617"	1-1/2"	DGW26s	Class A	29.84	15.28	8.84	5.57	4.53	3.73
11/2*	12'	1-1/2"	1"	DGWM24	_	_					
15/a"	12'	1-5/8"	1"	DGCM27	_	_					

VERTICAL

SUPPORT



* See AC3152 for additional main tee splice options.

MEMBRANE LOADS

DGSC180 Splice Clip

ACCESSORY

SYSTEM COMPONENTS


Straight Tee

Moldings³

Span	O.C. Spacing (in.)	Maximum Load (lb./SF)
2'	16	179.04
	24	119.36
4'	16	22.38
	24	14.92
5′	16	11.46
	24	7.64
6′	16	6.63
	24	4.42
7'	16	4.18
	24	2.78
7'-6"	16	3.40
	24	2.26
8′	16	2.80
	24	1.86
	24	14.92*
10′	16	11.46*
	24	7.64*
12'	16	6.63*
	24	4.42*
16′	16	2.8*
	24	1.86*
	24	4.42**

Tee Spacing	Drywall	Span	Support Requirement
16" o.c.	1/2"	up to 8'	None
		8′1″-16′***	Midspan
		16′ 1″-24′***	Two supports at 1/3 points
16" o.c.	5/8"	up to 7'-6"	None
		7'-7" to 15'***	Midspan
		15'-1" to 22'-6"***	Two supports at 1/3 points
24" o.c.	5/8"	up to 6'-6"	None
		6'-7" to 13'	Midspan
		13'-1" to 19'-6"***	Two supports at 1/3 points
	16" o.c.	16" o.c. 1/2" 16" o.c. 5/8"	16" o.c. 1/2" up to 8' 8'1"-16'*** 16' 1"-24'*** 16" o.c. 5/8" up to 7'-6" 7'-7" to 15'*** 15'-1" to 22'-6"*** 24" o.c. 5/8" up to 6'-6" 6'-7" to 13'

Typical ISB019 installation on DWG Main Tee.

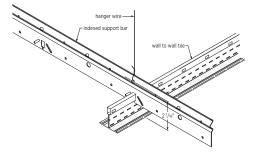

PHYSICAL DATA/ **FOOTNOTES**

Product literature and samples Data sheet: AC3230, AC3112

System brochure: AC3152

Finishes Galvanized.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Material
Min. G40 double-web tee, G40 hot-dipped galvanized steel.

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM deflection limit on L/240.
- Attachment to wall structure is critical.
- Members conform to performance standard C645.
 Installation per ASTM C636.
 Installation per ASTM C754.

- ISB109 for use with USG Wall-to-Wall System only. Main tees must be supported on both ends.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3230/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.


Notes

*Vertical support at midspan.

*Two vertical supports at 1/3 point.

*Spans greater than 14' require main-tee splice. Use DGSC180 splice clip or alternative splicing options described in system brochure AC3152.

USG DONN® BRAND M7 OVERLAPPING WALL ANGLE

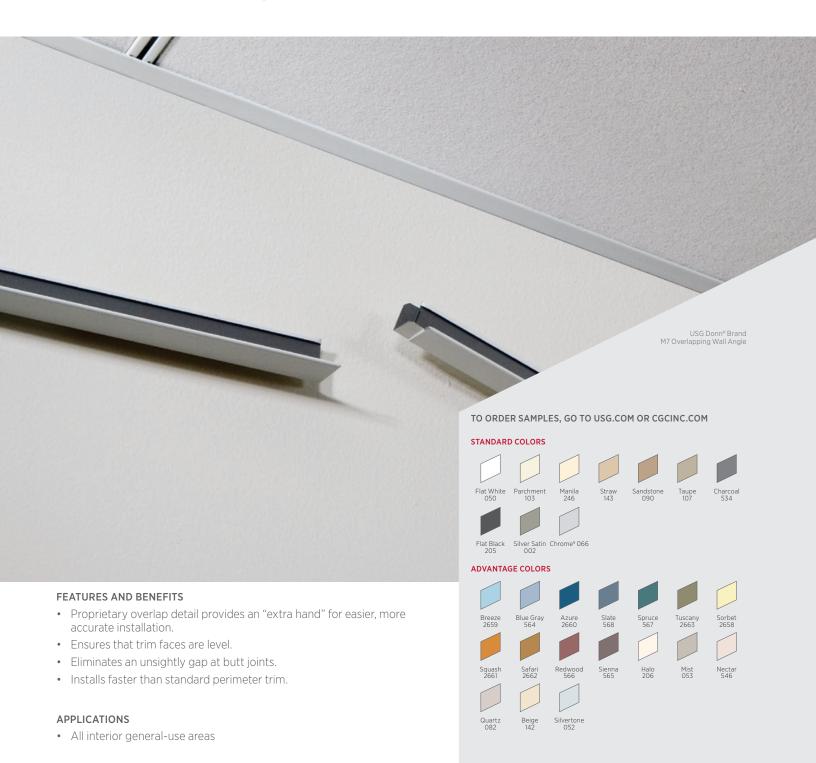

USG DONN® BRAND M7 OVERLAPPING WALL ANGLE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



- ⁷/8"-

7/8"

Wall Angle² Length Item No. Color 12' М7 Flat White 3600 mm Standard


Advantage

MOLDING^{1, 2}




PERFORMANCE **COMPARISON**

USG Donn® Brand M7 Overlapping Wall Angle



Overlap detail sits on adjacent trim, providing extra support for quicker, easier installation. The overlap ensures that trim faces are level, and it eliminates the unsightly gap created by traditional butt joints.

Traditional Wall Angle



With no support between lengths of trim, traditional wall angle is more difficult to install. Butt-cut wall angle is also subject to misalignment of trim faces and gaps at joints.

PHYSICAL DATA/ **FOOTNOTES**

Product literature and samples Data sheet: AC3270

Material

Hot-dipped galvanized steel body. Baked-on polyester paint.

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current version.

Notes

- For more information about moldings, see the Perimeter Interface selector.
- 2. Panels must be field-cut to size and field-revealed, where necessary, at the perimeter.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3270/rev. 2-17

USG DONN® BRAND TRANSITION MOLDING

DRYWALL TO ACOUSTICAL CEILING TRANSITION MOLDING



USG DONN® BRAND TRANSITION MOLDING

DRYWALL TO ACOUSTICAL CEILING TRANSITION MOLDING

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

COMPONENTS


USG Donn® Brand SL DXT™

USG Donn® Brand SL DX®

Profile	Item Number	Exposed Leg	Reveal	Length	Pieces/Carton	LF/Carton
3/8" 1-1/4" 3/8" 2/16"	CPDWA9120	9/16"	3/8"x 3/8"	120"	12	120
3/8" t 3/8" -15/16"	CPDWA15120	15/16"	3/8"x 3/8"	120"	12	120

INSTALLATION **DETAILS**

Shadowline USG Donn® Brand Transition Molding, Drywall to Acoustical Assembly Elevation

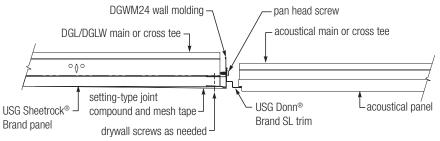

RECOMMENDED FINISHING INSTRUCTIONS

- $1. \ \, {\sf Embed \, mesh \, tape \, over \, flange \, with \, setting-type \, joint \, compound}.$
- 2. Apply second coat of setting-type or ready-mixed joint compound.
- 3. Apply third coat if needed.

Note:

For complete installation instructions, refer to installation guide AC3318.

PHYSICAL DATA/ **FOOTNOTES**

Product literature and samples Data sheet: AC3315 Installation guide: AC3318 Sample: 259401

usgdesignstudio.com or cgcdesignstudio.com

Material
Min. G30 hot-dipped galvanized steel. Baked-on polyester paint.

representative

For availability in Canada, please contact your local sales

Notice


Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

USG SUSPENSION SYSTEMS ACCESSORIES—MOLDINGS

Angle Molding w/Gasket M7CE

Use for standard ceiling perimeters. Use in Clean Room applications with USG Donn® Brand CE™ Acoustical Suspension System. **US Channel Wall Molding** US Channel Wall Molding w/Gasket US28CE

Shadow Molding For creating reveals at ceiling perimeters. Also helps to hide imperfections in drywall partitions and bulkheads.



Use to create ceiling breaks, soffits and

M/+ (lb)

Use with C-8 clip to hold down perimeter ceiling panels.

Angle Molding

Length x A x B x C

Description

Catalog Number

Use with C-8 clip in Clean Room applications with USG Donn® Brand CE™ Acoustical Suspension System.

changes in elevation.

Packaging/Ctn.

F-Molding

ANGLE MOLDING

		LF	Pcs.	Wt. (lb.)
M7 ¹	12'x7/8"x7/8" Wall Molding	480	40	63
M7OL	12'x7/8"x7/8" Overlapping Wall Molding	480	40	63
M7A	12'x7/8"x7/8" Aluminum Wall Molding	480	40	26
M7-10	10'x7/8"x7/8" Wall Molding	400	40	26
M7SS	12'x7/8"x7/8" Stainless Steel Wall Molding	240	20	31
M7Z	12'x7/8"x7/8" Hot-Dipped Galvanized Steel Wall Molding	480	40	58
M9 ¹	12'x9/16"x15/16" Wall Molding	480	40	55
M9-10	10'x9/16"x15/16" Wall Molding	400	40	23
M12	10'x1"x1-1/2" Wall Molding	250	25	63
MC11A25	10'x1"x1" Aluminum Cap Wall Molding	250	25	39
M7CE	12'x7/8"x7/8" Wall Molding w/gaskets	240	48	59
M20SM	10'x1"x2" Heavy Duty Wall Molding	250	25	80
M20SM-2	10'x2"x2" Wall Molding	200	20	76
M20 ²	10'x1"x2" Wall Molding	250	25	55
MS125	12'x15/16"x1/4"x1/4"x 9/16" (Option 1)	300	25	46
	12'x 9/16"x1/4"x 1/4"x 15/16" (Option 2)			
MS135	12'x 15/16"x 5/16"x 5/16" x9/16" (Option 1)	300	25	37
	12'x 9/16" x 5/16"x 5/16"x 15/16" (Option 2)			
MS144	12'x3/4"x3/8"x1/2"x3/4" (Option 1)	300	25	48
	12'x3/4"x1/2"x3/8"x3/4" (Option 2)			
MS154 ³	12'x7/8"x3/4"x3/4"x7/8"	300	25	67
MS164	12'x3/4"x3/4"x3/4"x3/4"	300	25	62
MS174 ³	12'x7/8"x3/8"x3/8"x9/16" (Option 1)	300	25	43
•••••	12'x9/16"x3/8"x3/8"x7/8" (Option 2)			
MS274	10'x7/8"x3/4"x9/32"x1-1/4"	200	20	54
US12	10'x3/4"x1/2"x1" U-Molding	500	50	44
US20	10'x1-1/4"x1/2"x1" U-Molding	300	30	57
US28	10'x1-11/16"x1/2"x1" U-Molding	300	30	63
US31	10' 1-15/16"x1/2"x1" U-Molding	300	30	70
UA25	10'x1-9/16"x1/2"x1" Aluminum U-Molding	300	30	33
U-2-3/32	12'x2-3/32"x7/8"x1-1/8" Aluminum U-Molding, Flat White	360	30	90
US28CE	10'x1-11/16"x1/2"x1" U-Molding w/gaskets, Flat White	300	30	63
MF8	10'x1/2" F-Molding (for 1/2" panels)	100	10	28
MF10	10'x5/8" F-Molding (for 5/8" panels)	100	10	29

SHADOW MOLDING

Length x A x B x C x D (See illustration above)

US CHANNEL WALL MOLDING

F-MOLDING

MF10

- 1. M7 and M9 available in standard and advantage colors in half carton quantities only, 240 LF per carton.
- 2. Not all M20 moldings are available in all areas. Please contact your USG Sales Representative.
- 3. MS154 and MS174 available with exposed horizontal leg painted a color.



USG SUSPENSION SYSTEMS ACCESSORIES MOLDINGS

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

Square Molding Corner Clip JS	Outside Corner JS174	Radius Molding Corner Clip JH, JB
Use with angle molding.	Use with MS174 Shadow Molding. JS274 also available for MS274.	For radius or "bullnose" corners.
0 0	A	8 8
Field-Modified Corner JM16	Inside Corner Angle Mold A2	Prefabricated Inside Corner A174

OUTSIDE CORNERS

Catalog Number	Description	Packaging/Ctn.		
		Pcs.	Wt. (lb.)	
JS9	Square 90° Outside Corner Cap for 9/16" Molding	100	3.0	
JS14	Square 90° Outside Corner Cap for 7/8" Molding	100	3.0	
JS16	Square 90° Outside Corner Cap for 1″ Molding	100	3.0	
JS174	Square 90° Outside Corner Cap for MS174 Shadow Molding	50	1.5	
JS274	Square 90° Outside Corner Cap for MS274 Shadow Molding	50	1.5	
JH9	1" Radius 90° Outside Corner Cap for 9/16" Molding	100	3.0	
JH12	1" Radius 90° Outside Corner Cap for 3/4" Molding	100	3.0	
JH14	1" Radius 90° Outside Corner Cap for 7/8" Molding	100	3.0	
JH15	1" Radius 90° Outside Corner Cap for 15/16" Molding	100	3.0	
JH16	1" Radius 90° Outside Corner Cap for 1" Molding	100	3.0	
JB14	3/4" Radius 90° Outside Corner Cap for 7/8" Molding	100	3.0	
JB16	3/4" Radius 90° Outside Corner Cap for 1" Molding	100	3.0	
JM16	Field-Modified Corner for 1" Molding	100	3.0	
A2	Inside Corner Cap for 7/8" Molding	200	4.0	
A174	Inside Corner Cap for MS174 Shadow Molding	50	1.5	
A274	Inside Corner Cap for MS274 Shadow Molding	50	1.5	

INSIDE CORNERS

Drywall Grid Hanger Clip A	Grid Load Transfer Bracket B	Furring Clip for Grid to Channel
To suspend secondary ceiling.	To suspend secondary ceiling.	Connect grid to 1-1/2" channel.
Seismic Attachment Clip for Perimeter Conditions	Molding Attachment Clip	Ceiling Cloud Suspension Brace
Attach tee ends at the perimeter in seismic design categories C, D, E and F.	Attach tees to angle molding and shadow molding.	For moving hanger wires away from ceiling cloud perimeters.
Catalog Number Description		Packaging /Ctm Potail Koy

GRID TO PRIMARY SUPPORT

GRID TO MOLDING¹

CEILING CLOUD SUSPENSION BRACE

Catalog Number	Description	Packaging/Ctn.	Detail Key	
		Pcs.	Wt. (lb.)	
DGHC	Drywall Grid Hanger Clip	100	1.5	А
256860	Grid Load Transfer Bracket, 15/16" grid	250	13	В
256861	Grid Load Transfer Bracket, 9/16" grid	250	13	В
256862	Grid Load Transfer Bracket, 1-1/2" grid	250	13	В
V-14	Furring Clip for Grid to Channel	500	45	С
ACM7	Seismic Perimeter Attachment Clip	100	7	D
MAC2	Molding Attachment Clip	100	3	E
TSB-24	Bare Galvanized or Flat Black	10	12.5	G

 $^{1. \ \} Please\ refer\ to\ usg. com\ or\ cgcinc. com\ for\ more\ information\ about\ seismic\ applications\ with\ the\ ACM7\ seismic\ clip.$

ORDER SAMPLES/LITERATURE

Pcs.

75

100

100

100

100

100

Wt. (lb.)

G1

G2

Н

J

13

2

3

4

3

2

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

MT/CT Converter		Two-Way Seismic Separation Joint Clip	Three-Way Off-Module Connector	r	
Changes main-tee direction 90° from adjacent main tee.		For seismic separation joints in IBC Seismic Design Categories D, E and F.	Use with cross tees and main tees that are the same height.		
Four-Way Seismic Se	eparation Joint Clip	Paired Main Tee Clip	Light-Fixture Clip J		
For seismic separation joints in IBC Seismic Design Categories D, E and F.		Use for linear air diffusers; use only with USG Donn* Brand DX*/DXL™ DXLA,™ ZXLA,™ Fineline* DXF™ and Fineline* 1/8 DXFF.™	For USG Donn® Brand Centricitee™ DXT™/ DXLT™ suspension system, use black clips with parabolic fixtures. Cross tee must be connected to main tee.		
Catalog Number	Description	1	Packaging/Ctn.	Detail Key	

TEE TO TEE

LIGHT-FIXTURE CLIP

LFC

DXMT/CT

DH2¹

DH3

DH4²

V-32

Notes
1. Please refer to Submittal Sheet AC3301 for more information about the DH2 two-way seismic separation joint clip.
2. Please refer to Submittal Sheet AC3271 for more information about the DH4 four-way seismic separation joint clip.

9"x1-1/2" MT/CT Converter—changes MT direction for DX/DXL grid.

Two-Way Seismic Separation Joint Clip

Four-Way Seismic Separation Joint Clip

Light-Fixture Hold-Down Clip—for 9/16" grid

Paired Main Tee Clip (2" separation center-to-center)

Three-Way Off-Module Connector

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com


FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)


Seismic Compression Post	Tee Face Sleeve	Tee Face Sleeve¹ L2
For bracing in IBC Seismic Design Categories D, E, F and exterior ceiling applications for wind uplift.	To cut in tees to existing system and for separation joints.	To cut in tees to existing system and for separation joints.
	USG Donn® Brand DX® Acoustical Suspension System USG Donn® Brand Centricitee™ DXT™ Acoustical Suspension System	

Accessory Hanger Hook²

Remove top clip for use with standard 1/4" USG Donn® Brand Fineline® Acoustical Suspension System.




USG Donn® Brand DX[®] Acoustical Suspension System



USG Donn® Brand Fineline® DXF™Acoustical Suspension System





Reveal edge Square edge

SEISMIC COMPRESSION **POSTS**

TEE ACCESSORIES

PARTITION ATTACHMENT

Catalog Number	Description	Packagin	Packaging/Ctn.		
		Pcs.	Wt. (lb.)	7	
VSA18/30	Adjustable 18" to 30"	1	2.0	К	
VSA30/48	Adjustable 30" to 48"	1	2.5	K	
VSA48/84	Adjustable 48" to 84"	1	4.5	К	
VSA84/102	Adjustable 84" to 102"	1	7.5	K	
VSA102/120	Adjustable 102" to 120"	1	9	K	
VSA120/144	Adjustable 120" to 144"	1	11	K	
TFS-1	Tee Face Sleeve (3" long) for 15/16" USG Donn® Brand DX®/DXL™ Acoustical Suspension System	100	10	L1	
ΓFS-2	Tee Face Sleeve (3" long) for 9/16" USG Donn® Brand Centricitee™ DXT™ Acoustical Suspension System	100	3	L1	
TFS-3	Tee Face Sleeve (3″ long) for USG Donn® Brand Fineline® DXF™ Acoustical Suspension System with 1/4″ Reveal	250	4	L1	
TFS-4	Tee Face Sleeve (3" long) for USG Donn® Brand Fineline® 1/8 DXFF™ Acoustical Suspension System with 1/8" Reveal	250	4	L1	
TFS-5	Tee Face Sleeve (3" long) for USG Donn® Brand Identitee® DXI™ Acoustical Suspension System with 1/8" Reveal		4	L2	
TFS-5 DXI FC	Tee Face Intersection sleeve (3" long) for USG Donn® Brand Identitee® DXI™ Acoustical Suspension System with 1/8" Reveal		4	L2	
AH1	Accessory Hanger Hook (white, injection molded)	50	1	М	
PAC15-SQ	Partition Clip for 15/16" or 9/16" SQ panels (245339)	100	8	N1	
PAC15-SL	Partition Clip for 15/16" SL panels (254340)	100	8	N2	
PAC 9-FL	Partition Clip for 9/16" FL panels (254341)	100	8	N2	

- 1. The USG Donn* Brand Identitee* DXI™ Tee-Face Intersection Sleeve (TFS-5 DXI FC) is used for off-module intersections to maintain the clean,
- uninterrupted aesthetic of the grid profile.

 2. Whenever possible the accessory hanger hook should be installed on a main tee. If an accessory hanger hook is installed on a main tee, the load should not exceed 10 lb. without installing a supplementary hanger wire support to the structure at the location of the hanger hook. If an accessory hanger hook is installed on a cross tee, the load should not exceed 4 lb. without installing a supplementary hanger wire support to the structure at the location of the hanger hook. The accessory hanger hook is not designed to support loads exceeding 30 lb.

 3. The partition attachment clip shown above is manufactured by Revoe Manufacturing of Canada and can be purchased through USG.

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative
TECHNICAL SERVICES

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

Panel Retention Clip 20 N3	4281	Hold-Down Clip—Fire-Rated Grid O1	Hold-Down Clip O2	
prevent panel displace	The retention clips help ment from incidental ed with USG Rock Face®	Used when required in some fire-rated assemblies.	To maintain a Clean Room seal.	
Variable Locking Hold-1	Down Clip	Accessible Hold-Down Clip	Variable Hold-Down Clip	
Use as a locking hold-down clip for various acoustical and metal panels.		Use as a hold-down clip for 5/8" panels. Provides ready accessibility.	For 5/8" to 3/4" panels.	
Catalog Number	Description		Packaging/Ctn	Detail Key

PANEL RETENTION CLIP

HOLD-DOWN CLIPS

Catalog Number	Description	Packaging/	Packaging/Ctn.		
		Pcs.	Wt. (lb.)		
20428	Attaches to 1-1/2" main tees and cross tees behind lay-in ceilings. The retention clips help prevent panel displacement from incidental contact. Recommended with USG Rock Face® Acoustical Panels for impaction-resistant systems.	100	17	N3	
L15	Hold-Down Clip—for 5/8" fire-rated panels	1000	7	01	
L15CE	Hold-Down Clip—for panels in Clean Room applications (same clip as L15; smaller quantity)	500	3.5	02	
PZ	Variable Locking Hold-Down Clip	100	1	03	
L45	Accessible Hold-Down Clip for 5/8" panels	1000	15	Р	
V15	15 Variable Hold-Down Clip			Q	

1. For more information about the Keep Clip™ from American Retention Components, Inc., please visit www.retentionclip.com.

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

Wall Spring Clip R	Miter Closure Clip for USG Donn* Brand Fineline* Acoustical Suspension System S	USG Celebration™ Hold-Down Channel Clip T
To hold down perimeter ceiling panels. Useful for maintaining Clean Room seal with US28CE molding.	For closing off unused miters.	To maintain a Clean Room seal.
Partition Attachment Clip U	T-Bolt V	USG Donn* Brand Fineline* Acoustical Suspension System Cut-Off Die W
To screw-attach ceiling-height partitions.	To bolt-attach partitions, signage or pendant-mounted indirect lighting.	Use to field-cut USG Donn® Brand Fineline® tees.

HOLD-DOWN CLIPS¹

USG DONN® BRAND FINELINE® ACOUSTICAL SUSPENSION SYSTEM ACCESSORIES

Catalog Number	Description	Packaging/	Packaging/Ctn.		
		Pcs.	Wt. (lb.)		
C-8	Wall Spring Clip	2000	29	R	
C-8CE	Wall Spring Clip (same clip as C-8; smaller quantity)	500	8	R	
MCC3	2" Miter Closure Clip for 1/8" USG Donn* Brand Fineline* Acoustical Suspension System	50	1	S	
MCC2	2" Miter Closure Clip for standard USG Donn® Brand Fineline® Acoustical Suspension System		1	S	
T15	10"x11/32"x1-9/16"x3/4" Panel Hold-Down Clip	500	30	Т	
U-2-3/32	10"x11/32"x2-3/32"x3/4" Panel Hold-Down Clip		30	Т	
PAC1	3" Partition Attachment Clip		1	U	
TB1	1"x1/4"-20 T-Bolt		1	V	
FC1	USG Donn® Brand Fineline® Acoustical Suspension System Cut-Off Die (scaffold mount)		10	W	

^{1.} Please refer to *USG Exterior Ceiling Applications* (SC2561) for more information about exterior ceiling applications with the T15 and U-2-3/32 hold-down clips. Use T-15 hold-down clip with UA25 molding and use U-2-3/32 hold-down clip with U-2-3/32 molding.

USG SUSPENSION SYSTEMS ACCESSORIES—STABILIZER BARS

Standard Stabilizer Bar A	Locking Stabilizer Bar	Accessible Stabilizer Bar
	,	
		- 1 1 12

STANDARD STABILIZER BARS¹

LOCKING STABILIZER BARS¹

ACCESSIBLE STABILIZER BARS¹

Catalog Number	Description	Packaging	Packaging/Ctn.			
		LF	Pcs.	Wt. (lb.)	Key	
CC15-20	Standard 20" Stabilizer Bar	83.3	50	11	А	
CC15-30	Standard 30" Stabilizer Bar	125	50	17	А	
CC15-4-2	Standard 4' Stabilizer Bar Notched 2' o.c.	200	50	27	Α	
SB12	Locking 12" Stabilizer Bar	200	200	27	В	
SB24	Locking 24" Stabilizer Bar	400	200	52	В	
SB24-A	Locking 24" Stabilizer Bar Elongated for Ashlar Connection	400	200	52	В	
SB36	Locking 36" Stabilizer Bar	300	100	40	В	
SB48	Locking 48" Stabilizer Bar	400	100	50	В	
SB48-24	Locking 24" Stabilizer Bar 24" Center-to-Center Notch	400	100	50	В	
SB60	Locking 60" Stabilizer Bar	500	100	64	В	
ASB24	Accessible 24" Stabilizer	50	25	17	С	
ASB30	Accessible 30" Stabilizer Bar	62.5	25	25	С	
ASB48	Accessible 48" Stabilizer	100	25	33	С	
ASB600MM	Accessible 600 mm Stabilizer Bar	15(m)	25	17	С	
ASB900MM	Accessible 900 mm	22.5(m)	25	25	С	
ASB1200MM	Accessible 1200 mm	30(m)	25	33	С	

^{1.} Please refer to Application Guide (IC592) for more information about USG stabilizer bars in plank and large panel applications.

USG SUSPENSION SYSTEMS ACCESSORIES—MISCELLANEOUS

Suspension Systems.

Universal Field Cross Tee Hole Tool

For all USG Donn® Brand Acoustical


Handheld Field Cross Tee Hold Tool

For all USG Donn® Brand Acoustical Suspension Systems.



Air Diffuser

Field-cut foil-backed ceiling panel to fit diffuser face. Use with USG Donn® Brand Fineline® and Centricitee™ Acoustical Suspension Systems.




SB2 Sloped Ceiling Bracket

Catalog Number


USG Logix™ Universal Yoke


Utility Module Bracket

Packaging/Ctn.



Description





CROSS TEE HOLE PUNCHES³

TOUCH-UP PAINT

TOOCH OF TAIN

AIR DIFFUSERS

Recommended for use with 9/16" systems

USG LOGIX™ INTEGRATED SYSTEM


ADJUSTABLE WALL MOLDING BRACKET

		Pcs.	Wt. (lb.)
215738	Universal Field Cross Tee Hole Tool	1	30
200308	Handheld Cross Tee Hole Tool	1	5
204755	Replacement Die Block for Universal Cross Tee Tool	1	1
276759	Replacement Die Block for Handheld Cross Tee Tool	1	1
214418	Replacement Punch for Universal Cross Tee Tool	1	1
276760	Replacement Punch for Handheld Cross Tee Tool	1	1
B15	Silver Satin (020)	6	7
B14	Flat Black Spray Paint (205) ¹	6	7
B13	Flat White Spray Paint (050) ¹	6	7
PC15 GAL	Standard Gallon ²	1	12
PC16 QT	Standard Quart ²	1	3
PC19 GAL	Custom Gallon	1	12
PC20 QT	Custom Quart	1	3
AD16	2'x2' 1 Slot with 6" Collar	1	7
AD18	2'x2'1Slot with 8" Collar	1	7
AD26	2'x2' 2 Slot with 6" Collar	1	8
AD28	2'x2' 2 Slot with 8" Collar	1	8
AD38	2'x2' 3 Slot with 8" Collar	1	8
AD310	2'x2' 3 Slot with 10" Collar	1	9
AD410	2'x2' 4 Slot with 10" Collar	1	10
AD412	2'x2' 4 Slot with 12" Collar	1	10
LGXUNVYK	USG Logix™ Integrated System Universal Yoke 4, 6, 100 mm, 150 mm, HDG, 2-Part Yoke	10	4
UMB-4-6	4, 6, Utility Module Bracket (UMB)	8	1.9
UMB-100-150	100 mm, 150 mm, Utility Module Bracket (UMB)	8	1.9
SB2	SB2 Adjustable Wall Molding Bracket—used to secure standard wall molding at an angle to accommodate a sloped acoustical ceiling.	100	11

- 1. One carton contains six 12 oz. cans. Paints cannot be shipped air freight.
- 2. Specify color number from price list.
- 3. Punch tools are not covered under the USG Standard Product Warranty.


USG SUSPENSION SYSTEMS ACCESSORIES—SEPARATION JOINTS


When a separation joint is required, USG offers several options that are practical, easy to install, and designed for minimal visibility. USG Donn® Brand separation joints represent the greatest range of options to satisfy the stringent requirements for separation joints.

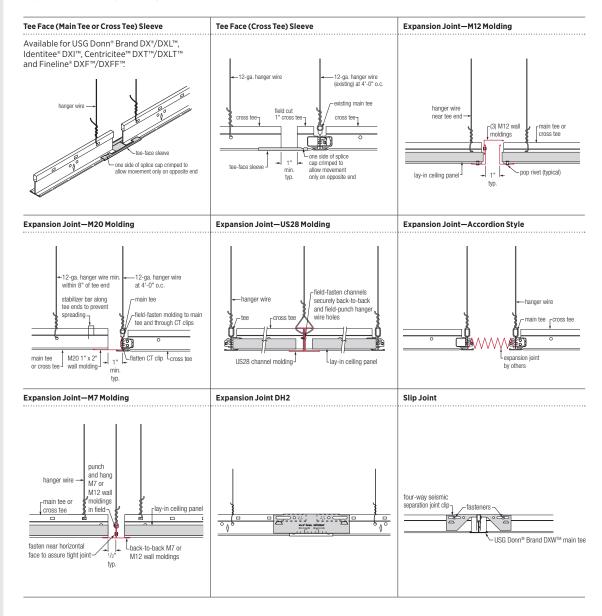



Notice


Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

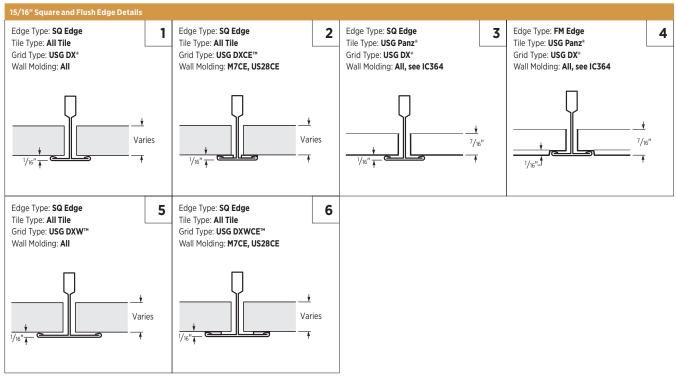


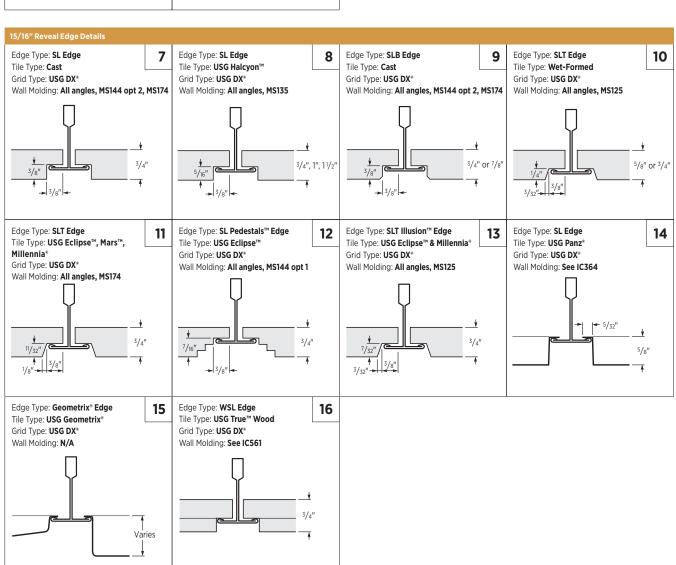


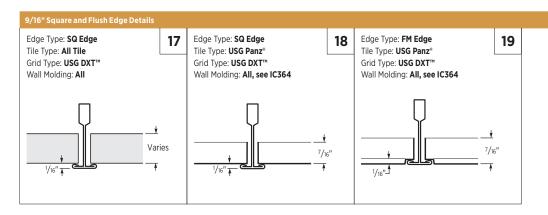


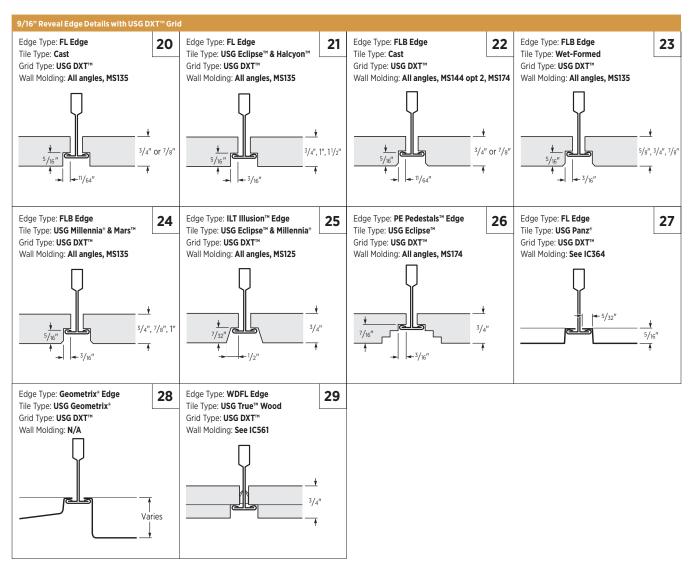

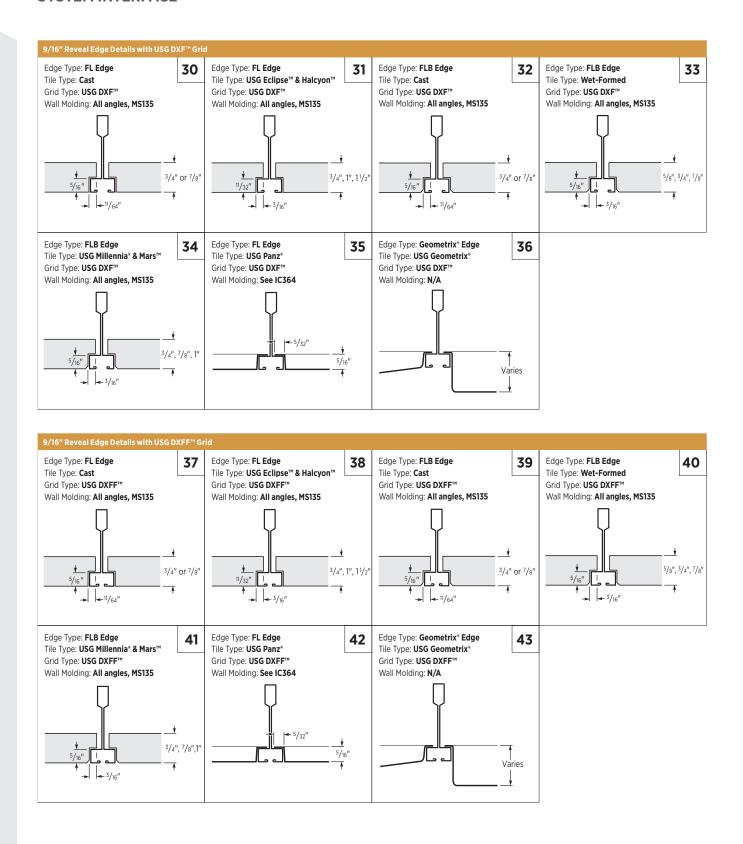

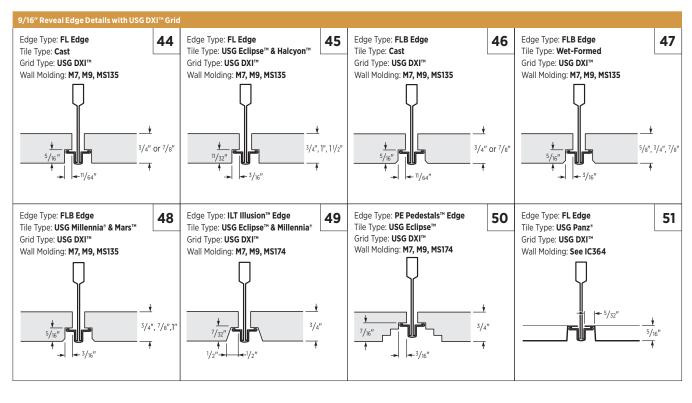

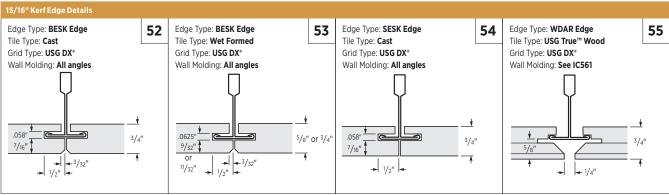

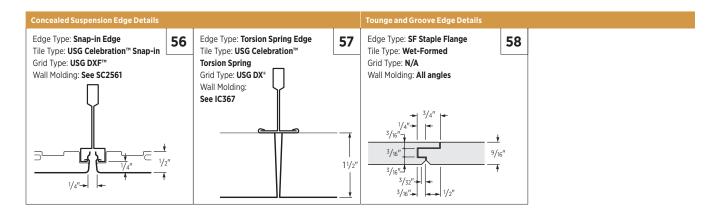

USG CEILING SOLUTIONS COLOR PROGRAM

STANDARD COLORS FOR **CEILING PANELS AND** SUSPENSION SYSTEMS^{1, 4}

> SUSPENSION SYSTEMS ONLY


ADVANTAGE COLORS FOR **CEILING PANELS AND** SUSPENSION SYSTEMS^{1, 4}

STANDARD COLORS





ADVANTAGE COLORS

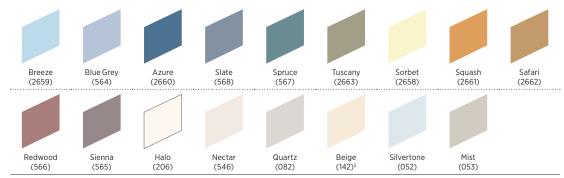

PREMIUM COLORS

PREMIUM COLOR PALETTE



SUSPENSION SYSTEMS ONLY

Galvanized Clear Coat (USG DX*/DXL™ only)3 Bronze

(033)

CUSTOM COLOR MATCHING



Please consult your USG/CGC sales representative for custom colors. USG will match colors from most major paint manufacturers. Plant to review all colors not listed in color programs for manufacturing capability.

- Samples shown are representative of colors for tile and grid only. Color may vary on specialty products.

 Brass and Chrome available in USG Donn* Brand DX*/DXL™ Acoustical Suspension System only. All Brass and Chrome items are service level C. Brass and Chrome cross tees available only in DXD™-type butt-cut ends. Shadow moldings are not available in Brass and Chrome.
- Galvanized steel with a clear coat can vary significantly in finish from lot to lot. This is due to the difference in finish inherent in the hot-dipped galvanization coating process. Galvanized steel with a clear coat available in USG Donn® Brand DX®/DXL™ Acoustical Suspension System only
- Grid colors applied to the visible cap only. For 360° painting, consult the Specialty Ceiling System price list. Moldings are painted on the exposed horizontal leg.
- Beige is a Standard color for CGC Donn Brand Suspension Systems.
- Manila and Charcoal are Advantage not Standard colors for CGC Donn® Brand Suspension Systems.
- Premium colors available in Donn* Brand DXT/DXLT only.

 To highlight the unique texture of USG Sandrift™ Acoustical Panels, choose light colors.
- Standard colors: Available for quick delivery. Minimum quantities apply.
 - Advantage colors: Available within five weeks. Minimum quantities apply. Premium colors: Available within six weeks. Minimum quantities apply. Contact your USG/CGC sales representative for details. See USG Architectural Representative locator map at usgdesignstudio.com or cgcdesignstudio.com. Include color number with item number, size and edge condition. For colors, it is not recommended to mix date codes or lot numbers

USG COLOR PROGRAM FOR ACOUSTICAL CEILING PANELS

ORDER SAMPLES/LITERATURE

FOR MOST UP-TO-DATE USG: samplit@usg.com fax: 888 874-2348 | usg.com **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

AVAILABLE PANELS

USG ECLIPSE™ CLIMAPLUS™ (SC1812)

USG FROST™ (SC1968)

USG GLACIER™ BASIC (SC1819)

USG MARS™ HIGH-NRC/HIGH-CAC (SC2487)

> **USG PREMIER** HI-LITE™ KAPOK (SC1838)

> > USG RADAR™ (SC2127)

USG RADAR™ ILLUSION™ TWO/24 (SC2126)

USG RENDITIONS™ ANIMATIONS (IC327), USG RENDITIONS™ **BOUNDARIES** (IC332) AND USG RENDITIONS™ **CUSTOM FROST™ PANEL** (CLIMAPLUS™ NOT AVAILABLE)

> USG SANDRIFT™ (SC1841)

(IC356)

Item No.	Size	Edge	Standar	d Colors ⁹	Advanta	age Colors ¹⁰	Premiur	n Colors ¹⁰	Sq. Ft./ Carton	Color Options
			Min. Sq. Ft.	Lead Time Days	Min. Sq. Ft.	Lead Time Days	Min. Sq. Ft.	Lead Time Days		
76975	2'x2'x3/4"	FL	48	10	48	10	_	_	48	Standard colors (Flat Black and Charcoal
76775	2'x2'x3/4"	SLT	48	10	48	10	_	_	48	not available.) Advantage: Beige, Mist, Silvertone only.
414	2'x2'x3/4"	SLB	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors
418	2'x2'x3/4"	FL	32	10	2,688	15	2,688	15	32	Colors outside the Standard, Advantage and Premium programs are subject to
419	2'x2'x3/4"	FLB	32	10	2.688	15	2,688	15	32	approval by plants.
707	2'x2'x3/4"	SL	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors
708	2'x2'x3/4"	FL	32	10	2,688	15	2,688	15	32	Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
88137	2'x2'x1"	SQ	32	30-45	32	30-45	32	30-45	32	Premium colors offered. Standard and
88138	2'x2'x1"	SLT	32	30-45	32	30-45	32	30-45	32	Advantage colors are all considered "Custom" for pricing.
88139	2'x2'x1"	FLB	32	30-45	32	30-45	32	30-45	32	
88134	2'x2'x7/8"	SQ	40	30-45	40	30-45	40	30-45	40	
88135	2'x2'x7/8"	SLT	40	30-45	40	30-45	40	30-45	40	
88136	2'x2'x7/8"	FLB	40	30-45	40	30-45	40	30-45	40	
86186	2'x2'x3/4"	SQ	48	30-45	48	30-45	48	30-45	48	
86786	2'x2'x3/4"	SLT	48	30-45	48	30-45	48	30-45	48	
86986	2'x2'x3/4"	FLB	48	30-45	48	30-45	48	30-45	48	
7054G	2'x2'x5/8"	SQ	128	20	_	_	_	_	128	White and Flat Black only.
7055G	2'x4'x5/8"	SQ	128	20		_		_	128	
7056G	2'x2'x5/8"	SQ	128	20		_	_	_	128	
7057G	2'x4'x5/8"	SQ	128	20		_		_	128	
2210	2'x2'x5/8"	SQ	64	10	64	10	_	_	64	Standard colors. Advantage: Beige, Mist, Silvertone only.
2220	2'x2'x5/8"	SLT	64	10	64	10	_	_	64	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
2410	2'x4'x5/8"	SQ	64	10	64	10	_	_	64	Standard colors. Advantage: Beige, Mist, Silvertone only.
2842	2'x4'x3/4"	SLT	48	10	48	10	_	_	48	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
Various	2'x2'x3/4"	SLB, FL, FLB	32	15	2,688	20	2,688	20	32	White, Standard, Advantage and Premium colors. (Advantage are 2,688 min. sq. ft.) Note Custom colors are 25-day minimum lead time for USG Frost™.
808 ⁸	2'x2'x3/4"	SL	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors Colors outside the Standard, Advantage
809 ⁸	2'x2'x3/4"	FL	32	10	2,688	15	2,688	15	32	and Premium programs are subject to approval by plants.

- Samples shown are representative of colors for tile and grid only. Color may vary on specialty products.
- Brass and Chrome available in USG Donn* Brand DX*/DXL™ Acoustical Suspension System only. All Brass and Chrome items are service level C. Brass and Chrome cross tees available only in DXD™-type butt-cut ends. Shadow moldings are not available in Brass and Chrome.
- Galvanized steel with a clear coat can vary significantly in finish from lot to lot. This is due to the difference in finish inherent in the hot-dipped galvanization coating process. Galvanized steel with a clear coat available in USG Donn* Brand DX*/DXL™ Acoustical Suspension System only.

 Grid colors applied to the visible cap only. For 360° painting, consult the Specialty Ceiling System price list. Moldings are painted on the exposed horizontal leg.
- Beige is a Standard color for CGC Donn Brand Suspension Systems.
- Manila and Charcoal are Advantage not Standard colors for CGC Donn® Brand Suspension Systems.
- Premium colors available in Donn® Brand DXT/DXLT only.
- To highlight the unique texture of USG Sandrift™ Acoustical Panels, choose light colors.
- Standard colors: Available for quick delivery. Minimum quantities apply.
- Advantage colors: Available within five weeks. Minimum quantities apply. Premium colors: Available within six weeks. Minimum quantities apply. Contact your USG/CGC sales representative for details. See USG Architectural Representative locator map at usadesignstudio.com or cacdesignstudio.com. Include color number with item number, size and edge condition. For colors, it is not recommended to mix date codes or lot numbers.

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968) FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

STANDARD COLORS

- · Available within 15 days unless otherwise noted.
- · One-carton minimum for suspension systems.
- Suspension systems have color caps only.
- For 360° painting, consult the Specialty Ceiling System price list.
- · Moldings are painted on the exposed horizontal leg.
- All metric items are offered in Flat White, USG service level C and CGC service level B. MEDXF3600, MEDXF600
 and MEDXF1200N also offered in Flat White with Black Reveal, USG service level C and CGC service level B.

ADVANTAGE AND PREMIUM COLORS

- · Available within five weeks.
- · One-carton minimum per component for suspension systems.
- · Includes matching air diffusers.
- Premium colors available in USG DXT[™] only.

CUSTOM COLORS

- · Suspension systems and panels are also available in colors not listed in Standard, Advantage and Premium offerings.
- · Colors other than Standard, Advantage and Premium offerings are subject to approval.
- A 3"x5" color chip is needed for matching.
- Suspension systems not included in the standard, advantage, and premium color program are available as custom colors.
- · Lead time will be quoted via the Request-To-Quote (RTQ) and will start after acceptance of color match.
- · Minimum order quantities may apply.

SUSPENSION SYSTEM SERVICE LEVELS

Level	Lead time from order acceptance
Quick Ship	1–2 days
A	5-7 days
В	15 days
c	30 days
Advantage and Premium Colors	Typically 5 weeks from order.

EXCEPTIONS USG ONLY

- USG Donn® Brand Fineline® DXF™/DXLF™ Acoustical Suspension System available in Flat White with Black Reveal for no additional charge. Service level B.
- USG Donn® Brand Fineline® DXF™/DXLF™ Acoustical Suspension System available in Silver Satin 002. Service level B.
- USG Donn® Brand Fineline® DXF™/DXLF™ and 1/8 DXFF™ and DXFEV™ Acoustical Suspension Systems also available in colors not listed in Standard, Advantage and Premium offerings.
- USG Donn® Brand Fineline® DXFEV™ Acoustical Suspension System (environmental) available in Flat White with Black Reveal standard, service level C. Standard, Advantage and Premium colors available, service level C.
- USG Donn® Brand Fineline® DXF™/DXLF™ Acoustical Suspension System and 1/8 DXFF™ not available in Plated Brass 065 or Plated Chrome 066.
- USG Logix™ Integrated Systems are available in Flat White, service level C.

SUSPENSION SYSTEM USG DONN* BRAND

AXTM/AXCETM
(AC3041)

		Base Colors	Standard Colors	Silver Satin, Brass and Chrome Exceptions	Advantage Colors
	Service Level	Quick Ship	В	С	5 weeks
	Item No.				
Main Tee	AX26	Flat White	0	Silver Satin ⁶	0
	AXCE26	Flat White ⁶	0	Silver Satin ⁶	0
	AX224	Flat White	0	Silver Satin ⁶	0
Cross Tee	AX424	Flat White	0	Silver Satin ⁶	0
	AXCE224	Flat White ⁶	0	Silver Satin ⁶	0
	AXCE424	Flat White ⁶	0	Silver Satin ⁶	0

Notes

- [•] Available in USG color program with established upcharge and lead times.
- [o] Suspension systems not included in the standard, advantage, and premium color program are available as custom colors. The custom color upcharge and lead time will apply.

CGC COLOR PROGRAM

${\tt CGC\,Color\,Program\,for\,Suspension\,System}$

- 1 CGC Service Level Quick Ship
- 4 CGC Service Level C
- 2 CGC Service Level A3 CGC Service Level B
- 5 CGC Five weeks6 CGC RTQ for Service Level

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

USG DONN® BRAND CENTRICITEE™ DXT™/DXLT™ (AC3040)

USG DONN® BRAND CE™ (AC3129)

USG DONN® BRAND DX®/DXL™ CONCEALED (AC3035)

> USG DONN® BRAND DX*/DXL™ (AC3167)

		Base Colors	Standard Colors	Silver Satin, Brass and Chrome Exceptions	Advantage Colors	
	Service Level	Quick Ship	В	С	5 weeks	
	Item No.					
Main Tee	DXT-24-10	Flat White ⁶	0	0	0	
	DXT24	Flat White ¹ , Flat Black ³	•	Silver Satin ⁶	•	
	DXLT24	Flat White ³	O ³	0	O ⁵	
	DXT26	Flat White, Flat Black ³	O ₃	0	O ⁵	
Cross Tee	DXT222	Flat White ¹ , Flat Black ³	•	Silver Satin ⁶	•	
	DXLT222	Flat White ³	O ₃	0	O ⁵	
	DXT422	Flat White	O ³	0	O ⁵	
	DXT424	Flat White ¹ , Flat Black ³	•	Silver Satin ⁶	•	
	DXLT424	Flat White ³	O ₃	0	O ⁵	
Main Tee	DXWCE26	Flat White ³	0	0	0	
Cross Tee	DXWCE224	Flat White ³	0	0	0	
	DXWCE424	Flat White ³	0	0	0	
Main Tee	DXCE24	Flat White ³	0	0	0	
	DXCE26	Flat White ⁶	0	0	0	
Cross Tee	DXCE224	Flat White ³	0	0	0	
	DXCE424	Flat White ³	0	0	0	
Main Tee	DX/DXL24	Flat White	0	0	0	
	DX/DXL26	Flat White	0	0	0	
Cross Tee	DX/DXL424	Flat White ⁶	0	0	0	
Molding	US28	Flat White ⁶	0	0	0	
Main Tee	DX/DXL24	Flat White ¹ , Flat Black ²	•	Silver Satin ³ Brass, Chrome ⁶	•	
	DX/DXL26	Flat White ¹ , Flat Black ³	•	Silver Satin ⁶	•	
Cross Tee	DX/DXL216	Flat White ¹ , Flat Black ²	•	Silver Satin ³ Brass, Chrome	•	
	DX/DXL424	Flat White ¹ , Flat Black ²	•	Silver Satin ⁶ Brass, Chrome ⁶	•	
	DX422	Flat White ¹ , Flat Black ²	•	Silver Satin ³ Brass, Chrome ⁶	•	
	DX/DXL524	Flat White	•	Silver Satin ⁶	•	

Brass and Chrome cross tees limited to DXD™-type butt-cut ends only.

- $[\bullet]$ Available in USG color program with established upcharge and lead times.
- $[o] \, Suspension \, systems \, not \, included \, in \, the \, standard, \, advantage, \, and \, premium \, color \, program \, are \, available \, as \, custom \, colors.$ The custom color upcharge and lead time will apply.

CGC COLOR PROGRAM

CGC Color Program for Suspension System

- 1 CGC Service Level Quick Ship
- 2 CGC Service Level A 3 - CGC Service Level B
- 4 CGC Service Level C
- 5 CGC Five weeks
- 6 CGC RTQ for Service Level

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com

CGC: contact Sales Representative TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

SUSPENSION SYSTEM
USG DONN® BRAND
IDENTITEE® DXI™

(AC3281)

USG DONN® BRAND DXLA™/DXACE™ (AC3036)

> **USG DONN®** BRAND DXSS™ (AC3068)

USG DONN® BRAND DXW™ (AC3037)

USG DONN® BRAND FINELINE® 1/8 DXFF™7 (AC3033)

> **USG DONN® BRAND FINELINE®** DXFTM/DXLF^{TM 8, 9, 10} (AC3034)

		Base Colors	Standard Colors	Silver Satin, Brass and Chrome Exceptions	Advantage Colors
	Service Level	Quick Ship	В	С	5 weeks
	Item No.				
Main Tee	DXI24HRC	Flat White ⁶	•6	Silver Satin ⁶	●6
	DXI26HRC	Flat White ⁶	•6	Silver Satin ⁶	•6
Cross Tee	DXI424HRC	Flat White ⁶	•6	Silver Satin ⁶	•6
	DXI524HRC	Flat White ⁶	•6	Silver Satin ⁶	•6
	DXI224HRC	Flat White ⁶	•6	Silver Satin ⁶	•6
Main Tee	DXLA24	Flat White ⁶	0	Silver Satin ⁶	0
	DXLA26	Flat White ⁶	0	0	О
Cross Tee	DXLA216	Flat White ⁶	0	Silver Satin ⁶	0
	DXLA424	Flat White ⁶	0	Silver Satin ⁶	0
Main Tee	DXACE26	Flat White ⁶	0	0	0
Cross Tee	DXACE224	Flat White ⁶	0	0	0
	DXACE424	Flat White ⁶	0	0	0
Main Tee	DXSS24	Stainless Steel ⁶	0	0	0
Cross Tee	DXSS224	Stainless Steel ⁶	0	0	0
	DXSS424	Stainless Steel ⁶	0	0	О
Molding	M7SS	Natural ⁶	0	0	0
Main Tee	DXW26	Flat White ³	0	0	0
Cross Tee	DXW224	Flat White ³	0	0	0
	DXW424	Flat White ³	0	0	0
Main Tee	DXFF2930	Flat White ⁴	0	0	0
	DXFF2924	Flat White ⁴	0	0	0
	DXFF2948	Flat White ⁶	0	0	0
	DXFFH2924	Flat White ⁴	0	0	0
Cross Tee	DXFF229	Flat White ³	0	0	0
	DXFF429	Flat White ⁴	0	0	0
	DXFF429N	Flat White ⁶	0	0	0
	DXFF429S	Flat White ⁶	0	0	0
	*HRC not available	with quick ship lead time in F	lat Black, not available in B	rass or Chrome.	
Main Tee	DXF2924-10	Flat White ⁶	0	0	0
	DXF2924	Flat White	0	Silver Satin Service Level B ^{6,11}	0
	DXF2948	Flat White ³	0	0	0
	DXLF2924	Flat White ⁴	0	0	0
	DXFH2924	Flat White ²	0	0	0
	DXF429	Flat White ⁴	0	0	0
Cross Tee	DXF229	Flat White ⁴	●6	Silver Satin Service Level B ^{6,11}	•6
	DXLF229	Flat White ⁴	●6	0	● ⁶
	DXF429	Flat White	•6	0	● ⁶
	DXF429S	Flat White ⁴	•6	0	●6
	DXLF429N	Flat White ⁴	•6	0	•6
	DXF529N	Flat White ⁴	•6	0	•6

Notes

- $[\bullet]$ Available in USG color program with established upcharge and lead times.
- [o] Suspension systems not included in the standard, advantage, and premium color program are available as custom colors.

 The custom color upcharge and lead time will apply.

CGC COLOR PROGRAM

CGC Color Program for Suspension System

- 1 CGC Service Level
- Quick Ship
- CGC Service Level A
- 3 CGC Service Level B
- 4 CGC Service Level C 5 - CGC Five weeks
- 6 CGC RTQ for Service Level

- USG Donn® Brand Fineline® 1/8 DXFF™ also available in colors not in Standard, Advantage or Premium color programs.
- Available in Flat White with Black Reveal. Service level B.
- USG Donn® Brand Fineline® DXF®/DXLF™ also available in colors not in Standard, Advantage or Premium color programs.
 USG Donn® Brand Fineline® DXF®/DXLF™ also available in Flat White with Black Reveal standard, service level C. Standard and Advantage colors available, service level C. Colors not in Standard, Advantage or Premium programs
- 11. USG Donn* Brand Fineline* DXF™/DXLF™ available in Silver Satin 002. Service level B.
- 12. M7 and M9 color program available in half cartons only (M720, M920).

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

SUSPENSION SYSTEM **USG DONN®**

BRAND ZXLA™ (AC3029)

WALL MOLDING (AC2396)

		Base Colors	Standard Colors	Silver Satin, Brass and Chrome Exceptions	Advantage Colors
	Service Level	Quick Ship	В	С	5 weeks
	Item No.				
Main Tee	ZXLA24	Flat White ³	0	Silver Satin ⁶	0
	ZXLA26	Flat White ⁶	0	Silver Satin ⁶	0
Cross Tee	ZXLA224	Flat White ³	0	Silver Satin ⁶	0
	ZXLA424	Flat White ³	0	Silver Satin ⁶	0
Angle Molding	M7 ¹²	Flat White, Flat Black ²	•	Silver Satin	●5
	M7OL	Flat White ⁶	0	0	0
	M7A	Flat White	0	0	0
	M7Z	Flat White ⁶	0	Silver Satin ⁶	0
	M9 ¹²	Flat White, Flat Black	● ⁶	Silver Satin ⁶	● ⁵
	M12	Flat White level C ³	0	0	0
	MC11A25	Flat White ⁶	0	Brass, Chrome ⁶	0
	M7CE	Flat White level B ³	0	0	0
	M7ACE	Flat White level B ⁶	0	0	0
	M20	Flat White, Flat Black level C ⁶	0	0	0
	M20SM	Flat White ⁶	0	0	0
	M20SM-2	Flat White ⁶	0	0	0
Shadow	MS174	Flat White	•	Silver Satin ⁶	•
Molding	MS274	Flat White ⁶	● ⁶	0	● ⁶
Channel	US28	Flat White ⁶	0	0	0
Molding	US31	Flat White ³	● ⁶	0	• ⁶
	UA25	Flat White ³	0	Silver Satin ⁶	0
	UA24CE	Flat White level B ⁶	0	Silver Satin ⁶	0
	US28CE	Flat White level B ⁶	0	0	0

CGC COLOR PROGRAM

CGC Color Program for Suspension System

- 1 CGC Service Level Quick Ship
- 2 CGC Service Level A
- 3 CGC Service Level B
- 4 CGC Service Level C
- 5 CGC Five weeks
- 6 CGC RTQ for Service Level

Notes

- USG Donn® Brand Fineline® 1/8 DXFF™ also available in colors not in Standard, Advantage or Premium color programs.
- Available in Flat White with Black Reveal. Service level B.
- USG Donn® Brand Fineline® DXF™/DXLF™ also available in colors not in Standard, Advantage or Premium color programs.
- 10. USG Donn® Brand Fineline® DXFEV™ (environmental) available in Flat White with Black Reveal standard, service level C. Standard and Advantage colors available, service level C. Colors not in Standard, Advantage or Premium programs are available. USG Donn® Brand Fineline® DXF™/DXLF™ available in Silver Satin 002. Service level B.
- 12. M7 and M9 color program available in half cartons only (M720, M920).
- [] Available in USG color program with established upcharge and lead times.
- $\hbox{ \hbox{$\tt [o]$ Suspension systems not included in the standard, advantage, and premium color program are available as custom colors. } \\$ The custom color upcharge and lead time will apply.

usgdesignstudio.com or cgcdesignstudio.com

Manufactured by USG Interiors, LLC 550 West Adams Street Chicago, IL 60661

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1859/rev. 4-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

METAL FINISHES

USG offers metal ceiling panels in several distinctive finishes: Premium Metal, Anodized Metal—Brushed or Polished, Plated Steel Painted Metal and Wood Tones. These color reproductions are shown to represent available finishes and colors. A sample should be reviewed before placing an order.

Availability	Premium	Anodized	Plated	Painted Metals						Diamondflex™	Wood	
	Metals	Metals	Steel	Flat White	Silver Satin	Matte White	Metallic Copper	Metallic Gold	Metallic Oyster	Custom Color ³	Expanded Metals	Tones ⁵
USG CELEBRATION™ SNAP-IN METAL PANELS			_								-	
USG CELEBRATION™ TORSION SPRING METAL CEILING PANELS	_		_								_	
USG CELEBRATION™ CANOPIES	_		_								_	
USG COMPÄSSO™ STANDARD USG COMPÄSSO™ ELITE USG COMPÄSSO™ SLIM PERIMETER TRIMS	-	-				-	-	_	_		-	
USG C² PAIRED COMPÄSSO™ CHANNELS	-	_				_	-	_	_		_	
USG CURVATURA™ 3-DIMENSIONAL SUSPENSION SYSTEM— 2'X2' PANELS	_	-	_			-						
USG CURVATURA™ ONE-DIRECTIONAL SYSTEM—2'X6' PANELS	_	_	_			_					_	
USG GEOMETRIX* 3-DIMENSIONAL METAL PANELS	_	_	_			_	_	_	_		_	_
USG GRIDWARE™ OPEN CELL DECORATIVE SUSPENSION SYSTEM¹	_	_	_			_	_	_	_		_	_
USG LIBRETTO* GRIDLESS METAL SYSTEM	_	_	_				_	_	_		_	_
USG PANZ* METAL PANELS ²			_									
USG PARALINE* LINEAR METAL SYSTEM	_		_			_					-	_
USG PARALINE* PLUS LINEAR METAL SYSTEM	_		_			_					_	
USG PIXELS®		_	_			_	_	_	_		_	_

Suspension, trim and panel available in same painted color.
 Suspension and trim available in coordinating painted colors only.

METAL FINISHES

PREMIUM METALS

2'x2' panels only

Aged Copper (1017)



Etched Ice Dark (1016)



Etched Ice Light (1015)



ANODIZED METAL PANELS³

USG Celebration™ and Panz®, 2'x2' and 2'x4' panels only

Brushed Aluminum (058)



Polished Brass (PM21)



Polished Chrome (PM61)



Satin Chrome (PM614)



PLATED METAL (STEEL)³

USG Compässo™—2-1/4", 4", 6" and 8" trim only

Plated Chrome (066)



- 1. Also available in Flat Black.
 2. Two-foot maximum panel width for painted metallic finishes.
 3. Anodized finish subject to "rainbowing"—multicolor patterns exaggerated by critical lighting.


METAL FINISHES

PAINTED METALS


Metallic finishes shown















USG Paraline® only; PII— Black Reveal not available with these finishes










 $\textbf{DIAMONDFLEX}^{\text{\tiny{TM}}}$ Expanded Metals 2'x2'

panels only









- 1. Also available in Flat Black.
 2. Two-foot maximum panel width for painted metallic finishes.
 3. Anodized finish subject to "rainbowing"—multicolor patterns exaggerated by critical lighting.

Presenting a complete line of perforation options for:


- USG Celebration™ Metal Panels
- USG Curvatura™ 3-Dimensional System
- USG Geometrix® 3-Dimensional Metal Panels
- USG Panz® Metal Panels

Standard Perforations

Pattern Number	Perforation Pattern	Open Area %5
A062	Round 1/16" Perforations, 0.25" o.c. (without border)	5%
A062A	Round 1/16" Perforations, 0.25" o.c.	5%
A062D (Micro perf.)	Round .062" Perforations, 0.124" o.c.	19%
A116	Round 15/128" Perforations, 0.354" o.c.	17%
A188	Round 3/16" Perforations, 1" o.c.	3%
A250	Round 1/4" Perforations, 0.5" o.c.	39%
A500 ^{1,5}	Round 1/2" Perforations, 0.848" o.c.	55%
B079	Round 5/64" Perforations, 0.312" o.c.	6%
B125	Round 1/8" Perforations, 0.375" o.c.	10%
B188A	Round 3/16" Perforations, 0.312" o.c.	33%
B197	Round 13/64" Perforations, 0.316" o.c.	35%
B250	Round 1/4" Perforations, 0.437" o.c.	30%
B250H (Formerly H250)⁵	Round 1/4" Perforations, 0.32" o.c.	58%
B312	Round 5/16" Perforations, 0.437" o.c.	46%
B500 ^{1,5}	Round 1/2" Perforations, 0.600" o.c.	63%
C030 ⁶	Round 1/32" Perforations, 0.197" o.c.	1.8%
C040	Round 5/128" Perforations, 0.197" o.c.	3.2%
C062 ²	Round 1/16" Perforations, 0.351" o.c.	2%
C062A²	Round 1/16" Perforations, 0.175" o.c.	10%
C116	Round 15/128" Perforations, 0.344" o.c.	8%
C188 ¹	Round 3/16" Perforations, 1.414" o.c.	1%
C250A	Round 1/4" Perforations, 0.65" o.c.	12%
C375²	Round 3/8" Perforations, 1.125" o.c.	9%
C500	Round 1/2" Perforations, 1.5" o.c.	9%
D250 ²	Square 1/4" Perforations, 0.75" o.c.	11%
D375²	Square 3/8" Perforations, 1.125" o.c.	11%
D500	Square 1/2" Perforations, 1.5" o.c.	17%
D500D⁵	Square 1/2" Perforations, 0.595" o.c.	70%
EC25D ³	Round 1/4" dia. x 1/16" Embossing, 1.18" o.c.; No Perforation	0%
EC25U3	Round 1/4" dia. x 1/16" Embossing, 1.18" o.c.; No Perforation	0%
EM25D3	Round 1/4" dia. x 1/16" Embossing, 1/4" Perforations, 1.14" o.c.	2%
EM25U3	Round 1/4" dia. x 1/16" Embossing, 1/4" Perforations, 1.14" o.c.	2%


STANDARD PERFORATIONS⁴

Pattern No. A062/A062A




Round—1/16" perforations 0.25" o.c., 5% open area

Pattern No. A062D




Round—0.062" perforations 0.124" o.c., 19% open area Micro perf.

Pattern No. A116




Round—15/128" perforations 0.354" o.c., 17% open area

Pattern No. A188




Round—3/16" perforations 1" o.c., 3% open area

Pattern No. A250




Round—1/4" perforations 0.5" o.c., 39% open area

Pattern No. A500




Round—1/2" perforations 0.848" o.c., 55% open area not to be used with the USG Curvatura™ One-Directional Ceiling System

Pattern No. B079




Round—5/64" perforations 0.312" o.c., 6% open area

Pattern No. B125




Round—1/8" perforations 0.375" o.c., 10% open area

Pattern No. B188A




Round—3/16" perforations 0.312" o.c., 33% open area

Pattern No. B197




Round—13/64" perforations 0.316" o.c., 35% open area

Pattern No. B250



Round—1/4" perforations 0.437" o.c., 30% open area

Pattern No. B250H (formerly H250)



Round—1/4" perforations 0.32" o.c., 58% open area

PERFORATIONS⁴

STANDARD

Pattern No. B312

Round-5/16" perforations 0.437" o.c., 46% open area

Pattern No. B500




Round-1/2" perforations $0.600^{\prime\prime}$ o.c., 63% open area not to be used with the USG Curvatura™ One-Directional Ceiling System

Pattern No. CO30




Round—1/32" perforations 0.197" o.c., 1.8% open area

Pattern No. CO40




Round - 5/128" perforations 0.197" o.c., 3.2% open area

Pattern No. CO62




Round-1/16" perforations 0.351" o.c., 2% open area

Pattern No. C062A




Round—1/16" perforations 0.175" o.c., 10% open area

Pattern No. C116




Round-15/128" perforations 0.344" o.c., 8% open area

Pattern No. C188




Round-3/16" perforations 1.414" o.c., 1% open area

Pattern No. C250A




Round-1/4" perforations 0.65" o.c., 12% open area

Pattern No. C375




Round-3/8" perforations 1.125" o.c., 9% open area

Pattern No. C500




Round-1/2" perforations 1.5" o.c., 9% open area

Pattern No. D250




Square-1/4" perforations 0.75" o.c., 11% open area

STANDARD PERFORATIONS⁴




Square-3/8" perforations 1.125" o.c., 11% open area

Pattern No. D500



Square—1/2" perforations 1.5" o.c., 17% open area

Pattern No. D500D




Square—1/2" perforations 0.595" o.c., 70% open area (70% open area required for sprinklers above ceiling)


EMBOSSING ONLY⁴

Pattern No. EM25D

Pattern No. EM25U



Round—1/4" dia. x 1/16" embossing 1.18" o.c., no perforation



Round—1/4" dia. x 1/16" embossing 1.18" o.c., no perforation


Face side

Face side

Pattern No. EC25U

EMBOSSING AND PERFORATIONS⁴

Pattern No. EC25D



Round—1/4" perforations 1.41" o.c., 2% open area Black Acoustibond™ backer standard

Round-1/4" perforation 1.41" o.c., 2% open area Acoustibond™ backer not available

Face side

Face side

- Do not use with USG Curvatura™ One-Directional Ceiling System.

- 2. Standard for USG Geometrix* panels.
 3. 2'x2' USG Celebration™ and Panz* panels only.
 4. USG Perforation patterns shown at 75% of actual size. When ordering, please refer to the pattern number for perforation samples 4. Good reinfold pattern and the pattern and pat

WOOD FINISHES

WOOD TONES FAUX FINISHES^{1, 3}

USG Celebration™ and Coordinating suspension and/or trim color available.

Beech (3467)



Dark Bamboo (3465)



Dark Cherry (3468)



Light Bamboo (3466)



Light Cherry (3469)



Maple (3470)



Red Oak (3471)



Walnut (3472)



USG TRUE™ WOOD VENEERS1, 2

Coordinating suspension and/or trim color available.



Dark Bamboo



Dark Cherry



Light Bamboo



Light Cherry



Maple



Red Oak



Walnut




- Notes
 1. Color Disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.
- Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats.
 Wood Tone Disclaimer: Faux wood finishes exhibit variations in grain, texture and color often ranging from light to dark, thereby affecting the surface
- look from one item to another.

USG TRANSLUCENTS™ FINISHES

USG offers luminous ceiling panels in several distinctive styles and finishes. These color reproductions are shown to represent available finishes and colors. Décors are not to scale. A sample should be reviewed before placing an order.


COLOR GALLERY

For USG Billo™, Topo™, Translucents™ Panels and Translucents™ Canopies

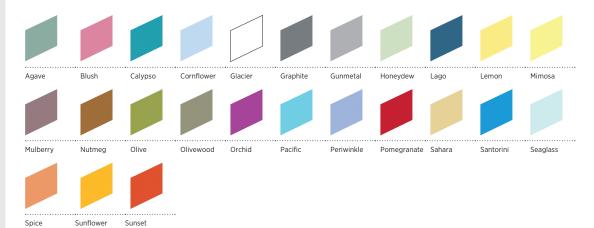

DÉCORS

Shown with Coordinating Suspension Color

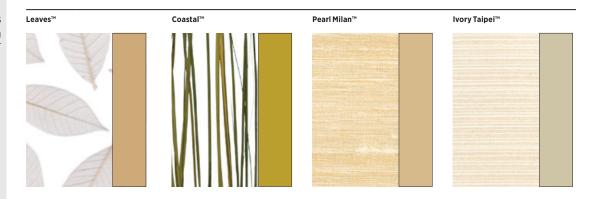

Lipstick Meander™




Mystery Meander™



White Meander™




Luna Ice™



Oyster Linen™



Beige Interlock™



Matrix™




USG TRANSLUCENTS FINISHES

DÉCORS CONT. Shown with Coordinating Suspension Color






















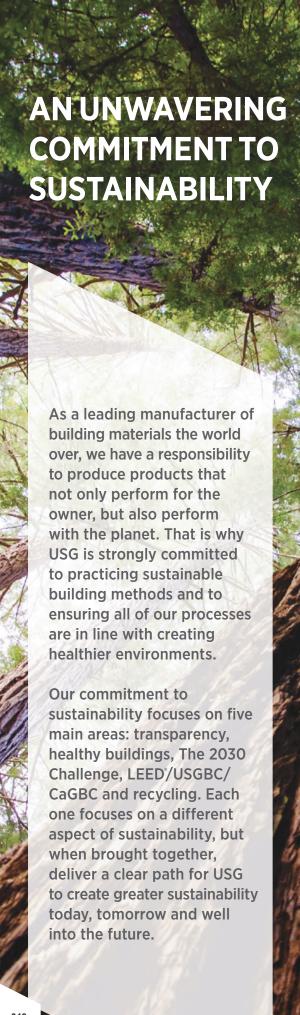

COMMITMENT TO TRANSPARENCY

Product Attribute Report (PAR):

The PAR is a comprehensive sustainability document developed by USG to serve as a quick reference on environmental and health-related attributes associated with the final product. Through the use of the PAR, building professionals can obtain a complete understanding of a product's entire life cycle impact.



Environmental Product Declaration (EPD):

Sustainability is becoming increasingly important in

PRODUCT ATTRIBUTE REPORT

USG

USG

USG

STORY ACOUSTICAL PRINCIPATION

For the control of th

the world of building design. For architects and designers, EPDs help maximize a design's sustainability, and earn industry certifications and LEED credits. Delivering on USG's commitment to increase product transparency, EPDs help us do just that.

Health Product Declaration (HPD):

The HPD was created by the Health Product Declaration Collaborative (HPDC) to encourage the disclosure of product ingredients. The HPD is a document that discloses product ingredients and associated human and environmental hazards. Potential hazards are identified by using various hazard lists published by several government and scientific organizations. The HPD gives architects, contractors, specifiers and others involved in

material evaluation the information needed to make an informed decision.



COMMITMENT TO HEALTHY BUILDINGS

Whether in a home, workplace, school or office, people are spending less time outside. According to the United States Environmental Protection Agency (U.S. EPA), exposure to indoor air pollutants may be two to five times higher than the outdoor air. Exposure to indoor air pollutants can adversely affect occupant health and productivity. Fortunately, there are things we can do to address

some of the more common indoor air pollutants.

At USG, we're proud to be GREENGUARD Gold Certified on more than 200 of our wallboard, ceilings, joint treatment and plaster products. The GREENGUARD Certification program, a unit of Underwriters Laboratories Inc. (UL), certifies compliance to California Department of Public Health's stringent emissions limit for building materials.



COMMITMENT TO THE 2030 CHALLENGE

The 2030 Challenge was introduced to make renewable energy and sustainability the new standard for buildings. It challenges architects to design buildings and developments to be carbon-neutral in an effort to slow the growth rate of greenhouse gases produced by buildings.

It's an extremely important initiative, and we're taking it very seriously. Our dedicated team of engineers and designers are already making great progress by reducing the amount of water, energy and greenhouse gas emissions in the manufacturing process. We're excited to lead the charge toward a brighter and more sustainable future.





COMMITMENT TO LEED AND THE U.S. & CANADA **GREEN BUILDING COUNCILS**

Leadership in Energy and Environmental Design (LEED):

LEED is the most widely used third-party verification for green buildings, with 1.85 million square feet being LEED certified daily. LEED certification is available for all buildings, from homes to corporate headquarters. Projects pursuing LEED certification earn points across several areas that address sustainability issues. Based on the number of points achieved, a project then receives one of four LEED rating levels: Certified, Silver, Gold and Platinum. LEED is changing the way the industry thinks about how buildings and communities are planned, constructed, maintained and operated.

United States Green Building Council (USGBC):


The USGBC is an organization dedicated to improving the way buildings are designed, constructed and operated through LEED—the top third-party verification system for sustainable structures around the world. At USG, we have been proud members of the USGBC since January 15, 1997. Our commitment to sustainability and making sure our products and processes work in greater harmony with the environment gives USG and the USGBC a solid partnership as we work to improve the world of building today, for the natural world of tomorrow.

Canada Green Building Council (CaGBC):

The CaGBC is a not-for-profit, national organization that has been working since 2002 to advance green building and sustainable community development practices in Canada.



MATERIALS: Focuses on materials to get a better understanding of what's in them and the effect those components have on human health and



SMART GRID: Brings the benefit of smart grid thinking to the forefront with a credit that rewards projects for participating in demand response programs.



PERFORMANCE-BASED: Takes a more performance-based approach to indoor environment quality to ensure



WATER EFFICIENCY: Provides a transparent picture of water efficiency by evaluating total building



ENABLING YOU TO CREATE HIGHPERFORMANCE SPACES THAT FUNCTION BEAUTIFULLY

Our ceiling solutions deliver peace of mind knowing that your building and its occupants are prepared for whatever comes their way.

THIS PAGEUSG Eclipse™
Acoustical Panels

USG "F" Fissured™ Acoustical Panels

CLEAN ROOMS

In the building industry, Clean Rooms are defined as enclosed spaces that utilize air pressure and filters to control the amount of particulate matter in the air. A Clean Room has a controlled level of contamination that is specified by the number of particles per cubic meter for a given particulate size. Federal Standard 209E classifies Clean Rooms from Class 1 to Class 100,000, whereas ISO 14644-1 classifies them from Class 1 to Class 9, as shown in the table below.

Clean Room Classification	
FED-STND-209E	ISO 14644-1
No Comparable STND	Class 1
No Comparable STND	Class 2
Class 1	Class 3
Class 10	Class 4
Class 100	Class 5
Class 1000	Class 6
Class 10,000	Class 7
Class 100,000	Class 8
No Comparable STND	Class 9



Our commitment to Clean Room technologies has enabled us to create a variety of ceiling systems that deliver the ultimate control in air quality. USG Clean Room™ Ceiling Systems feature a gasketed grid, hold-down clips, specific lighting fixtures and HEPA filters that are Clean Room-certified. Plus, USG Clean Room Ceiling Systems have been tested and certified by Acorn Industries, Inc.—the world's experts in contamination control engineering. USG Clean Room Ceiling Systems enable you to create a room with superb air quality from floor to ceiling.



USG offers a range of ISO Class 5 ceiling solutions.

To learn more about USG Clean Room Ceiling Systems, go to pages 64-65 or visit usg.com or cgcinc.com

EXTERIOR CEILING SYSTEMS

From parking lots to sheltered walkways to carports, exterior ceilings are an essential part of the way we design and build today. They must be functional and aesthetic, complimenting the design of a structure while performing in a wide range of wind, temperature and moisture conditions.

For decades, USG Exterior Ceiling Systems have been utilized in a wide variety of exterior applications. From satisfying stringent performance requirements and design criteria to providing beauty and durability, USG exterior ceiling systems ensure you have a complete system that's built to last, while also delivering a lasting impression.

USG offers numerous systems for use in exterior environments that are not directly exposed to the weather, such as under a soffit, parking garage, covered entrance or drive-through.

Each ceiling system combines a specially engineered suspension system with either traditional modules, elegant linear pans or metal panels creating a dynamic ceiling with clean, contemporary planes and, most importantly, performance at the highest level.

To learn more about USG Exterior Ceiling Systems, visit usg.com or cgcinc.com



SEISMIC SOLUTIONS

Seismic compliance is the use of approved systems and designs that meet the seismic requirements of a building project, delivering safety to occupants while maintaining the building's function during and after seismic activity, such as an earthquake. Within those approved systems and designs are nonstructural components, which represent a high percentage of a project's capital investment. The basic objectives of seismic design for nonstructural components are to provide life safety, minimize property loss and prevent functional loss. Failure of these components in an earthquake has the potential to cause harm, block exits, impede rescue efforts and disrupt the building's function.

Since 1957, USG Donn® Brand Suspension Systems have set the standard, with the optimal combination of shape, size, steel gauge and connection details to produce the tightest systems available, with the greatest lateral and torsional stiffness. To this day, suspension systems from USG are proven to greatly exceed the lateral forces experienced in a seismic event.

To learn more about seismic design category, go to usg.com or cgcinc.com





FIRE RESISTANCE

In the building industry, fire resistance refers to a variety of factors that all play a role in how well materials prevent the starting and spreading of fire within a space or spaces. The universal fire-safety properties are described in terms of fire resistance, surface-burning characteristics and noncombustibility.

Fire Resistance, Fire Endurance Rating or Fire-Rated: Fire-resistance ratings have long been used by UL/ULC, ASTM and building codes to measure the performance of various construction types for passive fire protection purposes. As applied to elements of buildings, the fire-resistance rating classifies the ability of an assembly to confine and isolate fire within a zone comprised of fire-resistant rated wall, ceiling and floor assemblies. The rating relates to the period of time the assembly will serve as a barrier to the spread of excessive heat and fire from one compartment to the next and how long the assembly will remain structurally stable under a standard fire exposure as defined by ASTM E119 or CAN/ULC-S101.

Flame Spread: The measure of a material's relative surface-burning behavior. Both the flame spread and smoke developed are measured in accordance with ASTM E84 or CAN/ULC-S102.

Noncombustible Material Class A Designation: This is a material that will not burn or contribute considerable fuel to a fire, as determined through ASTM E136 or CAN/ULC-S114. This includes materials that may ignite but will not sustain a flame. In addition, Class A products will not produce excessive smoke that obscures visibility—an important factor in designing safe exits for building occupants. Class A though is not a fire-resistance designation.

At USG, we are proud to be the leader among building material manufacturers in providing products and systems designed to keep people safe from fire. Our patented Firecode* products are designed to meet the life-safety codes of your build.

To learn more about USG fire safety and fire-rated assemblies, see the right column of this page, visit usgdesignstudio.com or cgcdesignstudio.com

HOLDING OUR PRODUCTS TO THE HIGHEST INDUSTRY STANDARDS

At USG, we are proud to achieve UL certification in both our USG Donn' Brand Suspension Systems, as well as our acoustical tiles.

USG Donn* Brand Suspension Systems					
PRODUCT	UL Type Designation				
USG DXL™ USG DXL™ Concealed—15/16" wide	DXL				
USG DXLA,™ Aluminum Cap—15/16" wide	DXLA				
USG ZXLA™ Aluminum Cap Environmental—15/16″ wide	ZXLA				
USG Centricitee™ DXLT,™ 9/16″ wide	DXLT				
USG Fineline® DXLF,™ 9/16" wide, 1/4" bolt slot	DXLF				
USG Drywall Suspension System, DGL—15/16"	DGL				
USG Drywall Suspension System, DGLW— 1-1/2" wide	DGLW				
USG Paraline® Linear Metal System	DXLP				

Acoustical Tiles	
Product	UL Type
USG Astro®	Astro-FR
USG Clean Room™	М
USG Eclipse™	FR-X1
USG Fissured™ Basic	FR-83
USG Frost™ Basic	AP*
USG Glacier™ Basic	AP*
USG Radar™ Basic	FR-83
USG Radar™ Ceramic	FR-4
USG Radar™	FR-83
USG Radar™ High-NRC/High-CAC	FR-83
USG Radar™ Illusion™	FR-83
USG Radar™ Education	FR-83
USG Rock Face®	FR-83
USG Sandrift™ Basic	AP*
USG Sheetrock® Brand Lay-In Panels	FC-CB
USG Touchstone™	FR-83
*AP = AP, AP-1, AP-2, AP-3	



To learn more about USG fire afety and fire-rated assemblies, visit usgdesignstudio.com or cgcdesignstudio.com

SOUND DESIGN STARTS WITH HOW SOUND AND HEARING WORK—AND UNDERSTANDING THE IMPORTANCE OF BALANCED ACOUSTICS

THE WAY SOUND TRAVELS THROUGH SPACES

Sound moves in a wave motion as an elastic medium produced by a vibrating object. These vibrations move the particles of the medium (such as air) adjacent to it, back and forth, creating an alternate compression and rarefaction of the medium. These disturbances move away from the source in a wave motion, much as a ripple moves along the surface of water when a stone is dropped in. The more elastic a substance, the better it can conduct sound. For example, steel is highly elastic, making it an excellent conductor of sound.

Moreover, sound not only travels in a straight path from its source, but also bounces off partitions, bends around barriers and squeezes through small openings, all of which can allow noise to reach surprisingly far beyond its point of origin.

HOW SOUND CAN BE CONTROLLED WITHIN SPACES

The basic mechanisms involved in noise control for buildings are sound absorption and sound transmission.

SOUND ABSORPTION: Necessary to reduce the reverberation, or echo, in a space to help improve clarity of speech and reduce excessive noise within a room. Acoustically absorbent material absorbs the majority of the incident sound waves and reverberations.

SOUND TRANSMISSION: Either airborne or structural, sound transmission must be reduced to prevent sound from traveling between two spaces. Airborne sound transmission is when sound travels through the air, such as partitions and openings. Impact sound transmission originates by contact with a structure and then travels through the structure.

BALANCED ACOUSTICS = NRC + CAC


EVALUATING CEILINGS: NRC, CAC & AC

Noise Reduction Coefficient (NRC)

NRC: A measure of sound absorption.

A 0.70 means the material absorbs 70% of sound waves. This is an important consideration for controlling acoustics within a confined area. Tests are conducted according to **ASTM C423**.

ASTM C423: Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.

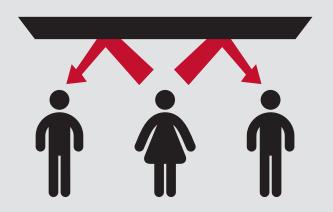


Ceiling Attenuation Class (CAC)

CAC: Applies to the sound attenuation of acoustical ceilings with a shared plenum between horizontally adjacent spaces.

A value of under 25 is considered poor, while a value of 35 and over is exceptional. Tests are conducted per **ASTM E1414** and classified per **ASTM E413**.

ASTM E1414: Standard Test Method for Airborne Sound Attenuation Between Rooms Sharing a Common Ceiling Plenum.

ASTM E413: Classification for Rating Sound Insulation.

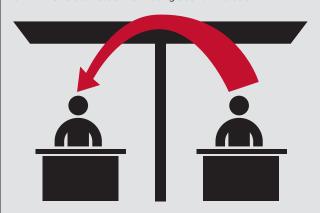

EVALUATING CEILINGS: NRC, CAC & AC

Articulation Class (AC)

AC: A single-number rating, for speech privacy purposes, of a ceiling system in an open plan space. A rating of 170 or higher is considered acceptable. The higher the AC rating, the better the performance.

ASTM 1111: Standard Test Method for Measuring the Interzone Attenuation of Open Office Components.

ASTM 1110: Standard Classification for Determination of Articulation Class.




EVALUATING WALLS

Sound Transmission Class (STC)

STC: A widely used rating of sound attenuation performance of wall and floor systems. Laboratory tests are conducted per **ASTM E90** and classified per **ASTM E413**.

ASTM E90: Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.

ASTM E413: Classification for Rating Sound Insulation.

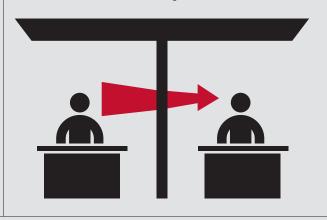

USG ACOUSTICAL DATA

All sound testing is conducted at the USG Corporate Innovation Center Acoustical Test Facility, which is accredited under the National Voluntary Laboratory Accreditation Program (NVLAP Lab Code: 200132-0). Testing of acoustical materials is conducted under the UL Client Data Test Program. All acoustical data are representative of each product family listed.

Acoustical Panel Product Name

USG ASPEN™ BASIC 3/4"

USG ASTRO® 5/8"

USG CLEAN ROOM® (PERFORATED) 5/8"

USG ECLIPSE™ 3/4"

USG ECLIPSE™ HIGH-NRC 7/8"

USG "F" FISSURED™ BASIC 3/4"

> USG FISSURED™ BASIC 5/8"

USG FISSURED™ BASIC FIRECODE™ 5/8"

USG FROST™ 3/4"

USG FROST™ BASIC 7/8"

USG FROST™ HIGH-NRC/ HIGH-CAC 7/8"

USG GLACIER™ BASIC 3/4"

USG HALCYON™ 3/4"

USG HALCYON™ 1" USG HALCYON™ 1-1/2"

USG HALCYON™

(FOIL BACKED) 1"

USG HALCYON™ FOIL BACKED 1-1/2″

> USG HALCYON™ HEALTHCARE 1"

USG HALCYON™ HEALTHCARE 1-1/2″

USG MARS™ 3/4"

USG MARS™ HIGH-NRC 80 7/8"

USG MARS™ HIGH-CAC

USG MARS™ HIGH-NRC 85 7/8"

> USG MARS™ HIGH-NRC 90 1"

USG MARS™ CLEAN ROOM™ 3/4"

USG MARS™ HEALTHCARE WITH AIRCARE™ 3/4"

USG MARS™ HEALTHCARE HIGH-NRC 80 7/8"

USG MILLENNIA® 3/4"

USG MILLENNIA® HIGH-NRC 3/4"

> USG OLYMPIA™ MICRO™ 5/8"

USG OLYMPIA™ MICRO™ 60 NRC 3/4"

rairing no	diffigure 1.									
NRC	CAC	AC	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
0.55	35		0.48	0.39	0.57	0.77	0.67	0.59		
0.55	35	_	0.51	0.35	0.47	0.65	0.69	0.68		
0.55	35	_	0.43	0.38	0.57	0.87	0.76	0.60		
0.70	35	_	0.35	0.40	0.62	0.87	0.89	0.85		
0.75	35	-	0.39	0.39	0.73	0.93	0.95	0.91		
0.70	35	-	0.73	0.30	0.63	1.00	0.97	0.97		
0.55	35	-	0.45	0.30	0.41	0.72	0.73	0.60		
0.55	35	-	0.38	0.32	0.47	0.75	0.71	0.61		
0.70	36	_	0.33	0.33	0.71	0.89	0.83	0.73		
0.70	40	_	0.38	0.46	0.82	0.95	0.88	0.87		
0.80	38	_	0.43	0.38	0.77	0.92	0.88	0.83		
0.65	35	_	0.36	0.26	0.55	0.99	1.02	1.02		
0.90	20	170	0.72	0.90	0.82	0.97	1.03	1.01		
0.95	20	200	0.72	0.92	0.88	1.04	1.06	1.09		
1.00	25	210	0.73	0.92	0.96	1.08	1.07	1.06		
0.90	30	-	0.45	0.64	0.87	1.07	1.09	1.00		
0.95	30	190	0.48	0.77	0.94	1.12	1.10	1.04		
0.95	20	180	0.93	0.83	0.77	1.03	1.08	1.04		
1.00	25	-	1.04	0.90	0.85	1.10	1.07	1.00		
0.75	35	180	0.42	0.39	0.60	0.90	0.99	1.01		
0.80	35	170	0.44	0.40	0.74	0.99	0.98	0.99		
0.60	40	_	0.39	0.30	0.59	0.80	0.88	0.96		
0.85	35	180	0.76	0.65	0.77	1.00	1.04	0.99		
0.90	30	-	0.53	0.55	0.86	1.06	1.06	1.02		
0.75	35	-	0.42	0.39	0.60	0.90	0.99	1.01		
0.75	35	_	0.42	0.39	0.60	0.90	0.99	1.01		
0.80	35	_	0.44	0.40	0.74	0.99	0.98	0.99		
0.70	35	_	0.48	0.41	0.61	0.85	0.89	0.89		
0.75	30	_	0.59	0.59	0.63	0.85	0.91	0.86		
0.50	35	_	0.40	0.37	0.60	0.65	0.51	0.35		
0.60	35	_	0.40	0.44	0.66	0.71	0.52	0.37		

USG ACOUSTICAL DATA

Acoustical Panel Product Name

USG ORION™ 60 1/2"

USG ORION™ 75 5/8"

USG ORION™ 85 5/8"

USG PEBBLED™ 5/8"

USG PREMIER HI-LITE™ TWILL (PERFORATED)

USG PREMIER HI-LITE™ (PERFORATED) KAPOK

USG PREMIER NUBBY™

(FOIL BACKED) 1" USG RADAR™ 5/8"

> $USG\,RADAR^{\scriptscriptstyle{\intercalM}}$ FIRECODE® 5/8"

USG RADAR™ ILLUSION™ 3/4"

 $USG\,RADAR^{\scriptscriptstyle{\mathsf{TM}}}$ CERAMIC 5/8"

 $USG\,RADAR^{\scriptscriptstyle{\intercalM}}$ HIGH DURABILITY 5/8"

> USG RADAR™ HIGH-NRC 3/4"

USG ROCK FACE® 5/8"

USG TOUCHSTONE™ 5/8"

NRC	CAC	AC	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.60	23	_	0.82	0.68	0.71	0.85	0.97	1.05
0.75	24	_	0.60	0.65	0.71	0.90	1.01	1.04
0.85	24	-	0.73	0.77	0.76	0.94	1.03	1.10
0.55	35	_	0.33	0.32	0.50	0.77	0.67	0.50
0.70	20	_	0.72	0.75	0.63	0.84	0.79	0.72
0.70	20	_	0.53	0.76	0.65	0.81	0.74	0.55
0.90	25		0.44	0.60	0.88	1.03	1.11	1.15
0.55	33	_	0.46	0.29	0.39	0.66	0.77	0.72
0.55	35	-	0.43	0.40	0.48	0.84	0.84	0.73
0.55	35	-	0.40	0.38	0.54	0.72	0.72	0.66
0.50	40	_	0.35	0.28	0.38	0.60	0.76	0.77
0.55	35	_	0.39	0.28	0.42	0.71	0.79	0.70
0.70	35	160	0.37	0.35	0.61	0.93	0.88	0.79
0.55	35		0.37	0.28	0.57	0.82	0.57	0.40
0.55	35	_	0.40	0.26	0.58	0.85	0.61	0.44

- All acoustical data are representative of each product family listed. For the most recent test results on a specific product, please contact your local USG representative or visit usgdesignstudio.com.
- CAC data obtained and tested according to E1414 using type CE mounting (Continuous at partitions, Exposed suspension system).
 NRC data obtained and tested according to ASTM C423. All material was tested in type E400 mounting, as specified in ASTM E795.
 AC data obtained and tested according to ASTM 1111.

			- 1-	/	to 11 .
1100 AGR=1177 = 1 21 =	Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
USG ASPEN™ BASIC ACOUSTICAL PANELS	650	54	12	48	20
	651	54	6	48	20
	652	54	6	48	20
		1	I		
USG ASTRO® ACOUSTICAL PANELS	8122	60	12	48	20
	8221	60	16	64	16
	8241	60	8	64	18
	8223	60	16	64	16
	8243	60	8	64	18
	8227	60	16	64	16
	8247	60	8	64	18
	8322	60	12	48	16
	8722	60	12	48	16
		T	I		
USG ASTRO® ILLUSION™ ACOUSTICAL PANELS	8742	60	6	48	20
ACOUSTICAL PANELS	8744	60	6	48	20
		ı	ı		
USG CLEAN ROOM™ ACOUSTICAL PANELS	56099	72	16	64	16
ACOUSTICAL PANELS	56091	72	8	64	18
	56060	72	16	64	16
	56090	72	8	64	18
		1	ı	ı	
USG ECLIPSE™	70073	45	40	40	18
ACOUSTICAL PANELS	76575	49	12	48	20
	76775	49	12	48	20
	ME76775	49	12	46.5	20
	76779	57	12	48	20
	76975	49	12	48	20
	ME76975	49	12	46.5	20
	76979	57	12	48	20
	78575	49	6	48	20
	78775	49	6	48	20
	78975	49	6	48	20
USG ECLIPSE™ HIGH-NRC	76520	59	10	40	20
ACOUSTICAL PANELS	76521	59	6	48	16
	76522	59	10	40	20
	76523	59	6	48	16
	76524	59	10	40	20
	76525	59	6	48	16
			J	I	
USG ECLIPSE™ HRC	76575HRC	49	12	48	20
ACOUSTICAL PANELS	76775HRC	49	12	48	20
	76975HRC	49	12	48	20
	78575HRC	49	6	48	20
	78775HRC	49	6	48	20
	78975HRC	49	6	48	20
		1	1	<u> </u>	<u> </u>

					. 6.0
	Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
USG ECLIPSE™ ILLUSION™ & PEDESTALS™	72015	55	12	48	20
ACOUSTICAL PANELS	72215	55	12	48	20
	72715	55	12	48	20
	72716	55	12	48	20
	78011	49	6	48	20
	78085	49	6	48	20
	78711	49	6	48	20
	78785	49	6	48	20
			I		
USG "F" FISSURED™ BASIC ACOUSTICAL	101	69	48	48	32
PANELS	102	69	48	48	32
	131	50	8	32	28
	132	49	8	32	28
	133	49	8	32	28
	135	72	6	48	28
	136	72	6	48	28
		T	T	T	T
USG FISSURED™ BASIC ACOUSTICAL PANELS	506	43	16	64	20
ACCOMICALIANCES	507	43	8	64	20
	560	42	16	64	20
	562	42	8	64	20
	585	65	16	74	20
	586	74	8	64	20
			T		
USG FROST™ BASIC ACOUSTICAL PANELS	415	49	8	32	28
ACCOSTICALTANCES	440	56	8	32	28
	450	71	6	48	16
	460	71	6	48	16
		1	Τ.	T	
USG FROST™ HIGH-NRC/HIGH-CAC	484	56	8	32	24
ACOUSTICAL PANELS	488	57	8	32	24
	489	57	8	32	24
1100 == 0.00%	41.4	10		72	20
USG FROST™/ USG FROST™ HIGH-LR	414	48	8	32	28
ACOUSTICAL PANELS	418	49	8	32	28
	419	49	8	32	28
	490	48	8	32	28
	491	48	8	32	28
LICC CL ACIEDIM DACIC	701	64	144	144	72
USG GLACIER™ BASIC ACOUSTICAL PANELS	701	64	44	44	32
	707	42	8	32	28
	708 	43	8	32	28
	711	66	6	48	16
	715	44	8	32	28
USG HALCYON™	 88221	24	12	48	28
ACOUSTICAL PANELS	• • • • • • • • • • • • • • • • • • • •			+	14
	88223 	47	12	96	+
	88224	46	8	64	14
	88225	24	12	48	28
	88226	47	12	96	14

USG HALCYON™ ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq.Ft./Ctn.	Ctn./Pallet
88227	24	12	48	28
97221	25	16	64	28
97241	49	16	128	14
97266	76	12	150	7
97356	24	8	32	28
97357	24	8	32	28
97358	48	8	64	14
97368	46	12	96	14
97359	24	8	32	28
98221	23	12	48	28
98223	23	12	48	28
98225	23	12	48	28
98241	45	12	96	14
98243	45	12	96	14
98245	45	12	96	14
98331	35	12	75	14
98333	35	12	75	14
98335	35	12	75	14
98336	76	12	150	7
99221	22	8	32	28
99223	22	8	32	28
99225	22	8	32	28
99241	44	8	64	14
99270	76	12	150	7

USG HALCYON™ CANOPIES

99131	15	2	_	Varies
99132	23	2	_	Varies
99133	28	2	_	Varies
99134	12	2	_	Varies
99135	17	2	_	Varies
99136	18	2	_	Varies
99137	26	2	_	Varies
99138	18	2	-	Varies
99139	12	2	-	Varies
99140	15	2	_	Varies
99150	15	2	_	Varies
99151	15	2	_	Varies
99152	15	2	_	Varies
99153	15	2	_	Varies
99154	15	2	_	Varies
99155	15	2	_	Varies
99156	15	2	_	Varies
99157	15	2	_	Varies
99158	15	2	_	Varies
99159	15	2	-	Varies
99160	13	2	_	Varies

USG HALCYON™ PLANKS AND LARGE SIZE ACOUSTICAL PANELS

97262	56	16	192	14
97263	100	16	256	14
97360	73	12	144	14
97361	97	12	192	14

24

48

24

USG HALCYON™ PLANKS AND LARGE SIZE ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
97362	73	12	144	14
97363	97	12	192	4
97364	65	4	128	4
97365	97	12	192	7
97366	97	12	192	7
97367	97	12	192	14
98197	92	12	192	14
98348	69	12	144	14
98441	90	12	192	7
98443	90	12	192	7
98445	90	12	192	7
98481	60	4	128	20
99268	69	12	144	14
99269	92	12	192	14
99282	81	16	160	14
98217	48	8	32	28
98218	16	8	64	14
98232	32	12	48	28

96

32

64

14

28

14

12

8

8

USG HALCYON™ HEALTHCARE ACOUSTICAL PANELS

98233

98234

98235

USG HALCYON™ LOGIX™ FIELD AND CHANNEL ACOUSTICAL PANELS

			1 '	
98236	48	12	48	28
98237	16	12	96	14
98238	32	12	48	28
98239	24	12	96	14
97227	49	48	96	14
97228	61	48	120	14
97266	76	12	150	7
97277	43	12	84	14
97402	49	72	96	14
97403	61	72	120	14
97404	72	72	144	14
97405	73	48	144	14
97406	25	8	48	14
97407	46	12	90	14
97408	48	12	93	14
97411	22	12	42	28
97412	43	12	84	14
97413	23	12	44	28
97414	45	12	88	14
97416	45	12	88	14
97417	35	12	68	14
97418	69	12	135	7
97419	36	12	70	14
97420	71	12	140	7
97422	69	12	135	7
97423	71	12	140	7
97424	85	12	168	7
97425	89	12	176	7

USG HALCYON™ LOGIX™ FIELD AND CHANNEL ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
97426	91	12	180	7
97427	93	12	184	7
97428	110	12	216	7
97430	49	72	96	14
97431	61	72	120	14
97432	72	72	144	14
97433	73	48	144	14
97434	21	24	120	14
97435	25	24	144	14
97436	46	12	90	14
97437	48	12	93	14
97439	43	12	84	14
97440	23	12	44	28
97441	45	12	88	14
97443	43	12	84	14
97444	45	12	88	14
97446	123	12	240	14
97447	35	12	68	14
97448	69	12	135	7
97449	36	12	70	14
97450	71	12	140	7
97453	71	12	140	7
97454	85	12	168	7
97455	89	12	176	7
97456	91	12	180	7
97457	93	12	184	7
97458	110	12	216	7
97491	17	8	96	14
97492	21	8	40	14
97571	17	24	96	14
98220	22	12	42	28
98223	25	12	48	28
98243	49	12	96	14
98333	38	12	75	14
98337	69	12	135	7
98443	97	12	192	7
98483	65	4	128	4
99263	25	24	48	_
99267	51	12	100	14
99268	73	12	144	14
99269	97	12	192	14
99270	76	12	150	7
99271	49	48	96	14
99272	61	48	120	14
96271	61	12	120	14
97333	35	12	68	14
97335	36	12	70	14
97466	43	12	84	14
97467	23	12	44	28
97468	45	12	88	14
97470	45	12	88	14
		1	1	L

USG HALCYON™ LOGIX™ FIELD AND CHANNEL ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
97473	72	12	140	7
97475	89	12	176	7
97476	91	12	180	7
97477	93	12	184	4
97460	49	72	96	14
97461	61	72	120	14
97462	72	72	144	14
97463	25	24	144	14
97464	48	12	93	14
97574	73	48	144	14
97576	21	24	120	14
98131	55	48	108	14
98191	25	24	48	_
98192	17	24	96	14
98194	51	12	100	14
98195	22	12	42	28
98196	43	12	84	14
98197	97	12	192	14
98198	49	48	96	14
98199	61	48	120	14
98216	97	48	192	_
98225	25	12	48	28
98245	49	12	96	14
98335	38	12	75	7
98336	76	12	150	7
98341	58	12	114	14
98343	85	12	168	7
98344	110	12	216	14
98348	73	12	144	14
98359	69	12	135	7
98360	46	12	90	14
98440	69	12	135	7
98445	97	12	192	7
99197	42	48	84	14
99213	122	12	240	14
99265	97	24	192	_

USG MARS™/USG MARS™ HRC ACOUSTICAL PANELS

		T	1	T
86185	51	12	48	20
86185HRC	51	12	48	20
86185CR	51	12	48	20
86288	51	24	48	18
86785	51	12	48	20
86785HRC	51	12	48	20
86830	40	6	37.5	20
86875	40	6	37.5	20
86985	51	12	48	20
86985HRC	51	12	48	20
88185	51	6	48	20
88185HRC	51	6	48	20
88185CR	51	6	48	20
88785	51	6	48	20

USG MARS™/USG MARS™ HRC ACOUSTICAL PANELS CONT.

USG MARS™/USG MARS™ HIGH-NRC PLANKS AND ACOUSTICAL PANELS

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
88785HRC	51	6	48	20
88985	51	6	48	20
88985HRC	51	6	48	20
86161	63	6	60	20
86166	75	6	72	16
86166HRC	75	6	72	16
86221	63	6	60	20
86223	75	6	72	20
86350	73	6	60	16
86360	88	6	72	16
88984	63	6	60	20
88996	75	6	72	16
88996HRC	75	6	72	16
89550	73	6	60	16
89650	73	6	60	16
89660	88	6	72	16
89662	66	6	60	16
89663	79	6	72	16
89664	66	6	60	16
89665	79	6	72	16
89667	66	6	60	16
89668	79	6	72	16
89670	88	6	72	16
89673	49	4	40	20
89674	59	4	48	20
89675	49	4	40	20
89676	59	4	48	20
89677	49	4	40	20
89678	59	4	48	20
86152	59	10	40	20
86340	59	6	48	16
86470	59	10	40	20
86750	59	10	40	20
80113	42	6	38	16
80139	42	6	38	16
80165	42	6	38	16
80213	31	4	25	20
80239	31	4	25	20

USG MARS™ HEALTHCARE HIGH-NRC ACOUSTICAL PANELS

> USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

80113	42	6	38	16
80139	42	6	38	16
80165	42	6	38	16
80213	31	4	25	20
80239	31	4	25	20
80265	31	4	25	20
86100	59	10	40	20
86186	63	12	48	20
86300	59	6	48	16
86400	45	6	37.5	18
86426	42	6	38	18
86429	86	6	75	8

USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
86466	42	6	38	8
86497	86	6	75	8
86500	45	6	37.5	20
86786	63	12	48	20
86986	63	12	48	20
87100	59	10	40	20
87187	63	6	48	16
87200	49	10	40	20
88134	44	10	40	20
88135	53	10	40	20
88136	53	10	40	20
88137	39	8	32	20
88138	39	8	32	20
88139	39	8	32	20
88786	63	6	48	16
88986	63	6	48	20
89134	53	6	48	16
89135	53	6	48	16
89136	53	6	48	16
89137	39	4	32	16
89138	39	4	32	16
89139	39	4	32	16
89140	83	6	75	9
89141	83	6	75	9
89142	83	6	75	9
89143	61	4	50	10
89144	61	4	50	10
89145	61	4	50	10
89500	59	6	48	20
89600	59	6	48	20

USG MARS™ HEALTHCARE ACOUSTICAL PANELS

59	Ь	48	20
51	12	48	20
51	12	48	20
44	10	40	20
44	10	40	20
44	10	40	20
63	12	48	_
63	12	48	_
63	12	48	_
51	12	48	20
51	12	48	20
51	12	48	20
51	12	48	20
51	6	48	20
51	6	48	20
53	6	48	16
63	6	48	16
63	6	48	16
	51 51 44 44 44 63 63 63 51 51 51 51 51 51 51	51 12 51 12 44 10 44 10 63 12 63 12 63 12 51 12 51 12 51 12 51 12 51 6 51 6 51 6 53 6 63 6	51 12 48 51 12 48 44 10 40 44 10 40 44 10 40 63 12 48 63 12 48 63 12 48 51 12 48 51 12 48 51 12 48 51 12 48 51 6 48 51 6 48 51 6 48 53 6 48 63 6 48

USG MARS™ HEALTHCARE ACOUSTICAL PANELS CONT.

USG MARS™ LOGIX™ ACOUSTICAL PANELS

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
88683	51	6	48	20
88683AIR	51	6	48	20
88983	51	6	48	20
88983AIR	51	6	48	20
			1	1
86134	43	40	40	_
86135	43	40	40	_
86136	43	40	40	_
86160	53	6	50	20
86164	53	6	50	20
86166	76	6	72	16
86185	51	12	48	20
86223	76	6	72	16
86267	76	6	75	10
86289	43	20	40	18
86245	43	20	40	18
86242	43	20	40	18
86321	26	6	24	20
86325	26	12	24	20
86503	71	6	68	10
86507	32	12	30	20
86514	26	18	24	20
86515	32	18	30	20
86516	25	6	24	20
86517	32	6	30	20
86518	38	6	36	20
86519	48	6	45	20
86520	49	6	47	20
86522	45	12	42	20
86523	45	6	42	20
86524	47	12	44	20
86525	47	6	44	20
86527	45	6	42	20
86528	47	6	44	20
86530	36	6	34	20
86531	71	6	68	10
86532	37	6	35	20
86533	74	6	70	10
86535	74	6	70	10
86536	76	6	75	10
86537	37	18	36	20
86538	38	12	36	20
86540	26	18	24	20
86541	32	18	30	20
86542	26	12	24	20
86543	32	12	30	20
86544	25	6	24	20

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
86545	32	6	30	20
86546	38	6	36	20
86547	48	6	45	20
86548	49	6	47	20
86550	45	12	42	20
86551	45	6	42	20
86552	47	12	44	20
86553	47	6	44	20
86555	45	6	42	20
86556	47	6	44	20
86557	36	6	34	20
86558	71	6	68	10
86559	37	6	35	20
86560	74	6	70	10
86563	74	6	70	10
86564	76	6	75	10
86565	37	18	36	20
86566	38	12	36	20
86567	38	12	36	20
86568	26	18	24	20
86569	32	18	30	20
86570	38	6	36	20
86571	50	6	47	20
86573	45	6	42	20
86574	47	12	44	20
86575	47	6	44	20
86577	45	6	42	20
86578	47	6	44	20
86579	71	6	68	10
86580	74	6	70	10
86583	74	6	70	10
86584	37	18	36	20
86785	51	12	48	20
86815	40	6	38	20
86830	40	6	38	20
86831	71	6	68	10
86834	37	6	35	20
86835	32	12	30	20
86850	36	6	34	20
86875	40	6	38	20
86905	53	6	50	20
86985	51	12	48	20
88185	51	6	48	20
88840	42	12	42	20
88845	48	6	45	20
88686	71	6	68	10

USG MARS™ LOGIX™ ACOUSTICAL PANELS CONT.

USG MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
88785	51	6	48	20
88885	31	6	30	20
88887	25	12	24	20
88985	51	6	48	20
88996	76	6	72	16

88996	/6	6	12	16
		1		
80100	50	6	45	18
80101	52	6	47	18
80102	55	6	50	18
80103	39	10	35	20
80104	46	6	42	20
80105	41	10	37	20
80106	48	6	44	20
80107	46	6	42	20
80108	48	6	44	20
80109	37	6	34	18
80110	50	6	45	6
80111	39	6	35	18
80112	52	6	47	6
80113	42	6	38	18
80114	50	6	45	10
80115	52	6	47	10
80116	18	18	16	36
80117	22	18	20	32
80118	26	18	24	32
80119	18	12	16	36
80120	22	12	20	32
80121	26	12	24	32
80122	32	32	28	18
80123	26	6	24	36
80124	33	6	30	36
80125	40	6	36	32
80126	50	6	45	18
80127	52	6	47	18
80128	55	6	50	18
80129	36	10	35	20
80130	46	6	42	20
80131	41	10	37	16
80132	48	6	44	20
80133	46	6	42	20
80134	48	6	44	20
80135	37	6	34	18
80136	50	6	45	6
80137	39	6	35	18
80138	52	6	47	6
80139	42	6	38	18
80140	50	6	45	6
80141	52	6	47	6
80142	18	18	16	24
80143	22	18	20	24

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
80144	26	18	24	24
80145	18	12	16	24
80146	22	12	20	24
80147	26	12	24	32
80148	31	28	28	15
80149	26	6	24	36
80150	33	6	30	36
80151	40	6	36	32
80152	50	6	45	18
80153	52	6	47	18
80154	55	6	50	18
80155				
• • • • • • • • • • • • • • • • • • • •	39	10	35	20
80156	46	6	42	20
80157	41	10	37	20
80158	48	6	44	20
80159	46	6	42	20
80160	48	6	44	20
80161	37	6	34	18
80162	50	6	45	6
80163	39	6	35	18
80164	52	6	47	6
80165	42	6	38	16
80166	50	6	45	6
80167	52	6	47	6
80168	18	18	16	24
80169	22	18	20	24
80170	26	18	24	32
80171	18	12	16	24
80172	22	12	20	24
80173	26	12	24	32
80174	31	32	28	18
80175	26	6	24	36
80176	33	6	30	32
80177	40	6	36	32
80200	37	4	30	20
80201	38	4	31	20
80202	40	4	33	20
• • • • • • • • • • • • • • • • • • • •	34		28	
80203		8		20
80204	34	4	28	20
80205	35	8	29	20
80206	35	4	29	20
80207	34	4	28	20
80208	35	4	29	20
80209	41	4	34	20
80210	55	4	45	10
80211	43	4	35	20
80212	46	4	47	10
80213	46	6	38	20
80214	55	4	45	10
80215	57	4	47	10
				

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
80216	20	12	16	40
80217	24	12	20	40
80218	29	12	24	36
80219	20	8	16	40
80220	24	8	20	40
80221	29	8	24	36
80222	34	28	28	18
80223	20	4	16	40
80224	24	4	20	40
80225	29	4	24	36
80226	37	4	30	20
80227	38	4	31	20
80228	40	4	33	20
80229	34	8	28	20
80230	34	4	28	20
80231	35	8	29	20
80232	35	4	29	20
80233	34	4	28	20
80234	35	4	29	20
80235	41	4	34	20
80236	55	4	45	10
80237	43	4	35	20
80238	57	4	47	10
80239	46	4	38	20
80240	55	4	45	10
80241	57	4	47	10
80242	20	12	16	40
80243	24	12	20	40
80244	29	12	24	36
80245	20	8	16	40
80246	24	8	20	40
80247	29	8	24	36
80248	34	28	28	18
80249	20	4	16	40
80250	24	4	20	40
80251	29	4	24	36
80252	37	4	30	20
80253	38	4	31	20
80254	40	4	33	20
80255	34	8	28	20
80256	34	4	28	20
80257	35	8	29	20
80258	35	4	29	20
80259	34	4	28	20
80260	35	4	29	20
80261	41	4	34	20
80262	55	4	45	10
80263	43	4	35	20
80264	57	4	47	10
80265	46	4	38	20

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
80267	57	4	47	10
 80268	20	12	16	40
 30269	24	12	20	40
 80270	29	12	24	36
80271	20	8	16	40
80272	24	8	20	40
80273	29	8	24	36
80274	34	28	28	18
80275	20	4	16	40
80276	24	4	20	40
80277 80277	29	4	24	36
86100	59	10	40	20
•••••				
88134	53	10	40	20
86137	34	14	28	18
86138	34	14	28	18
86139	34	14	28	18
86145	37	12	30	16
86331	30	12	24	16
86333	33	12	30	16
86400	45	6	38	18
86402	30	18	24	16
86403	37	18	30	16
86404	30	12	24	16
86405	44	18	36	16
86406	44	12	36	16
86407	30	6	24	16
86408	37	6	30	16
86409	44	6	36	16
86410	55	6	45	18
86411	57	6	47	18
86414	43	10	35	20
86415	52	5	42	18
86416	45	10	37	20
86417	54	6	44	18
86419	52	6	42	16
86420	54	6	44	16
 86421	41	6	34	18
86422	83	6	68	8
86423	43	6	35	18
86424	86	6	70	8
86426	46	6	38	18
86427	83	6	68	8
86428	86	6	70	8
86429	92	6	75	8
86440 86441	30	18	24	16
86441 	37	18	30	16
86442 	30	12	24	16
86443	37	12	30	16
86444	30	6	24	16
86445	37	6	30	16

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
86446	wt./ctn.	6		16
•••••			36	ļ
86447 86448	55	6	45	18
	57	6	46	18
86449	61	6	50	18
86451	43	10	35	20
86452	52	6	42	18
86453 86454	45	10	37	20
•••••	54	6	44	18
86456	52	6	42	16
86457	54	6	44	16
86458	41	6	34	18
86459	43	6	35	18
86460	83	6	68	8
86461	86	6	70	8
86464	83	6	68	8
86465	86	6	70	8
86466	92	6	75	8
86467	44	18	36	16
86468	44	12	36	16
86473	44	18	36	16
86474	44	12	36	16
86475	30	18	24	16
86476	37	18	30	16
86477	37	6	30	16
86478	44	6	36	16
86479	55	6	45	18
86480	57	6	47	18
86481	61	6	50	18
86483	43	10	35	20
86484	52	6	42	18
86485	45	10	36	20
86486	54	6	44	18
86488	52	6	42	16
86489	54	6	44	16
86490	41	6	34	18
86491	83	6	68	8
86492	43	6	35	18
86493	86	6	70	8
86496	86	6	70	8
86497	92	6	75	8
86500	45	6	38	20
86501	83	6	68	8
86505	30	6	24	16
86663	31	16	32	18
86664	31	16	32	18
86665	31	16	32	18
87100	59	10	40	20
87200	49	10	40	20
88135	53	10	40	20
88137	39	8	32	20
89134	53	6	48	16

USG MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet	
89135	53	6	48	16	
89140	83	6	75		
89141	83	6	75	9	
89142	83	6	75	9	
89143	61	4	50	10	
89144	61	4	50	10	
89145	61	4	50	10	
89500	58	6	48	16	
89600	58	6	48	20	
89660	89	6	50	10	
89663	79	6	72	16	
89665	79	6	72	10	
89668	79	6	72	10	
89670	88	6	72	10	
89674	59	4	48	20	
89675	59	4	48	20	
89676	59	4	48	20	
89678	59	4	48	20	
70003	51	40	40	18	
76505	51	12	48	20	
76705	51	12	48	20	

USG MILLENNIA* ACOUSTICAL PANELS

.....78705

USG MILLENNIA* HIGH-NRC ACOUSTICAL PANELS

USG OLYMPIA™ MICRO™ ACOUSTICAL PANELS

76201	51	12	48	20
76302	51	12	48	20
78501	51	6	48	20
4210	64	16	64	20
4211	64	16	64	20
4221	64	16	64	16/20
4221HRC	64	16	64	16/20
4231	64	16	64	16/20
4231HRC	64	16	64	16/20
4411	64	8	64	20
4411HRC	64	8	64	20
4421	64	8	64	20
4421HRC	64	8	64	20
4431	64	8	64	20
4742	48	6	48	20
4744	48	6	48	20
4750	53	12	48	20
4751	53	6	48	20
4752	53	12	48	20
4753	53	6	48	20
4754	53	12	48	20

	Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
USG OLYMPIA™ MICRO™	4755	53	6	48	20
ACOUSTICAL PANELS	4913	64	8	64	20
CONT.					
USG ORION™ ACOUSTICAL	62150	46	16	64	20
PANELS	62151	46	8	64	20
	62152	46	16	64	20
	62153	46	8	64	20
	62154	46	16	64	20
	62155	46	8	64	20
	62156	48	20	80	20
	62157	48	10	80	20
	62162	46	16	64	20
	62163	46	8	64	20
	62164	46	16	64	20
	62165	46	8	64	20
	62166	46	16	64	20
	62167	46	8	64	20
USG PEBBLED™	4800	56	8	64	20
ACOUSTICAL PANELS	4801	56	16	64	20
	4805	56	16	64	20
	4850	77	8	64	20
	4851	77	16	64	20
	4867	56	16	64	20
			l .	I	
USG PREMIER HI-LITE™	7050G	35	32	128	18
ACOUSTICAL PANELS	7051G	35	16	128	18
	7052G	35	32	128	18
	7053G	35	16	128	18
	7054G	35	32	128	18
	7055G	35	16	128	18
	7056G	35	32	128	18
	7057G	35	16	128	18
	7187G	38	12	96	18
					1.7
USG PREMIER NUBBY™	7000G	35	32	128	14
ACOUSTICAL PANELS	7002G	35	24	96	14
	7003G	35	12	96	14
	7012G	37	24	96	14
	7013G	37	12	96	14
	7087G	68	8	80	14
			-		1
USG RADAR™ BASIC	2110	42	16	64	20
ACOUSTICAL PANELS	ME2110	42	16	62	16
	2115	74	16	64	16
	2120	46	16	64	16
	ME2120	46	16	62	20
	2125	74	16	64	16
	2130	46	16	64	16
	2135	74	16	64	16
	2310	42	8	64	20
		1 *	1. *	1.55	1 1

USG RADAR™ BASIC
ACOUSTICAL PANELS
CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
ME2310	42	8	62	18
2315	74	8	64	18
2320	42	8	64	20
2617	43	8	67	16
2618	85	6	75	10
2619	53	8	80	20
2627	46	8	67	20
2742	46	6	48	20
2990	54	48	48	18
2991	56	40	40	18
22111	58	12	48	20

USG RADAR™ HIGH-NRC/ HIGH-CAC ACOUSTICAL PANELS

58	12	48	20
58	12	48	20
58	6	48	20
58	12	48	20
75	8	64	18
58	6	48	20
49	12	48	20
49	6	48	20
49	12	48	20
49	12	48	20
49	6	48	20
58	12	48	20
58	12	48	20
58	12	48	20
58	6	48	20
	58 58 58 75 58 49 49 49 49 58 58	58 12 58 6 58 12 75 8 58 6 49 12 49 12 49 12 49 12 49 12 58 12 58 12 58 12 58 12	58 12 48 58 6 48 58 12 48 75 8 64 58 6 48 49 12 48 49 12 48 49 12 48 49 12 48 49 12 48 58 12 48 58 12 48 58 12 48 58 12 48

USG RADAR™ OPEN PLAN ACOUSTICAL PANELS USG RADAR™ CERAMIC ACOUSTICAL PANELS

2410P

USG RADAR™ ACOUSTICAL PANELS

56645	79	6	48	20
2207	48	16	64	16
2210	46	16	64	20
2215	74	16	64	16
2220	48	16	64	20
ME2220	48	16	62	16
2225	74	16	64	18
2227	48	16	64	16
2230	46	16	64	20
2232	46	8	64	20
2235	74	16	64	16
2407	48	8	64	18
2410	46	8	64	20
ME2410	46	8	62	18
	••••	•	*	*

	Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
USG RADAR™	2415	74	8	64	18
ACOUSTICAL PANELS	2420	46	8	64	18
CONT.	2425	74	8	64	18
	2570	57	48	48	18
	2888	46	12	48	20
	2890	46	6	48	20
				I	
USG RADAR™ ILLUSION™	2842	46	6	48	20
ACOUSTICAL PANELS	2844	46	6	48	20
	2846	46	6	48	20
	2852	46	6	48	20
	2854	46	6	48	20
	2862	46	6	48	20
	2864	46	6	48	20
	2882	46	6	48	20
	2884	46	6	48	20
		1	1		
USG RADAR™ EDUCATION	2207	48	16	64	16
ACOUSTICAL PANELS	22111	58	12	48	20
	22121	58	12	48	20
	22122	58	6	48	20
	22127	58	12	48	20
	2227	48	16	64	16
	22350	49	12	48	16
	22360	49	6	48	18
	22370	49	12	48	16
	22421	49	12	48	16
	22441	49	6	48	18
	22523	58	12	48	20
	22541	58	6	48	20
	2407	48	8	64	18
			·		
USG ROCK FACE®	56335	82	16	48	20
ACOUSTICAL PANELS	56380	82	6	48	20
	55483	71	12	48	20
USG SANDRIFT™	808	48	8	32	28
ACOUSTICAL PANELS	809	48	8	32	28
	815	49	8	32	28
USG SHEETROCK® BRAND LAY-IN ACOUSTICAL	3200	67	4	32	32
CEILING PANELS	3260	33	4	16	92
	3270	67	4	32	46
USG TOUCHSTONE™ ACOUSTICAL PANELS	5893	65	12	48	20
ACCOUNTED FAILES	5894	65	6	48	20
	5896	65	12	48	20
	5899	65	12	48	20

				Westlake & Ca	rtersville		Stockton		
	Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
USG DX*/DXL™	Main Tees								
DX/DXL24	20	240	60	30	7,200	1,950	30	7,200	1,950
DX/DXL24HRC	20	240	60	30	7,200	1,950	30	7,200	1,950
DX/DXL26	20	240	73	30	7,200	2,252	30	7,200	2,190
DX/DXL26HRC	20	240	73	60	7,200	1,140	30	7,200	2,190
	Cross Tees								
DX/DXL216	60	120	19	60	7,200	1,178	60	7,200	1,140
DX/DXL216HRC	60	120	19	30	7,200	2,370	60	7,200	1,140
DX316	60	180	32	30	5,400	908	30	5,400	900
DX2016	60	100	17	60	6,000	960	60	6,000	2,280
DX3016	60	150	22	30	4,500	810	n/a	n/a	n/a
DXL324	60	180	50	30	5,400	1,388	30	5,400	1,500
DX416	60	240	43	30	7,200	1,178	30	7,200	1,290
DX426	60	240	73	30	7,200	1,950	30	7,200	2,370
DX422	60	240	45	30	7,200	1,208	60	14,400	2,640
DX422HRC	60	240	45	30	7,200	1,320	30	7,200	1,080
DX/DXL424	60	240	65	30	7,200	1,778	30	7,200	1,950
DX/DXL424HRC	60	240	65	30	7,200	1,950	30	7,200	1,920
DXL524	60	300	79	30	9,000	2,408	30	9,000	3,270
DX624	20	120	30	n/a	n/a	n/a	n/a	n/a	n/a
DX824	20	160	39	30	4,800	1,292	30	4,800	1,170
USG DXLA™	Main Tees							1	
DXLA24	20	240	59	30	7,200	2,132	30	7,200	1,740
DXLA26	20	240	78	30	7,200	1,950	30	7,200	2,188
	Cross Tees								
DXLA216	60	120	16	60	7,200	1,358	60	7,200	960
DXLA424	60	240	58	609	14,400	3,185	30	7,200	1,740
USG DXACE™	Main Tees								
DXACE26	20	240	30	30	7,200	1,950	30	7,200	1,950
	Cross Tees				,	7		,	,,,,,
DXACE224	60	120	12	60	7,200	960	60	7,200	960
DXACE424	60	240	23	30	7,200	1,958	30	7,200	1,740
					1 '	1			1 '
USG CENTRICITEE™ DXT™	Main Tees								
DXT24	20	240	60	30	7,200	1,802	30	7,200	1,800
DXT24HRC	20	240	60	30	7,200	1,800	30	7,200	1,800
DXT24-10	20	200	50	30	6,000	1,500	30	6,000	n/a
DXT26	20	240	67	30	7,200	2,012	30	7,200	2,010
DXT26HRC	20	240	67	30	7,200	2,010	30	7,200	2,010
	Cross Tees	`							
DXT122	60	60	12	n/a	n/a	n/a	n/a	n/a	n/a
DXT222	60	120	20	60	7,200	1,238	60	7,200	1,200
DXT222HRC	60	120	20	30	3,600	600	30	3,600	600
DXT422	60	240	37	30	7,200	1,118	30	7,200	1,110
DXT424	60	240	60	30	7,200	1,808	30	7,200	1,800
DXT424HRC	60	240	60	30	7,200	1,800	n/a	n/a	n/a

				Westlake & Cartersville		Stockton	Stockton		
	Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
USG CENTRICITEE™ DXT™	Cross Tees	Er/ctil.	Wt./Ctil.	Ctils./ Fullet	Lifranet	Wt./Fallet	Ctils./ Fullet	Li/Fallet	Wt./ Fallet
CONT.	Cross rees								
DXT524	60	300	75	n/a	n/a	n/a	n/a	n/a	n/a
DXT624	20	120	30	30	3,600	900	30	3,600	900
DXT824	20	160	40	30	4,800	1,200	30	4,800	1,200
DXLT24	20	240	60	30	7,200	1,802	24	7,200	2,208
DXLT222	60	120	20	60	7,200	1,238	30	3,600	600
DXLT424	60	240	60	30	7,200	1,808	30	7,200	1,800
USG FINELINE® DXF™/DXLF™	Main Tees								
DXF2930	20	200	52	n/a	n/a	n/a	n/a	n/a	n/a
DXF2924	20	240	62	30	7,200	1,890	30	7,200	1,980
DXF2924HRC	20	240	62	30	7,200	1,890	30	7,200	1,980
DXF2924-10	20	200	52	30	6,000	1,590	30	6,000	1,590
DXF2948	20	240	62	30	7,200	1,920	30	7,200	1,980
DXF2920	20	200	52	n/a	n/a	n/a	n/a	n/a	n/a
DXFH2924	20	240	71	30	7,200	2,190	30	7,200	2,310
DXLF2924	20	240	62	30	7,200	1,860	30	7,200	1,860
	Cross Tees								
DXF129	50	50	14	120	6,000	1,838	120	6,000	1,800
DXF229	50	100	26	60	6,000	1,658	60	6,000	1,620
DXLF229	50	100	26	60	6,000	1,440	60	6,000	1,620
DXF229HRC	50	100	26	60	6,000	1,620	60	6,000	1,620
DXF30	50	125	32	60	7,500	2,078	60	7,500	2,040
DXF429	50	200	52	30	6,000	1,590	30	6,000	1,590
DXF429S	50	200	52	30	6,000	1,590	30	6,000	1,590
DXF429N	50	200	52	30	6,000	1,628	30	6,000	1,590
DXF429NHRC	50	200	52	30	6,000	1,590	30	6,000	1,590
DXLF429N	50	200	52	60	6,000	1,440	30	6,000	1,590
DXF529	50	250	65	30	7,500	2,018	30	7,500	1,980
DXF529N	50	200	52	30	7,500	1,980	30	7,500	1,980
DXF57	50	210	64	n/a	n/a	n/a	n/a	n/a	n/a
DXF629	20	120	34	75	9,000	2,550	75	9,000	2,550
DXF829	20	160	44	30	4,800	1,320	30	4,800	1,320
USG FINELINE® DXFEV™	Main Tees								
DXFEV2912	20	240	62	30	7,200	1,920	30	7,200	n/a
DXFEV2924	20	240	62	30	7,200	2,040	30	7,200	2,040
DXFEVH2912	20	240	62	30	7,200	2,310	30	7,200	2,310
DXFEVH2924	20	240	62	30	7,200	2,310	30	7,200	2,310
DXFEVH2930	20	240	62	30	7,200	2,310	30	7,200	2,310
DAI EVIIZOSO	Cross Tees	240	02	30	7,200	2,310	30	7,200	2,310
DXFEV229	50	100	26	60	6,000	1,680	60	6,000	1,680
DXFEV429N	50	200	52	30	6,000	1,740	30	6,000	1,740
DXFEV629	20	120	34	75	9,000	2,550	75	9,000	n/a
DXFEV829	20	160	44	30	4,800	1,320	30	4,800	n/a
DAI EVOZS		1.55	1		.,500	.,020		.,555	.,, =

				Westlake & Ca	rtersville		Stockton		
	Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Palle
USG FINELINE® 1/8 DXFF™	Main Tees								
DXFF2924	20	240	68	30	7,200	1,950	30	7,200	1,950
DXFF2930	20	200	54	n/a	n/a	n/a	n/a	n/a	n/a
DXFF2948	20	240	68	30	7,200	1,980	30	7,200	1,980
DXFFH2924	20	240	72	30	7,200	2,220	30	7,200	2,220
	Cross Tees								
DXFF129	50	50	14	120	6,000	1,598	120	6,000	1,560
DXFF229	50	100	27	60	6,000	1,718	60	6,000	1,680
DXFF429	50	200	54	30	6,000	1,650	30	6,000	1,590
DXFF429N	50	200	54	30	6,000	1,688	30	6,000	1,650
DXFF429S	50	200	54	30	6,000	1,650	30	6,000	1,590
DXFF529N	50	250	67	30	7,500	2,078	30	7,500	2,040
		230	07	30	7,500	2,070	30	7,300	2,040
ENTITEE® DXI™	Main Tees	240	60	10	4.700	110.4	7.0	7,200	1,020
DXI24HRC	20	240	60	18	4,320	1,184	30	7,200	1,920
DXI26HRC	20	240	60	18	4,320	1,346	30	7,200	2,190
	Cross Tees								
DXIH120HRC	20	200	50	18	3,600	1,127	n/a	n/a	n/a
DXIH120/27HRC	20	200	50	18	3,600	1,127	n/a	n/a	n/a
XIH2412/20HRC	20	200	50	n/a	n/a	n/a	n/a	n/a	n/a
DXIH96/21HRC	20	160	40	18	2,880	908	30	4,800	1,470
DXI124HRC	60	60	12	96	5,760	1,574	60	3,600	960
DXI2124HRC	60	105	18	48	5,040	1,372	n/a	n/a	n/a
DXI224HRC	60	120	20	48	5,760	1,574	60	7,200	1,920
DXI2724HRC	60	120	20	30	4,050	1,080	n/a	n/a	n/a
DXI3024HRC	60	150	30	32	4,800	1,318	n/a	n/a	n/a
DXI4224HRC	60	210	50	28	5,880	1,606	n/a	n/a	n/a
DXI424HRC	60	240	60	28	6,720	1,830	30	7,200	1,920
DXI5424HRC	60	270	68	28	7,560	2,054	n/a	n/a	n/a
DXI524HRC	60	300	75	28	8,400	2,278	30	9,000	2,400
DXI5724HRC	60	300	75	30	8,550	2,280	n/a	n/a	n/a
DXI624HRC	20	120	30	18	2,160	608	30	3,600	960
DXI824HRC	20	160	40	18	2,880	800	30	4,775	1,350
USG ZXLA™	Main Tees								
ZXLA24	20	240	56	30	7,200	1,740	30	7,200	1,740
ZXLA26	20	240	74	30	7,200	2,040	30	7,200	2,040
	Cross Tees					·			
ZXLA224	60	120	28	60	7,200	1,800	60	7,200	1,800
ZXLA424	60	240	56	30	7,200	1,740	30	7,200	1,740
G AX™/AXCE™	Main Tees								
AX26	20	240	30	20	4,800	600	20	4,800	600
AXCE26	20	240	30	20	4,800	600	20	4,800	600
	Cross Tees								
AX224	60	120	12	120	14,400	1,440	120	14,400	1,440
AX424	60	240	23	60	14,400	1,440	60	14,400	1,440
AXCE224	60	120	12	120	14,400	1,440	120	14,400	1,440
		1	1					1	

				Westlake & Ca	rtersville		Stockton		
	Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
USG DXW™	Main Tees	'			'		'		'
DXW26	16	192	70	24	4,608	1,680	24	4,608	1,680
	Cross Tees	'	'					'	
DXW224	48	96	25	24	2,304	744	24	2,304	744
DXW424	48	192	61	48	9,216	2,928	48	9,216	2,916
							_	<u> </u>	
USG CE™	Main Tees								
DXCE 24	20	240	60	30	7,200	1,950	30	7,200	1,950
DXCE 26	20	240	73	30	7,200	2,190	30	7,200	2,190
DXWCE 26	16	192	12	24	4,608	1,680	24	4,608	1,680
	Cross Tees							_	
DXCE 224	60	120	19	60	7,200	1,980	60	7,200	1,980
DXCE 424	60	240	65	30	7,200	1,950	30	7,200	1,950
DXWCE 224	48	96	30	_	_	_	_	_	
DXWCE 424	48	192	59	_	_	_	_	_	_
USG DXSS™	Main Tees		1		1				
DXSS24	20	240	66	30	7,200	2,010	30	7,200	2,010
	Cross Tees								
DXSS224	60	120	24	60	7,200	1,920	60	7,200	1,920
DXSS424	60	240	48	30	7,200	1,950	30	7,200	1,950
ALL MOLDING									
M7	40	480	63	40	19,200	2,520	40	19,200	2,320
M7HRC	40	480	63	40	19,200	2,520	40	19,200	2,520
M70L	40	480	64	40	19,200	2,520	40	19,200	2,560
M720	20	240	31	40	19,200	2,520	40	19,200	2,320
M7A	40	480	26	40	19,200	1,040	40	19,200	1,040
M7Z		480	58	40	1		40		+
	40				19,200	2,520		19,200	2,600
M7-10	40	400	26	40	16,000	1,920	40	16,000	1,920
M9	40	480	55	40	19,200	2,200	40	19,200	2,000
M9HRC	40	480	55	42	20,160	1,302	42	20,160	1,302
M920	20	240	27	40	19,200	2,200	40	19,200	2,000
M9-10	40	400	23	40	16,000	1,840	40	16,000	1,840
M12	25	250	63	40	9,600	1,600	40	9,600	1,600
MC11A25	25	250	39	_			-	-	
M7CE	20	240	40	-	-		-	-	-
M7ACE	20	240	40	-	-		-	-	-
M20	25	250	25	_			_	-	
M20SM	25	250	80	-	-	_	_	-	
M20SM-2	20	200	80	_	_	_	_	_	_
OW MOLDING									
MS125	25	300	46	_	_	_	_	_	_
MS135	25	300	37	_	_		-	+	
MS144	25	300	48	_	_	_	_	_	
MS154	25	300	67	_	-	 	_		_
110107	20	500	1 5,						

				Westlake & Cartersville			Stockton		
	Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
SHADOW MOLDING CONT.		'							
MS174	25	300	43	-	_	_	_	_	_
MS174HRC	25	300	43	_	_	_	_	_	_
MS274	20	200	54	_	_	_	_	_	_
CHANNEL MOLDING									
US8	10	100	8	-	_	_	_	_	_
US12	50	500	44	-	-	_	_	_	_
US20	30	300	57	-	-	_	_	_	_
US28	30	300	63	_	_	_	_	-	-
US31	30	300	70	-	-	_	_	_	_
UA25	30	300	33	-	_	_	_	_	_
U-2-3/32	30	360	90	-	-	_	_	_	_
UA25CE	30	300	33	-	_	_	_	-	_
UA31	30	300	34	-	_	_	_	_	_
US28CE	30	300	63	-	_	_	_	_	_
TRANSITION MOLDING									
CPDWA15120	12	120	41	_	_	_	_	_	_
CPDWA9120	12	120	39	-	-	_	_	_	_
			'						
F-MOLDING									
MF8	10	100	28	_	_	_	_	_	_
MF10	10	100	29	-	_	_	_	_	_
USG DGLW DRYWALL SUSPENSION SYSTEM	Main Tees								
DGLW-26, 26E	16	192	68	24	4,608	1,512	24	4,608	1,512
	Cross Tees								
DGLW224	48	_	_	24	2,304	648	24	2,304	648
DGLW2624	48	_	_	24	2,472	720	24	2,472	720
DGLW424, 424E	48	_	_	24	4,608	1,344	24	4,608	1,320
DGLW50	48	_	_	24	4,800	1,368	24	4,800	1,368
DGLW624	24	_	_	-	-	-	-	_	_
	Wall Molding								
CGWM24	20	_	-	-	_	-	_	_	_
DGCM27	30	_	_	17	6,120	1,479	17	6,120	1,479
			•						

Item Number	Pattern	Page Number
US20	1-1/4" x 1/2" x 1" U Molding	218
US28	1-11/16" x 1/2" x 1" U Molding	179, 185, 187, 218
US28CE	1-11/16" x 1/2" x 1" U Molding with Gasket	179, 187, 218
US31	1-15/16" x 1/2" x 1" U Molding	218
UA25	1-9/16" x 1/2" x 1" Aluminum U Wall Molding	218
UA25CE	1-9/16" x 1/2" x 1" Aluminum U Wall Molding with Gasket	177, 218
M12	1" x 1- 1/2" Wall Molding	191, 218
MC11A25	1" x 1" Aluminum Cap Wall Molding	187, 218
M20SM	1" x 2" Heavy-Duty Wall Molding	183, 218
M20	1" x 2" Wall Molding	19, 183, 218
MS174HRC	1" x 3/8" x 3/8" x 9/16" Shadow Molding High Recycled Content Steel	202
MS125	15/16" x 1/4" x 1/4" x 9/16" Shadow Molding	218
MS135	15/16" x 5/16" x 5/16" x 9/16" Shadow Molding	218
U-2-3/32	2-3/32" x 7/8" x 1-1/8" Aluminum U Molding	218
M20SM-2	2" x 2" Heavy-Duty Wall Molding	183, 218
US12	3/4" x 1/2" x 1" U Molding	218
MS164	3/4" x 3/4" x 3/4" x 3/4" Shadow Molding	218
MS144	3/4" x 3/8" x 1/2" x 3/4" Shadow Molding	218
MS274	7/8" x 3/4" x 1/4" x 1-1/4" Seismic Shadow Molding	181, 183, 194, 218
MS154	7/8" x 3/4" x 3/4" x 7/8" Shadow Molding	218
MS174	7/8" x 3/8" x 3/8" x 9/16" Shadow Molding	181, 194, 197, 202, 218
M7A	7/8" x 7/8" Aluminum Wall Molding	177, 187, 218
M7ACE	7/8" x 7/8" Aluminum Wall Molding with Gasket	177, 187
M7Z	7/8" x 7/8" G60 Galvanized Steel Wall Molding	187, 207, 218
M7OL	7/8" x 7/8" Overlapping Wall Molding	218
M7	7/8" x 7/8" Wall Molding	19, 183, 191, 194,202, 207, 215, 218
M7-10	7/8" x 7/8" Wall Molding	218
M7HRC	7/8" x 7/8" Wall Molding High Recycled Content Steel	183, 202
M7CE	7/8" x 7/8" Wall Molding with Gasket	179, 218
M9	9/16" x 15/16" Wall Molding	181, 194, 197, 202, 218
M9-10	9/16" x 15/16" Wall Molding	218
M9HRC	9/16" x 15/16" Wall Molding High Recycled Content Steel	181, 202
MF8	F-Molding (for 1/2" panels)	218
MF10	F-Molding (for 5/8" panels)	218
131	USG "F" Fissured™ Basic Acoustical Panels	71, 211
132	USG "F" Fissured™ Basic Acoustical Panels	71
133	USG "F" Fissured™ Basic Acoustical Panels	71
135	USG "F" Fissured™ Basic Acoustical Panels	71
136	USG "F" Fissured™ Basic Acoustical Panels	71
101	USG "F" Fissured™ Basic Acoustical Tile	71
102	USG "F" Fissured™ Basic Acoustical Tile	71

Item Number	Pattern	Page Number
650	USG Aspen™ Basic Acoustical Panels	61, 71
651	USG Aspen™ Basic Acoustical Panels	61
652	USG Aspen™ Basic Illusion™ Two/24 Acoustical Panels	61
8742	USG Astro® Illusion™ Two/24 Acoustical Panels	63
8744	USG Astro® Illusion™ Two/24 Acoustical Panels	63
8122	USG Astro® Acoustical Panels	63
8221	USG Astro® Acoustical Panels	63
8223	USG Astro® Acoustical Panels	63
8227	USG Astro® Acoustical Panels	63
8241	USG Astro® Acoustical Panels	63
8243	USG Astro® Acoustical Panels	63
8247	USG Astro® Acoustical Panels	63
8322	USG Astro® Acoustical Panels	63
8722	USG Astro® Acoustical Panels	63
56091	USG Clean Room™ Class 100 (ISO 5) Acoustical Panels	65
56099	USG Clean Room™ Class 100 (ISO 5) Acoustical Panels	65
56060	USG Clean Room™ Class 10m-100M (ISO 7) Acoustical Panels	65
56090	USG Clean Room™ Class 10m-100M (ISO 7) Acoustical Panels	65
DXFF129	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	197
DXFF229	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	197
DXFF429	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	197
DXFF429N	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	197
DXFF429S	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	197
DXFF529N	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	197
DXFF2924	USG Donn® Brand 1/8" DXFF™ - 9/16" Main Tee	197
DXFF2930	USG Donn® Brand 1/8" DXFF™ - 9/16" Main Tee	197
DXFF2948	USG Donn® Brand 1/8" DXFF™ - 9/16" Main Tee	197
DXFFH2924	USG Donn® Brand 1/8" DXFF™ - 9/16" Main Tee	197
AXCE224	USG Donn® Brand AXCE™ - 15/16" Cross Tee	177
AXCE26	USG Donn® Brand AX™	177
AXCE424	USG Donn® Brand AX™	177
AX224	USG Donn® Brand AX™ - 15/16" Cross Tee	177
AX424	USG Donn® Brand AX™ - 15/16" Cross Tee	177
AX26	USG Donn® Brand AX™ - 15/16" Main Tee	177
DXLT222	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	181
DXLT424	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	181
DXT122	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	181
DXT222	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	165, 181
DXT222HRC	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	181
DXT422	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	181
DXT424	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	165, 181
DXT424HRC	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	181
DXT524	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	165, 181
DXT624	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	165, 181
DXT824	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	165, 181

Item Number	Pattern	Page Number
DXLT24	USG Donn® Brand Centricitee™ DXT™ - 9/16″ Main Tee	181
DXT24	USG Donn® Brand Centricitee™ DXT™ - 9/16″ Main Tee	165, 181
DXT24-10	USG Donn® Brand Centricitee™ DXT™ - 9/16″ Main Tee	181
DXT24HRC	USG Donn® Brand Centricitee™ DXT™ - 9/16″ Main Tee	181
DXT26	USG Donn® Brand Centricitee™ DXT™ - 9/16″ Main Tee	181
DXT26HRC	USG Donn® Brand Centricitee™ DXT™ - 9/16″ Main Tee	181
DX/DXL24	USG Donn® Brand DX® - 15/16 Main Tee	19, 165, 183, 185
DX2016	USG Donn® Brand DX® - 15/16" Cross Tee	183
DX3016	USG Donn® Brand DX® - 15/16" Cross Tee	165, 183
DX416	USG Donn® Brand DX® - 15/16" Cross Tee	183
DX422	USG Donn® Brand DX® - 15/16" Cross Tee	165, 183
DX422HRC	USG Donn® Brand DX® - 15/16" Cross Tee	183
DX624	USG Donn® Brand DX® - 15/16" Cross Tee	165, 183
DX824	USG Donn® Brand DX® - 15/16" Cross Tee	165, 183
DX/DXL24HRC	USG Donn® Brand DX® - HRC 15/16 Main Tee	183
DX/DXL216HRC	USG Donn® Brand DX®/DXL™ - 15/16" Cross Tee	183
DX/DXL424	USG Donn® Brand DX®/DXL™ - 15/16" Cross Tee	31, 183, 185
DX/DXL424HRC	USG Donn® Brand DX®/DXL™ - 15/16" Cross Tee	183
DX/DXL216	USG Donn® Brand DX®/DXL™ - 15/16" Main Tee	183
DX/DXL26	USG Donn® Brand DX®/DXL™ - 15/16" Main Tee	19, 31, 183, 185
DX/DXL26HRC	USG Donn® Brand DX®/DXL™ - 15/16" Main Tee	183
DX/DXL24	USG Donn® Brand DX®/DXL™ Concealed - 15/16″ Main Tee	19, 165, 183, 185
DX/DXL26	USG Donn® Brand DX®/DXL™ Concealed - 15/16″ Main Tee	19, 31, 183, 185
DXACE224	USG Donn® Brand DXACE™ - 15/16" Cross Tee	187
DXACE424	USG Donn® Brand DXACE™ - 15/16" Cross Tee	187
DXACE26	USG Donn® Brand DXACE™ - 15/16" Main Tee	187
DXLA216	USG Donn® Brand DXLA™ - 15/16" Cross Tee	187
DXLA424	USG Donn® Brand DXLA™ - 15/16" Cross Tee	187
DXLA26	USG Donn® Brand DXLA™ - 15/16" Main Tee	187
DXLA24	USG Donn® Brand DXLA™ - 15/16" Main Tee	187
DXSS224	USG Donn® Brand DXSS™ - 15/16" Cross Tee	189
DXSS424	USG Donn® Brand DXSS™ - 15/16" Cross Tee	189
DXSS24	USG Donn® Brand DXSS™ - 15/16" Main Tee	189
DXW224	USG Donn® Brand DXW™ - 1-1/2" Cross Tee	191
DXW424	USG Donn® Brand DXW™ - 1-1/2" Cross Tee	191
DXW26	USG Donn® Brand DXW™ - 1-1/2" Main Tee	191
DXFEV229	USG Donn® Brand Fineline® DXFEV™ - 9/16" Cross Tee	199
DXFEV429N	USG Donn® Brand Fineline® DXFEV™ - 9/16" Cross Tee	199
DXFEV629	USG Donn® Brand Fineline® DXFEV™ - 9/16" Cross Tee	199
DXFEV829	USG Donn® Brand Fineline® DXFEV™ - 9/16" Cross Tee	199
DXFEV2912	USG Donn® Brand Fineline® DXFEV™ - 9/16" Main Tee	199
DXFEV2924	USG Donn® Brand Fineline® DXFEV™ - 9/16" Main Tee	199
DXFEVH2912	USG Donn® Brand Fineline® DXFEV™ - 9/16" Main Tee	199
DXFEVH2924	USG Donn® Brand Fineline® DXFEV™ - 9/16" Main Tee	199

Item Number	Pattern	Page Number
DXF129	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF229	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF229HRC	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF30	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF429	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF429N	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF429NHRC	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF429S	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF529	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF529N	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF57	USG Donn® Brand Fineline® DXF™ - 9/16" Cross Tee	193
DXF2920	USG Donn® Brand Fineline® DXF™ - 9/16" Main Tee	193
DXF2924	USG Donn® Brand Fineline® DXF™ - 9/16" Main Tee	193
DXF2924-10	USG Donn® Brand Fineline® DXF™ - 9/16" Main Tee	193
DXF2924HRC	USG Donn® Brand Fineline® DXF™ - 9/16" Main Tee	193
DXF2930	USG Donn® Brand Fineline® DXF™ - 9/16" Main Tee	193
DXF2948	USG Donn® Brand Fineline® DXF™ - 9/16" Main Tee	193
DXFH2924	USG Donn® Brand Fineline® DXF™ - 9/16" Main Tee	193
DXLF229	USG Donn* Brand Fineline* DXLF™ - 9/16" Cross Tee	193
DXLF429N	USG Donn® Brand Fineline® DXLF™ - 9/16" Cross Tee	193
DXLF2924	USG Donn® Brand Fineline® DXLF™ - 9/16" Main Tee	193
DXI224HRC	USG Donn® Brand Identitee® DXI™ - 9/16" Cross Tee	201
DXI424HRC DXI524HRC	USG Donn® Brand Identitee® DXI™ - 9/16" Cross Tee USG Donn® Brand Identitee® DXI™ - 9/16" Cross Tee	201
DXI24HRC	USG Donn® Brand Identitee® DXI™ - 9/16" Main Tee	201
DXI26HRC	USG Donn® Brand Identitee® DXI™ - 9/16" Main Tee	201
CPDWA15120	USG Donn® Brand SL DX® Transition Molding	217
CPDWA9120	USG Donn* Brand SL DXT* Transition Molding	217
ZXLA424	USG Donn® Brand ZXLA™ - 15/16" Cross Tee	207
ZXLA224	USG Donn® Brand ZXLA™ - 15/16" Cross Tee	207
ZXLA24	USG Donn® Brand ZXLA™ - 15/16" Main Tee	207
ZXLA26	USG Donn® Brand ZXLA™ - 15/16" Main Tee	207
DGLW224	USG Drywall Suspension System - DGLW Cross Tee	211
DGCM27	USG Drywall Suspension System - DGLW Molding	211, 213
DGLW2624	USG Drywall Suspension System - DGLW Cross Tee	211
DGLW424, 424E	USG Drywall Suspension System - DGLW Cross Tee	211
DGLW50	USG Drywall Suspension System - DGLW Cross Tee	211
DGLW624	USG Drywall Suspension System - DGLW Cross Tee	211
78011	USG Eclipse™ Illusion™ Four/48 Acoustical Panels	69
78711	USG Eclipse™ Illusion™ Four/48 Acoustical Panels	69
78085	USG Eclipse™ Illusion™ Two/24 Acoustical Panels	69
78785	USG Eclipse™ Illusion™ Two/24 Acoustical Panels	69
72015	USG Eclipse™ Pedestals™ I Acoustical Panels	69
72715	USG Eclipse™ Pedestals™ I Acoustical Panels	69
72215	USG Eclipse™ Pedestals™ IV Acoustical Panels	69
72716	USG Eclipse™ Pedestals™ IV Acoustical Panels	69

Item Number	Pattern	Page Number
76575	USG Eclipse™ Acoustical Panels	67
76775	USG Eclipse™ Acoustical Panels	67
76779	USG Eclipse™ Acoustical Panels	67
76975	USG Eclipse™ Acoustical Panels	67
76979	USG Eclipse™ Acoustical Panels	67
78575	USG Eclipse™ Acoustical Panels	67
78775	USG Eclipse™ Acoustical Panels	67
78975	USG Eclipse™ Acoustical Panels	67
ME76775	USG Eclipse™ Acoustical Panels	67
ME76975	USG Eclipse™ Acoustical Panels	67
70073	USG Eclipse™ Acoustical Tile	67
76520	USG Eclipse™ High-NRC Acoustical Panels	67
76521	USG Eclipse™ High-NRC Acoustical Panels	67
76522	USG Eclipse™ High-NRC Acoustical Panels	67
76523	USG Eclipse™ High-NRC Acoustical Panels	67
76524	USG Eclipse™ High-NRC Acoustical Panels	67
76525	USG Eclipse™ High-NRC Acoustical Panels	67
76575HRC	USG Eclipse™ HRC Acoustical Panels	67
76775HRC	USG Eclipse™ HRC Acoustical Panels	67
76975HRC	USG Eclipse™ HRC Acoustical Panels	67
78575HRC	USG Eclipse™ HRC Acoustical Panels	67
78775HRC	USG Eclipse™ HRC Acoustical Panels	67
78975HRC	USG Eclipse™ HRC Acoustical Panels	67
506	USG Fissured™ Basic Acoustical Panels	73
507	USG Fissured™ Basic Acoustical Panels	73
560	USG Fissured™ Basic Acoustical Panels	73
562	USG Fissured™ Basic Acoustical Panels	73
585	USG Fissured™ Basic Acoustical Panels	73
586	USG Fissured™ Basic Acoustical Panels	73
414	USG Frost™ Acoustical Panels	77
418	USG Frost™ Acoustical Panels	77
419	USG Frost™ Acoustical Panels	77
415	USG Frost™ Basic Acoustical Panels	75
440	USG Frost™ Basic Acoustical Panels	75
450	USG Frost™ Basic Acoustical Panels	75
460	USG Frost™ Basic Acoustical Panels	75
490	USG Frost™ High-LR Acoustical Panels	77
491	USG Frost™ High-LR Acoustical Panels	77
484	USG Frost™ High-NRC/High-CAC Acoustical Panels	77
488	USG Frost™ High-NRC/High-CAC Acoustical Panels	77
489	USG Frost™ High-NRC/High-CAC Acoustical Panels	77
707	USG Glacier™ Basic Acoustical Panels	79
708	USG Glacier™ Basic Acoustical Panels	79
711	USG Glacier™ Basic Acoustical Panels	79
715	USG Glacier™ Basic Acoustical Panels	79
701	USG Glacier™ Basic Acoustical Tile	79

Item Number	Pattern	Page Number
97266	USG Halcyon™ Acoustical Panels	81, 147
97356	USG Halcyon™ Acoustical Panels	81
97357	USG Halcyon™ Acoustical Panels	82
97358	USG Halcyon™ Acoustical Panels	82
97359	USG Halcyon™ Acoustical Panels	83
97368	USG Halcyon™ Acoustical Panels	83
98336	USG Halcyon™ Acoustical Panels	83,149
99270	USG Halcyon™ Acoustical Panels	82,148
88221	USG Halcyon™ Acoustical Panels	81
88223	USG Halcyon™ Acoustical Panels	81
88224	USG Halcyon™ Acoustical Panels	81
88225	USG Halcyon™ Acoustical Panels	82
88226	USG Halcyon™ Acoustical Panels	82
88227	USG Halcyon™ Acoustical Panels	83
97221	USG Halcyon™ Acoustical Panels	81
97241	USG Halcyon™ Acoustical Panels	81
98221	USG Halcyon™ Acoustical Panels	81, 147
98223 98225	USG Halcyon™ Acoustical Panels	82,148
98241	USG Halcyon™ Acoustical Panels USG Halcyon™ Acoustical Panels	83, 149
98243	USG Halcyon™ Acoustical Panels	82,148
98245	USG Halcyon™ Acoustical Panels	83,149
98331	USG Halcyon™ Acoustical Panels	81, 147
98333	USG Halcyon™ Acoustical Panels	82,148
98335	USG Halcyon™ Acoustical Panels	83,149
99221	USG Halcyon™ Acoustical Panels	81
99223	USG Halcyon™ Acoustical Panels	82
99225	USG Halcyon™ Acoustical Panels	83
99241	USG Halcyon™ Acoustical Panels	81
99131	USG Halcyon™ Canopies	89
99132	USG Halcyon™ Canopies	89
99133	USG Halcyon™ Canopies	89
99134	USG Halcyon™ Canopies	89
99135	USG Halcyon™ Canopies	89
99136	USG Halcyon™ Canopies	89
99137	USG Halcyon™ Canopies	89
99138	USG Halcyon™ Canopies	89
99139	USG Halcyon™ Canopies	89
99140	USG Halcyon™ Canopies	89
99150 99151	USG Halcyon™ Canopies	89
99152	USG Halcyon™ Canopies USG Halcyon™ Canopies	89
99153	USG Halcyon™ Canopies	89
99154	USG Halcyon™ Canopies	89
99155	USG Halcyon™ Canopies	89
99156	USG Halcyon™ Canopies	89
	zzz Ganopies	

Item Number	Pattern	Page Number
99157	USG Halcyon™ Canopies	89
99158	USG Halcyon™ Canopies	89
99159	USG Halcyon™ Canopies	89
99160	USG Halcyon™ Canopies	89
HCA522	USG Halcyon™ Canopies	89
98217	USG Halcyon™ Healthcare Acoustical Panels	85
98218	USG Halcyon™ Healthcare Acoustical Panels	85
98232	USG Halcyon™ Healthcare Acoustical Panels	85
98233	USG Halcyon™ Healthcare Acoustical Panels	85
98234	USG Halcyon™ Healthcare Acoustical Panels	85
98235	USG Halcyon™ Healthcare Acoustical Panels	85
98236	USG Halcyon™ Healthcare Acoustical Panels	85
98237	USG Halcyon™ Healthcare Acoustical Panels	85
98238	USG Halcyon™ Healthcare Acoustical Panels	85
98239	USG Halcyon™ Healthcare Acoustical Panels	85
97363	USG Halcyon™ Large Size Acoustical Panels	87
97364	USG Halcyon™ Large Size Acoustical Panels	87
97365	USG Halcyon™ Large Size Acoustical Panels	87
97366	USG Halcyon™ Large Size Acoustical Panels	87
98441	USG Halcyon™ Large Size Acoustical Panels	87, 147
98443	USG Halcyon™ Large Size Acoustical Panels	87, 148
98445	USG Halcyon™ Large Size Acoustical Panels	87, 149
98481	USG Halcyon™ Large Size Acoustical Panels	87, 147
98131	USG Halcyon™ Logix™ Channel Panels	149
98191	USG Halcyon™ Logix™ Channel Panels	149
98216	USG Halcyon™ Logix™ Channel Panels	149
99197	USG Halcyon™ Logix™ Channel Panels	149
99263	USG Halcyon™ Logix™ Channel Panels	148
99265	USG Halcyon™ Logix™ Channel Panels	149
97227	USG Halcyon™ Logix™ Channel Panels	147
97228	USG Halcyon™ Logix™ Channel Panels	147
97402	USG Halcyon™ Logix™ Channel Panels	147
97403	USG Halcyon™ Logix™ Channel Panels	147
97404	USG Halcyon™ Logix™ Channel Panels	147
97405	USG Halcyon™ Logix™ Channel Panels	147
97406	USG Halcyon™ Logix™ Channel Panels	147
97430	USG Halcyon™ Logix™ Channel Panels	148
97431	USG Halcyon™ Logix™ Channel Panels	148
97432	USG Halcyon™ Logix™ Channel Panels	148
97433	USG Halcyon™ Logix™ Channel Panels	148
97434	USG Halcyon™ Logix™ Channel Panels	148
97435	USG Halcyon™ Logix™ Channel Panels	148
97460	USG Halcyon™ Logix™ Channel Panels	149
97461	USG Halcyon™ Logix™ Channel Panels	149
97462	USG Halcyon™ Logix™ Channel Panels	149
97463	USG Halcyon™ Logix™ Channel Panels	149

Item Number	Pattern	Page Number
97491	USG Halcyon™ Logix™ Channel Panels	147
97492	USG Halcyon™ Logix™ Channel Panels	147
97571	USG Halcyon™ Logix™ Channel Panels	148
97574	USG Halcyon™ Logix™ Channel Panels	149
97576	USG Halcyon™ Logix™ Channel Panels	149
98192	USG Halcyon™ Logix™ Channel Panels	149
98198	USG Halcyon™ Logix™ Channel Panels	149
98199	USG Halcyon™ Logix™ Channel Panels	149
99271	USG Halcyon™ Logix™ Channel Panels	148
99272	USG Halcyon™ Logix™ Channel Panels	148
96271	USG Halcyon™ Logix™ Field Panels	149
97266	USG Halcyon™ Logix™ Field Panels	81, 147
97277	USG Halcyon™ Logix™ Field Panels	147
97333	USG Halcyon™ Logix™ Field Panels	149
97335 97407	USG Halcyon™ Logix™ Field Panels USG Halcyon™ Logix™ Field Panels	149
97407	USG Halcyon™Logix™ Field Panels USG Halcyon™Logix™ Field Panels	147
97411	USG Halcyon™ Logix™ Field Panels	147
97412	USG Halcyon™ Logix™ Field Panels	147
97413	USG Halcyon™ Logix™ Field Panels	146
97414	USG Halcyon™ Logix™ Field Panels	147
97416	USG Halcyon™ Logix™ Field Panels	147
97417	USG Halcyon™ Logix™ Field Panels	147
97418	USG Halcyon™ Logix™ Field Panels	147
97419	USG Halcyon™ Logix™ Field Panels	147
97420	USG Halcyon™ Logix™ Field Panels	147
97422	USG Halcyon™ Logix™ Field Panels	147
97423	USG Halcyon™ Logix™ Field Panels	147
97424	USG Halcyon™ Logix™ Field Panels	147
97425	USG Halcyon™ Logix™ Field Panels	147
97426	USG Halcyon™ Logix™ Field Panels	147
97427	USG Halcyon™ Logix™ Field Panels	147
97428	USG Halcyon™ Logix™ Field Panels	147
97436	USG Halcyon™ Logix™ Field Panels	147
97437	USG Halcyon™ Logix™ Field Panels	147
97439	USG Halcyon™ Logix™ Field Panels	148
97440	USG Halcyon™ Logix™ Field Panels	148
97441	USG Halcyon™ Logix™ Field Panels	148
97443	USG Halcyon™ Logix™ Field Panels	148
97444	USG Halcyon™ Logix™ Field Panels	148
97446	USG Halcyon™ Logix™ Field Panels	148
97447	USG Halcyon™ Logix™ Field Panels	148
97448 97449	USG Halcyon™ Logix™ Field Panels	148
97449	USG Halcyon™ Logix™ Field Panels	148
97453	USG Halcyon™ Logix™ Field Panels USG Halcyon™ Logix™ Field Panels	148
J/433	030 Halcyon Logix" Field PatielS	140

Item Number	Pattern	Page Number
97454	USG Halcyon™ Logix™ Field Panels	148
97455	USG Halcyon™ Logix™ Field Panels	148
97456	USG Halcyon™ Logix™ Field Panels	148
97457	USG Halcyon™ Logix™ Field Panels	148
97458	USG Halcyon™ Logix™ Field Panels	148
97464	USG Halcyon™ Logix™ Field Panels	148
97466	USG Halcyon™ Logix™ Field Panels	148
97467	USG Halcyon™ Logix™ Field Panels	149
97468	USG Halcyon™ Logix™ Field Panels	149
97470	USG Halcyon™ Logix™ Field Panels	149
97473	USG Halcyon™ Logix™ Field Panels	149
97475	USG Halcyon™ Logix™ Field Panels	149
97476	USG Halcyon™ Logix™ Field Panels	149
97477	USG Halcyon™ Logix™ Field Panels	149
98194	USG Halcyon™ Logix™ Field Panels	148
98195	USG Halcyon™ Logix™ Field Panels	148
98196	USG Halcyon™ Logix™ Field Panels	149
98197	USG Halcyon™ Logix™ Field Panels	87, 149
98220	USG Halcyon™ Logix™ Field Panels	148
98223	USG Halcyon™ Logix™ Field Panels	82, 148
98225	USG Halcyon™ Logix™ Field Panels	83, 149
98243	USG Halcyon™ Logix™ Field Panels	82, 148
98245	USG Halcyon™ Logix™ Field Panels	83,149
98333	USG Halcyon™ Logix™ Field Panels	82, 148
98335	USG Halcyon™ Logix™ Field Panels	83,149
98336	USG Halcyon™ Logix™ Field Panels	83, 149
98337	USG Halcyon™ Logix™ Field Panels	148
98341	USG Halcyon™ Logix™ Field Panels	149
98343	USG Halcyon™ Logix™ Field Panels	149
98344	USG Halcyon™ Logix™ Field Panels	149
98348	USG Halcyon™ Logix™ Field Panels	87, 149
98359	USG Halcyon™ Logix™ Field Panels	149
98360	USG Halcyon™ Logix™ Field Panels	148
98440	USG Halcyon™ Logix™ Field Panels	149
98443	USG Halcyon™ Logix™ Field Panels	87, 148
98445	USG Halcyon™ Logix™ Field Panels	87, 149
98483	USG Halcyon™ Logix™ Field Panels	148
99213	USG Halcyon™ Logix™ Field Panels	149
99267	USG Halcyon™ Logix™ Field Panels	147
99268	USG Halcyon™ Logix™ Field Panels	87, 148
99269	USG Halcyon™ Logix™ Field Panels	87, 148
99270	USG Halcyon™ Logix™ Field Panels	82,148
97360	USG Halcyon™ Planks Acoustical Panels	87
97361	USG Halcyon™ Planks Acoustical Panels	87
97362	USG Halcyon™ Planks Acoustical Panels	87
97367	USG Halcyon™ Planks Acoustical Panels	87

Item Number	Pattern	Page Number
99282	USG Halcyon™ Planks Acoustical Panels	87
97262	USG Halcyon™ Planks Acoustical Panels	87
97263	USG Halcyon™ Planks Acoustical Panels	87
98197	USG Halcyon™ Planks Acoustical Panels	87, 149
98348	USG Halcyon™ Planks Acoustical Panels	87, 149
99268	USG Halcyon™ Planks Acoustical Panels	87, 148
99269	USG Halcyon™ Planks Acoustical Panels	87, 148
86785	USG Mars™ Acoustical Panels	91, 152
86785HRC	USG Mars™ Acoustical Panels	91, 152
86830	USG Mars™ Acoustical Panels	91, 153
86875	USG Mars™ Acoustical Panels	91, 152
86985	USG Mars™ Acoustical Panels	91, 153
88185	USG Mars™ Acoustical Panels	91, 151
88785	USG Mars™ Acoustical Panels	91, 152
88985	USG Mars™ Acoustical Panels	91, 153
86185	USG Mars™ Acoustical Panels/USG Mars™ Logix™ Field Panels	91, 151
86185CR	USG Mars™ Clean Room™ ISO 5 (Class 100) Acoustical Panels	91
86169	USG Mars™ Healthcare Acoustical Panels 75/35	93
86684	USG Mars™ Healthcare Acoustical Panels 75/35	93
86984	USG Mars™ Healthcare Acoustical Panels 75/35	93
88189	USG Mars™ Healthcare Acoustical Panels 75/35	93
88683	USG Mars™ Healthcare Acoustical Panels 75/35	93
88983	USG Mars™ Healthcare Acoustical Panels 75/35	93
86169AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
86684AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
86984AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
88189AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
88683AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
88983AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
86270	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
86272	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
86273	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
88271	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
88273	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
86152	USG Mars™ Healthcare High-NRC Acoustical Panels 80/35	93
86340	USG Mars™ Healthcare High-NRC Acoustical Panels 80/35	93
86470	USG Mars™ Healthcare High-NRC Acoustical Panels 80/35	93

Item Number	Pattern	Page Number
86750	USG Mars™ Healthcare High-NRC Acoustical Panels 80/35	93
86256	USG Mars™ Healthcare High-NRC Acoustical Panels 85/35	93
86257	USG Mars™ Healthcare High-NRC Acoustical Panels 85/35	93
86258	USG Mars™ Healthcare High-NRC Acoustical Panels 85/35	93
88256	USG Mars™ Healthcare High-NRC Acoustical Panels 85/35	93
86186	USG Mars™ High-CAC Acoustical Panels 60/40	98
86786	USG Mars™ High-CAC Acoustical Panels 60/40	98
86986	USG Mars™ High-CAC Acoustical Panels 60/40	98
87187	USG Mars™ High-CAC Acoustical Panels 60/40	98
88786	USG Mars™ High-CAC Acoustical Panels 60/40	98
88986	USG Mars™ High-CAC Acoustical Panels 60/40	98
86426	USG Mars™ High-NRC Acoustical Panels 80/35	98,154
86429	USG Mars™ High-NRC Acoustical Panels 80/35	98,154
86466	USG Mars™ High-NRC Acoustical Panels 80/35	98, 155
86497	USG Mars™ High-NRC Acoustical Panels 80/35	98,156
86100	USG Mars™ High-NRC Acoustical Panels 80/35	98,154
86300	USG Mars™ High-NRC Acoustical Panels 80/35	98,154
86400	USG Mars™ High-NRC Acoustical Panels 80/35	98,156
86500	USG Mars™ High-NRC Acoustical Panels 80/35	98, 155
87100	USG Mars™ High-NRC Acoustical Panels 80/35	98,156
87200	USG Mars™ High-NRC Acoustical Panels 80/35	98, 155
89500	USG Mars™ High-NRC Acoustical Panels 80/35	98,156
89600	USG Mars™ High-NRC Acoustical Panels 80/35	98,155
80113	USG Mars™ High-NRC Acoustical Panels 85/35	97, 157
80139	USG Mars™ High-NRC Acoustical Panels 85/35	97, 158
80165	USG Mars™ High-NRC Acoustical Panels 85/35	97, 159
89140	USG Mars™ High-NRC Acoustical Panels 85/35	97, 157
89141	USG Mars™ High-NRC Acoustical Panels 85/35	97, 158
89142	USG Mars™ High-NRC Acoustical Panels 85/35	97, 159
88134	USG Mars™ High-NRC Acoustical Panels 85/35	97, 157
88135	USG Mars™ High-NRC Acoustical Panels 85/35	97, 158
88136	USG Mars™ High-NRC Acoustical Panels 85/35	97, 159
89134	USG Mars™ High-NRC Acoustical Panels 85/35	97, 157
89135	USG Mars™ High-NRC Acoustical Panels 85/35	97, 158
89136	USG Mars™ High-NRC Acoustical Panels 85/35	97, 159
80213	USG Mars™ High-NRC Acoustical Panels 90/30	97, 160
80239	USG Mars™ High-NRC Acoustical Panels 90/30	97, 161
80265	USG Mars™ High-NRC Acoustical Panels 90/30	97, 162
89143	USG Mars™ High-NRC Acoustical Panels 90/30	97, 160
89144	USG Mars™ High-NRC Acoustical Panels 90/30	97, 161
89145	USG Mars™ High-NRC Acoustical Panels 90/30	97, 162
88137	USG Mars™ High-NRC Acoustical Panels 90/30	97, 160
88138	USG Mars™ High-NRC Acoustical Panels 90/30	97, 161

Item Number	Pattern	Page Number
88139	USG Mars™ High-NRC Acoustical Panels 90/30	97,162
89137	USG Mars™ High-NRC Acoustical Panels 90/30	97, 160
89138	USG Mars™ High-NRC Acoustical Panels 90/30	97, 161
89139	USG Mars™ High-NRC Acoustical Panels 90/30	97, 162
86145	USG Mars™ High-NRC Logix™ Channel Panels 80/35	154
86331	USG Mars™ High-NRC Logix™ Channel Panels 80/35	156
86333	USG Mars™ High-NRC Logix™ Channel Panels 80/35	156
86403	USG Mars™ High-NRC Logix™ Channel Panels 80/35	154
86404	USG Mars™ High-NRC Logix™ Channel Panels 80/35	154
86405	USG Mars™ High-NRC Logix™ Channel Panels 80/35	154
86406	USG Mars™ High-NRC Logix™ Channel Panels 80/35	154
86407	USG Mars™ High-NRC Logix™ Channel Panels 80/35	154
86408	USG Mars™ High-NRC Logix™ Channel Panels 80/35	154
86409	USG Mars™ High-NRC Logix™ Channel Panels 80/35	154
86440	USG Mars™ High-NRC Logix™ Channel Panels 80/35	155
86441	USG Mars™ High-NRC Logix™ Channel Panels 80/35	155
86442	USG Mars™ High-NRC Logix™ Channel Panels 80/35	155
86443	USG Mars™ High-NRC Logix™ Channel Panels 80/35	155
86444	USG Mars™ High-NRC Logix™ Channel Panels 80/35	155
86445	USG Mars™ High-NRC Logix™ Channel Panels 80/35	155
86446	USG Mars™ High-NRC Logix™ Channel Panels 80/35	155
86467	USG Mars™ High-NRC Logix™ Channel Panels 80/35	155
86468	USG Mars™ High-NRC Logix™ Channel Panels 80/35	155
86473	USG Mars™ High-NRC Logix™ Channel Panels 80/35	156
86474	USG Mars™ High-NRC Logix™ Channel Panels 80/35	156
86475	USG Mars™ High-NRC Logix™ Channel Panels 80/35	156
86476	USG Mars™ High-NRC Logix™ Channel Panels 80/35	156
86477	USG Mars™ High-NRC Logix™ Channel Panels 80/35	156
86478	USG Mars™ High-NRC Logix™ Channel Panels 80/35	156
86505	USG Mars™ High-NRC Logix™ Channel Panels 80/35	156
80116	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80117	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80118	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80119	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80120	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80121	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80122	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80123	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80124	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80125	USG Mars™ High-NRC Logix™ Channel Panels 85/35	156
80142	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80143	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80144	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80145	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80146	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80147	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158

Item Number	Pattern	Page Number
80148	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80149	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80150	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80151	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80168	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
80169	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
80170	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
80171	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
80172	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
80173	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
80174	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
80175	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
80176	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
80177	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
86663	USG Mars™ High-NRC Logix™ Channel Panels 85/35	159
86664	USG Mars™ High-NRC Logix™ Channel Panels 85/35	158
86665	USG Mars™ High-NRC Logix™ Channel Panels 85/35	157
80216	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80217	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80218	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80219	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80220	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80221	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80222	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80223	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80224	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80225	USG Mars™ High-NRC Logix™ Channel Panels 90/30	160
80242	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80243	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80244	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80245	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80246	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80247	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80248	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80249	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80250	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80251	USG Mars™ High-NRC Logix™ Channel Panels 90/30	161
80268	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162
80269	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162
80270	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162
80271	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162
80272	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162
80273	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162
80274	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162
80275	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162
80276	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162

Item Number	Pattern	Page Number
80277	USG Mars™ High-NRC Logix™ Channel Panels 90/30	162
86100	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,154
86400	USG Mars™ High-NRC Logix™ Field Panels 80/35	98, 156
86410	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86411	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86414	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86415	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86416	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86417	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86419	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86420	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86421	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86422	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86423	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86424	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86426	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,154
86427	USG Mars™ High-NRC Logix™ Field Panels 80/35	154
86428 86429	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,154
86447	USG Mars™ High-NRC Logix™ Field Panels 80/35 USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86448	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86449	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86451	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86452	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86453	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86454	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86456	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86457	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86458	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86459	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86460	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86461	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86464	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86465	USG Mars™ High-NRC Logix™ Field Panels 80/35	155
86466	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,155
86479	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86480	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86481 86483	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86484	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86485	USG Mars™ High-NRC Logix™ Field Panels 80/35 USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86486	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86488	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86489	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86490	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86491	USG Mars™ High-NRC Logix™ Field Panels 80/35	156

Item Number	Pattern	Page Number
86492	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86493	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86496	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
86497	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,156
86500	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,155
86501	USG Mars™ High-NRC Logix™ Field Panels 80/35	156
87100	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,156
87200	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,155
89500	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,156
89600	USG Mars™ High-NRC Logix™ Field Panels 80/35	98,155
89660	USG Mars™ High-NRC Logix™ Field Panels 80/35	102, 155
89670	USG Mars™ High-NRC Logix™ Field Panels 80/35	102, 156
80100	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80101	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80102	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80103	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80104	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80105	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80106	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80107	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80108	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80109	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80110	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80111	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80112	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80113	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 157
80114	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80115	USG Mars™ High-NRC Logix™ Field Panels 85/35	157
80126	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80127	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80128	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80129	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80130	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80131	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80132	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80133 80134	USG Mars™ High-NRC Logix™ Field Panels 85/35 USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80135		
80136	USG Mars™ High-NRC Logix™ Field Panels 85/35 USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80137	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80138	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80139	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 158
80140	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80141	USG Mars™ High-NRC Logix™ Field Panels 85/35	158
80152	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80153	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
	030 mais might race Logix Friend Patriets 03/33	133

Item Number	Pattern	Page Number
80154	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80155	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80156	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80157	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80158	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80159	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80160	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80161	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80162	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80163	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80164	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80165	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 159
80166	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
80167	USG Mars™ High-NRC Logix™ Field Panels 85/35	159
88134	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 157
88135	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 158
89134	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 157
89135	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 158
89140	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 157
89141	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 158
89142	USG Mars™ High-NRC Logix™ Field Panels 85/35	97, 159
89663	USG Mars™ High-NRC Logix™ Field Panels 85/35	101, 157
89665	USG Mars™ High-NRC Logix™ Field Panels 85/35	102,158
89668 80200	USG Mars™ High-NRC Logix™ Field Panels 85/35 USG Mars™ High-NRC Logix™ Field Panels 90/30	102,159
80201	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80202	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80203	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80204	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80205	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80206	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80207	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80208	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80209	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80210	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80211	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80212	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80213	USG Mars™ High-NRC Logix™ Field Panels 90/30	97, 160
80214	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80215	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
80226	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80227	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80228	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80229	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80230	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80231	USG Mars™ High-NRC Logix™ Field Panels 90/30	161

Item Number	Pattern	Page Number
80232	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80233	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80234	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80235	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80236	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80237	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80238	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80239	USG Mars™ High-NRC Logix™ Field Panels 90/30	97, 161
80240	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80241	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
80252	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80253	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80254	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80255	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80256	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80257	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80258	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80259	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80260	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80261	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80262	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80263	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80264	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
80265	USG Mars™ High-NRC Logix™ Field Panels 90/30	97, 162
80267	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
86137	USG Mars™ High-NRC Logix™ Field Panels 90/30	160
86138	USG Mars™ High-NRC Logix™ Field Panels 90/30	161
86139	USG Mars™ High-NRC Logix™ Field Panels 90/30	162
88137	USG Mars™ High-NRC Logix™ Field Panels 90/30	97, 160
89143	USG Mars™ High-NRC Logix™ Field Panels 90/30	97, 160
89144	USG Mars™ High-NRC Logix™ Field Panels 90/30	97, 161
89145 ————————————————————————————————————	USG Mars™ High-NRC Logix™ Field Panels 90/30	97, 162
89674	USG Mars™ High-NRC Logix™ Field Panels 90/30	101, 160
89675	USG Mars™ High-NRC Logix™ Field Panels 90/30	102,161
89678	USG Mars™ High-NRC Logix™ Field Panels 90/30	102,162
89662	USG Mars™ High-NRC Planks	101
89663	USG Mars™ High-NRC Planks	101, 157
89664	USG Mars™ High-NRC Planks	102
89665	USG Mars™ High-NRC Planks	102,158
89667	USG Mars™ High-NRC Planks	102
89668	USG Mars™ High-NRC Planks	102,159
89673	USG Mars™ High-NRC Planks	101
89674	USG Mars™ High-NRC Planks	101, 160
89675	USG Mars™ High-NRC Planks	102,161
89676	USG Mars™ High-NRC Planks	102
89677	USG Mars™ High-NRC Planks	102

Item Number	Pattern	Page Number
89678	USG Mars™ High-NRC Planks	102,162
86350	USG Mars™ High-NRC Planks	101
86360	USG Mars™ High-NRC Planks	101, 154
89550	USG Mars™ High-NRC Planks	102
89650	USG Mars™ High-NRC Planks	102
89660	USG Mars™ High-NRC Planks	102,155
89670	USG Mars™ High-NRC Planks	102,156
86185HRC	USG Mars™ HRC Acoustical Panels	91
86985HRC	USG Mars™ HRC Acoustical Panels	91
88185HRC	USG Mars™ HRC Acoustical Panels	91
88785HRC	USG Mars™ HRC Acoustical Panels	91
88985HRC	USG Mars™ HRC Acoustical Panels	91
86166HRC	USG Mars™ HRC Planks	101
88996HRC	USG Mars™ HRC Planks	101
86134	USG Mars™ Logix™ Channel Panels 75/35	151
86136 86242	USG Mars™ Logix™ Channel Panels 75/35 USG Mars™ Logix™ Channel Panels 75/35	153
86289	USG Mars™ Logix™ Channel Panels 75/35	151
86321	USG Mars™ Logix™ Channel Panels 75/35	153
86325	USG Mars™ Logix™ Channel Panels 75/35	151
86507	USG Mars™ Logix™ Channel Panels 75/35	151
86514	USG Mars™ Logix™ Channel Panels 75/35	151
86515	USG Mars™ Logix™ Channel Panels 75/35	151
86516	USG Mars™ Logix™ Channel Panels 75/35	151
86517	USG Mars™ Logix™ Channel Panels 75/35	151
86518	USG Mars™ Logix™ Channel Panels 75/35	151
86537	USG Mars™ Logix™ Channel Panels 75/35	151
86538	USG Mars™ Logix™ Channel Panels 75/35	151
86540	USG Mars™ Logix™ Channel Panels 75/35	152
86541	USG Mars™ Logix™ Channel Panels 75/35	152
86542	USG Mars™ Logix™ Channel Panels 75/35	152
86543	USG Mars™ Logix™ Channel Panels 75/35	152
86544 86545	USG Mars™ Logix™ Channel Panels 75/35 USG Mars™ Logix™ Channel Panels 75/35	152
86546	USG Mars™ Logix™ Channel Panels 75/35	152
86565	USG Mars™ Logix™ Channel Panels 75/35	152
86566	USG Mars™ Logix™ Channel Panels 75/35	152
86567	USG Mars™ Logix™ Channel Panels 75/35	153
86568	USG Mars™ Logix™ Channel Panels 75/35	153
86569	USG Mars™ Logix™ Channel Panels 75/35	153
86570	USG Mars™ Logix™ Channel Panels 75/35	153
86584	USG Mars™ Logix™ Channel Panels 75/35	153
86850	USG Mars™ Logix™ Channel Panels 75/35	153
88885	USG Mars™ Logix™ Channel Panels 75/35	153
88887	USG Mars™ Logix™ Channel Panels 75/35	153
86160	USG Mars™ Logix™ Field Panels 75/35	151

Item Number	Pattern	Page Number
86164	USG Mars™ Logix™ Field Panels 75/35	153
86166	USG Mars™ Logix™ Field Panels 75/35	101, 152
86185	USG Mars™ Logix™ Field Panels 75/35	91, 151
86223	USG Mars™ Logix™ Field Panels 75/35	101, 151
86267	USG Mars™ Logix™ Field Panels 75/35	153
86503	USG Mars™ Logix™ Field Panels 75/35	151
86519	USG Mars™ Logix™ Field Panels 75/35	151
86520	USG Mars™ Logix™ Field Panels 75/35	151
86522	USG Mars™ Logix™ Field Panels 75/35	151
86523	USG Mars™ Logix™ Field Panels 75/35	151
86524	USG Mars™ Logix™ Field Panels 75/35	151
86525	USG Mars™ Logix™ Field Panels 75/35	151
86527	USG Mars™ Logix™ Field Panels 75/35	151
86528	USG Mars™ Logix™ Field Panels 75/35	151
86530	USG Mars™ Logix™ Field Panels 75/35	151
86531	USG Mars™ Logix™ Field Panels 75/35	151
86532	USG Mars™ Logix™ Field Panels 75/35	151
86533	USG Mars™ Logix™ Field Panels 75/35	151
86535	USG Mars™ Logix™ Field Panels 75/35	151
86536	USG Mars™ Logix™ Field Panels 75/35	151
86547	USG Mars™ Logix™ Field Panels 75/35	152
86548	USG Mars™ Logix™ Field Panels 75/35	152
86550	USG Mars™ Logix™ Field Panels 75/35	152
86551	USG Mars™ Logix™ Field Panels 75/35	152
86552	USG Mars™ Logix™ Field Panels 75/35	152
86553	USG Mars™ Logix™ Field Panels 75/35	152
86555	USG Mars™ Logix™ Field Panels 75/35	152
86556	USG Mars™ Logix™ Field Panels 75/35	152
86557	USG Mars™ Logix™ Field Panels 75/35	152
86558	USG Mars™ Logix™ Field Panels 75/35	152
86559	USG Mars™ Logix™ Field Panels 75/35	152
86560	USG Mars™ Logix™ Field Panels 75/35	152
86563	USG Mars™ Logix™ Field Panels 75/35	152
86564	USG Mars™ Logix™ Field Panels 75/35	152
86571	USG Mars™ Logix™ Field Panels 75/35	153
86573	USG Mars™ Logix™ Field Panels 75/35	153
86574	USG Mars™ Logix™ Field Panels 75/35	153
86575	USG Mars™ Logix™ Field Panels 75/35	153
86577	USG Mars™ Logix™ Field Panels 75/35	153
86578	USG Mars™ Logix™ Field Panels 75/35	153
86579	USG Mars™ Logix™ Field Panels 75/35	153
86580	USG Mars™ Logix™ Field Panels 75/35	153
86583	USG Mars™ Logix™ Field Panels 75/35	153
86785	USG Mars™ Logix™ Field Panels 75/35	91, 152
86815	USG Mars™ Logiv™ Field Panels 75/35	151
86830	USG Mars™ Logix™ Field Panels 75/35	91, 153

Item Number	Pattern	Page Number
86831	USG Mars™ Logix™ Field Panels 75/35	153
86834	USG Mars™ Logix™ Field Panels 75/35	153
86835	USG Mars™ Logix™ Field Panels 75/35	153
86875	USG Mars™ Logix™ Field Panels 75/35	91, 152
86905	USG Mars™ Logix™ Field Panels 75/35	152
86985	USG Mars™ Logix™ Field Panels 75/35	91, 153
88185	USG Mars™ Logix™ Field Panels 75/35	91, 151
88686	USG Mars™ Logix™ Field Panels 75/35	152
88785	USG Mars™ Logix™ Field Panels 75/35	91, 152
88840	USG Mars™ Logix™ Field Panels 75/35	153
88845	USG Mars™ Logix™ Field Panels 75/35	153
88985	USG Mars™ Logix™ Field Panels 75/35	91, 153
88996	USG Mars™ Logix™ Field Panels 75/35	101, 153
86161	USG Mars™ Planks	101
86166	USG Mars™ Planks	101, 152
86221	USG Mars™ Planks	101
86223	USG Mars™ Planks	101, 151
88984	USG Mars™ Planks	101
88996	USG Mars™ Planks	101, 153
76505	USG Millennia® Acoustical Panels	105
76705	USG Millennia® Acoustical Panels	105
76901	USG Millennia® Acoustical Panels	105
76907	USG Millennia® Acoustical Panels	105
78505	USG Millennia® Acoustical Panels	105
78705	USG Millennia® Acoustical Panels	105
70003 76201	USG Millennia® Acoustical Tile	105
	USG Millennia® High-NRC Acoustical Panels	105
76302 78080	USG Millennia® High-NRC Acoustical Panels	105
78780	USG Millennia® Illusion™ Two/24 Acoustical Panels USG Millennia® Illusion™ Two/24 Acoustical Panels	105
4211	USG Olympia™ Micro™ Acoustical Panels	107
4221	USG Olympia™ Micro™ Acoustical Panels	107
4231	USG Olympia™ Micro™ Acoustical Panels	107
4411	USG Olympia™ Micro™ Acoustical Panels	107
4421	USG Olympia™ Micro™ Acoustical Panels	107
4431	USG Olympia™ Micro™ Acoustical Panels	107
4750	USG Olympia™ Micro™ Acoustical Panels	107
4210	USG Olympia™ Micro™ Acoustical Panels Unperforated	107
4913	USG Olympia™ Micro™ Acoustical Panels Unperforated	107
4221HRC	USG Olympia™ Micro™ HRC Acoustical Panels	107
4231HRC	USG Olympia™ Micro™ HRC Acoustical Panels	107
4411HRC	USG Olympia™ Micro™ HRC Acoustical Panels	107
4421HRC	USG Olympia™ Micro™ HRC Acoustical Panels	107
4751	USG Olympia™ Micro™ HRC Acoustical Panels	107
4752	USG Olympia™ Micro™ HRC Acoustical Panels	107

Item Number	Pattern	Page Number
4753	USG Olympia™ Micro™ HRC Acoustical Panels	107
4754	USG Olympia™ Micro™ HRC Acoustical Panels	107
4755	USG Olympia™ Micro™ HRC Acoustical Panels	107
4742	USG Olympia™ Micro™ Illusion™ Two/24 Acoustical Panels	107
4744	USG Olympia™ Micro™ Illusion™ Two/24 Acoustical Panels	107
62156	USG Orion™ 60 Acoustical Panels	109
62157	USG Orion™ 60 Acoustical Panels	109
62150	USG Orion™ 75 Acoustical Panels	109
62151	USG Orion™ 75 Acoustical Panels	109
62152	USG Orion™ 75 Acoustical Panels	109
62153	USG Orion™ 75 Acoustical Panels	109
62154	USG Orion™ 75 Acoustical Panels	109
62155	USG Orion™ 75 Acoustical Panels	109
62162	USG Orion™ 85 Acoustical Panels	109
62163	USG Orion™ 85 Acoustical Panels	109
62164	USG Orion™ 85 Acoustical Panels	109
62165	USG Orion™ 85 Acoustical Panels	109
62166	USG Orion™ 85 Acoustical Panels	109
62167	USG Orion™ 85 Acoustical Panels	109
4800	USG Pebbled™ Acoustical Panels	111
4801	USG Pebbled™ Acoustical Panels	111
4805	USG Pebbled™ Acoustical Panels	111
4867	USG Pebbled™ Acoustical Panels	111
7054G	USG Premier Hi-Lite™ Kapok Acoustical Panels	113
7055G	USG Premier Hi-Lite™ Kapok Acoustical Panels	113
7056G	USG Premier Hi-Lite™ Kapok Acoustical Panels	113
7057G	USG Premier Hi-Lite™ Kapok Acoustical Panels	113
7050G	USG Premier Hi-Lite™ Twill Acoustical Panels	113
7051G	USG Premier Hi-Lite™ Twill Acoustical Panels	113
7052G	USG Premier Hi-Lite™ Twill Acoustical Panels	113
7053G	USG Premier Hi-Lite™ Twill Acoustical Panels	113
7000G	USG Premier Nubby™ Acoustical Panels	115
7002G	USG Premier Nubby™ Acoustical Panels	115
7003G	USG Premier Nubby™ Acoustical Panels	115
7012G	USG Premier Nubby™ Acoustical Panels	115
7013G	USG Premier Nubby™ Acoustical Panels	115
2210	USG Radar™ Acoustical Panels	121
2215	USG Radar™ Acoustical Panels	121
2220	USG Radar™ Acoustical Panels	121
2225	USG Radar™ Acoustical Panels	121
2230	USG Radar™ Acoustical Panels	121
2235	USG Radar™ Acoustical Panels	121
2410	USG Radar™ Acoustical Panels	121
2410P	USG Radar™ Acoustical Panels	121
2415	USG Radar™ Acoustical Panels	121

Item Number	Pattern	Page Number
ME2220	USG Radar™ Acoustical Panels	121
ME2410	USG Radar™ Acoustical Panels	121
2570	USG Radar™ Acoustical Tile	121
ME2617	USG Radar™ Basic Acoustical Panels	117
2110	USG Radar™ Basic Acoustical Panels	117
2115	USG Radar™ Basic Acoustical Panels	117
2120	USG Radar™ Basic Acoustical Panels	117
2125	USG Radar™ Basic Acoustical Panels	117
2130	USG Radar™ Basic Acoustical Panels	117
2310	USG Radar™ Basic Acoustical Panels	117
2315	USG Radar™ Basic Acoustical Panels	117
2320	USG Radar™ Basic Acoustical Panels	117
2617	USG Radar™ Basic Acoustical Panels	117
2618	USG Radar™ Basic Acoustical Panels	117
2619	USG Radar™ Basic Acoustical Panels	117
2627	USG Radar™ Basic Acoustical Panels	117
2742	USG Radar™ Basic Acoustical Panels	117
2990	USG Radar™ Basic Acoustical Panels	117
ME2110	USG Radar™ Basic Acoustical Panels	117
ME2120	USG Radar™ Basic Acoustical Panels	117
ME2310	USG Radar™ Basic Acoustical Panels	117
56644	USG Radar™ Ceramic Acoustical Panels	119
56645	USG Radar™ Ceramic Acoustical Panels	119
2207	USG Radar™ Education High-Durability Acoustical Panels	121, 127
2227	USG Radar™ Education High-Durability Acoustical Panels	121, 127
2407	USG Radar™ Education High-Durability Acoustical Panels	121, 127
22111	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22121	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22122	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22127	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22350	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22370	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22421	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22360	USG Radar™ Education High-NRC/High-CAC Acoustical Panels	123, 127
22441	USG Radar™ Education High-NRC/High-CAC Acoustical Panels	123, 127
22523	USG Radar™ Education High-NRC/High-CAC Acoustical Panels	123, 127
22541	USG Radar™ Education High-NRC/High-CAC Acoustical Panels	123, 127
22310	USG Radar™ High-CAC Acoustical Panels	123
2207	USG Radar™ High-Durability Acoustical Panels	121, 127
2227	USG Radar™ High-Durability Acoustical Panels	121, 127
2407	USG Radar™ High-Durability Acoustical Panels	121, 127
2420	USG Radar™ High-Durability Acoustical Panels	121

Item Number	Pattern	Page Number
2425	USG Radar™ High-Durability Acoustical Panels	121
22111	USG Radar™ High-NRC Acoustical Panels	123, 127
22121	USG Radar™ High-NRC Acoustical Panels	123, 127
22122	USG Radar™ High-NRC Acoustical Panels	123, 127
22127	USG Radar™ High-NRC Acoustical Panels	123, 127
22311	USG Radar™ High-NRC Acoustical Panels	123
22350	USG Radar™ High-NRC Acoustical Panels	123, 127
22370	USG Radar™ High-NRC Acoustical Panels	123, 127
22421	USG Radar™ High-NRC Acoustical Panels	123, 127
22360	USG Radar™ High-NRC/High-CAC Acoustical Panels	123, 127
22441	USG Radar™ High-NRC/High-CAC Acoustical Panels	123, 127
22521	USG Radar™ High-NRC/High-CAC Acoustical Panels	123
22523	USG Radar™ High-NRC/High-CAC Acoustical Panels	123, 127
22527	USG Radar™ High-NRC/High-CAC Acoustical Panels	123
22541	USG Radar™ High-NRC/High-CAC Acoustical Panels	123, 127
2862	USG Radar™ Illusion™ 32/6 Acoustical Panels	125
2864	USG Radar™ Illusion™ 32/6 Acoustical Panels	125
2852	USG Radar™ Illusion™ Eight/12 Acoustical Panels	125
2854	USG Radar™ Illusion™ Eight/12 Acoustical Panels	125
2882	USG Radar™ Illusion™ Four/48 Acoustical Panels	125
2884	USG Radar™ Illusion™ Four/48 Acoustical Panels	125
2842	USG Radar™ Illusion™ Two/24 Acoustical Panels	125
2844	USG Radar™ Illusion™ Two/24 Acoustical Panels	125
2846	USG Radar™ Illusion™ Two/24 Acoustical Panels	125
22320	USG Radar™ Open Plan Acoustical Panels	129
22325	USG Radar™ Open Plan Acoustical Panels	129
22330	USG Radar™ Open Plan Acoustical Panels	129
22335	USG Radar™ Open Plan Acoustical Panels	129
22340	USG Radar™ Open Plan Acoustical Panels	129
22345	USG Radar™ Open Plan Acoustical Panels	129
55483	USG Rock Face® Acoustical Panels	137
56335	USG Rock Face® Acoustical Panels	137
56380	USG Rock Face® Acoustical Panels	137
808	USG Sandrift™ Acoustical Panels	139
809	USG Sandrift™ Acoustical Panels	139
815	USG Sandrift™ Basic Acoustical Panels	139
3260	USG Sheetrock® Brand Lay-In Gypsum Ceiling Panel	141
3270	USG Sheetrock® Brand Lay-In Gypsum Ceiling Panel	141
3200	USG Sheetrock® Brand Lay-In Gypsum Ceiling Panel Clean Room™	141
5893	USG Touchstone™ Acoustical Panels	143
5894	USG Touchstone™ Acoustical Panels	143
5896	USG Touchstone™ Acoustical Panels	
5899	USG Touchstone™ Acoustical Panels	143

HISTORY OF INNOVATION

The innovations brought to market by USG since 1902 have helped millions of people realize the American Dream.

From USG Sheetrock® Brand
Gypsum Panels and USG Donn®
Brand Ceiling Grid Systems
in the 1900s to more recent
USG Logix™ Integrated Ceiling
Systems and USG Sheetrock®
Brand UltraLight Panels, we
have a history of innovation
and of finding new solutions
designed to revolutionize the
way the construction industry
designs and builds the spaces
in which we live, work and play.

1920

- Sheetrock® Brand GYP-LAP® Gypsum Sheathing Panels
- Rocklath Gypsum Lath
- ► Acoustone® Ceiling Panels
- Auratone® Ceiling Panels
- Perf-A-Tape® Joint Reinforcement

1900

- Sheetrock® Brand Gypsum Panels
- Pyrobar Gypsum Partition Tile

1940

- Structo-Gauge® Gauging Plaster
- Pyrofill® Poured Gypsum Roof Deck
- Water Repellent Wallboard
- Structo-Lite® Perlited Plaster
- Sheetrock® Brand Firecode® Core (Type X)
- Tapered Edge Panels
- Ready-Mix Joint Compound
- 2" Solid Gypsum Wall Board System

1960

- Structocore™ Wall System
- First Metal Stud Drywall System
- RC-1 Channel
- Sheetrock® Brand WR Gypsum Panels
- Blendtex Gypsum Panels
- USG Panz® Metal Ceiling Panels
- Exterior Ceiling Board
- Donn® Exposed Tee Grid System
- Ultrawall® Relocatable Wall System
- USG Shaft Wall System
- Textone SW Gypsum Panels
- Area Separation Wall System
- Light Steel Framing

2000

- Levelrock™ Floor Underlayment System
- USG Decorative Interior Finish System
- Securock® Roof Board
- Sheetrock® Brand All Purpose Joint Compound with Dust Control
- Sheetrock® Brand Mold Tough® Panels
- Securock® Glass-Mat Sheathing Panels
- Astro® ClimaPlus™ Ceiling Panels
- **►** Zero-Emitting Ceiling Tiles
- True™ Wood Ceiling Panels
- Topo™ 3-Dimensional Ceiling Panels
- ► Geometrix® 3-Dimensional Metal Panels
- Libretto® Gridless Metal System
- ▶ Pixels® Metal Wall & Ceiling System
- Logix™ Integrated Ceiling System

1980

- Durock® Cement Board
- Sheetrock® Brand Plus 3® Lightweight
- All Purpose Joint Compound
- 3/4" Ultracode® Core Gypsum Panels
- ➤ X-Technology Ceiling Panels
- **►** Compässo® Suspension Trim
- Quick-Release™ II Clip
- Cuvatura™ 3-Dimesional System
- ► Radar[™] ClimaPlus[™] Ceiling Panels
- USG Drywall Suspension System
- Fiberock® Panels
- Celebration™ Metal Snap-In System

2010 TO DATE

- Sheetrock® Brand UltraLight Panels
- Mars™ High-NRC Ceiling Panels
- Orion™ Acoustical Panels
- Donn® AdvanceSpan Suspension Systems
- ► Halcyon™ Canopies
- ► True[™] Wood Renditions[™] Panels

NOTES

THIS PAGE

USG Libretto® Gridless Metal System

RIGHT PAGE TOP

USG Drywall Suspension System and Translucents™ Canopies-Wave in Artichoke Green

RIGHT PAGE BOTTOM USG Pixels® Wall Mounted Panels

USG Mars™ High-NRC/ High-CAC Acoustical Panels

TRADEMARKS
The trademarks USG, CGC,
ACOUSTIBOND, ASPEN,
ASTRO, AX, AXCE, BILLO, CE,
CELEBRATION, CENTRICITEE,
CLEAN ROOM, CLIMAPLUS,
COMPÄSSO, COMPOSITIONS,
CURVATURA, DIAMONDFLEX,
DONN, DX, DXACE, DXF,
DXFEV, DXF, DXI, DXL, DXLA,
DXLF, DXLT, DXSS, DXT, DXW,
ECLIPSE, FINELINE, FIRECODE,
"F" FISSURED, FISSURED,
"FOST, GEOMETRIX, GLACIER,
GRIDWARE, HALCYON,
IDENTITEE, ILLUSION,
LIBRETTO, LOGIX, MARS,
MICRO, MILLENNIA, OLYMPIA,
ORION, PANZ, PARALINE,
PARALOCK, PEBBLED,
PEDESTALS, PIXELS, PREMIER
HI-LITE, PREMIER NUBBY,
QUICK-RELEASE, RADAR,
RENDITIONS, ROCK FACE,
SANDRIFT, SHEETROCK, TOPO,
TOUCHSTONE, TRANSLUCENTS,
TRUE, WIREWORKS, ZXLA,
IT'S YOUR WORLD. BUILD IT.,
the USG/CGC logo, the design
elements and colors, and related
marks are trademarks of USG
Corporation or its affiliates.
AutoCAD and Revit are

NOTE
Products described here may
not be available in all geographi
markets. Consult your USG
Company sales office or
representative for information.



