


Fluent

Attaching Return/Bridge

Tools Required

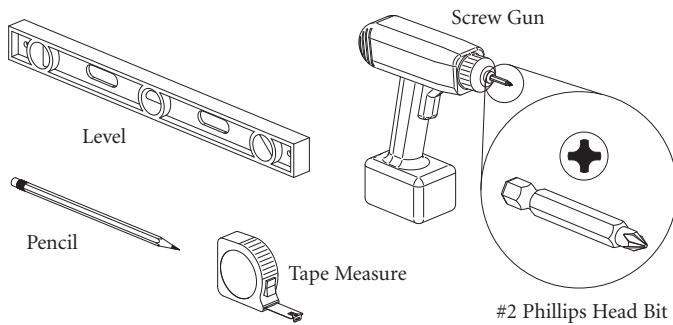

Hardware Required



Installation

1. Position the main unit in the desired location. Level main unit. Install the flat brackets to the main unit using #10 x 1" panhead screws provided. (Figure A).
2. Align the return or bridge unit up to the main unit. Position the tops so the outer edge of the main unit and return unit are flush and pull tight against main unit. Fasten return top to the flat brackets using #10 x 1" panhead screws provided. (Figure B).

Figure A

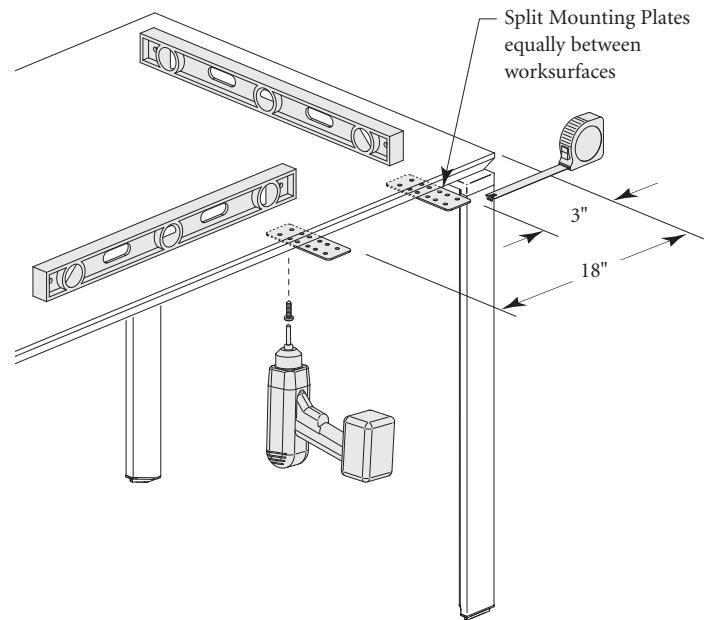


Figure B

