

Flat Profile Vertical Storage

Drawer removal and Anti-Tip Mechanism

Tools Required

- None

Installation

1. Beginning with both drawers pushed in, fully extend top drawer.
2. Pull wire eye clip out of the back of the drawer, and slide cord off of the clip. Feed cord out the back of the drawer, leaving the cord attached to the inside of the cabinet. (Figure A)
3. Repeat for bottom drawer.
4. Each drawer slide has a lever: one is depressed, the other is lifted. Simultaneously while lifting and depressing the levers, hold the drawer level and pull drawer towards you. (Figure B)
5. Set drawer aside and slide drawer channels back into case, making note of which location drawers are being removed from.
6. To reinstall drawers, beginning with the top drawer, carefully align and engage drawer slide members with cabinet members, but do not push drawer fully back into case.
NOTE: Be sure first drawer being installed was originally the top drawer.
7. Retrieve cord and feed back through hole in the top drawer back. Slide loop of cord back onto clip, and snap clip back into the hole in the drawer back.
8. Fully push top drawer closed.
9. Prior to installing bottom drawer, pull slack out of cord and allow cord to lay on floor as close as possible to the front of the case.
10. Repeat steps 7 and 8 for bottom drawer.
11. Verify that both drawers cannot be fully opened at the same time.

NOTE: Drawers can be partially opened at the same time during normal operation of anti-tip mechanism.

Figure A

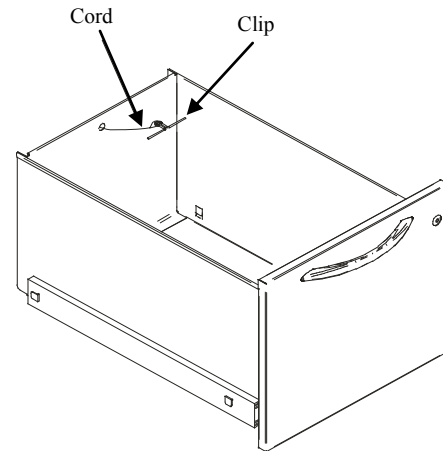


Figure B

