

Assembly Instructions

KI 700 Series Multimedia Storage Cupboard Installation

September 1997

KI Pembroke
P.O. Box 580
1000 Olympic Drive
Pembroke, Ontario
K8A 6X7

TEL (613) 735-5566
FAX (613) 735-3333

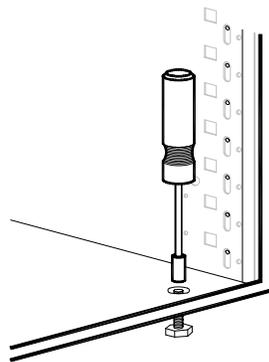
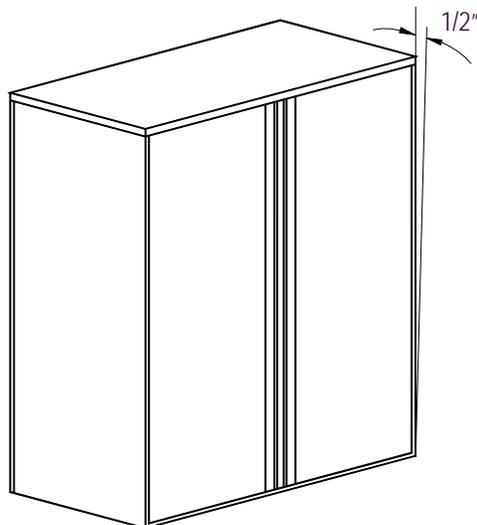


Figure 1

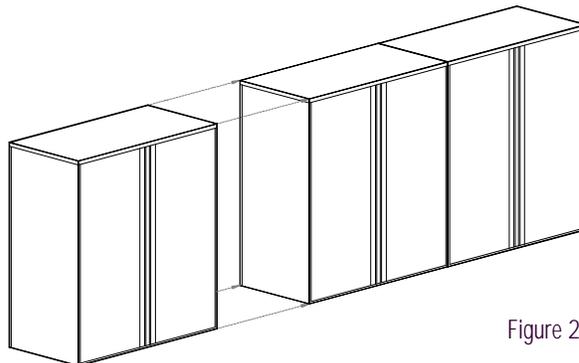


Figure 2

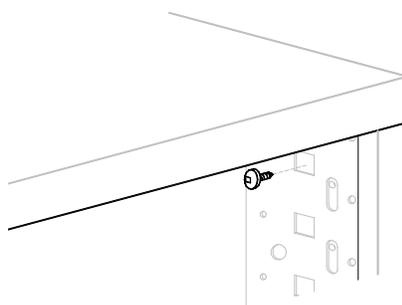



Figure 3

Installation Leveling

1. Cabinets should be leveled prior to loading.
2. Cabinets should be in their final location before leveling is attempted.
3. Two elements are clearly visible when a cabinet has been leveled properly. The cabinet will be vertical or tipped back slightly.
4. The doors will align with each other and with the sides of the cabinet.
5. To level the cabinet open the cupboard doors and adjust the glides located at each corner of the cabinet. Use a 1/4" hex driver or socket. Glides may also be adjusted by tipping the cabinet and rotating the 7/8" hex head (Figure 1).

Positioning Multiple Cabinets

1. Multiple cabinets should be ganged together/or to adjacent lateral files (see users guide for recommended installation of lateral files) (Figure 2).
2. Cabinets must be leveled prior to ganging. Begin by leveling the cabinet located at the highest point on the floor.
3. Gang cabinets by driving the supplied 1/2" self drilling screws into the side of the cabinet. Screws should be drilled as close to the top and bottom of the cabinet as possible. Front screws should be drilled through the square holes in the front upright. Back screws should be drilled directly behind the back upright (Figure 3).



Stacking Storage Cabinets

1. Ensure leveling glides if present, are removed.
2. Secure the upper unit to the lower one near the (4) corners of the top using the self drilling #10 screws from inside lower unit (Figure 4).

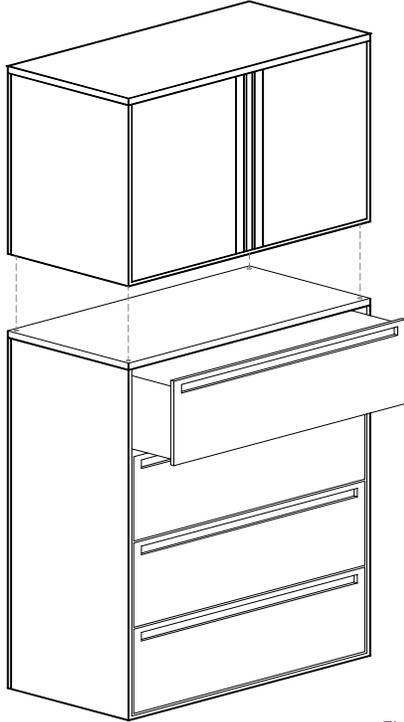


Figure 4

Multiple Cabinets

1. Cabinets should be ganged to adjacent units as described in previous section (Figure 5).

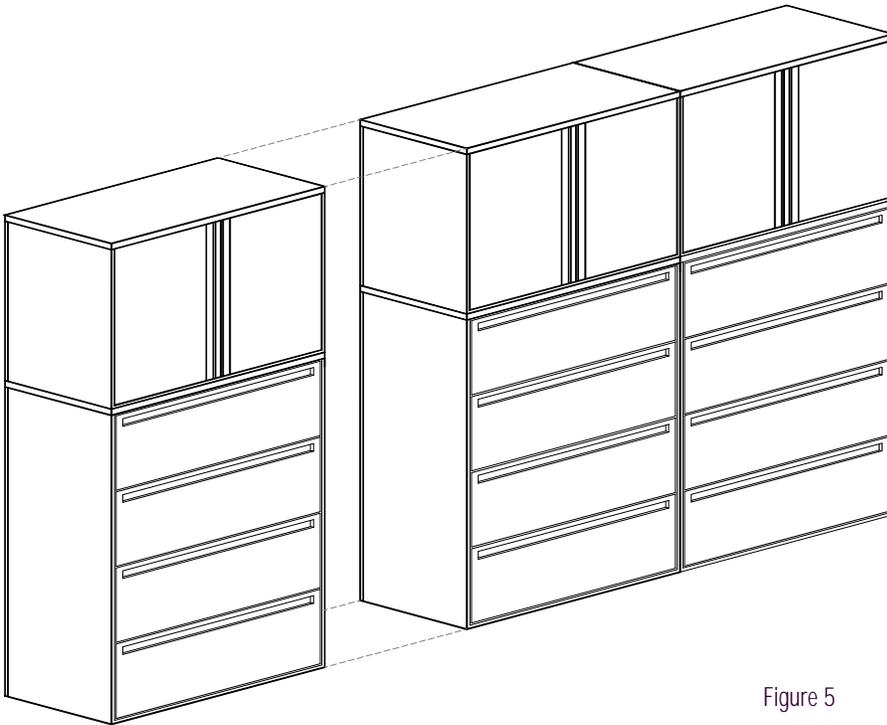


Figure 5