

PRODUCT SPECIFICATIONS

Spring-Activated Monitor Arm

December 2016

PRODUCT SPECIFICATIONS

Arm Construction

The Spring-Activated Monitor Arm is assembled using die cast aluminum components with either a satin chrome plated finish or powder-coat finish of silver, vista black or linen white.


Movement

The arm rotates 360 degrees at three joints with a 185 degree monitor tilt. The monitor can pivot from landscape to portrait.


Mounting Options

The following are available mounting options:

- Desk clamp (2" thickness or less)
- Grommet mount (2" or larger)




Desk Clamp

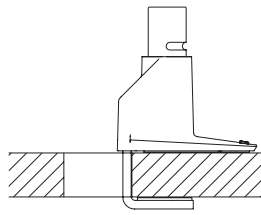


Grommet Mount



DIMENSIONS

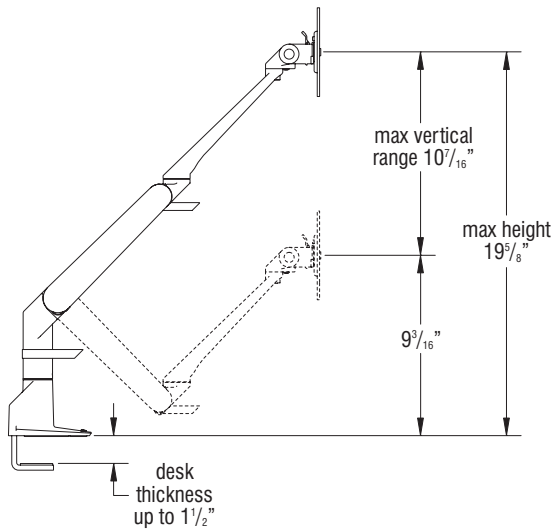

Side View - Vertical Range

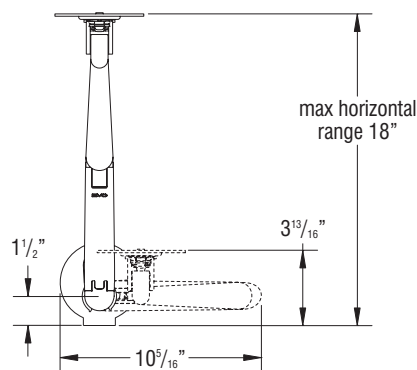

Top View - Horizontal Range & Arm Folded