

ST0259

Recessed Wall Luminaires

1/5




we-ef



Description

IP55. Recessed steplight for orientation. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout. Painted finish.

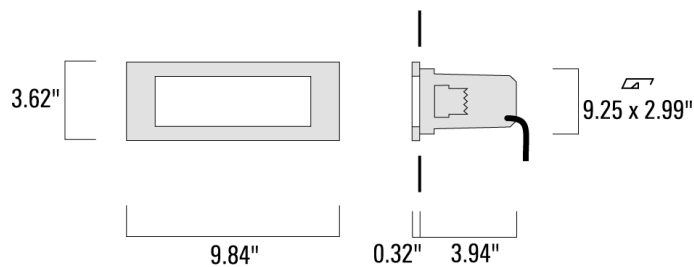

ST0259

Recessed Wall Luminaires

2/5



we-ef

Specifications

Material Specification

Body:	Luminaire body constructed in die cast aluminum.
Lens:	Opal polycarbonate lens.
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP55
Impact protection:	IK10
Corrosion protection:	5CE
Mounting:	Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout.
Listings:	UL, c UL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] electronic ballast in 120 or 277 volt. Specify voltage.
Cable:	Suitable for through wiring.

Ambient Temperature

Ta less than 25 deg C

ST0259

Recessed Wall Luminaires

3/5



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
diffused distribution	900 1200 1800	13 18 26	3500K	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze

ST0259

Recessed Wall Luminaires

4/5



we-ef

Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 diffused distribution	615-1631	CFQ18/ G24q-2 base	1200	electronic gear	2.60	
	615-1630	CFQ13/ G24q-1 base	900	electronic gear	2.60	
	615-1632	CFQ26/ G24q-3 base	1800	electronic gear	2.60	

Related Families / ST0200

Family		Dimensions	Wattage	Lumen	Links	
					 Links	 Download Data Sheet
ST0209 LED		8.07 x 3.62	4 W	538		
ST0209 LED Stainless steel		8.07 x 3.62	4 W	538		
ST0259 LED		9.84 x 3.62	6 W	807		
ST0259 LED Stainless steel		9.84 x 3.62	6 W	807		
ST0279 LED		16.73 x 5.32	9 W	1211		
ST0279 LED Stainless steel		16.73 x 5.32	9 W	1211		

ST0259

Recessed Wall Luminaires

5/5



Mounting Accessories

Installation blackout

C1

■ 615-9325 Installation blackout BST25-I

5.12

