

FLOOR TILE – ABRASIVE SURFACE



DIABLO RED OT01 (1)



ASHEN GRAY
OT03 (2)




ADOBE BROWN
OT05 (2)




SAHARA SAND
OT08 (2)


FLOOR TILE – NON-ABRASIVE SURFACE

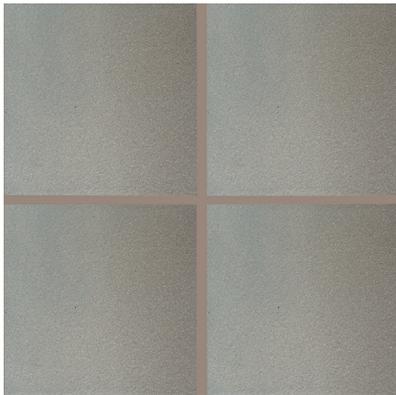

ASHEN FLASH OT04 (2)

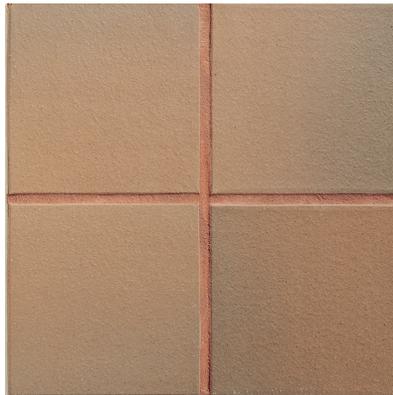

ADOBE FLASH OT06 (2)

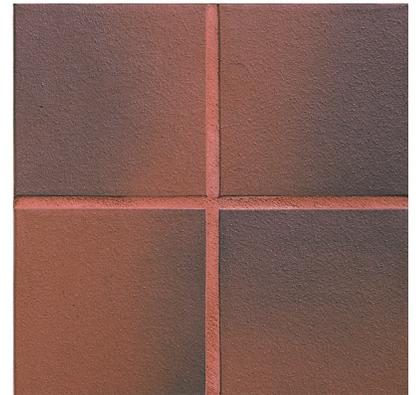

RED FLASH OT02 (1)

Texture Notes:

Abrasive surface available in 6 x 6 and 8 x 8 sizes in OT01, OT03, OT05, OT08, colors only.

Abrasive surface available in 4 x 8 size in OT01 and OT03 on a made-to-order basis.

(1) and (2) indicate Price Groups, (1) being the least expensive.



**PRE-CONSUMER
RECYCLED MATERIALS**



MADE IN THE U.S.A.

All or select items within this series meet the requirements for these qualifications. For more information visit daltile.com

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	8 x 8 Floor Tile†	(8" x 8") (20.30 cm x 20.30 cm)	1/2"	11.11	25
	6 x 6 Floor Tile†	(6" x 6") (15.20 cm x 15.20 cm)	1/2"	11.00	44
	4 x 8 Floor Tile†	(4" x 8") (10.20 cm x 20.30 cm)	1/2"	10.76	50

† Abrasive surface available in 6 x 6 and 8 x 8 sizes in OT01, OT03, OT05 and OT08 colors only.

‡ All colors available in 4 x 8 size in non-abrasive surface. Abrasive surface available in 4 x 8 size in OT01 and OT03 on a made-to-order basis.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	✓
Ramps & Inclines	≥ 0.65	✓*
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Suitable for industrial installation requiring high compressive strength.

Subject to Oils: Absorbs oils, grease and other liquids to keep floors slip-resistant, yet does not contaminate the surface. Proper cleaning methods easily remove any contaminants that do get absorbed into the tile.

* Abrasive surface only

** 6 x 6 only

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/8"	 Medium (V2)

TRIM

	Type	Number	Size	Pieces per Carton
	Bullnose	Q-1665†	6 x 6	44
	Bullnose Corner	QCRL-1665†	6 x 6	44
	Cove Base	Q-3565 ▲	5 x 6	44
	Cove Base Outcorner	QCR-L-3565 ▲	5 x 6	20
	Cove Base Inside Corner	QB-3565 ▲	1 x 5	25
	Cove Base	Q-3585 ▲	5 x 8	24
	Bullnose	Q-1885	8 x 8	25
	Bullnose Corner	QCRL-1885	8 x 8	25

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

† Available in abrasive surface

▲ Not available in Flash colors; use coordinating solid color.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 3.0%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

We do not recommend light colored quarry tile in commercial kitchens unless properly sealed or a grout release is used. Periodic resealing of the tile may be necessary.

Special care should be taken when grouting; a grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufacturers.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.

7834 C. F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



©2017 Daltile (10/17)