

Steelcase

Eyesite Triple Display Support


User Guide

Eyesite® Triple Display Support


Eyesite flat panel monitor arms offer more displays, comfort and control. Eyesite was designed to give users control over the angle and depth of displays – regardless of shape, size and quantity – maximizing display usage while increasing comfort and productivity.

Supports 3 displays, up to 24" and 15 lbs. per display.

We suggest using smaller displays on 24" deep worksurfaces to allow for proper focal length.

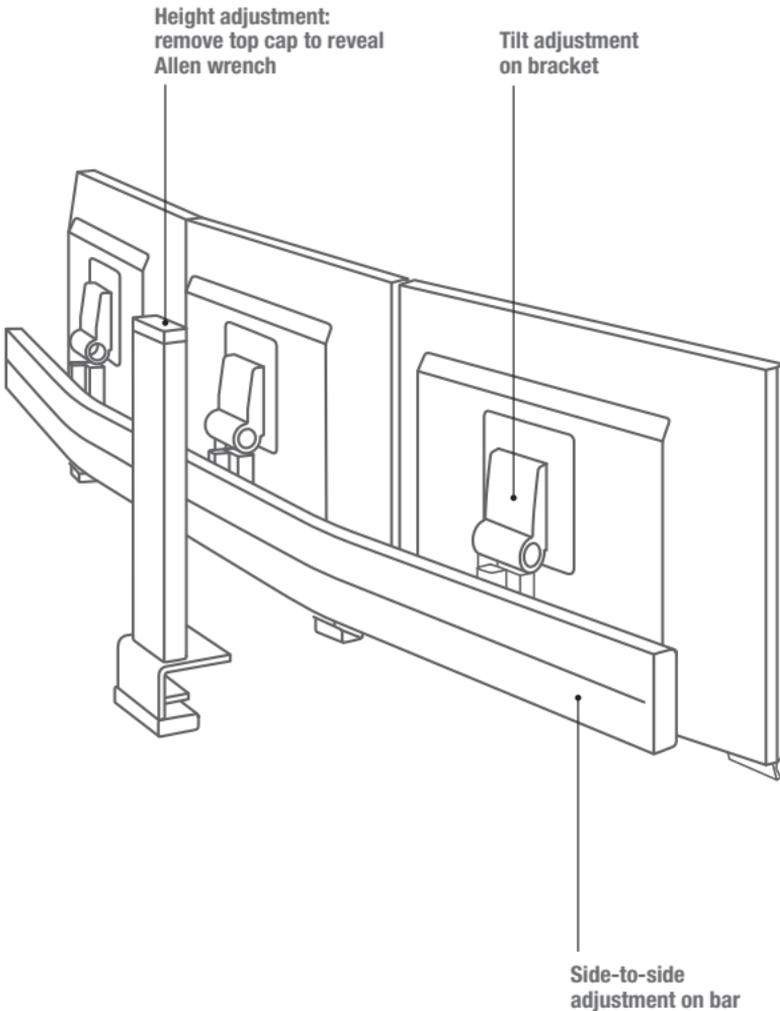


Eyesite Triple Display Support Controls



HEIGHT ADJUSTMENT

To adjust the height of the display, remove top cap and locate the adjustment nut on top of the column. Using the supplied Allen wrench, turn the adjustment nut clockwise to raise displays, or counterclockwise to lower displays. A drill with a $\frac{5}{32}$ " hex bit may be used.




TILT ADJUSTMENT

The viewing angle of the display may be easily adjusted with the set screw on the display mount bracket. Pivot the display mount bracket until you achieve the viewing angle desired, then tighten the set screw.

Tilt: +10°/-90° for easy access to cable connections

Pan: Fixed, no adjustment



SIDE-TO-SIDE ADJUSTMENT


Slide each display inward so the displays are adjacent to each other.

Tip: To ease the sliding motion, tilt the display back slightly, then slide left or right.

FOCAL LENGTH ADJUSTMENT

Fixed, no adjustment.

Basics of Monitor Arm Positioning




HEIGHT

Top of the display should be positioned at or slightly below eye level.




DISTANCE

Display should be 20" to 30" from the eyes, or approximately an arm's length away.



ALIGNMENT

Proper alignment is the key to preventing strain. The computer display, keyboard and mouse should be centered to allow the user to see the display without looking downward or to either side. The mouse should be accessible without twisting or reaching. Reference documents should never be flat on the desk, and should be at the same height as or aligned with the display, or above keyboard and below the display.



DUAL DISPLAY ALIGNMENT

If using two displays, position the display used more often closer. If used equally, center displays directly in front and angle them in a slight inward "V" shape.

Steelcase®

Visit steelcase.com

3/16 © 2016 All rights reserved. All specifications subject to change without notice. Printed in U.S.A.