


USG
Ceiling
Solutions

CEILINGS CATALOG

- SPECIALTY CEILING SYSTEMS
- ACOUSTICAL CEILING PANELS
- INTEGRATED CEILING SYSTEMS
- SUSPENSION SYSTEMS

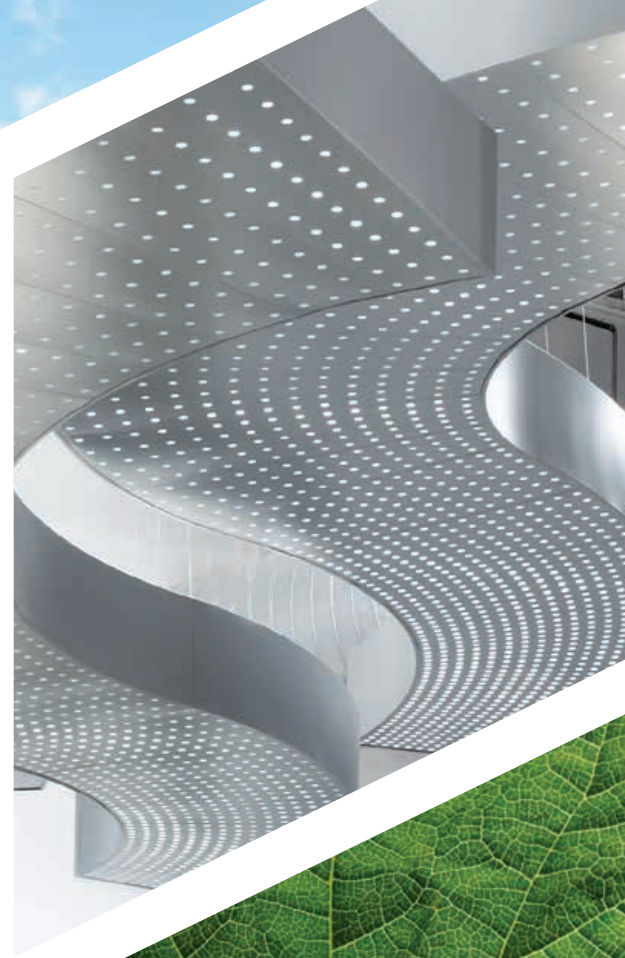

USG  CGC
IT'S YOUR WORLD. BUILD IT.™

Specialty Ceiling Systems



Acoustical Ceiling Panels



USG Logix™ Integrated Ceiling System



Suspension Systems



CEILING CATALOG

- SPECIALTY CEILING SYSTEMS
- ACOUSTICAL CEILING PANELS
- INTEGRATED CEILING SYSTEMS
- SUSPENSION SYSTEMS

TABLE OF CONTENTS

USG is the global leader in the manufacturing of ceiling suspension systems and a recognized innovator in the development of acoustical and gypsum panels as well as specialty ceiling systems. We believe that USG Ceiling products should not only bring visions to life, but they should also enhance and inspire those visions while reducing the building industry's impact on the environment.

USG Ceiling Solutions offers an extensive line of acoustical panels, suspension systems, integrated ceiling systems and specialty ceiling systems, and all USG Ceiling products are built to provide design freedom, easy installation and outstanding performance. USG. It's Your World. Build It.™

	Page		Page
Overview	2	Online Resources	6
	4	Sustainability	8
USG Specialty Ceiling Systems	10	USG Billo™ 3-Dimensional Panels	34
	12	USG C ² Paired Compásso™ Channel Accents	36
	14	USG Celebration™ Snap-In Metal Panels	38
	16	USG Celebration™ Canopies	40
	18	USG Celebration™ Torsion Spring System	42
	20	USG Compásso™ Elite/Standard Perimeter Trims	44
	22	USG Compásso™ Slim Perimeter Trims	46
	24	USG Compásso™ Elite for Drywall Perimeter Trims	48
	26	USG Compásso™ Elite Transitions	50
	28	USG Compásso™ Elite Perimeter Trims with Island Accent Lighting	52
	30	USG Compositions® Decorative Clouds	54
	32	USG Curvatura™ 3-Dimensional Ceiling System	56
		USG Geometrix® 3-Dimensional Metal Panels	58
		USG GridWare™ Open Cell Decorative System	
		USG Libretto® Gridless Metal System	
		USG Panz® Metal Panels	
		USG Paraline® Linear Metal Systems	
		USG Pixels® Metal Ceiling Panels	
		USG Pixels® Wall Mounted Panels	
		USG Topo™ 3-Dimensional System	
		USG Translucents™ Luminous Infill Panels	
		USG Translucents™ Canopies	
		USG True™ Wood Panels	
		USG True™ Wood Renditions™ Panels	
		USG WireWorks™ Open Cell Ceiling Panels	
USG Acoustical Ceiling Panels	60	USG Aspen™ Basic Acoustical Panels	106
	62	USG Astro® Acoustical Panels	108
	64	USG Clean Room™ Acoustical Panels	110
	66	USG Eclipse™/Eclipse™ High-NRC Acoustical Panels	112
	68	USG Eclipse™ Illusion™ & Pedestals™ Acoustical Panels	114
	70	USG "F" Fissured™ Basic Acoustical Panels	116
	72	USG Fissured™ Basic Acoustical Panels	118
	74	USG Frost™ Basic Acoustical Panels	120
	76	USG Frost™ High-NRC/High-CAC Acoustical Panels	122
	78	USG Glacier™ Basic Acoustical Panels	124
	80	USG Halcyon™ Acoustical Panels	126
	84	USG Halcyon™ Healthcare Acoustical Panels	128
	86	USG Halcyon™ Planks and Large Size Acoustical Panels	130
	88	USG Halcyon™ Canopies	132
	90	USG Mars™ Acoustical Panels	134
	92	USG Mars™ Healthcare Acoustical Panels	136
	96	USG Mars™ High-NRC/High-CAC Acoustical Panels	138
	100	USG Mars™ Planks/USG Mars™ High-NRC Planks and Large Sizes	140
	104	USG Millennia® High-NRC Acoustical Panels	142
		USG Olympia™ Micro™ Acoustical Panels	144
		USG Orion™ Acoustical Panels	
		USG Pebbled™ Acoustical Panels	
		USG Premier Hi-Lite™ Acoustical Panels	
		USG Premier Nubby™ Acoustical Panels	
		USG Radar™ Basic Acoustical Panels	
		USG Radar™ Ceramic Acoustical Panels	
		USG Radar™ Acoustical Panels	
		USG Radar™ High-NRC/High-CAC Acoustical Panels	
		USG Radar™ Illusion™ Acoustical Panels	
		USG Radar™ Education Acoustical Panels	
		USG Radar™ Open Plan Acoustical Panels	
		USG Renditions™ Animations Acoustical Panels	
		USG Renditions™ Boundaries Acoustical Panels	
		USG Renditions™ Custom Acoustical Panels	
		USG Rock Face® Acoustical Panels	
		USG Sandrift™ Acoustical Panels	
		USG Sheetrock® Brand Lay-In Gypsum Ceiling Panels	
		USG Ceilings® Kitchen Lay-In Panel	
		USG Touchstone™ Acoustical Panels	

	Page		Page	
USG Logix™ Integrated Ceiling System	146	USG Logix™ Introduction	152	
	148	USG Halcyon™ Logix™ Acoustical Panels	166	
USG Suspension Systems	176	USG Donn® Brand AdvanceSpan™ Suspension System	198	
	178	USG Donn® Brand AX™/AXCE™ Acoustical Suspension System	200	
	180	USG Donn® Brand CE™ Acoustical Suspension System	202	
	182	USG Donn® Brand Centricitee™ DXT™/DXLT™ Acoustical Suspension System	206	
	184	USG Donn® Brand DX®/DXL™ Acoustical Suspension System	208	
	186	USG Donn® Brand DX®/DXL™ Concealed Acoustical Suspension System	210	
	188	USG Donn® Brand DXLA™/DXACE™ Acoustical Suspension System	212	
	190	USG Donn® Brand DXSS™ Acoustical Suspension System	214	
	192	USG Donn® Brand DXW™ Acoustical Suspension System	216	
	194	USG Donn® Brand Finline® DXF™/DXLF™ Acoustical Suspension System	218	
			220	USG Suspension Systems Accessories
	Additional Resources	230	System Interface	252
		234	USG Ceiling Solutions Color Program	254
240		Metal Finishes	256	
243		Metal Perforations	258	
247		Wood Finishes	277	
248		USG Translucents™ Finishes	282	
250		Sustainability Commitment	294	
			252	Special Applications
			254	Balanced Acoustics
			256	USG Acoustical Data
		258	Acoustical Panel Packaging Data	
		277	Suspension System Packaging Data	
		282	Item Number Index	
		294	History of Innovation	

On the cover: USG Curved Drywall Suspension System/
USG Sheetrock® Brand Gypsum Panels and USG Libretto® Gridless
Metal System Serpentine Design with Contoured Perforation.



BUILT FOR YOU

UNITED STATES


usgdesignstudio.com

usg.com

CANADA

cgcdesignstudio.com

cgcinc.com

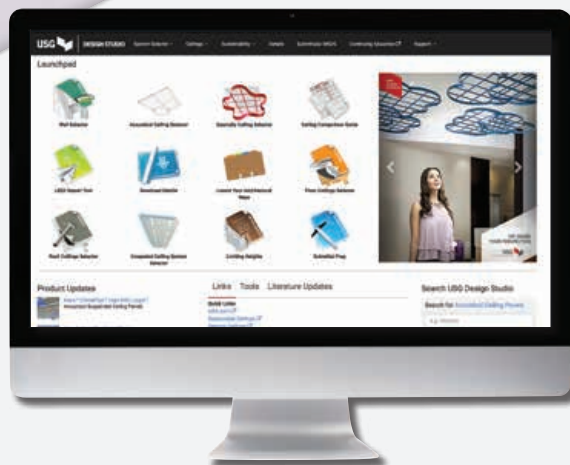


USGDESIGNSTUDIO.COM CGCDESIGNSTUDIO.COM

THE SUPPORT YOU NEED.

Our Design Studio® websites are much more than just valuable resources for product information. Designed around the way you think and work, these powerful tools are filled with features that foster collaboration and enable your entire team to work faster and more efficiently.



ARCHITECTURAL REPRESENTATIVE LOCATOR
Easily find your representative's contact information with this interactive state-by-state locator.



CEILING COMPARISON GUIDE
Select individual or multiple products and generate one specification that includes product information and installation references, submittals, delivery and storage of materials and cleaning instructions.



LEED® REPORT TOOL
Generate custom reports that determine how USG products can assist your project in qualifying for LEED credits.



SUBMITTAL BUILDER
Dynamically combine system files and product data sheets, including warranty information, installation guides and material safety data sheets (MSDS), into one document for easy download, customization, printing or emailing.



USG CEILING SOLUTIONS RECYCLING PROGRAM
Learn how you can help preserve resources with a program that takes back approved ceiling panels from any manufacturer and recycles them into new building materials.

USG.COM CGCINC.COM OUR HOMES ONLINE

VISIT THE WEBSITES TO:


- Find product and warranty information
- Order samples and literature (for CGC contact your local Sales Representative)
- Learn about USG's rich history of innovation within the building industry



WHERE WE MAKE AN IMPACT TOGETHER

Reaching the highest goals in sustainability requires a beginning-to-end focus on everything we do including the product development cycle. We've identified three corporate priorities where USG can make the most impact on sustainability.

- 1. Develop responsible solutions**
- 2. Enhance energy management**
- 3. Improve resource utilization**

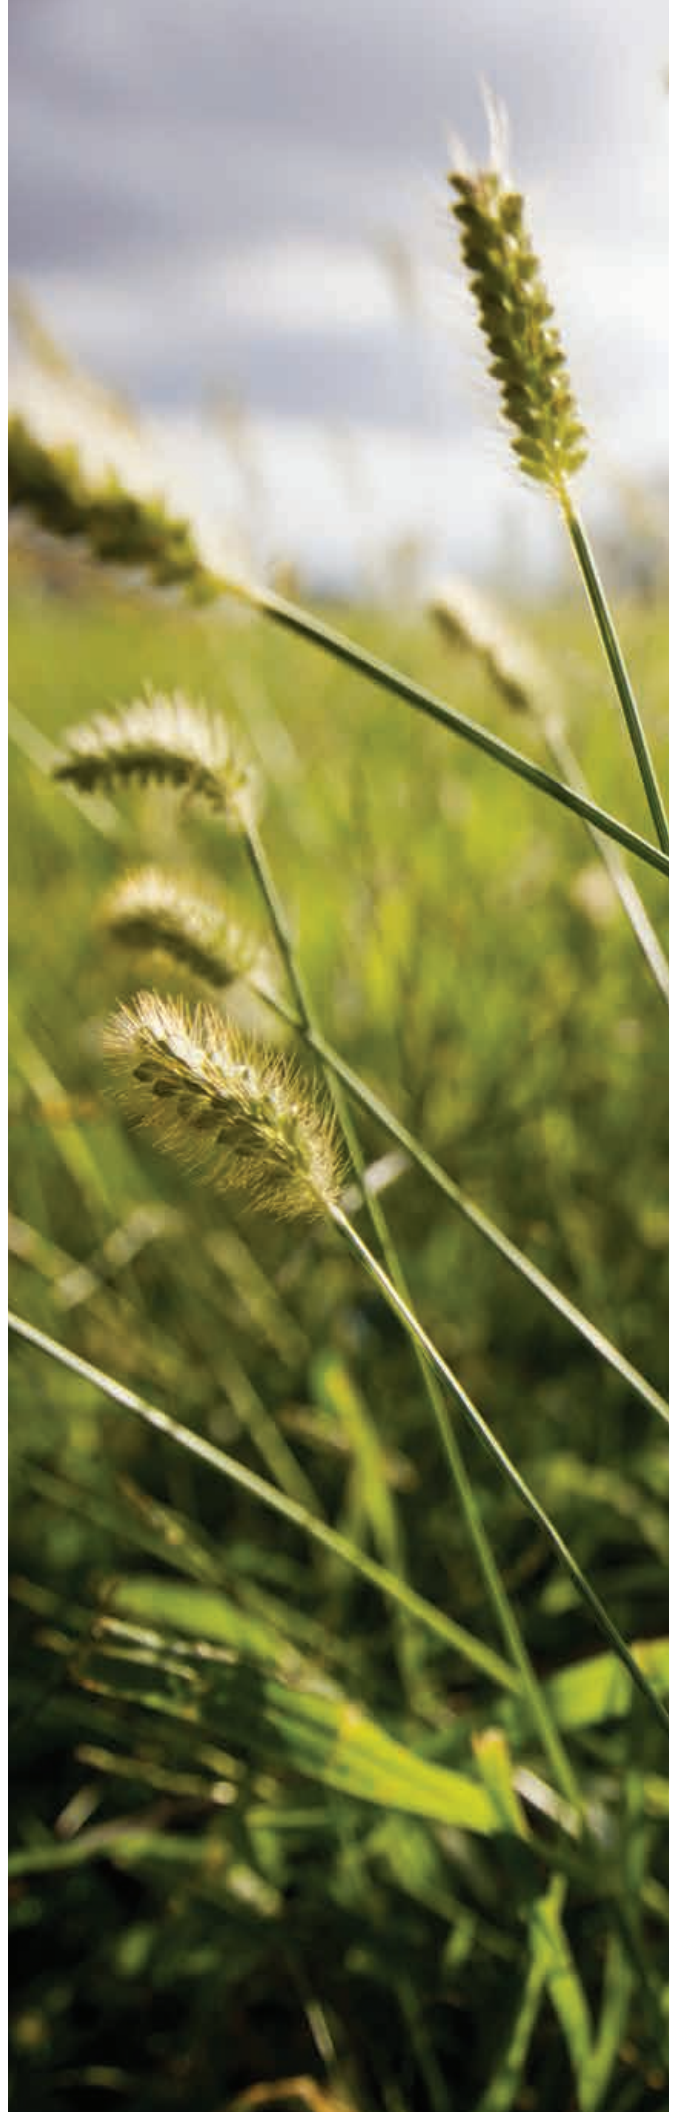

VOC Emissions

PAR—Product Attribute Reports

Social Responsibility

Ecosystem

Biomimicry

Stewardship
LEED®

Commitment

Climate Change

Renewable Resources

HPD—Health Product Declarations TRANSPARENCY

The 2030 Challenge

EPD—Environmental Product Declarations

Chemicals of Concern

Biodiversity

Recycled Content

Solar Energy

Resiliency

Cradle-to-Cradle

Eco Design


Zero Net Energy

Carbon Neutral

Biomass

OUR COMMITMENT
IS A NEVER-ENDING PROCESS.
WE WILL CONTINUE TO IMPROVE
WHAT WE DO IN ORDER TO MAKE
OUR COMPANY AND PRODUCTS
MORE SUSTAINABLE.

FOR MORE INFORMATION, GO TO PAGES 250–251



**GREAT CEILING
DESIGN IS MORE THAN
HOW IT LOOKS—IT'S
ALSO HOW IT SOUNDS**



LEFT
USG Halcyon™ Canopies
Acoustical Clouds

BOTTOM RIGHT
USG Mars™ High-NRC
Acoustical Panels

HEAR AND EXPERIENCE THE DIFFERENCE WITH USG CEILING SOLUTIONS

The quality of sound can greatly enhance or inhibit any space. That's why balanced acoustics are essential to every space. Our wide range of ceiling solutions is designed to be not only pleasing to the eye, but also music to your ears. Along with ceilings, USG manufactures walls and floors, so you have a partner to help you design to the broader acoustical needs of any space.



**FOR MORE INFORMATION,
GO TO PAGES 254-257**



**PERFORMANCE
MATTERS—SPECIAL
SPACES REQUIRE
SPECIAL PERFORMANCE**



**FOR PERFORMANCE THAT ENSURES
YOUR BUILDING AND ITS OCCUPANTS ARE
SAFE, CHOOSE USG CEILING SOLUTIONS**

From the threat of earthquakes, fires and outdoor elements, to air quality, there are numerous factors that can affect the integrity of your building and, most importantly, the occupants inside of it. Our commitment to Clean Room technologies, seismic solutions, fire-rated materials and exterior ceiling systems has enabled us to deliver special-performance solutions. Ensuring your building, and those who inhabit it, stand tall in the toughest conditions.



**FOR MORE INFORMATION,
GO TO PAGES 252-253**

USG BILLO™ 3-DIMENSIONAL PANELS



USG Billo™ 3-Dimensional Panels, White Opaque/USG Donn® Brand Centricitee™ DXT™ Acoustical Suspension System, Flat White

FEATURES AND BENEFITS


- Three-dimensional curved panels punctuate flat ceiling planes with rhythm and depth.
- 2'x2' preformed polycarbonate panels create myriad patterns with just one simple panel shape.
- Lightweight lay-in panels install into 9/16" narrow-profile USG Donn® Brand suspension systems, allowing full ceiling accessibility.
- Luminous panels may be backlit with fluorescent strip fixtures or integrated with standard lay-in fixtures.

APPLICATIONS

- All interior commercial applications

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

WHITES



COLOR GALLERY



Weave Pattern

Wave Pattern

USG BILLO™ 3-DIMENSIONAL PANELS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)





PRODUCT INFORMATION

Materials	Sizes and Weight	Module Size
Panels: Preformed polycarbonate Suspension System: All 2'x2' USG Donn® Brand 9/16" Centricitee™ DXT™ and Fineline® DXF™/DXFF™ profiles.	Panels: 2'x2' Weight: 0.25 lb./sq. ft.	Full 2'x2' modules only

FINISHES


Panel Color	Panel Light Transmission	Suspension System Coordinating Colors
White Translucent	26%	Flat White
White Opaque	8%	Flat White
Color Gallery Colors	Varies per Color	Flat White or per Specification

EDGE DETAILS

USG Billo™ Panels with 9/16" USG Donn® Brand Centricitee™ DXT™ Suspension	USG Billo™ Panels with 9/16" USG Donn® Brand Fineline® DXF™ Suspension	USG Billo™ Panels with 9/16" USG Donn® Brand Fineline® 1/8 DXFF™ Suspension	USG Billo™ Panels with 9/16" USG Identitee® DXI™ Suspension
			


PANEL HOLD-DOWN CLIP

Supplied with 9/16" down panels



ASSEMBLY

View from above

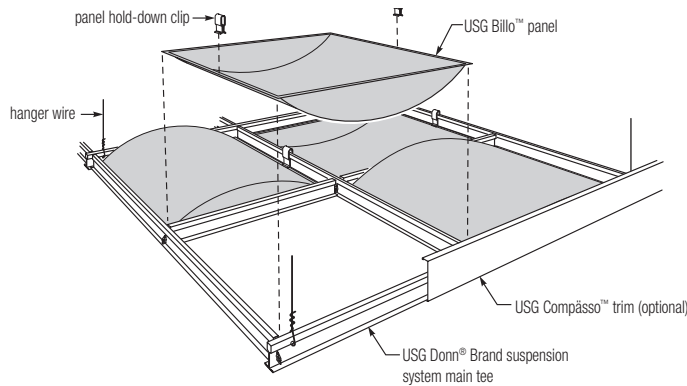

FOR MORE INFORMATION

Product literature
 System brochure: IC472
 Data sheet: IC473

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Code approval
 Infill panels meet Class B requirements for flame spread and smoke developed as defined by ASTM E1264, NFPA and IBC (UBC) as tested in accordance with ASTM E84 and CAN/ULC S102 surface-burning characteristics.

Note
 For Canadian product needs, please contact your local sales representative.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC473/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, BILLO, CENTRICITEE, COMPASSO, DONN, DXF, DXFF, DXT, FINELINE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.




USG C² PAIRED COMPASSO™ CHANNEL ACCENTS



USG C² Paired Compasso™
Channel Accents

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS




Flat White 050 Silver Satin 002

FEATURES AND BENEFITS

- Unique, multifunctional ceiling accents combine form and function.
- Easily integrate lighting and signage; can also be used as way-finding devices.
- Available in straight and curved sections; three sizes: 4", 6" and 8".
- Easy to install; suspend from ceiling with hanger wire, cable or rods.

APPLICATIONS

- Retail spaces
- Contemporary offices
- Education environments
- Entertainment
- Gaming

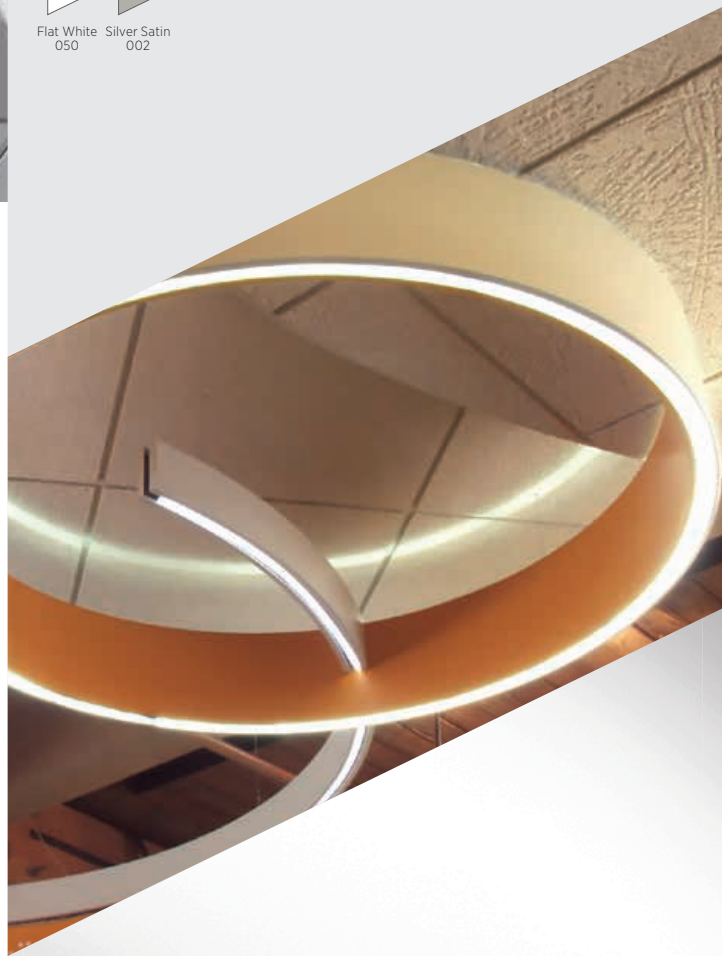

USG C² PAIRED COMPASSO™ CHANNEL ACCENTS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)


**FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION

CUSTOM DESIGNS¹

Pre-engineered—
no field cutting

Materials	Finishes
Painted steel	Flat White (050) and Silver Satin (002) are standard. Wood Tones and custom colors available.

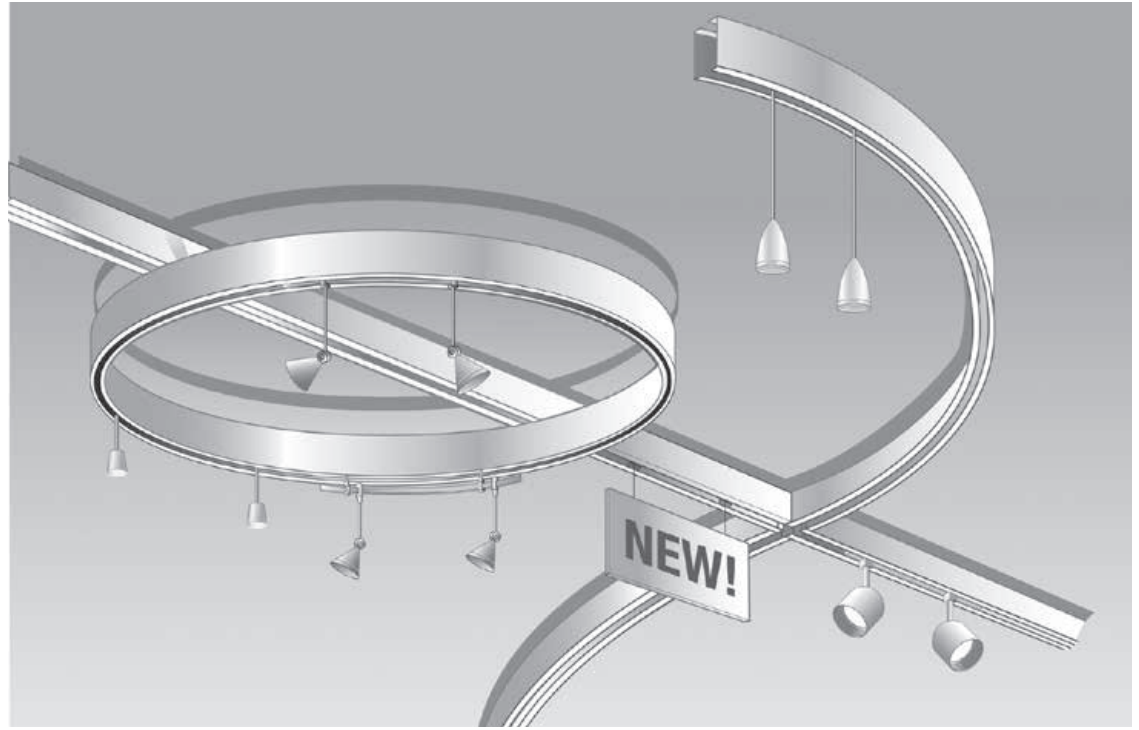

SIZE OPTIONS

Narrow Reveal (5/8")			Wide Reveal (1-3/8")	
4"	6"	8"	6"	8"

FOR MORE INFORMATION

Product literature
System brochure: IC400
Data sheet: IC401

Online tools
usgdesignstudio.com
or cgcdesignstudio.com

Recycled content
USG C² Paired Compasso™ Channel Accents:
25% recycled content.

Notes
1. Lighting is supplied by others.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.


IC401/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG CELEBRATION™ SNAP-IN METAL PANELS

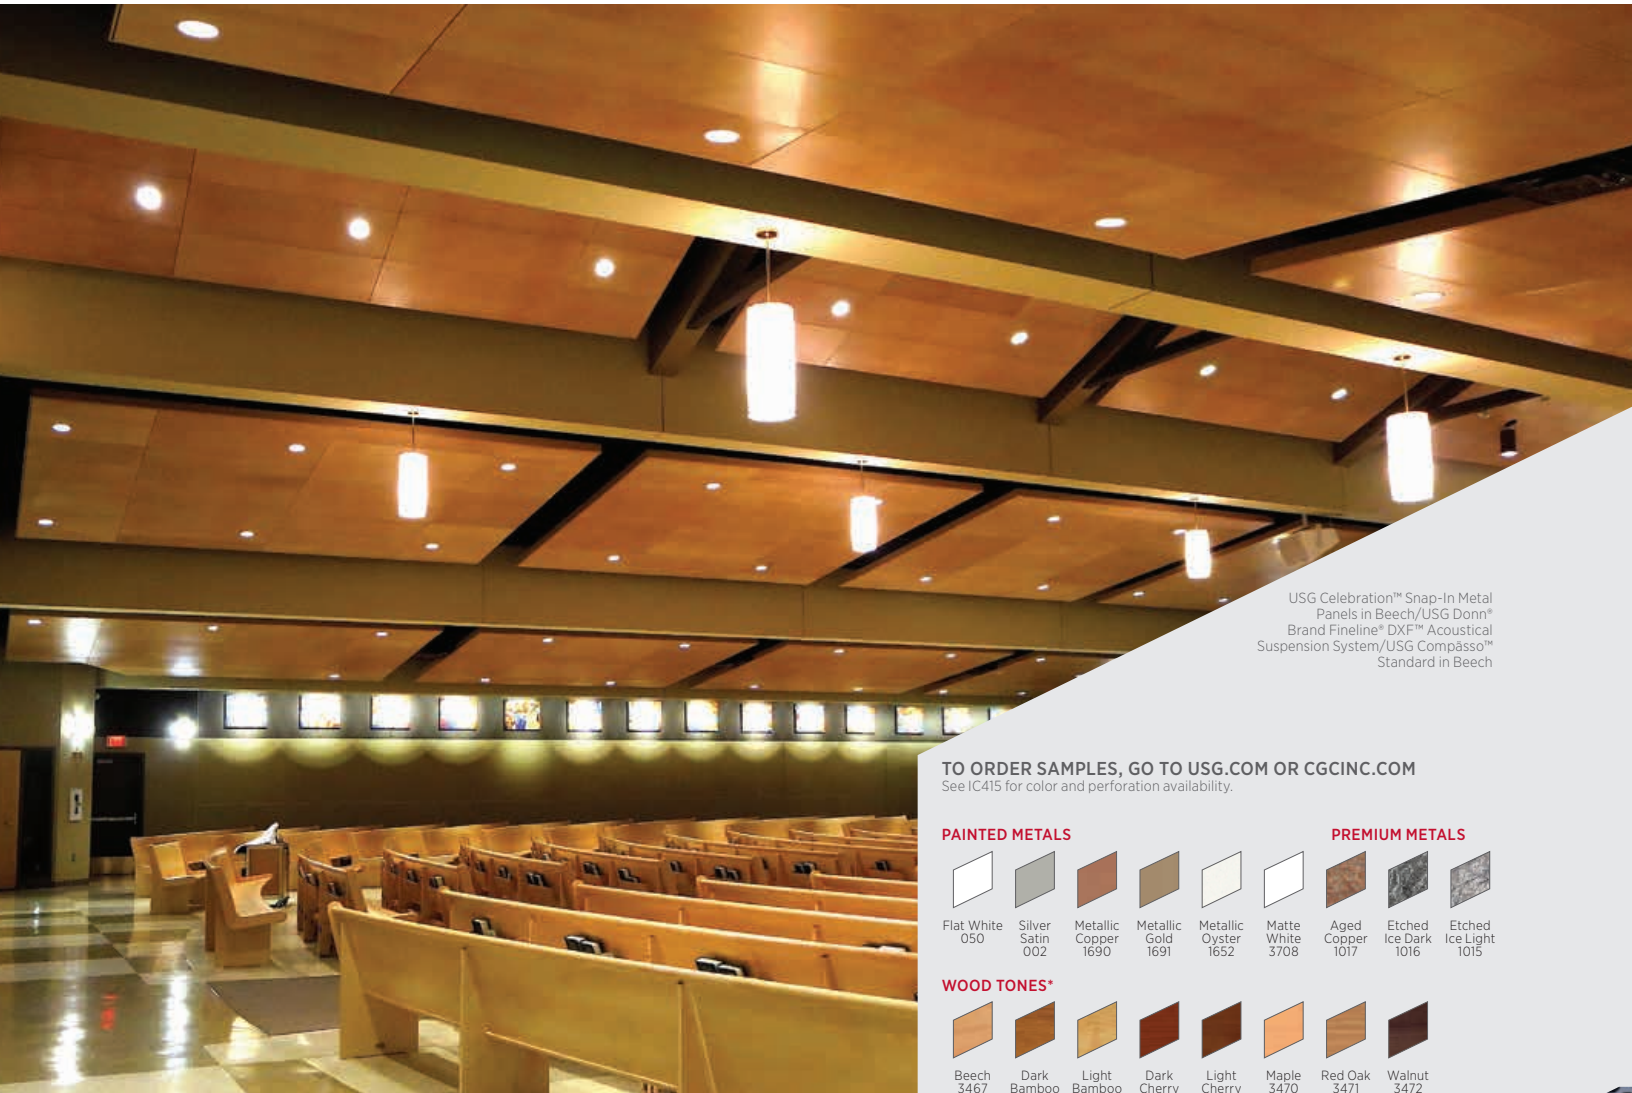


USG Celebration™ Snap-In Metal Panels in Beech/USG Donn® Brand Finline® DXF™ Acoustical Suspension System/USG Compasso™ Standard in Beech

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

See IC415 for color and perforation availability.

PAINTED METALS




PREMIUM METALS



WOOD TONES*



ANODIZED METALS



*Grid and trim available in painted coordinating colors.


FEATURES AND BENEFITS

- Aluminum panels provide a monolithic appearance.
- Easy installation into standard USG Donn® Brand Finline® DXF™ Acoustical Suspension System.
- Aluminum panels are positively attached to the suspension system through engineered connection.
- Downward panel access is excellent for shallow plenum areas.
- Wall-mount solution available; see IC605.
- Wind load tested and approved, including Miami-Dade NOA, for exterior applications with proper bracing and framing.

APPLICATIONS

- Entertainment
- Gaming
- Exterior ceilings
- Hospitality
- Transportation terminals

Perforation C500G

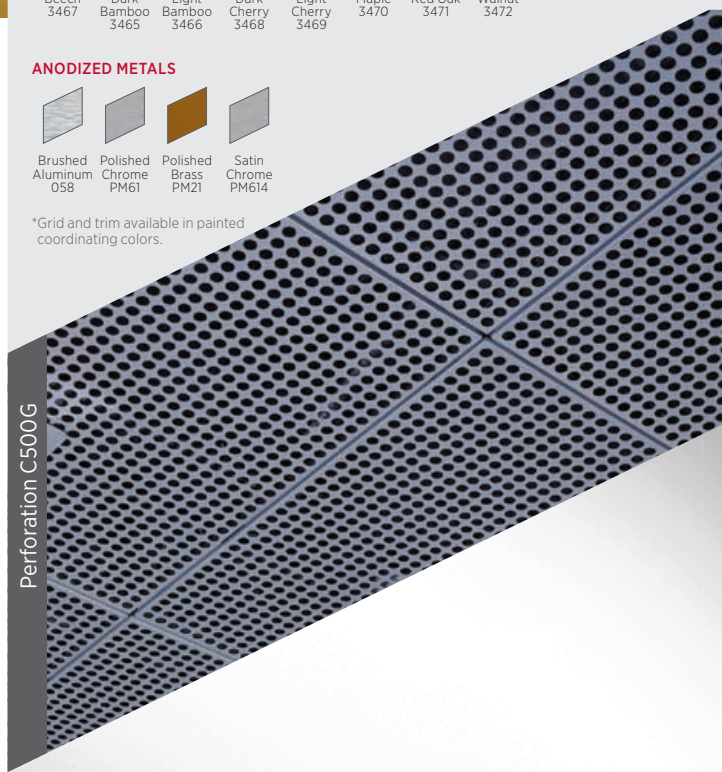

USG CELEBRATION™ SNAP-IN METAL PANELS

ORDER SAMPLES/LITERATURE
 USG: sampllit@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)



PRODUCT INFORMATION

Materials	Finishes	Typical Module Sizes ¹	Plenum Depth	Weight
Aluminum panels	Painted, powder coated or anodized in a variety of optional perforation and embossing patterns.	1'x 4', 1'x 5', 2'x 2', 2'x 4', 2'x 6', 2'x 8', 4'x 4', 20"x 60", 30"x 30", 30"x 60"	Since panels are installed from below, the clearance for installation and removal of panels is minimal. Additional plenum clearance of up to 9" may be required for air boot and lighting installations, depending on the unit selected.	Approximately 0.53 lb./sq. ft., not including lights and air diffusers.

GRID LAYOUT

The modular nature of USG Celebration™ Snap-In panels must be considered when an assembly is designed. The main tees and cross tees must be installed exactly on module lines. USG Celebration Snap-In panels cannot be installed across main tee and a 4 ft. cross tee. Panels may be field-cut at walls and columns or terminated at a grid module for island installations. Larger panels will require cross tees at their midspan². Please refer to IC592 for more information.

ACOUSTICS³

Description	Optional Acoustical Material	Sound Rating – NRC	
		Perforation A062	Perforation A116
Perforated Panel	Acoustibond™ backer	0.60	0.70
Perforated Panel	2", 0.75 lb. fiberglass in polybag (by others)	0.85	0.90


AIR HANDLING

The USG Celebration™ diffuser is an extruded aluminum frame with matching faceplate and color-coordinated vanes, in one-, two-, three- and four-slot configurations, with four-directional throw. Please refer to IC415 for more information.

CODE APPROVAL

USG Celebration™ Snap-In panels provide a continuous interlock with the suspension system through positive attachment. Supporting grid is capable of sustaining loads greater than those imposed by the USG Celebration system when installed in accordance with manufacturer's instructions. The system meets requirements of ASTM C635 and tested per AC368. See PER-14077 and PER-12055.


PERSPECTIVE

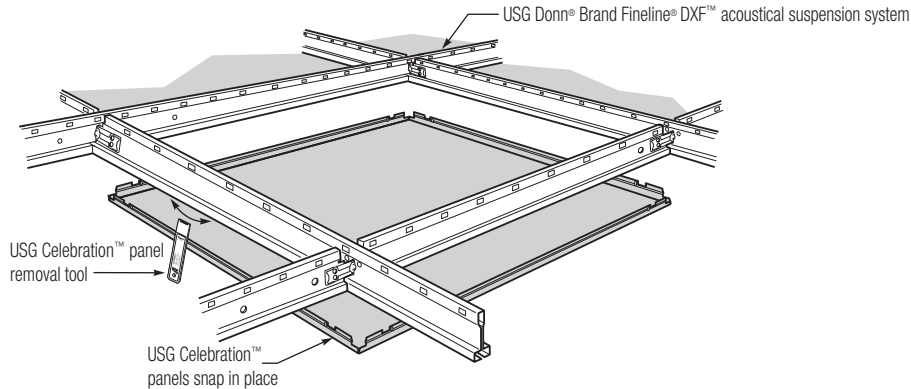


USG CELEBRATION™ AIR DIFFUSER

Available in one-, two-, three- and four-slot configurations, with four-directional throw. See IC415.

View from above

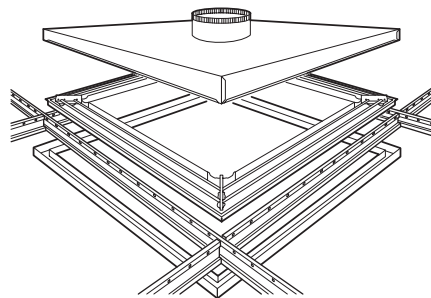

View from below

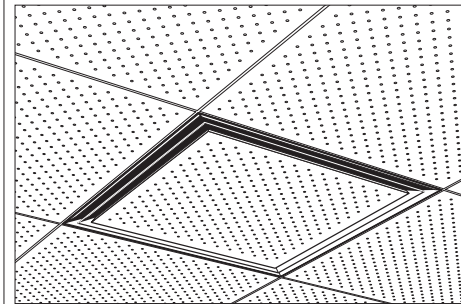

FOR MORE INFORMATION

Client: Resurrection Roman Catholic Parish, Regina, Saskatchewan
 Architect: Stantec Architecture Ltd.
 Structural: JC Kenyon Engineering
 Mechanical: Stantec Consulting
 Electrical: Ritenburg and Associates Ltd.
 Interior Design Consultant: Innovative Interiors

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC308/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Product literature

System brochure: IC415
 Data sheet: IC308
 Perforations selection guide: IC425
 Exterior ceiling systems guide: SC2561

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Notes

- Additional sizes available on request.
- If panel length is ≥ 60 inches then one stabilizer bar or cross tee is required at midpoint.
 - If panel length is ≥ 96 inches then two stabilizer bars or cross tees are required at the 1/3 and 2/3 points.
 - Cross tees ≥ 96 inches used in large modules shall have hanger wires installed minimum 4 ft. o.c.
- Refer to IC425 for additional NRC information based on perforation pattern.



High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.


Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CELEBRATION, COMPASSO, DONN, DXF, FINELINE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG CELEBRATION™ CANOPIES

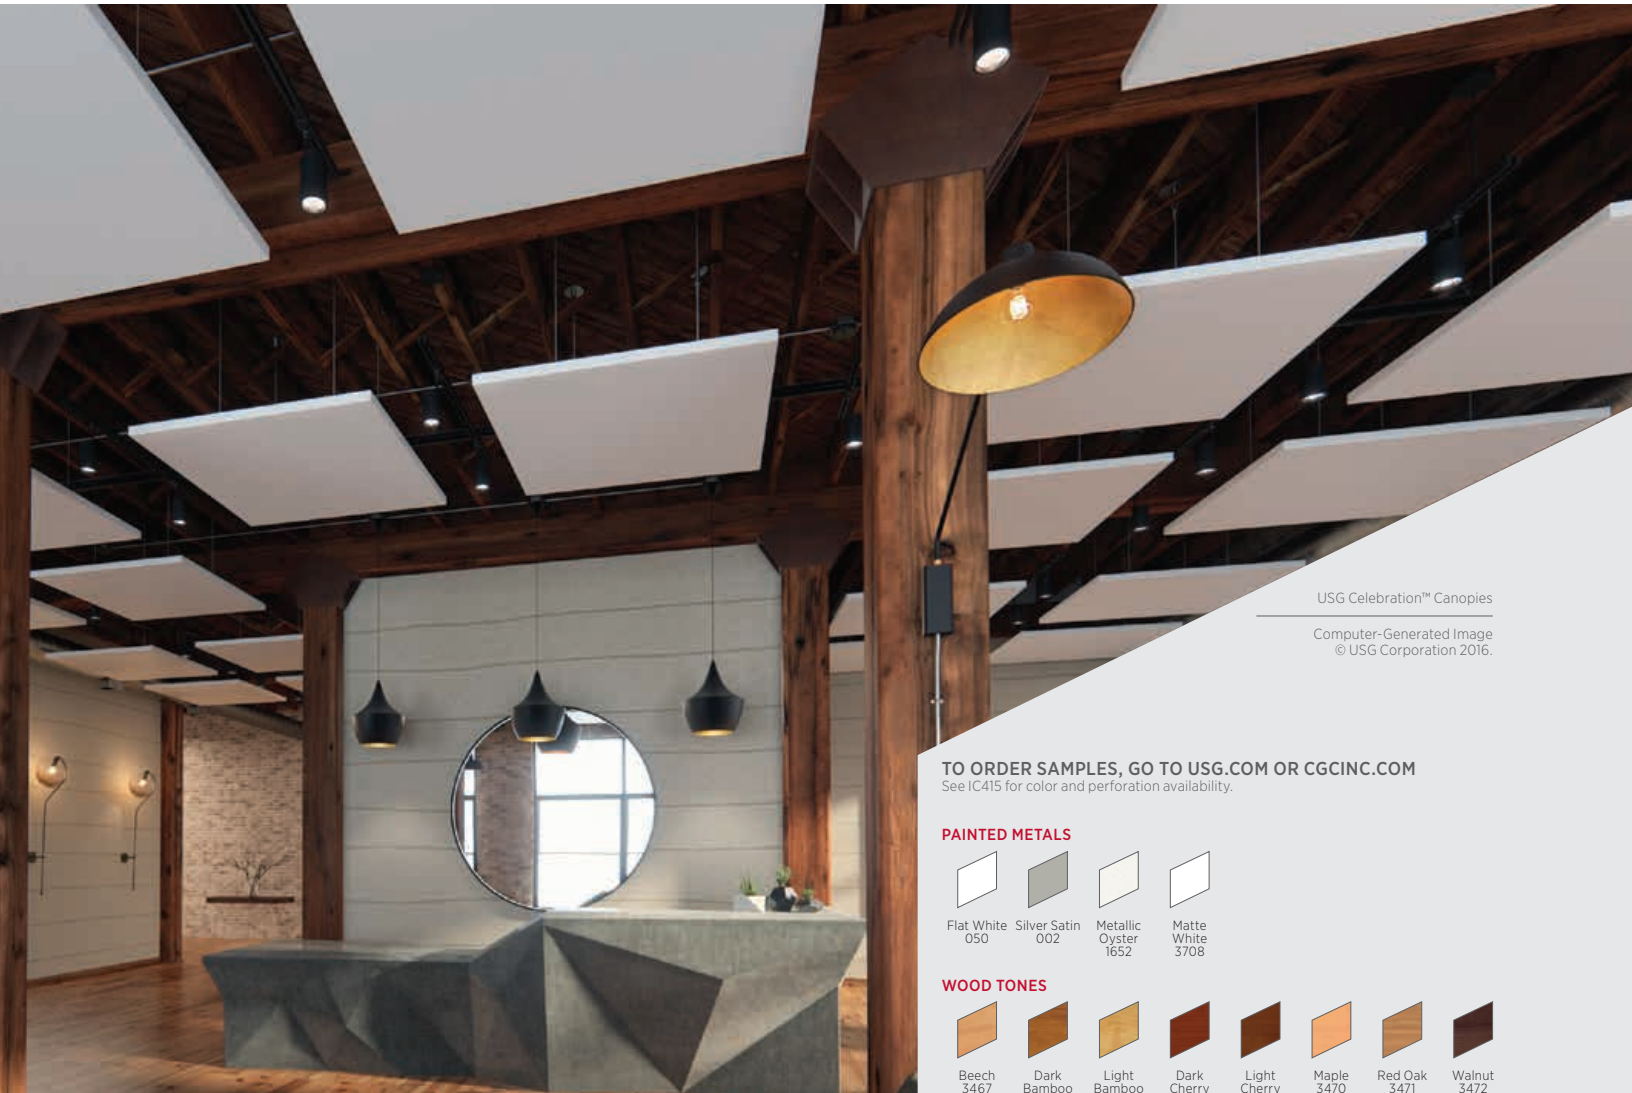

USG Celebration™ Canopies

Computer-Generated Image
© USG Corporation 2016.

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

See IC415 for color and perforation availability.

PAINTED METALS




Flat White 050 Silver Satin 002 Metallic Oyster 1652 Matte White 3708

WOOD TONES



Beech 3467 Dark Bamboo 3465 Light Bamboo 3466 Dark Cherry 3468 Light Cherry 3469 Maple 3470 Red Oak 3471 Walnut 3472

ANODIZED METALS




Brushed Aluminum 058 Polished Chrome PM61 Satin Chrome PM614

FEATURES AND BENEFITS

- Aluminum panels provide a monolithic appearance.
- Durable and easy to maintain.
- Shipped pre-assembled, ready for easy and fast installation.
- Specially engineered hardware allows for simple suspension.
- Exceptional noise reduction with absorption from both the front and back of the panels.
- High light-reflective finish (LR-0.90) for Matte White, 3708.
- Integral return edge requires no finish trim.
- Concealed suspension components with no visible hardware.
- Innovative connection options allow for grouped and ungrouped designs.
- Unconstrained by a linked suspension system to allow freedom of assembly and alignment.

APPLICATIONS

- All interior general-use areas

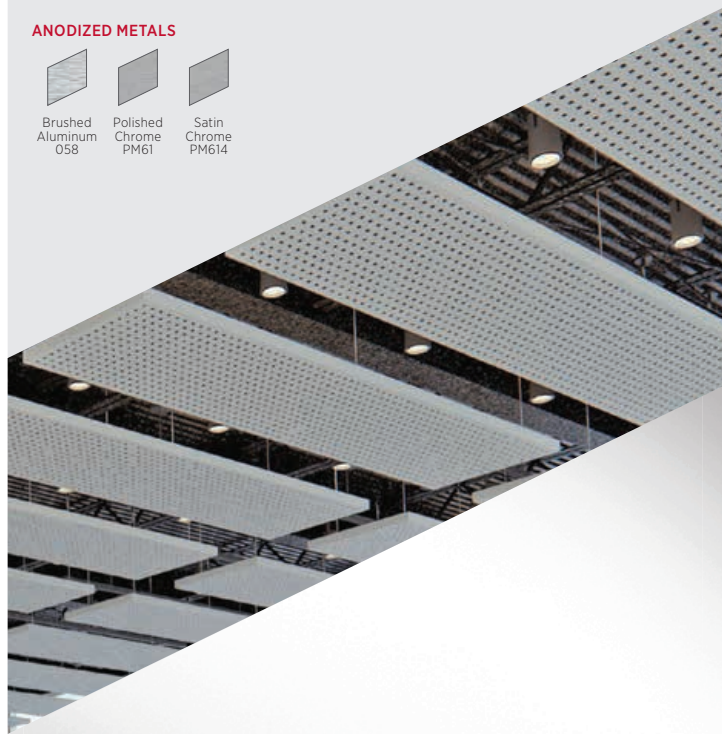

USG CELEBRATION™ CANOPIES

ORDER SAMPLES/LITERATURE
 USG: samplite@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)




PRODUCT INFORMATION¹

Finishes


PERSPECTIVE

Panel edge section



Materials	Edge	Panel Size	Weight	Fire Rating	LR	Recycled Content	Acoustical Performance Data
Aluminum panels; painted and anodized	1.75 in. 90° vertical return leg with 1/2 in. horizontal return flange	24" x 24", 24" x 48", 24" x 60", 24" x 72", 24" x 96", 30" x 30", 30" x 60", 48" x 48", 48" x 60"	0.63 lb./sq. ft.	Class A	0.90 for Matte White, 3708	≤ 90% Recycled Content	See <i>USG Celebration™ Canopies Systems Guide</i> (IC633) for acoustical performance data.

Panels available with perforation. Custom perforation sizes and patterns are available upon inquiry. A special acoustical backing is available for all perforated panels. See *USG Celebration™ Canopies Systems Guide* (IC633) for perforation availability. See *Perforation Selection Guide* (IC425) for custom perforation availability.

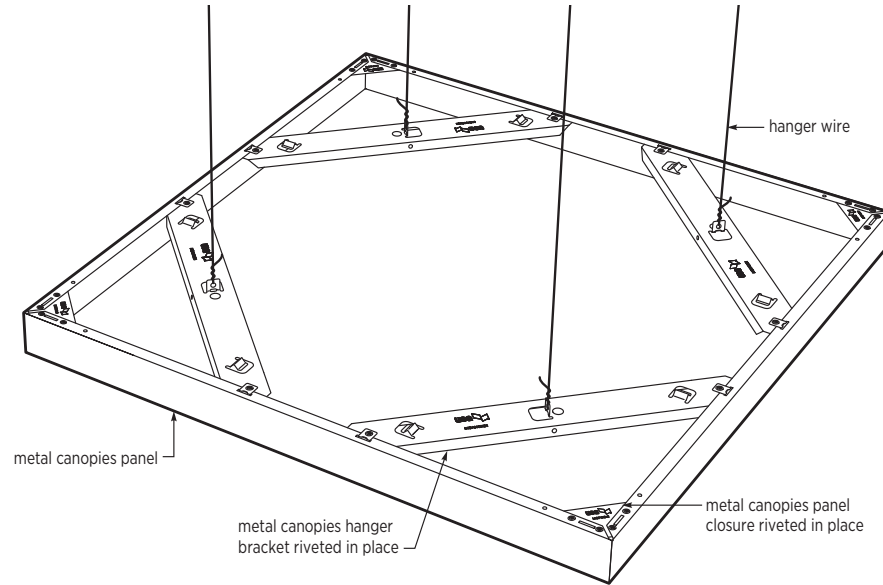

Note: USG Celebration™ canopies are shipped with the hanger brackets and panel closure brackets assembled and attached.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature

Installation guide: IC632
 System guide: IC633
 Data sheet: IC631

Online tools

usgdesignstudio.com or
cgcdesignstudio.com

Installation

Install according to ASTM C636, ASTM E580, Cisca and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system.

Color variations

Some commercially acceptable color variation may occur between lots and between different size canopies of the same color.

Warranty

One (1) year limited warranty. See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) for additional details.

Note

For Canadian product needs, please contact your local sales representative.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC631/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CELEBRATION, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG CELEBRATION™ TORSION SPRING SYSTEM

USG Celebration™
Torsion Spring System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM


PAINTED METALS



WOOD TONES*



ANODIZED METALS



*Trim available in painted coordinating colors.

FEATURES AND BENEFITS

- Aluminum panels provide a monolithic appearance.
- Full 90-degree swing-down motion provides easy downward access to plenum areas.
- Spring clip design provides superior panel alignment.
- No reveal.
- Wind load tested and approved, including Miami-Dade NOA, for exterior applications with proper bracing and framing.

APPLICATIONS

- Entertainment
- Gaming
- Hospitality
- Transportation terminals
- Computer and utility rooms
- Schools
- Healthcare
- Exterior ceilings

USG CELEBRATION™ TORSION SPRING SYSTEM

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)



PRODUCT INFORMATION

Materials	Finishes	Standard Sizes	Plenum Depth	Weight
Aluminum panels; painted and anodized	Panels available with perforation. Custom perforation sizes and patterns are available upon inquiry. A special acoustical backing is available for all perforated panels.	2'x2', 2'x4', 2'x6', 2'x8', 4'x4'	6" minimum to accommodate suspension system and torsion spring	Approximately 0.63 lb./sq. ft.

ACCESS

Any uncut USG Celebration™ Torsion Spring panel has downward accessibility and can be lowered and disengaged lengthwise for access to the space above while the engaged side continues to hold the panel in place to the grid system at a 90° angle. A special panel removal hand tool (part number 209216) available through USG is also recommended for use when lowering panels.

SUSPENSION SYSTEMS

	Component	ASTM Class	Length	Height	Item No.
Main Tees	15/16" Main Tee ¹	Intermediate Duty	12' (3600 mm)	USG: 1.64" (42 mm) CGC: 1.5" (25 mm)	DX/DXL24
	15/16" Main Tee ¹	Heavy Duty	12' (3600 mm)	USG: 1.64" (42 mm) CGC: 1.5" (25 mm)	DX/DXL26
Cross Tees	15/16" Cross Tee ¹	—	2' (600 mm)	1-1/2" (38 mm)	TSCT22
	15/16" Cross Tee ¹	—	4' (1200 mm)	1-1/2" (38 mm)	TSCT44
	15/16" Cross Tee ¹	—	6' (1800 mm)	1-1/2" (38 mm)	TSCT66
Wall Moldings	15/16" Wall Angle ¹	—	12' (3600 mm)	7/8" (22 mm)	M7
	2" Wall Angle ^{1,2}	—	10' (3000 mm)	1" (25 mm)	M20
	2-1/2" F-Molding ³	—	10' (3000 mm)	2-1/2" (64 mm)	CTS15AL
Molding Accessories	Panel Hold-Down Clip ⁴	—	10" (254 mm)	1-9/16" (40 mm)	T15
Perimeter Trims	6" USG Compässo™ Trim	—	—	6" (152 mm)	CP610
	8" USG Compässo™ Trim	—	—	8" (203 mm)	CP810
Perimeter Trim Clips	6" USG Compässo™ Clip	—	—	—	TSCLP615CP
	8" USG Compässo™ Clip	—	—	—	TSCLP815CP
	Perimeter main tee attachment clip for partial module trim applications	—	—	—	CTS-CMSC
Fixture Frames	Fixture Frame 2' x 2' Lay-In	—	—	—	FFLI2424IN
	Fixture Frame 2' x 4' Lay-In	—	—	—	FFLI2448IN
	Fixture Frame 2' x 2' Semi-Flush	—	—	—	FFSF2424IN
	Fixture Frame 2' x 4' Semi-Flush	—	—	—	FFSF2448IN
	Lighting Trim Splice Clip	—	—	—	CTS-LTS
	Lay-In Light Fixture Trim Extrusion	—	10' (3000 mm)	—	CTS-LILFT
	Semi-Flush Light Fixture Trim Extrusion	—	10' (3000 mm)	—	CTS-SFLFT

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature

Data sheet: IC622
 System guide: IC638
 Installation guide: IC637
 Perforations selection guide: IC425

Online tools

usgdesignstudio.com or
cgcdesignstudio.com

Acoustics

The NRC rating of 0.60 is for standard A062 perforation pattern with Acoustibond™ backer.

Recycled content

USG Celebration™ Torsion Spring aluminum panels: up to 90% recycled content.

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction.

Code approval

See PER-12055.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Notes

- Min. G30 hot-dipped galvanized. Install according to ASTM C636, ASTM E580, CISCA and USG requirements.
- For seismic applications. The main-tee and cross-tee connections meet IBC requirements for tension and compression strength.
- Produced from aluminum.
- When hold-down clips are required at the perimeter, the CTS15AL F-Mold can accommodate the USG T-15 Hold-Down Clip. Refer to IC638 for details.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC622/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, COMPÄSSO, CELEBRATION, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG COMPÄSSO™ ELITE EXTRUDED ALUMINUM PERIMETER TRIMS

USG COMPÄSSO™ STANDARD PERIMETER TRIMS



USG Compässon™ Elite Perimeter Trim with USG Halcyon™ Acoustical Panels/USG Donn® Brand Finline® DXF™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS



Flat White 050 Silver Satin 002 Coordinating Matte White 3756

POWDER-COATED METAL



Powder White 3767

WOOD TONES (COMPASSO STANDARD ONLY)



Beech 3467 Dark Bamboo 3465 Light Bamboo 3466 Dark Cherry 3468 Light Cherry 3469 Maple 3470 Red Oak 3471 Walnut 3472

CUSTOM COLORS AVAILABLE




FEATURES AND BENEFITS

- Creates free-form ceiling islands or fascias to define space and provide visual impact.
- Available in variable trim heights.
- Made to order; arrives on-site pre-engineered.
- Strong, durable and long-lasting steel or aluminum construction.
- Fits all USG ceiling systems.
- Compässon™ Elite for DXI™ available (straight only).
- Compässon™ Elite for DXI™ is recommended for use with full-size ceiling panels only.

APPLICATIONS

- Contemporary offices
- Entertainment
- Gaming
- High-bay areas
- Retail spaces

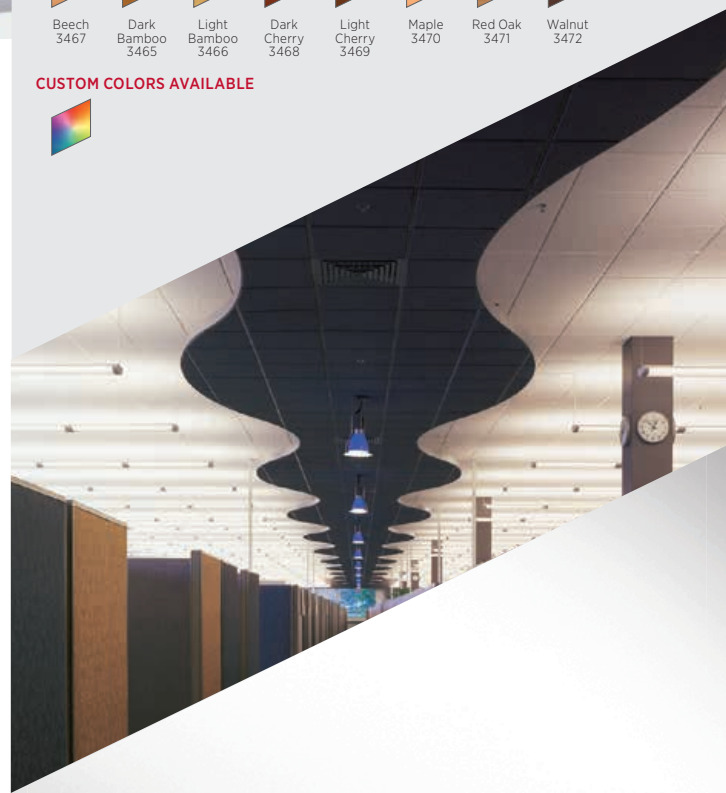

USG COMPASSO™ ELITE EXTRUDED ALUMINUM PERIMETER TRIMS

USG COMPASSO™ STANDARD PERIMETER TRIMS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)


FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION

Perspective

Materials	Finishes
Steel, aluminum	Painted, anodized, plated, powder coated

USG Compasso™ Standard shown

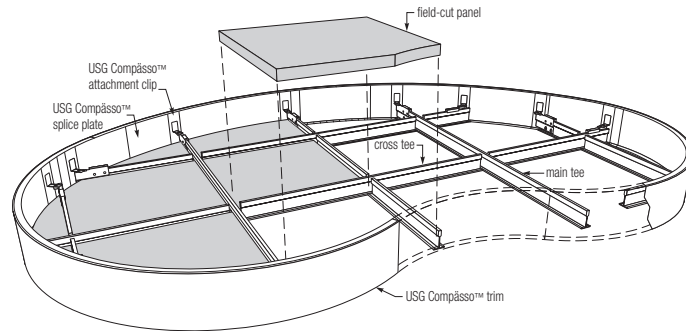

USG Compasso™ Standard

2", 2-1/4"	4"	6"	8"	10"	12"

USG Compasso™ Elite for DXI™ available in 4", 6" and 8", straight only.

Attachment Clip

USG Compasso™ Standard	USG Compasso™ Elite

FOR MORE INFORMATION

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC309/rev. 8-18
 © 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Product literature
 System brochure: IC400
 Data sheet: IC309

Online tools
usgdesignstudio.com
 or cgcdesignstudio.com

Recycled content
 See the Sustainability selector on usgdesignstudio.com or cgcdesignstudio.com.

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, DONN, DXF, FINELINE, HALCYON, IT'S YOUR WORLD. BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG COMPÄSSO™ SLIM PERIMETER TRIMS



USG Compasso™ Slim
Perimeter Trim

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED FINISHES



Flat White
050



Coordinating
Matte White
3756



Silver Satin
002

POWDER-COATED FINISH



Powder
White 3767


FEATURES AND BENEFITS

- Creates a wide, low-profile, “picture frame” edge detail.
- Dramatically frames ceiling islands.
- An innovative alternative to traditional perimeter trim.
- Extruded aluminum with durable Flat White painted or powder-coated finish.
- Precision-engineered to fit USG Donn® Brand DX®/DXL™, Centricitee™ DXT™, Identitee® DXI™ and Finline® DXF™/DXFF™ suspension systems.
- Compatible with Square (SQ), Shadowline (SL) and Finline (FL) acoustical panel edge profiles and drywall suspension systems.

APPLICATIONS

- Contemporary offices
- Entertainment
- Gaming
- High-bay areas
- Retail spaces

Section Detail

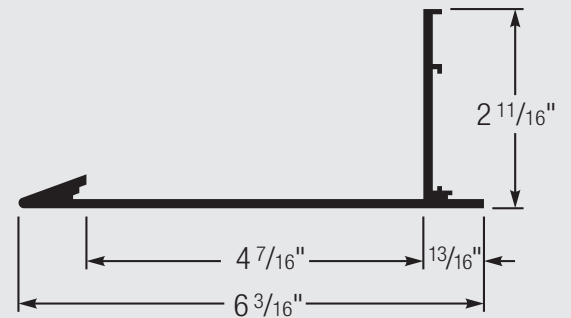

USG COMPASSO™ SLIM PERIMETER TRIMS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative


TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


PRODUCT INFORMATION

Reflected Plan


Materials	Finishes
Extruded aluminum	Baked-on polyester paint or powder-coated finish. Custom colors available.

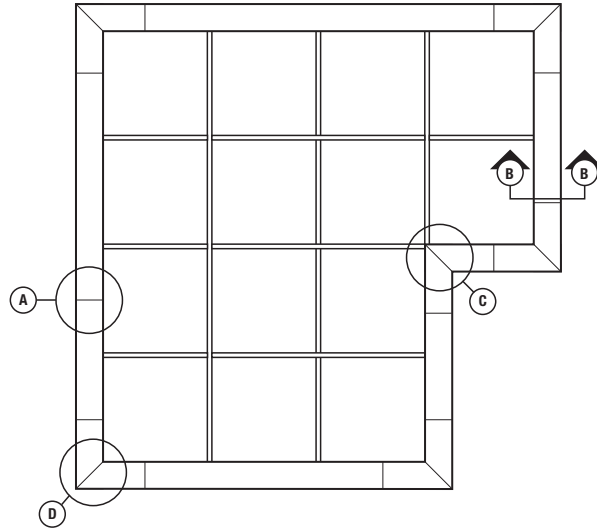


A. Splice Assembly

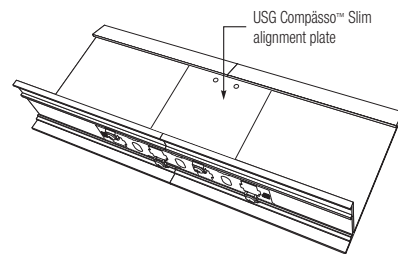


B. Edge Detail – USG Donn® Brand DX®/DXL™ and Centricitee™, Full Module, at Cross Tees

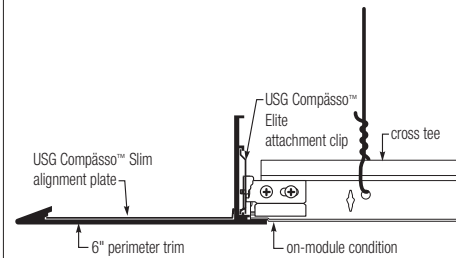

B. Edge Detail – USG Donn® Brand DX®/DXL™ and Centricitee™, Full and Partial Module

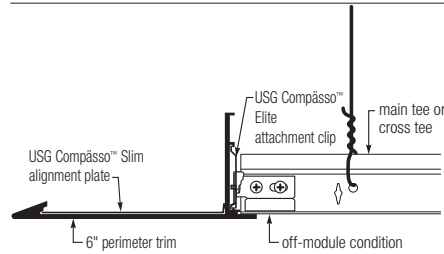


B. Edge Detail – USG Donn® Brand Fineline® Full and Partial Module

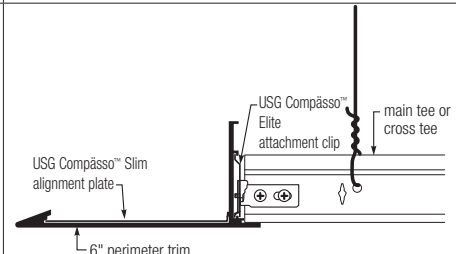


Corner Assembly

C. Inside Corner

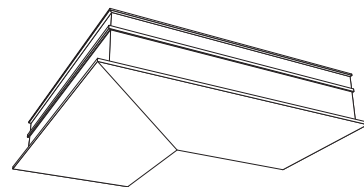

D. Outside Corner

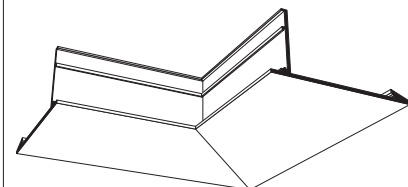

FOR MORE INFORMATION

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC538/rev. 8-17
 © 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Product literature
 Data sheet: IC538

Drywall Suspension Systems

For USG Compasso™ Slim Perimeter Trim with drywall suspension applications, use the USG Compasso™ Elite Celebration™ Clip with the USG Drywall Suspension System.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Recycled content
 ≤ 50% recycled content; 100% recyclable.

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CELEBRATION, CENTRICITEE, COMPASSO, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG COMPÄSSO™ ELITE FOR DRYWALL

EXTRUDED PERIMETER TRIMS - STRAIGHT AND CURVED

USG Compasso Elite for Drywall with
USG Sheetrock Brand Gypsum Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

USG COMPÄSSO™ ELITE FOR DRYWALL COLORS



Primer White


FEATURES AND BENEFITS

- USG Compässö™ Elite for Drywall is an extruded aluminum trim for creating drywall ceiling fascias.
- Easier to install than conventional drywall fascias.
- Available in 2-1/2", 4", 6" and 8" trim heights.
- Can be ordered in standard 10' lengths or custom engineered curves.
- Integrated taping flange for a clean, finished edge.
- Designed for 5/8" thick gypsum board.
- Works with USG Compässö™ Elite attachment clips and splice plates.
- White conversion coat can be field painted or left unpainted.

APPLICATIONS

- Contemporary offices
- Entertainment
- Hospitality
- Healthcare
- Retail
- Education

Perspective

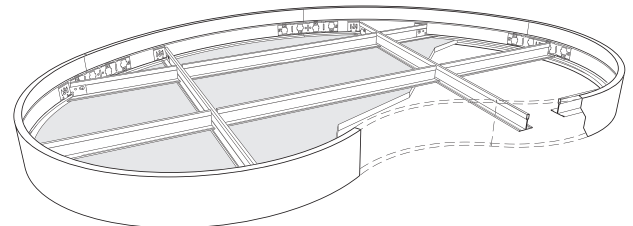

USG COMPASSO™ ELITE FOR DRYWALL

EXTRUDED PERIMETER TRIMS - STRAIGHT AND CURVED






ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
**TECHNICAL INFORMATION
 AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com





TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

COMPONENTS

Trim Profiles

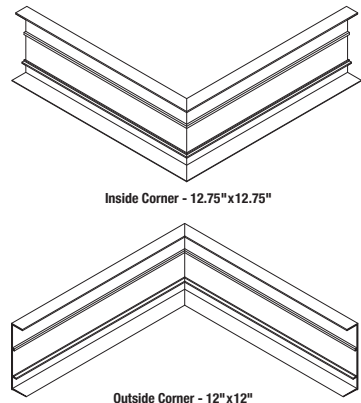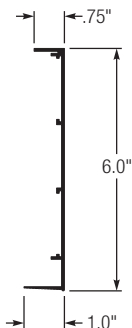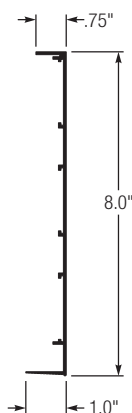		Materials		Finish
		Extruded aluminum alloy		Factory-applied, baked-on polyester conversion coat
2-1/2"	4"	6"	8"	Factory-Welded Corners (Quick ship straight shown)  Inside Corner - 12.75"x12.75" Outside Corner - 12"x12"
				

Attachment and Finishing Details

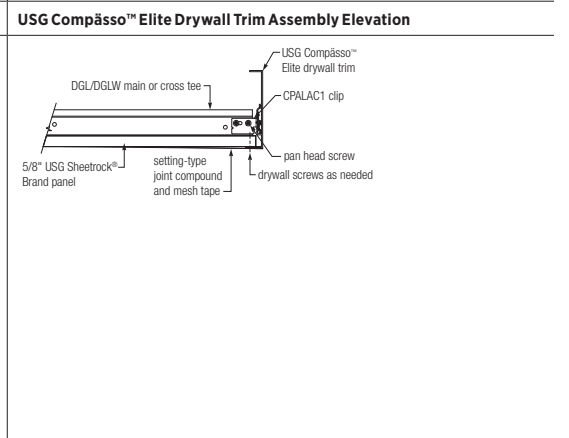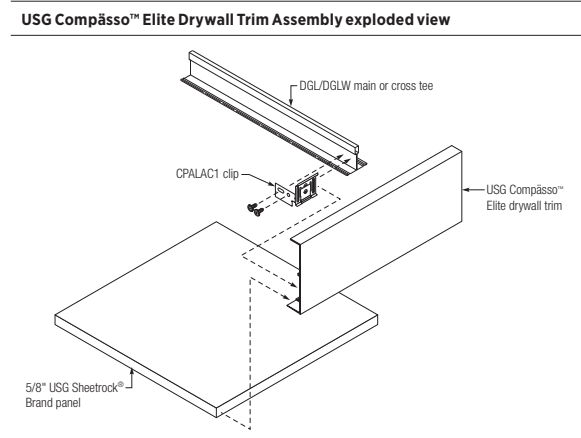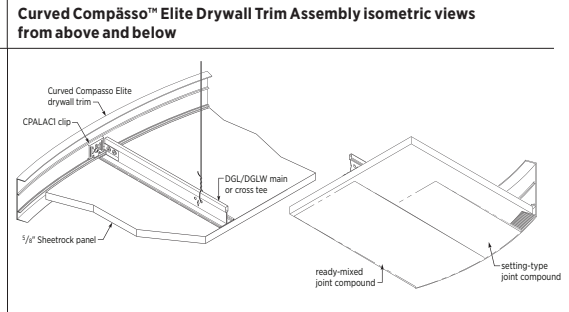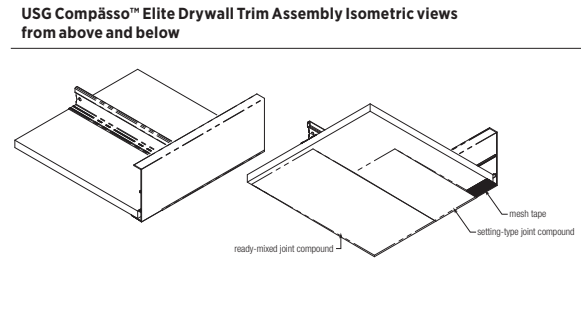

FINISHING RECOMMENDATIONS

1. Setting type joint compound is recommended for the first coat on the taping flange.
2. Apply second coat using ready-mixed or setting-type joint compound.
3. Apply third coat of joint compound if needed.

Note

Use USG Compasso™ Elite splice plates for joining pieces together.

FOR MORE INFORMATION

Product literature

Installation guide: IC624

Material

Extruded aluminum alloy

Samples (straight)

2-1/2" - 259732

4" - 258410

6" - 259412

8" - 259413

Recycled content

For details, see the LEED report tool at usgdesignstudio.com or cgcdesignstudio.com

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Limitations

Interior applications only.

Notice

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3317/rev. 5-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG COMPÄSSO™ ELITE TRANSITIONS



USG Compässo™ Elite DAS
Transitions Trim with
USG Mars™ Acoustical Panels/
USG Donn® Brand Identitee® DXI™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

Other colors available by special order.




Flat White
050

FEATURES AND BENEFITS

- USG Compässo™ Elite Transitions are extruded aluminum trims for creating elevation change fascias between differing ceiling planes.
- Easier to install than conventional drywall fascias.
- Available for drywall lower to acoustical upper and acoustical to acoustical ceiling transitions.
- Drywall transition has an integrated taping flange for a clean, finished edge.
- Designed for 5/8" thick gypsum board.
- Compatible with all USG Donn® Brand Suspension Systems and USG Drywall Suspension Systems.
- Works with USG Compässo™ Elite attachment clips and splice plates.

APPLICATIONS

- Contemporary offices
- Healthcare
- Entertainment
- Retail
- Hospitality
- Education

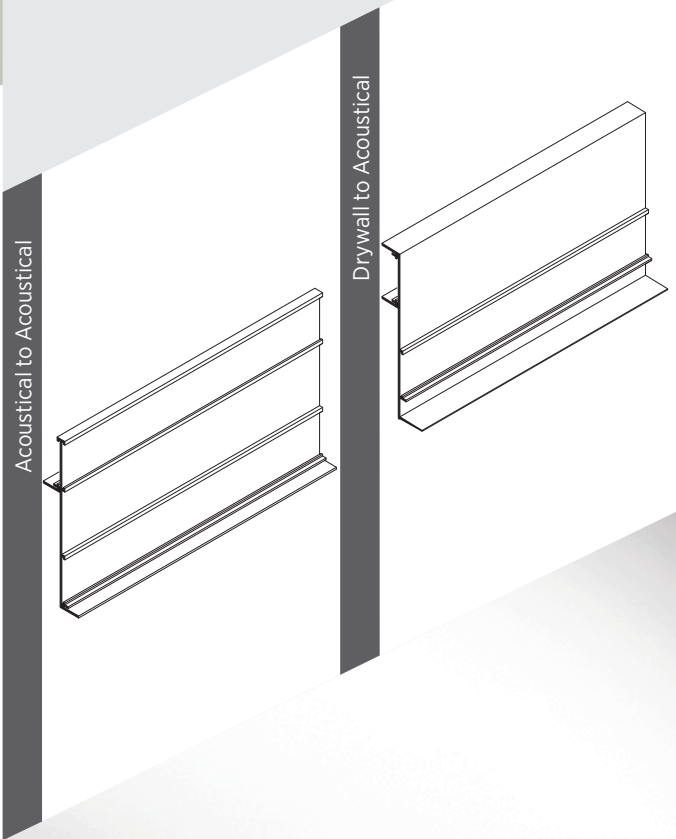

USG COMPASSO™ ELITE TRANSITIONS











ORDER SAMPLES/LITERATURE
 USG: samplite@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


PRODUCT INFORMATION

TRIM PROFILES

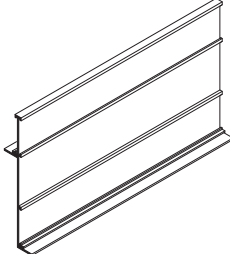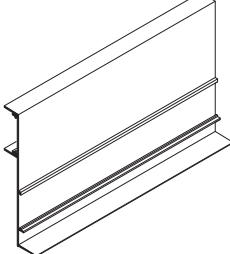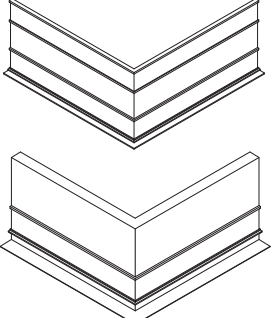
Materials	Length		Finishes		
Extruded aluminum alloy	10 ft.		Factory-applied powder-coated polyester finish		
USG Compasso™ Elite AAS Acoustical to Acoustical	2" - ALSFTACAC210	3" - ALSFTACAC310	4" - ALSFTACAC410	5" - ALSFTACAC510	6" - ALSFTACAC610
					
USG Compasso™ Elite DAS Drywall Lower to Acoustical Upper	2" - ALSFTDWAC210	4" - ALSFTDWAC410	6" - ALSFTDWAC610	Available Factory-Welded Corners	
					

ATTACHMENT DETAILS

USG Compasso™ Elite AAS

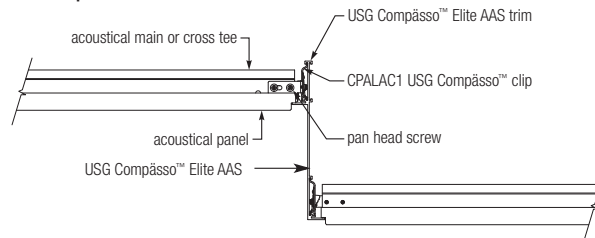

USG Compasso™ Elite DAS

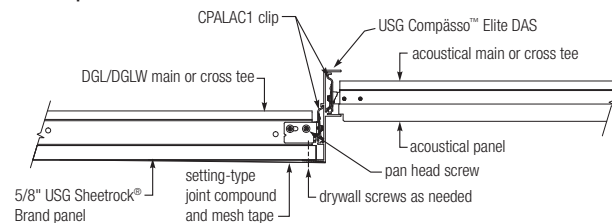

Important:

Taping flange must be lightly sanded before applying joint compound. For complete installation instructions, refer to *USG Compasso™ Elite Transitions Installation Guide (IC624)*.

Product literature

Installation guide: IC624

Samples:

2" AAS - 259402, 3" AAS - 259403, 4" AAS - 259404,
 5" AAS - 259405, 6" AAS - 259406, 2" DAS - 259407
 4" DAS - 259408, 6" DAS - 259409

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Material

Extruded aluminum alloy.

Limitations

Interior applications only.

FOR MORE INFORMATION

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC623/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661


The trademarks USG, CGC, COMPASSO, DONN, DXI, IDENTITEE, MARS, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG COMPÄSSO™ ELITE

PERIMETER TRIMS WITH ISLAND ACCENT LIGHTING

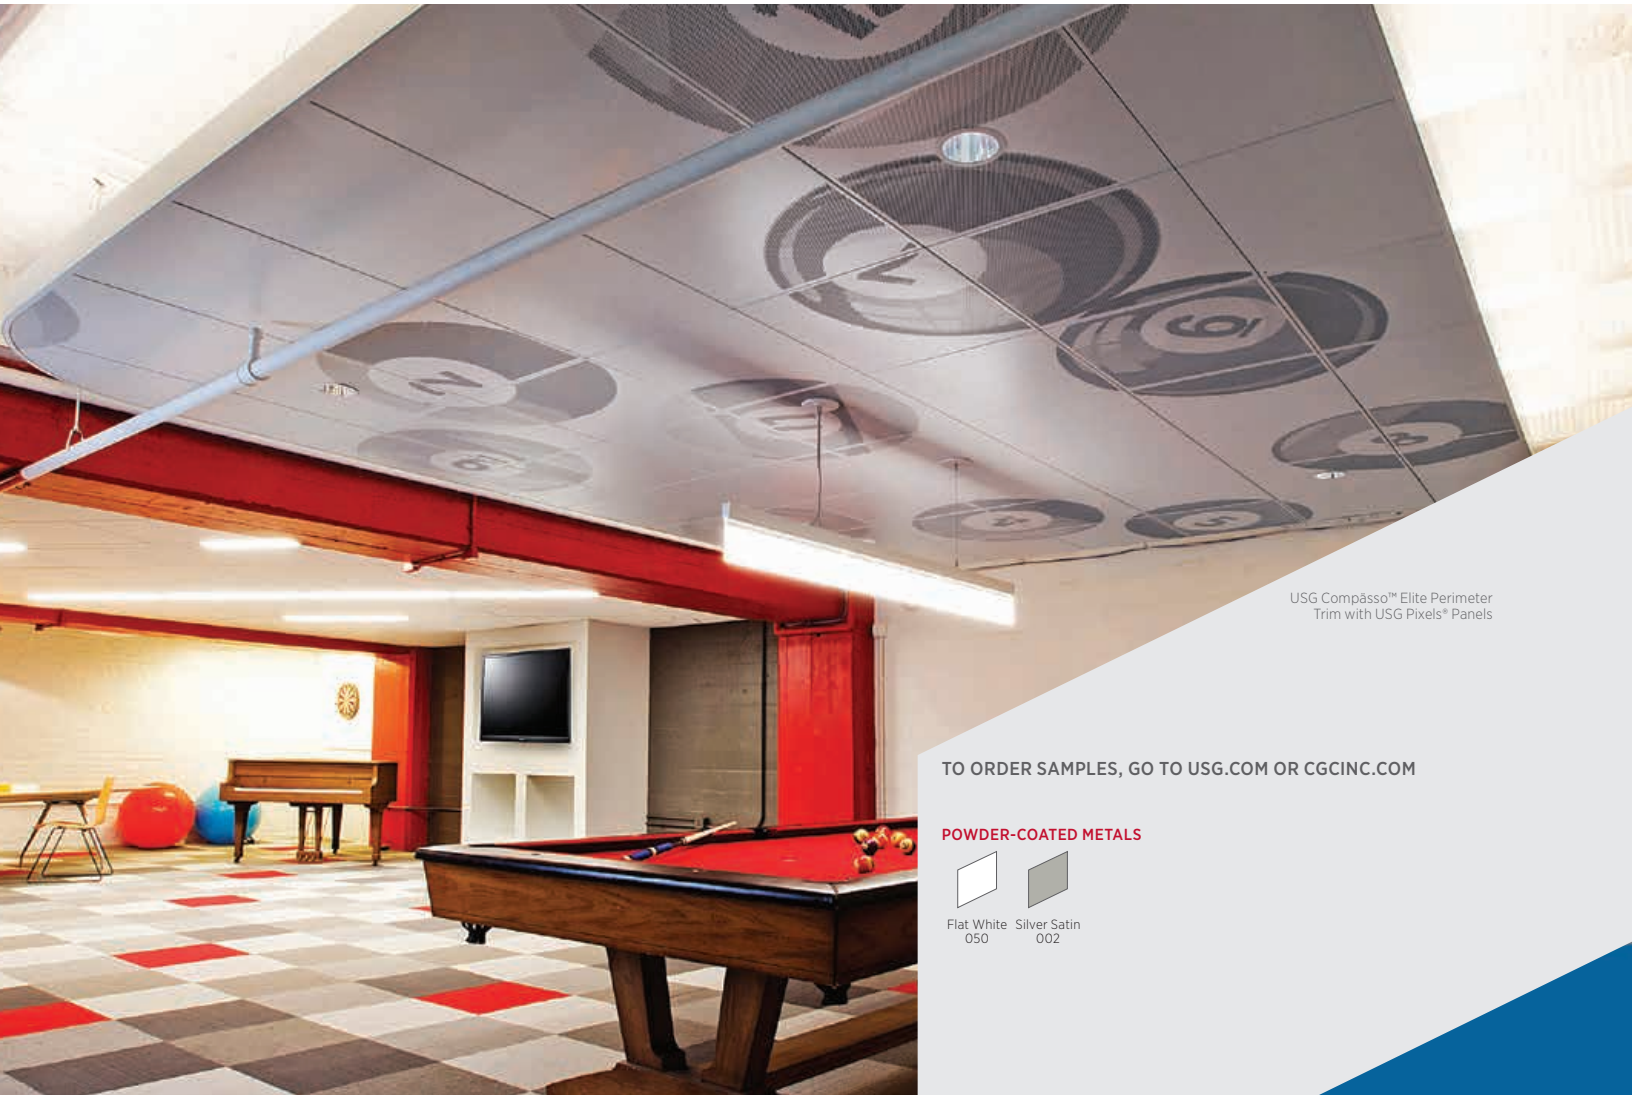

USG Compässon™ Elite Perimeter Trim with USG Pixels® Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

POWDER-COATED METALS



FEATURES AND BENEFITS

- Creates free-form ceiling islands with uplighting.
- Accommodates GE's Accent lighting modules.
- Available on all engineered USG Compässon™ Elite designs.
- Unique flexible track accommodates curved island designs.
- Proprietary clip attaches to USG Compässon™ Elite trim and provides cradle track and lights with exact angle for optimal lighting results.
- Designed together to work together.
- Available with USG Compositions® Decorative Clouds.

APPLICATIONS

- Contemporary offices
- Entertainment
- Gaming
- Retail spaces
- Virtually anywhere



USG COMPASSO™ ELITE

PERIMETER TRIMS WITH ISLAND ACCENT LIGHTING

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)


FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION

Finishes

Standard colors, Advantage colors and custom colors

PERSPECTIVE

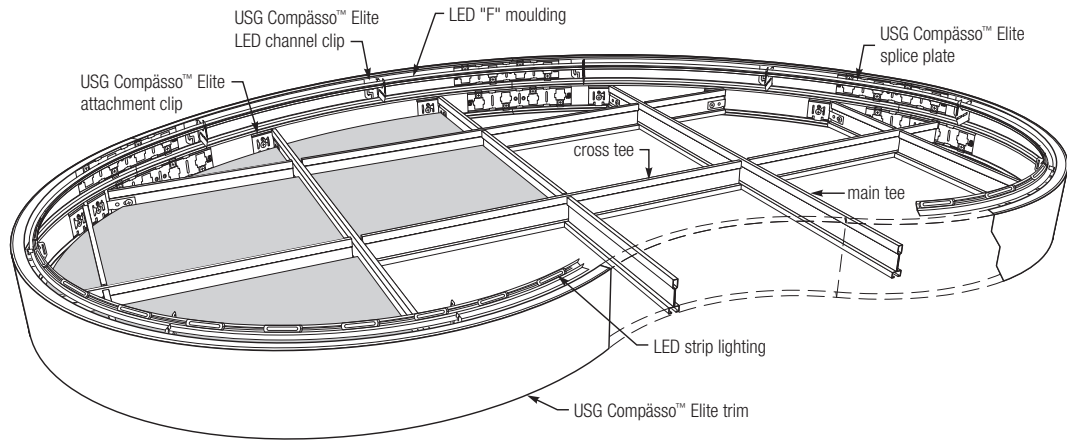


Trim Profiles Elite


4"	6"	8"	10"

Attachment Clip

Clip and Track

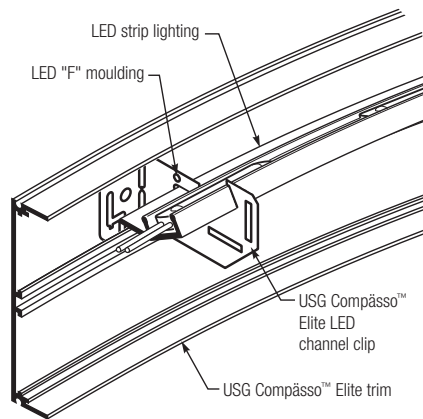

USG Compasso™ Elite Accent Lighting Assembly

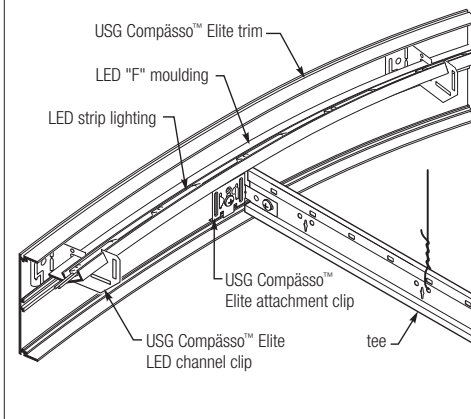

FOR MORE INFORMATION

Product literature
 System brochure: IC400
 Data sheet: IC612

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Recycled content
 See the Sustainability selector on usg.com or cgcinc.com.

Notes
 High Recycled Content is for USG Compasso™ Standard only.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC612/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, COMPOSITIONS, PIXELS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG COMPOSITIONS® DECORATIVE CLOUDS



USG Compositions® Decorative Clouds/USG Mars™ Acoustical Panels/USG Donn® Brand DX®/DXL™ Acoustical Suspension System


TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



Flat White
050

SUSPENSION SYSTEM



TRIM PROFILES



FEATURES AND BENEFITS

- Decorative clouds offered in several attractive shapes and configurations.
- Precut components expertly packaged and shipped in one convenient box.
- Custom look without the difficult coordination of custom applications.
- Premier USG Compäso™ Elite extruded perimeter trim.
- Fit-and-finish trim aesthetics appear seamless with minimal trim intersections and no corner trim intersections.
- Installation requires minimal hanger wires, eliminating the need for wires at perimeters.
- Simplifies specifying and ordering.

Note: Panels are selected and shipped separately.

APPLICATIONS

- All interior general-use areas

USG COMPOSITIONS® DECORATIVE CLOUDS


ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

15/16" TEE SYSTEM

Main Tee



Cross Tee



Tees	ASTM Class	Length	Height	Item Number	Color
	Heavy Duty	Custom per kit	1-1/2"	DX/DXL26	Flat White
	—	4'	1-1/2"	DX/DXL424	Flat White
	—	2'	1-1/2"	DX224	Flat White

PANEL OPTIONS	Square Edge	Shadowline	Shadowline Tapered	Shadowline Beveled

ACCENT LIGHTING OPTION	AL Clip	AL Flexible Track	AL Lighting
			Supplied by GE GElighting.com

Note: Panels are selected and shipped separately.

LAYOUTS

Squares		Rounded Rectangles	
Layout	Trim	Layout	Trim
6'x6'	4", 6", 8"	6'x6'	4", 6", 8"
6'x8'	4", 6", 8"	6'x8'	4", 6", 8"
6'x10'	4", 6", 8"	6'x10'	4", 6", 8"
6'x12'	4", 6", 8"	6'x12'	4", 6", 8"
6'x14'	4", 6", 8"	6'x14'	4", 6", 8"
8'x8'	4", 6", 8"	8'x8'	4", 6", 8"
8'x10'	4", 6", 8"	8'x10'	4", 6", 8"
8'x12'	4", 6", 8"	8'x12'	4", 6", 8"
8'x14'	4", 6", 8"	8'x14'	4", 6", 8"
10'x10'	4", 6", 8"	10'x10'	4", 6", 8"
10'x12'	4", 6", 8"	10'x12'	4", 6", 8"
10'x14'	4", 6", 8"	10'x14'	4", 6", 8"
12'x12'	4", 6", 8"	12'x12'	4", 6", 8"
12'x14'	4", 6", 8"	12'x14'	4", 6", 8"

EDGE TRIM OPTIONS

4"	6"	8"

ACCESSORIES

Tee Brace	Splice Plate	Attachment Clip	12-Gauge Hanger Wire

FOR MORE INFORMATION

Product literature
 System guide: IS267
 Installation guide: IS266
 Data sheet: IS282

Installation
 Must be installed in compliance with ASTM C636, ASTM E580, CISCA and standard industry practices, within all applicable code requirements. Alternative assemblies and installation methods may be utilized when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance
 For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764
 Refer to usg.com for most current version.

Notice
 We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IS282/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, COMPOSITIONS, DONN, DX, DXL, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG CURVATURA™ 3-DIMENSIONAL CEILING SYSTEM

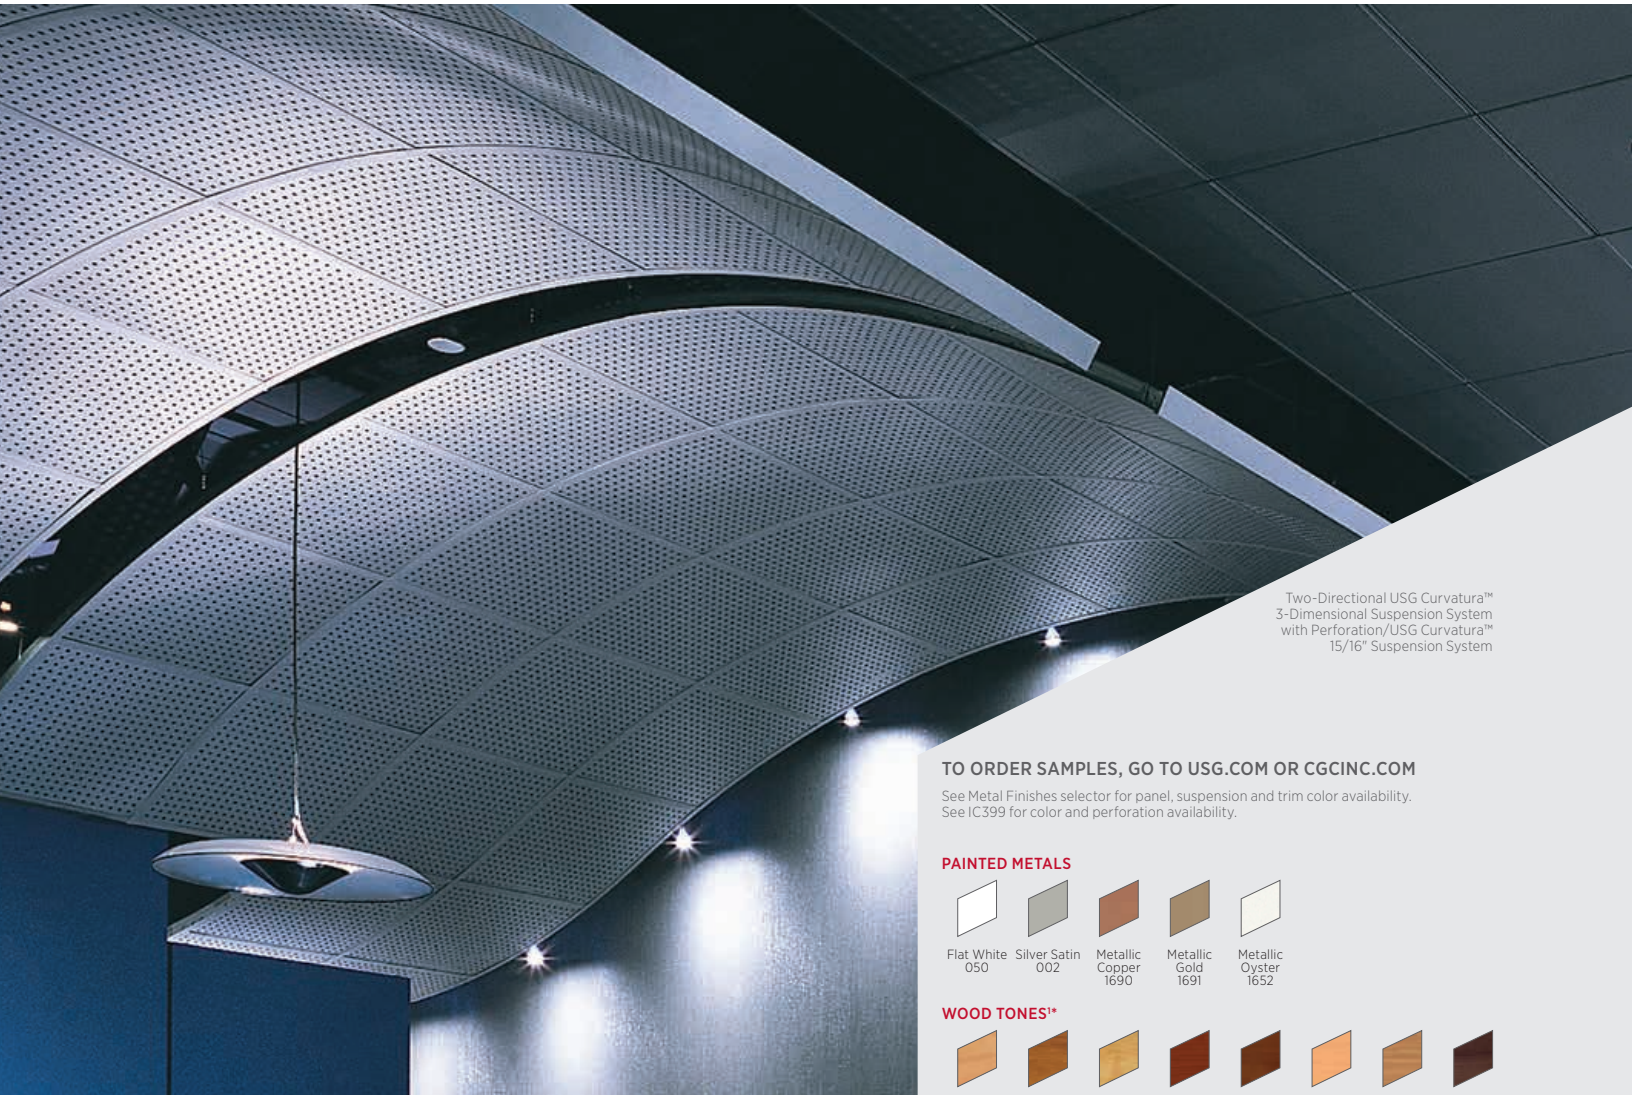

Two-Directional USG Curvatura™
3-Dimensional Suspension System
with Perforation/USG Curvatura™
15/16" Suspension System

FEATURES AND BENEFITS

- Create dramatic three-dimensional curved designs that combine shape, texture and lighting.
- Curved main tee segments and flexible panels provide endless combinations.
- Available in two configurations: One-Directional USG Curvatura™ with 2'x6' infill panels and Two-Directional USG Curvatura™ with 2'x2' panels.
- Secure 15/16" grid profile for stability.
- Coordinating colors for trim and suspension Wood Tone panels.
- Custom colors available.


APPLICATIONS

- Contemporary office environments
- Entertainment
- Gaming
- High-bay areas
- Retail space

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

See Metal Finishes selector for panel, suspension and trim color availability. See IC399 for color and perforation availability.

PAINTED METALS




Flat White 050 Silver Satin 002 Metallic Copper 1690 Metallic Gold 1691 Metallic Oyster 1652

WOOD TONES*



Beech 3467 Dark Bamboo 3465 Light Bamboo 3466 Dark Cherry 3468 Light Cherry 3469 Maple 3470 Red Oak 3471 Walnut 3472


DIAMONDFLEX™#1



Louvered Bright White Louvered Bright Silver Sheer Bright White Sheer Bright Silver

*Grid and trim available in painted coordinating colors.

One-Directional USG Curvatura™

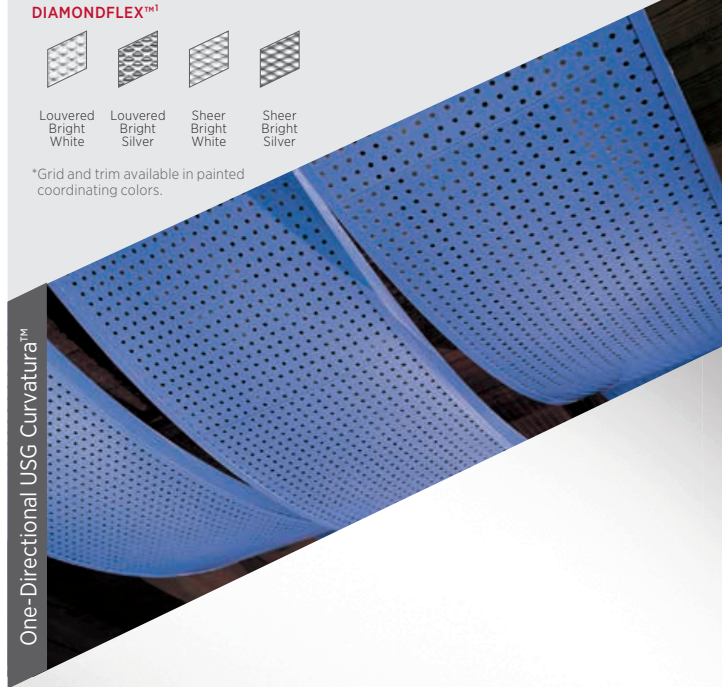

USG CURVATURA™ 3-DIMENSIONAL CEILING SYSTEM

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative



TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION


PERSPECTIVE

Two-Directional System
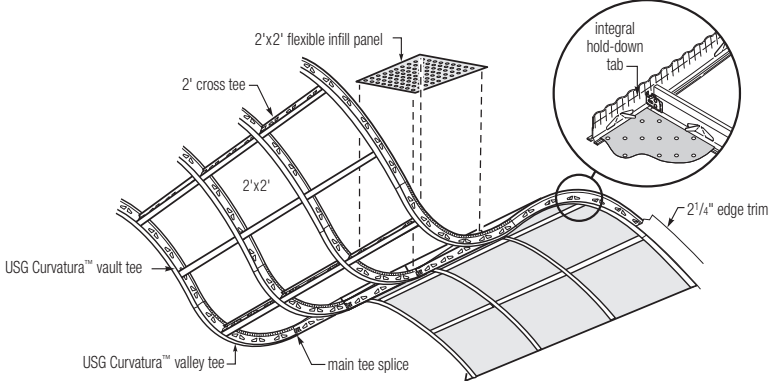
<p>Materials</p> <p>Panel: Available smooth or perforated Painted Metals and DiamondFlex™ expanded metal.¹ 2'x2' USG Translucents™ panels are also available.</p>	<p>Finishes</p> <p>Available with perforation and/or embossing</p>
<p>2'x2' Panels</p> 	<p>Available Grid Profile</p> <p>Standard</p>  <p>Vault Valley</p>

One-Directional System²

2'x6' Panels

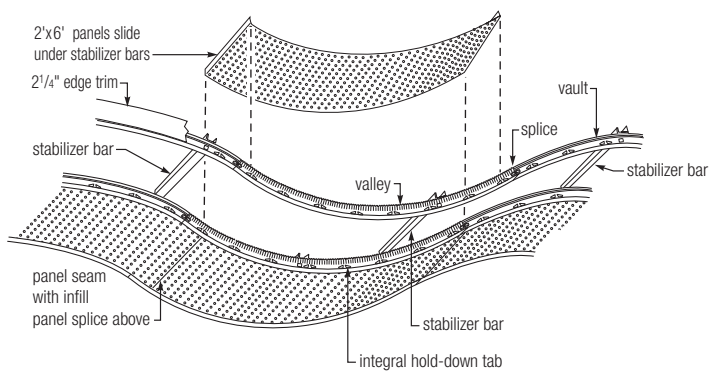

CURVED COMPONENTS

(Available as vaults and valleys)

10' Arc Length	8' Arc Length	6' Arc Length	4' Arc Length
R = 229"	R = 183"	R = 138"	R = 92"
R = 153"	R = 122"	R = 92"	R = 61"
R = 115"	R = 92"	R = 69"	R = 46"
R = 77"	R = 61"	R = 46"	R = 31"

FOR MORE INFORMATION

Product literature
 System brochure: IC399
 Data sheet: IC310
 Design selector: IC36109
 Perforation selector: IC425

Limitation
 Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Recycled content
 USG Curvatura™ aluminum panels: ≤ 90% recycled content. Steel panels: 25% recycled content. Suspension: 25% recycled content.

- Notes**
- DiamondFlex™ and Wood Tone panels available for Two-Directional USG Curvatura™.
 - One-Directional USG Curvatura™ Systems shall not be used in seismic design categories C, D, E and F.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC310/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CURVATURA, DIAMONDFLEX, TRANSLUCENTS, IT'S YOUR WORLD. BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS



USG Geometrix® Flat Panels
and 3" Wedge Panels/USG Donn®
Brand Centricitee™ DXT™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS



Flat White 050 Silver Satin 002

FEATURES AND BENEFITS

- Multiple profiles and depths lend new dimension to ceiling design.
- Panel depths of 1", 2" and 3" allow a spectrum of possibilities, from subtle textures to bold rhythms.
- 2'x2' lay-in panels are compatible with 9/16" and 15/16" USG Donn® Brand suspension systems.
- Solid or perforated panels.
- Available in Flat White, Silver Satin and custom colors for design versatility.

APPLICATIONS

- All commercial applications

USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)



PRODUCT INFORMATION

ACOUSTICS³

PANELS


Configurations

Depths

EDGE DETAILS

ASSEMBLY

Materials	Size and Weight	Finishes	
Panels: Aluminum	Panels 2'x2' Panel weight (for 3" deep flat panel): 0.75 lb./sq. ft.	Panels are available in smooth metal or in a choice of five perforated patterns (C375, D250, D375, C062 and C062A). A black Acoustibond™ backer is included on all perforated panels unless otherwise specified. Acoustibond backer is also available in white.	
Description	Optional Acoustical Material	Sound Rating - NRC	
Perforated panel	Acoustibond™ backer	0.60	
Perforated panel	2" 0.75 lb. fiberglass in polybag (by others)	0.85	
Flat ^{1,2}	Wedge ¹	Outside Wedge Corner	Inside Wedge Corner
USG Geometrix® Panels with 15/16" USG DX®/DXL™ Suspension	USG Geometrix® Panels with 9/16" USG Centricitee™ DXT™ Suspension	USG Geometrix® Panels with 9/16" USG Finline® DXF™ Suspension	USG Geometrix® Panels with 9/16" USG Finline® 1/8 DXFF™ Suspension

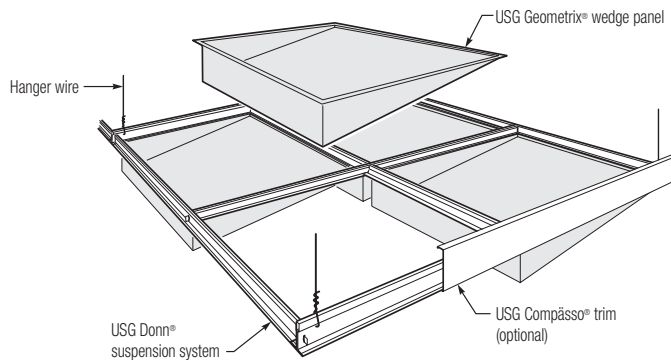

HRC High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature
 System brochure: IC437
 Data sheet: IC424

Limitation
 Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association.

Recycled content
 USG Geometrix® aluminum panels:
 ≤ 90% recycled content.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)
 Class A
 Flame spread: 15 or less
 Smoke developed: 30 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Notes

1. Available pre-engineered utility circles accommodate lighting and utilities.
2. Also available with 5/16" depth.
3. Refer to IC425 for additional NRC information based on perforation pattern.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC424/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CENTRICITEE, COMPASSO, DONN, DX, DXF, DXFF, DXL, DXT, FINELINE, GEOMETRIX, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG GRIDWARE™ OPEN CELL DECORATIVE SYSTEM

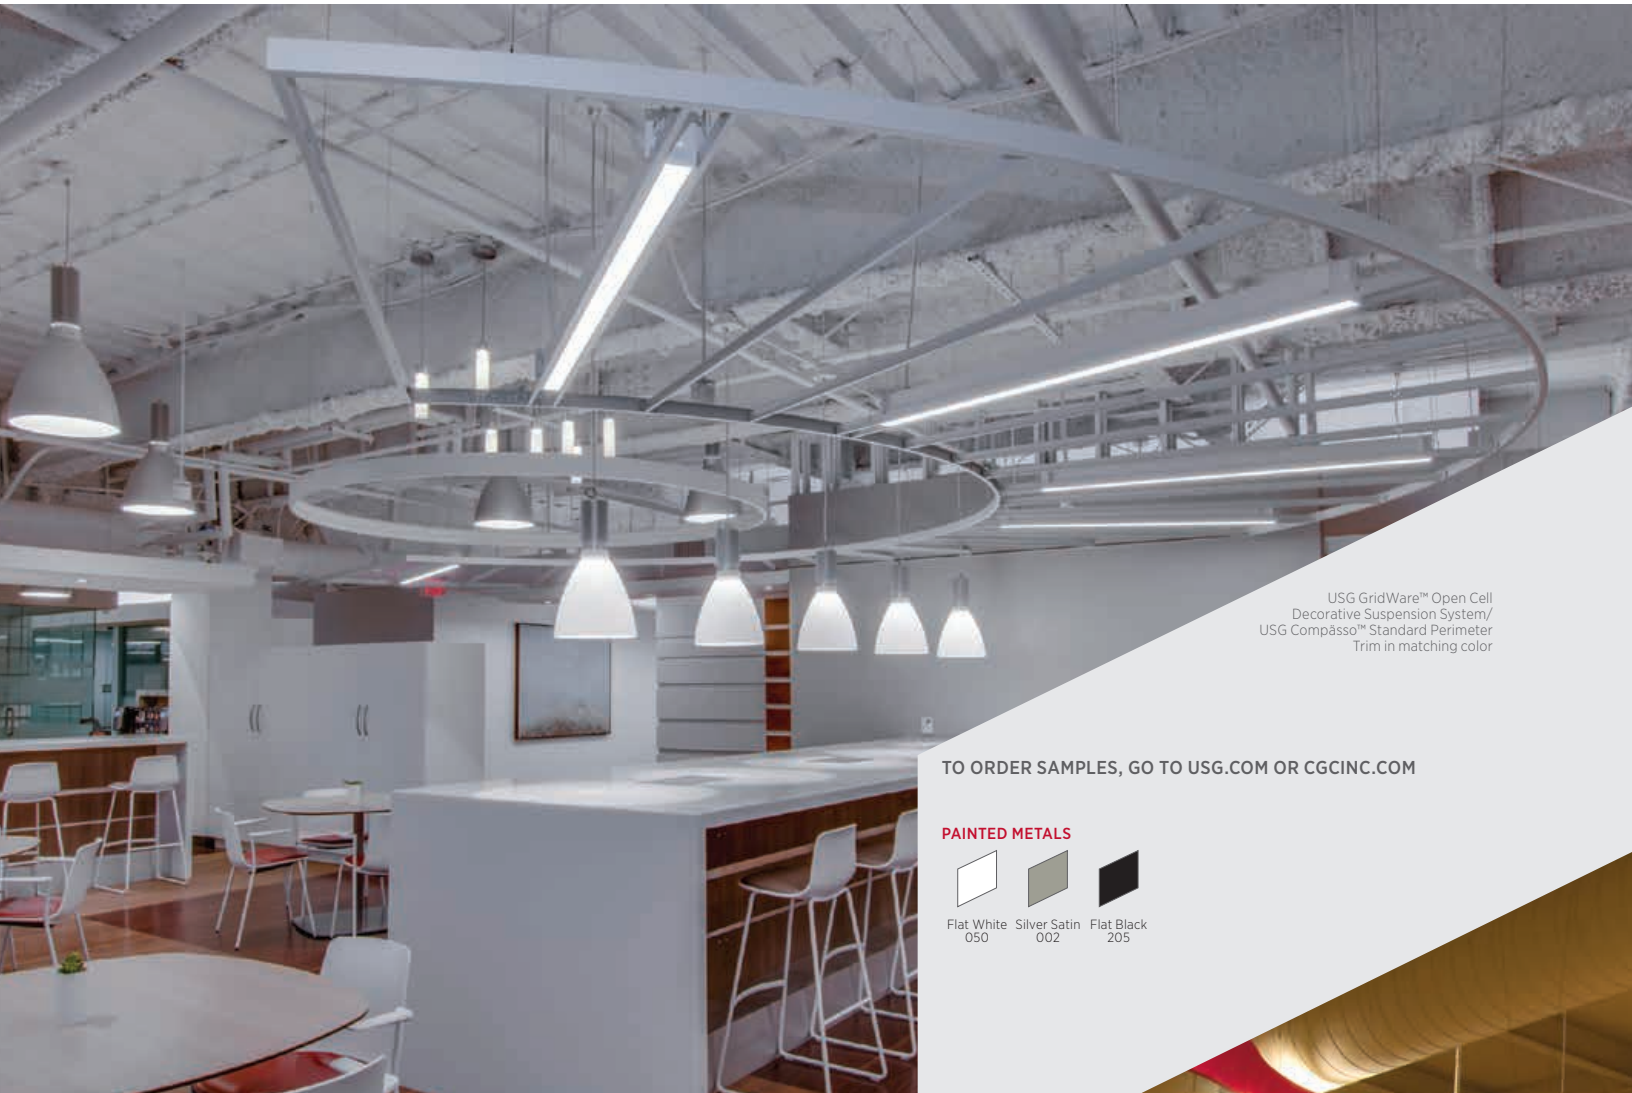

USG GridWare™ Open Cell
Decorative Suspension System/
USG Compasso™ Standard Perimeter
Trim in matching color

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS



Flat White
050



Silver Satin
002



Flat Black
205

FEATURES AND BENEFITS

- Open-cell suspension system painted 360°.
- Tees punched with only the necessary cross-tee holes for a clean look.
- Available in three standard grid profiles: 9/16", 15/16" and 1-1/2".
- Simple system readily accommodates standard lay-in light fixtures and air diffusers.
- Custom colors available.

APPLICATIONS

- Accent areas
- Hospitality
- Retail spaces



USG GRIDWARE™ OPEN CELL DECORATIVE SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplite@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative





FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)




PRODUCT INFORMATION

Materials	Typical Sizes	Finishes
Double-web, hot-dipped galvanized steel body and steel cap with chromated cross-tee clip.	2'x2' module; 2'x2', 2'x4' and 4'x4' cells Other dimensions and configurations available. Contact your local USG Sales Representative for more information.	<ul style="list-style-type: none"> GWDX stocked in Flat Black, Flat White and Silver Satin pre-painted, baked-on polyester paint finishes with exposed chromate cross-tee clips; touch-up paint is available to field-paint cross-tee clips to match the finish. Spray-painted, baked-on polyester finish with 100% tee coverage available as a special order. GWDXW and GWDXT available as a special order only; finish is spray-painted, baked-on polyester with 100% tee coverage.

FACE OPTIONS


GWDX	GWDXW	GWDXT	GWM9 - Wall Angle
			

DESIGN OPTIONS

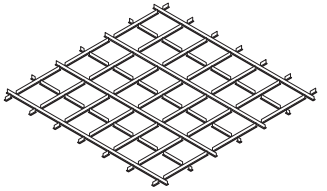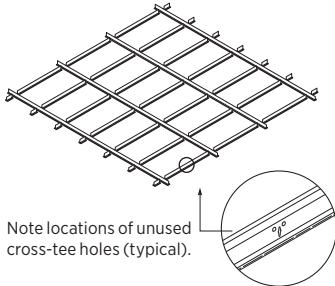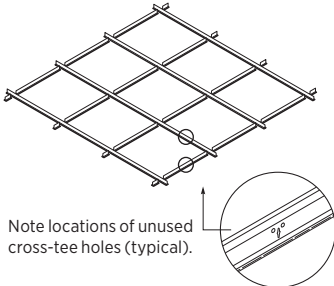
2'x2' Openings	2'x4' Openings	4'x4' Openings
		

USG GRIDWARE™ COMPONENTS


24" Cross Tee



48" Cross Tee



12' Main Tee



FOR MORE INFORMATION

Product literature
Data sheet: IC312

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Recycled content
USG GridWare™ suspension: 25% recycled content.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.


IC312/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, GRIDWARE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG LIBRETTO® GRIDLESS METAL SYSTEM

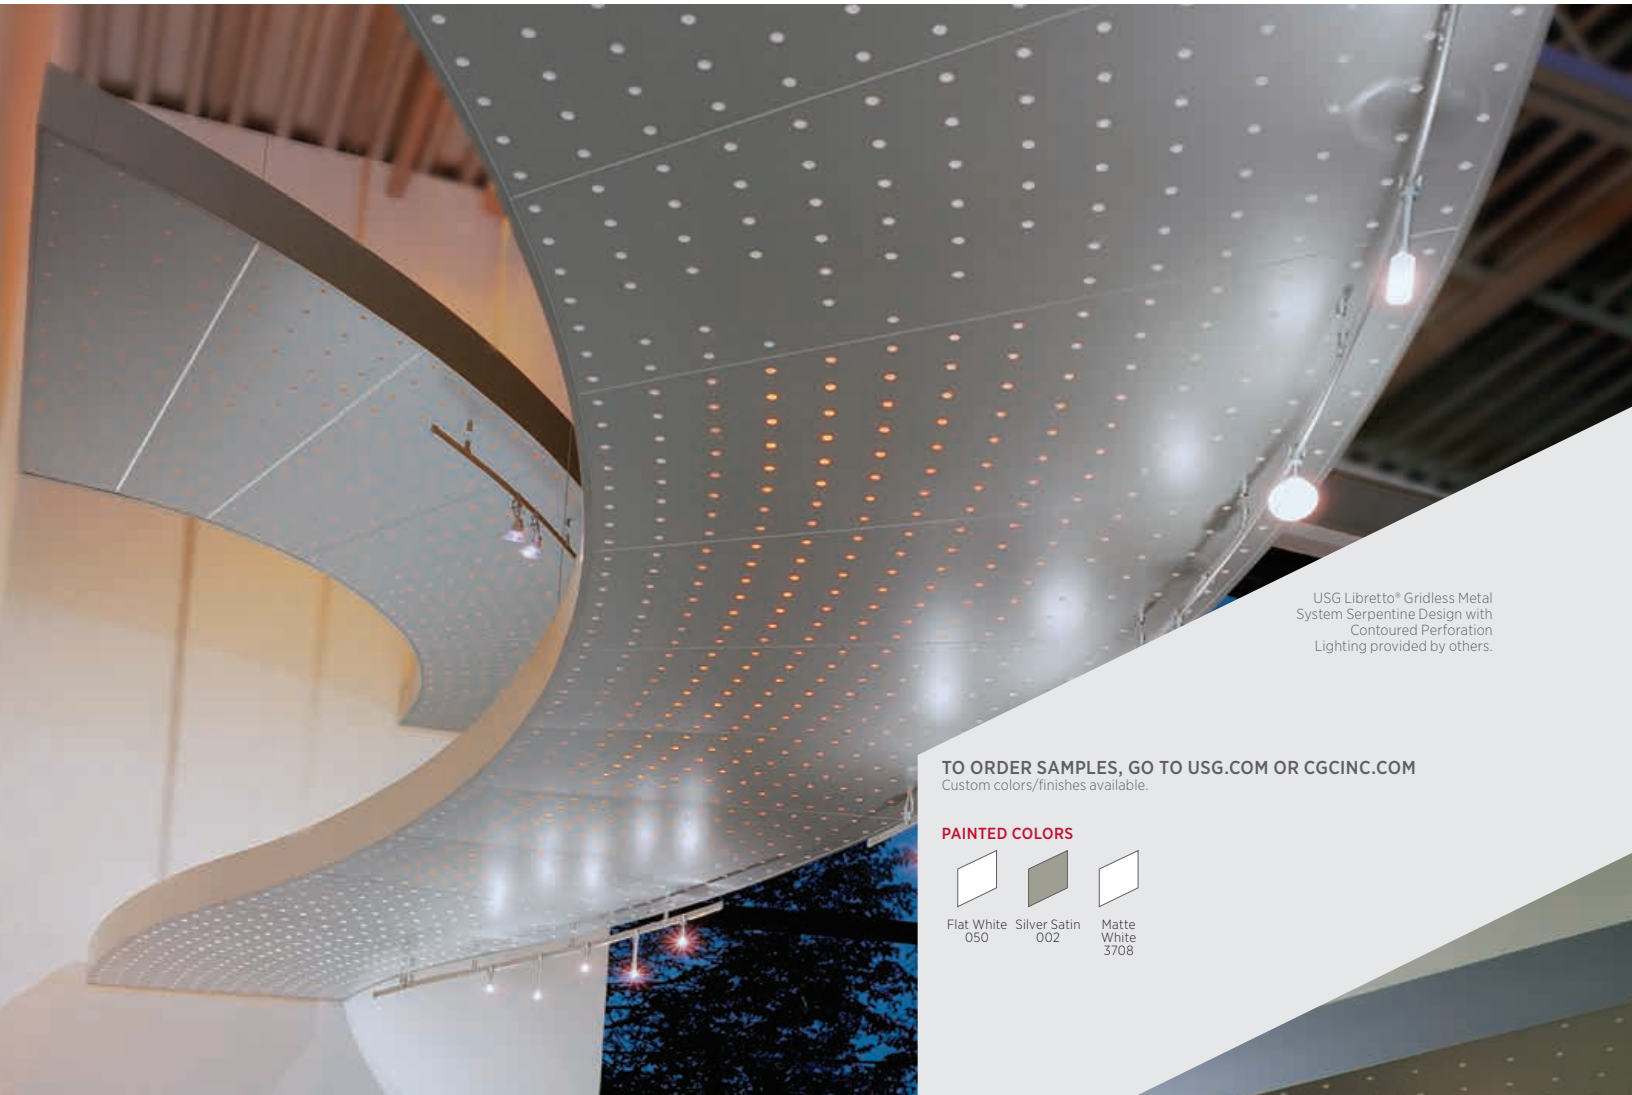

USG Libretto® Gridless Metal System Serpentine Design with Contoured Perforation
Lighting provided by others.

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM
Custom colors/finishes available.

PAINTED COLORS



Flat White 050 Silver Satin 002 Matte White 3708

FEATURES AND BENEFITS

- Collaborate with USG to create a custom design tailored to your space.
- Individually fabricated aluminum panels interconnect to form a continuous, uninterrupted plane.
- Carrier system is concealed and custom-fit, with choice of three perimeter profiles to achieve proper scale.
- You can request a contoured pattern that follows the shape of your USG Libretto® ceiling, specify a custom graphic or select a standard pattern for a square or rectangular ceiling.

APPLICATIONS

- Contemporary office environments
- Entertainment
- Gaming
- High-bay areas
- Retail space



USG LIBRETTO® GRIDLESS METAL SYSTEM

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)


PRODUCT INFORMATION

Materials	Perimeter Profile	Plenum Depth	Finishes
Panels: Aluminum Carrier system: Cold-rolled steel Edge profile: Cold-rolled steel	4", 6" or 8" in height.	Minimum 12", with 8" clearance above top edge of perimeter profile.	Panels available perforated with a contoured pattern that follows the shape of your ceiling, a custom graphic pattern, or a standard pattern for a square or rectangular ceiling. Optional black or white Acoustibond™ backer also available. Smooth, unperforated metal also available.

DETAILS Design Concepts


Radial	Crescent	Serpentine	Four-Sided Polygon

Torus

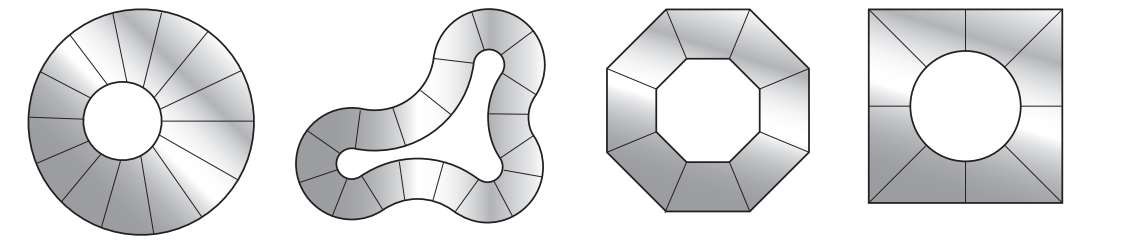

Assembly

View from above

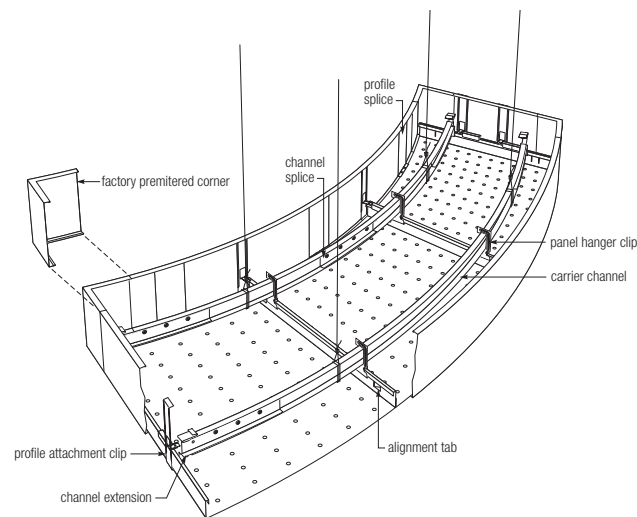

FOR MORE INFORMATION

Product literature
 System brochure: IC525
 Data sheet: IC526

Limitation
 Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)
 Class A
 Flame spread: 15 or less
 Smoke developed: 30 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Recycled content
 USG Libretto® aluminum panels: ≤ 25% recycled content; USG Libretto® suspension and trim: 25% recycled content.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC526/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, LIBRETTO, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG PANZ[®] METAL PANELS

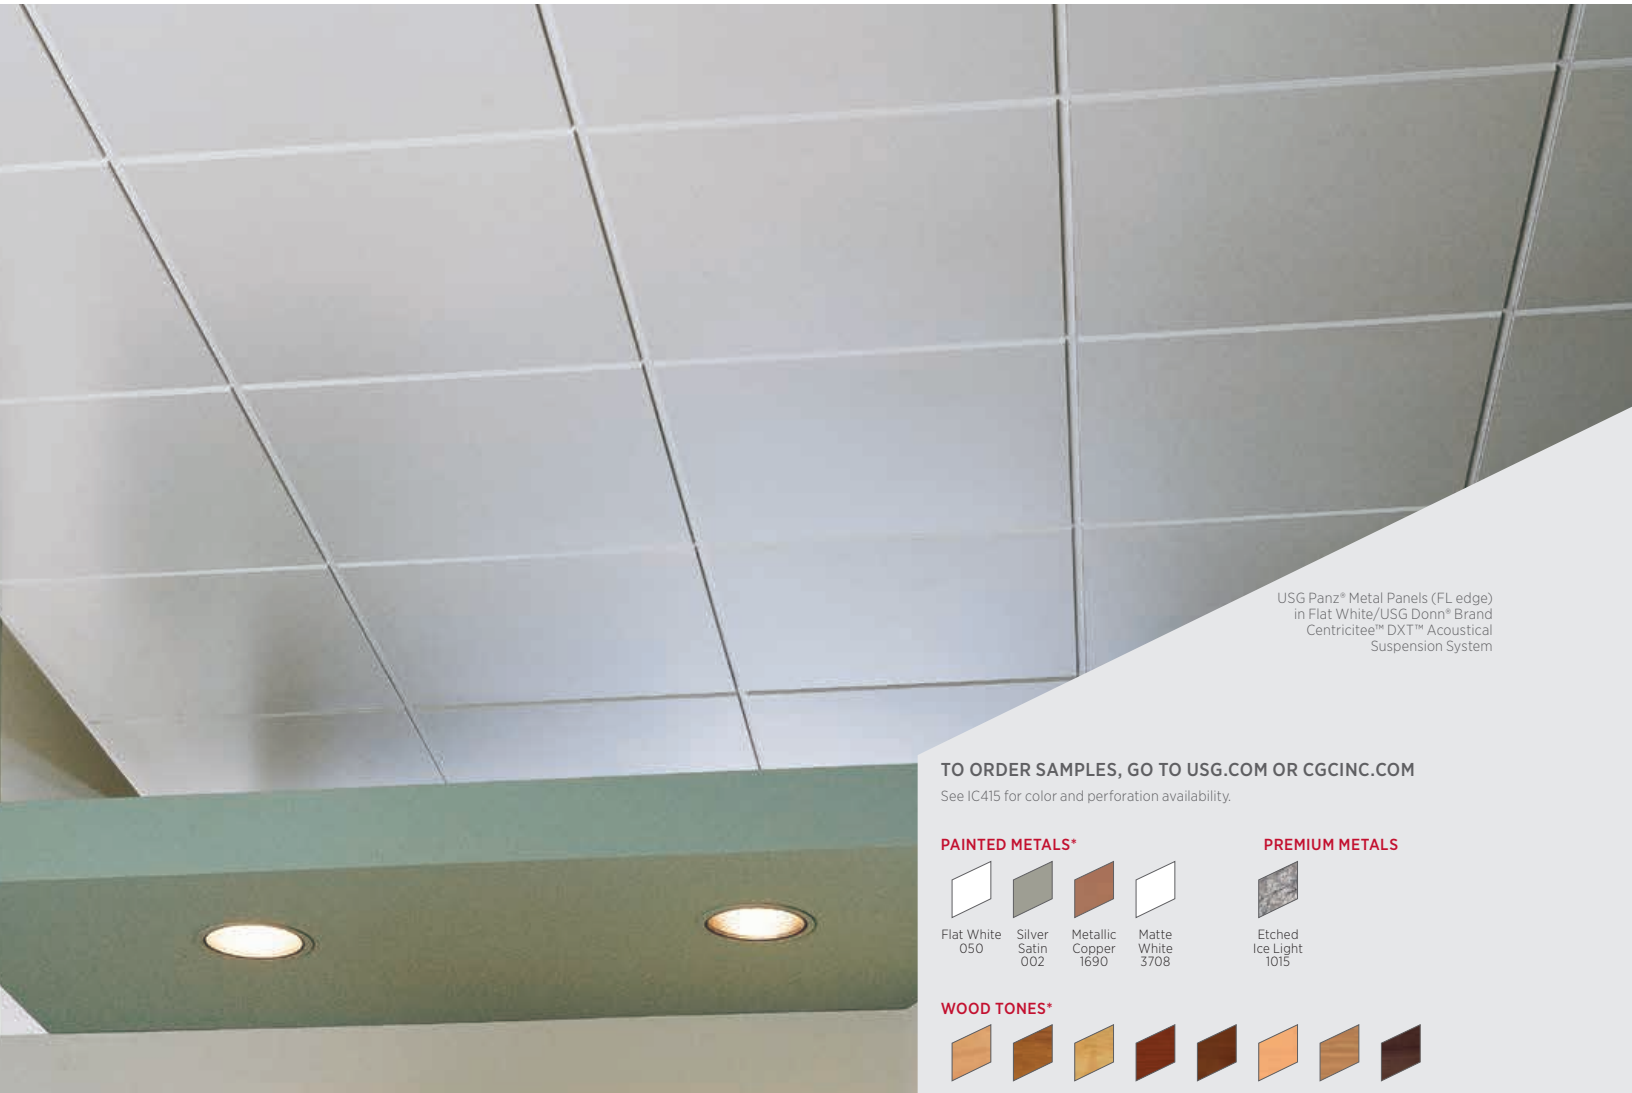

USG Panz[®] Metal Panels (FL edge)
in Flat White/USG Donn[®] Brand
Centricitee[™] DXT[™] Acoustical
Suspension System

FEATURES AND BENEFITS

- Simple lay-in design provides 100% access.
- Acoustibond[™] sound backer produces 0.60 NRC without additional acoustical material when perforated panels are installed within an enclosed plenum (minimum plenum depth: 18").
- Available in numerous perforation patterns.
- Available with same edge details as USG acoustical panels.


APPLICATIONS

- Computer and utility rooms
- Entertainment
- Gaming
- Frequently accessed plenums

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM


See IC415 for color and perforation availability.

PAINTED METALS*



Flat White 050
Silver Satin 002
Metallic Copper 1690
Matte White 3708

PREMIUM METALS




Etched Ice Light 1015

WOOD TONES*




Beech 3467
Dark Bamboo 3465
Light Bamboo 3466
Dark Cherry 3468
Light Cherry 3469
Maple 3470
Red Oak 3471
Walnut 3472

ANODIZED METALS



Brushed Aluminum 058
Polished Chrome PM61
Polished Brass PM21
Satin Chrome PM614

DIAMONDFLEX[™]3



Louvered Bright White
Louvered Bright Silver
Sheer Bright White
Sheer Bright Silver

*Trim available to match. Grid and trim available in painted coordinating colors.

USG PANZ® METAL PANELS

ORDER SAMPLES/LITERATURE
 USG: samplrt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative
 usgdesignstudio.com
 cgcdesignstudio.com

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)



PRODUCT INFORMATION

Materials	Available Sizes	Finishes
Panels: Aluminum	1' x 4', 1' x 5', 2' x 2', 2' x 4', 2' x 6', 2' x 8', 4' x 4', 20" x 60", 30" x 30", 30" x 60"	Painted, powder coated or anodized in a variety of optional perforation patterns. 2' x 2' panels available with perforation and/or embossing options.

ACOUSTICS⁴

Description	Optional Acoustical Material	Sound Rating - NRC	
		Perforation A062	Perforation A116
Perforated panel	Acoustibond™ backer	0.60	0.70
Perforated panel	2", 0.75 lb. fiberglass in polybag (by others)	0.85	0.90

PANELS

Smooth Panel	Perforated Panel	Perforated Panel with Acoustibond™ ^{1,2} Backer

EDGE DETAILS

USG Square Edge with 15/16" USG DX®/DXL™ Suspension	USG Square Edge with 9/16" ³ USG Centricitee™ DXT™ Suspension ²	USG Shadowline Edge with 15/16" USG DX®/DXL™ Suspension	USG Finline® Edge with 9/16" USG Centricitee™ DXT™ Suspension
USG Finline® Edge with 9/16" USG Finline® DXF™ Suspension	USG Finline® Edge with 9/16" USG Finline® 1/8 DXFF™ Suspension	USG Flush Mount Edge with USG DX®/DXL™ Suspension ³	USG Finline® Edge with USG Identitee® DXI™ Suspension

HRC High Recycled Content
 Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature

System brochure: IC415
 Data sheet: IC314
 Perforation selection guide: IC425

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Light reflectance

Flat White: LR-0.80 (less with perforations).

Notes

- Acoustibond™ standard backer not with DiamondFlex™ panels.
- Acoustibond™ backer is not available with DiamondFlex™ option.
- Only applicable for 2'x2' panels.
- Refer to IC425 for additional NRC information based on perforation pattern.
- If panel length is ≥ 60 inches then one stabilizer bar or cross tee is required at midpoint.
 — If panel length is ≥ 96 inches then two stabilizer bars or cross tees are required at the 1/3 and 2/3 points.
 — Cross tees ≥ 96 inches used in large modules shall have hanger wires installed minimum 4 ft. o.c.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC314/rev. 2-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CENTRICITEE, DIAMONDFLEX, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, IDENTITEE, PANZ, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.




USG PARALINE® LINEAR METAL SYSTEMS

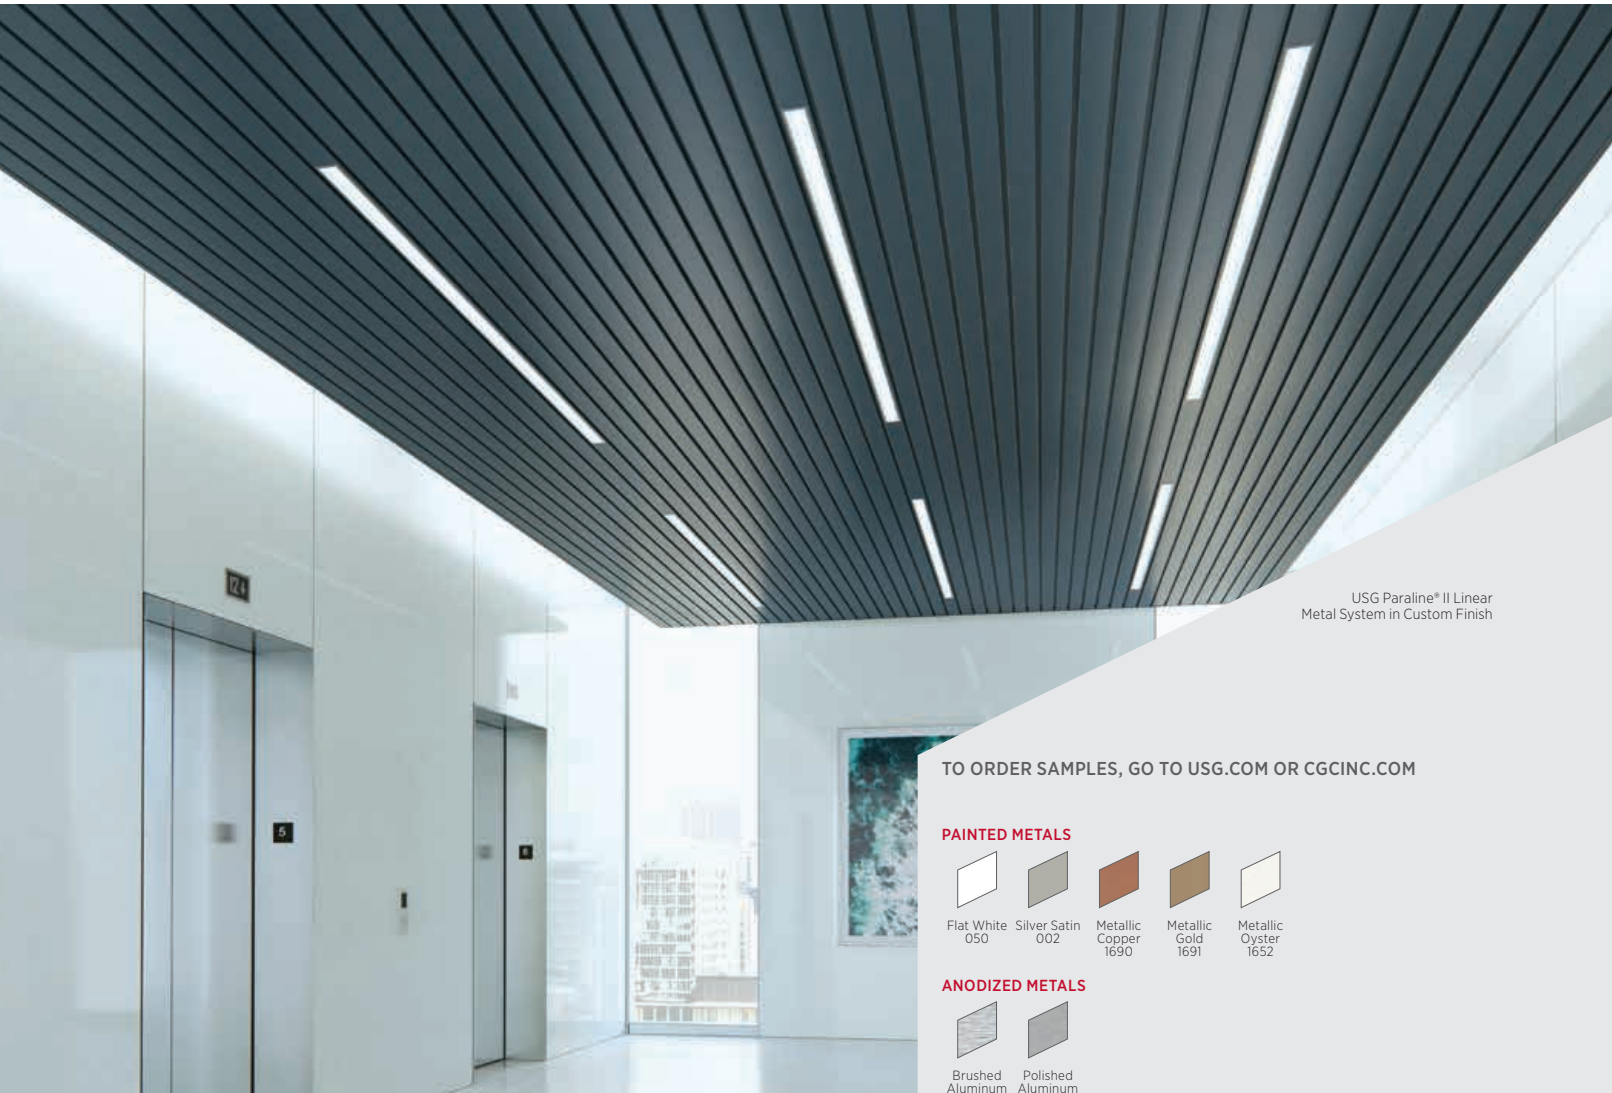

USG Paraline® II Linear Metal System in Custom Finish

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS



Flat White 050 Silver Satin 002 Metallic Copper 1690 Metallic Gold 1691 Metallic Oyster 1652

ANODIZED METALS



Brushed Aluminum 058 Polished Aluminum 086

FEATURES AND BENEFITS

- Elegant linear metal ceiling system features 12' long metal pans attached to a specially engineered suspension system.
- Closed-reveal USG Paraline® II are appropriate for exterior ceiling applications under protected soffits.
- Snap-up design offers unlimited access with minimum plenum depth requirements.
- Wind load tested and approved for exterior applications with proper bracing and framing.
- Available with perforated pans for USG Paraline® II for NRC ratings as high as 0.95 when backed with fiberglass.

APPLICATIONS

- Exterior ceilings
- High-bay areas
- Retail stores
- Transportation terminals



USG PARALINE® LINEAR METAL SYSTEMS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative
TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
**TECHNICAL INFORMATION
 AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com



PRODUCT INFORMATION


USG PARALINE® CLOSED PERFORATION PATTERN

Materials	Typical Sizes	Finishes
USG Paraline® I, II, and III: Aluminum.	3-1/4" x 12', 7-1/4" x 12'	Painted or anodized
	Perforation Pattern A062 Round—1/16" perforations 0.235 o.c., 5% open area on face of pan only. Perforation shown 50% actual size.	

DETAILS

USG Paraline® I	USG Paraline® II	USG Paraline® III
USG Paraline® I ceilings use 3-1/4" wide pans with roll-finished edges. Once assembled, the pans provide an open reveal for excellent acoustical control (sound is absorbed by acoustical material in the plenum).	USG Paraline® II ceilings maintain the 3-1/4" wide pan dimension, but are constructed with integral flanges that overlap to form a reveal closure that is appropriate for exterior soffit applications. Perforated available.	USG Paraline® III ceilings have bolder, 7-1/4" wide pans for larger-scale applications. Pans have a roll-finished edge to provide the same open reveal as USG Paraline® I with similar acoustical control.

PERSPECTIVE

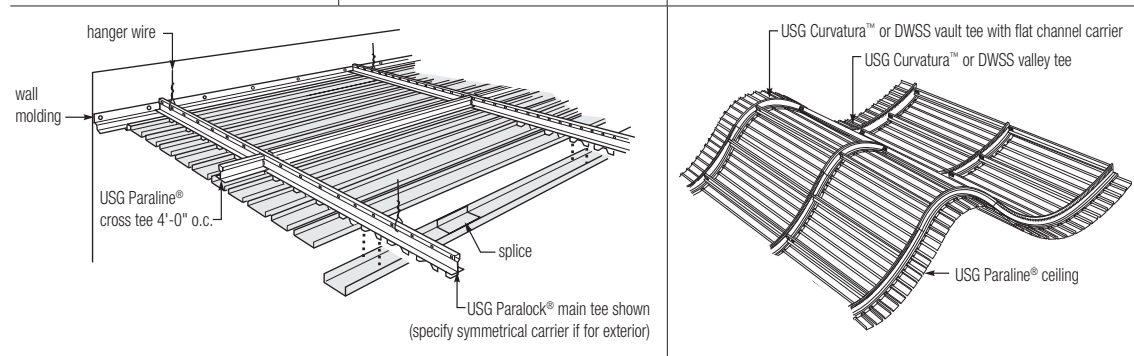

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature

System brochure: IC463
 Data sheet: IC315
 Exterior ceiling systems guide: SC2561

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Code approval

See PER-12055.

Carrier systems

The carrier systems for the various USG Paraline® systems are not interchangeable and different carrier types may be required for exterior applications. For more information about the various USG Paraline® systems & components, please consult the appropriate Systems Guide. For more information about exterior applications with Paraline® refer to SC2561.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Fire-rated designs

UL fire-rated design number D-218 rating for two-hour or three-hour restrained or unrestrained assembly and three-hour unrestrained beam rating.

Light reflectance

Flat White: LR-0.80 (less with perforations and other colors).

Notes

1. Perforation Pattern A062 is available on USG Paraline® II only.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC315/rev. 6-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CURVATURA, PARALINE, PARALOCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG PIXELS® METAL CEILING PANELS

PERFORATED IMAGERY



Rendering of USG Pixels®
Metal Ceiling Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS



Flat White 050 Silver Satin 002

FEATURES AND BENEFITS

- Transform photographs, art and logos into perforated images on metal panels.
- Produce imagery on ceilings.
- No limit to image or ceiling size.
- Suitable for USG Celebration™ Snap-In, Panz® and Curvatura™.
- Images can be positive or negative for backlighting.
- Choose from three resolutions based on aesthetic or budget considerations.
- Provides up to 0.70 NRC dependent on open area of perforated image.

APPLICATIONS

- Way-finding
- Retail
- Hospitality
- Institutional

USG Pixels® Metal Panels for Ceiling Application



USG PIXELS® METAL CEILING PANELS

PERFORATED IMAGERY

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com



PRODUCT INFORMATION


Materials	Systems	Nominal
Aluminum metal panels	USG Celebration™ Snap-In, Panz® Metal Panels	2'x2'; 2'x4'; 2'x6' Custom Sizes available.
Aluminum metal panels	USG Curvatura™ 3-Dimensional Suspension System	2'x2'; 2'x6'
Steel suspension system	USG Donn® Brand DX®, Centricitee™ DXT™, Fineline® DXF™	

ACOUSTICS' RESOLUTION


Up to 0.70 NRC with >20% Open Area of perforation image with Acoustibond™ backer.



Hi Res



Med Res




Low Res

IMAGE SIZE

No limit to image size or canvas size (total ceiling area containing image).



6'x10' canvas
(Depicted using 2'x2' panels)

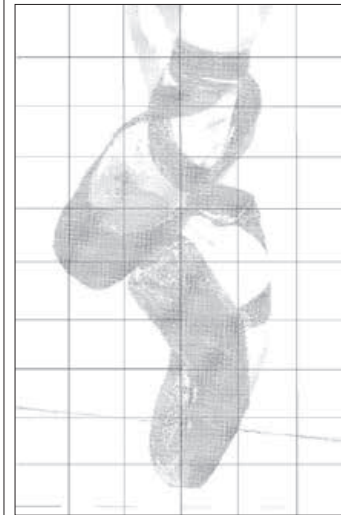

12'x20' canvas
(Depicted using 2'x2' panels)

See *USG Pixels® Metal Panels Design Guide (IC566)* for design considerations.

HRC High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature

Data sheet: IC563
 Design guide: IC566
 Check sheet: IC565

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Notes

1. Refer to IC425 for additional NRC information based on perforation pattern.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC563/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661


The trademarks USG, CGC, ACOUSTIBOND, CELEBRATION, CENTRICITEE, CURVATURA, DONN, DX, DXF, DXT, FINELINE, PANZ, PIXELS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG PIXELS® WALL MOUNTED PANELS


PERFORATED IMAGERY

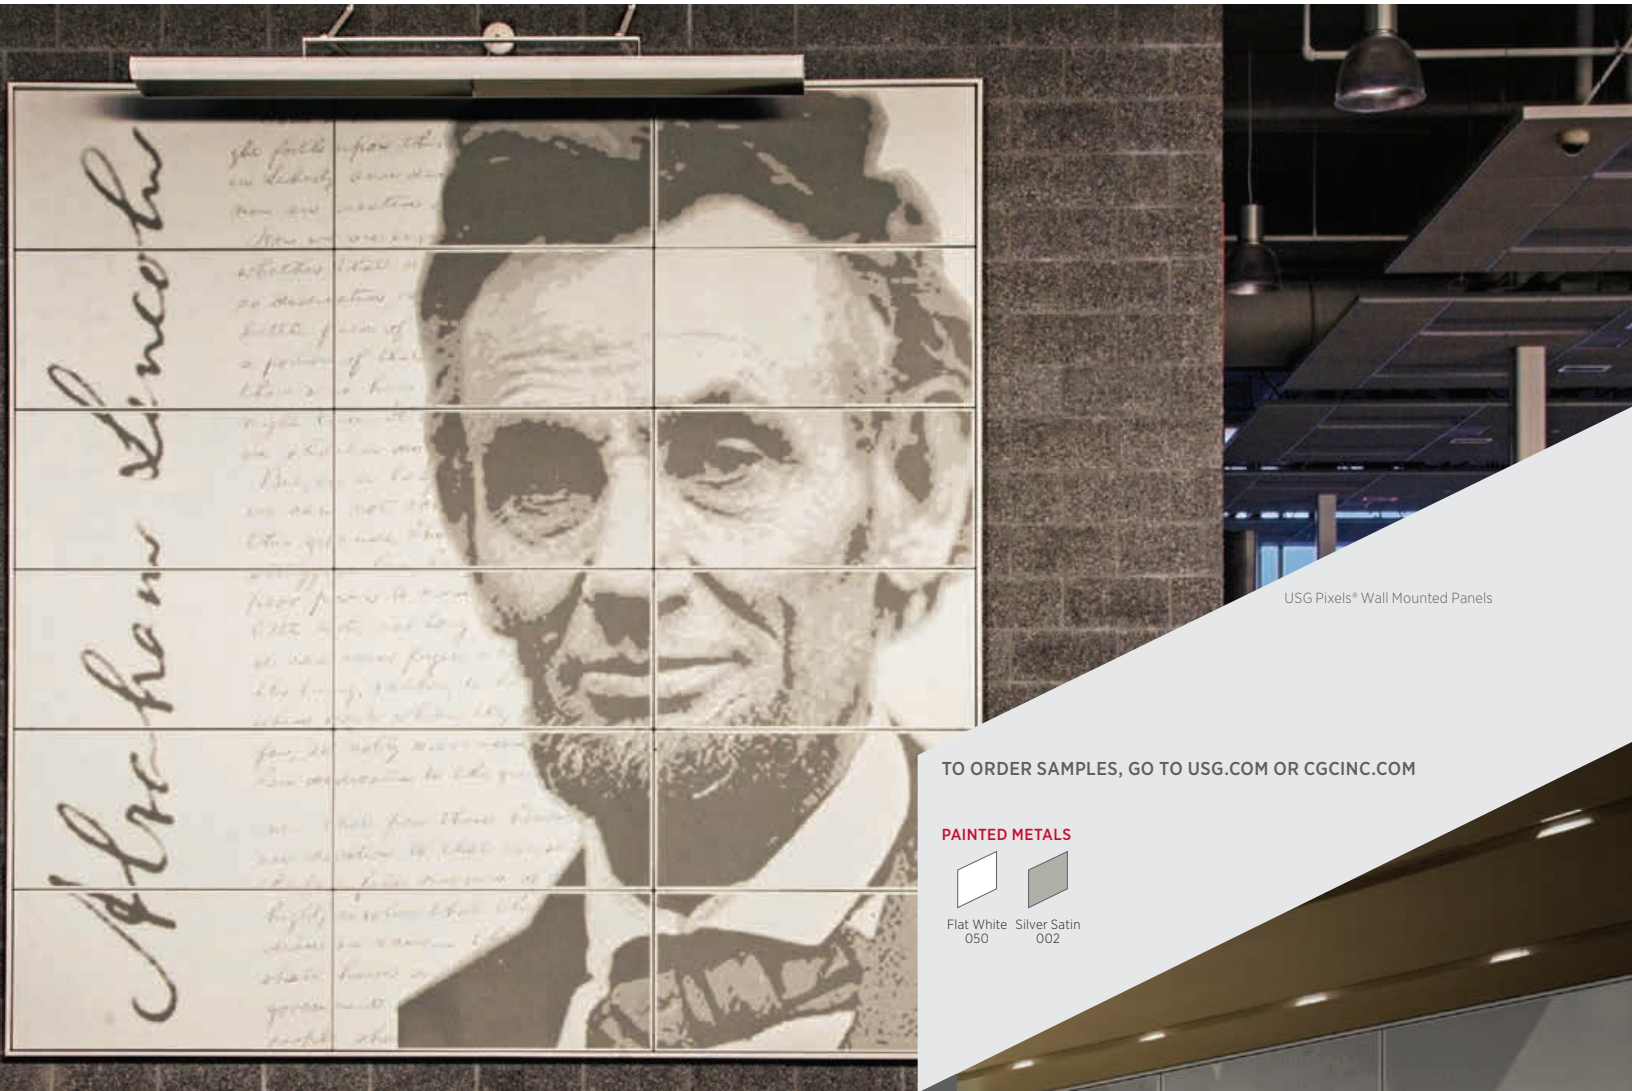

USG Pixels® Wall Mounted Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS



Flat White 050 Silver Satin 002

FEATURES AND BENEFITS

- Transform photographs, art and logos into perforated panels.
- Produce dramatic imagery on walls.
- No limit to image or mural size.
- Suitable for USG Celebration™ Snap-In Metal Panels.
- Images can be positive or negative for backlighting.
- Choose from three resolutions based on aesthetic or budget considerations.

APPLICATIONS

- Retail
- Hospitality
- Institutional
- Government
- Education

USG Pixels® Wall Mounted Panels nonbacklit



USG PIXELS® WALL MOUNTED PANELS

PERFORATED IMAGERY

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
**TECHNICAL INFORMATION
 AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)



PRODUCT INFORMATION

Frame-Mounted Application
(Backlit)

Surface-Mounted Application
(Nonbacklit)

Materials	System	Available Sizes
Aluminum Metal Panels	USG Celebration™ Snap-In Metal Panels USG Pixels® Metal Panels	2'x2'; 2'x4'; 2'x6'
Aluminum Frame	USG Compáso™ Elite	4", 6"
Steel Grid	USG Donn® Brand Finline® DXF™	Main Tees, Cross Tees
MDF	Wall Mount Backerboard	2'x2'; 2'x4'; 2'x6'
Extruded Aluminum	Aluminum Trim	Per design

Frame-Mounted Application (Backlit)

Detail A

Surface-Mounted Application (Nonbacklit)

Detail B

See USG Pixels® Wall Mounted Design & Installation Guide (IC606)

HRC High Recycled Content
 Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature
 Data sheet: IC605
 Wall mounted design and installation guide: IC606
 USG Pixels® perforated imagery for ceilings: IC563
 USG Pixels® design guide: IC566
 USG Pixels® check sheet: IC565

Limitation
 Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

ASTM E84 surface-burning characteristics (with Acoustibond™ backer)
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

ASTM E84 surface-burning characteristics (with light diffusing backer)
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Notice
 We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC605/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CELEBRATION, COMPASSO, DONN, DXF, FINELINE, PIXELS, SHEETROCK, IT'S YOUR WORLD. BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG TOPO™ 3-DIMENSIONAL SYSTEM



USG Topo™ 3-Dimensional System
with White Translucent Panels/
USG Donn® Brand Topo™ Suspension
System in Silver Satin with
Silver Satin Trim

FEATURES AND BENEFITS


- Translucent and opaque infill panel colors enhance existing lighting for added visual interest.
- Optional pre-engineered utility circles accommodate additional lighting and utility access.
- Transform flat ceiling planes into gently rolling landscapes with preformed panels that install easily into the narrow-profile USG Donn® Brand Topo™ Suspension System.

APPLICATIONS

- All commercial applications

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

WHITES



COLOR GALLERY



USG TOPO™ 3-DIMENSIONAL SYSTEM

ORDER SAMPLES/LITERATURE
 USG: samplite@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

PRODUCT INFORMATION


Materials	Size and Weight	Module Size
Panels: Preformed. Material thickness: 0.04". Suspension system: Extruded aluminum available in color-coordinated finishes. Edge trim system: Painted cold-rolled steel.	Panels: 2'x2' System weight approximately: 0.5 lb./sq. ft.	Full 2'x2' modules only

FINISHES

Color	Light Transmission	USG Donn® Brand Topo™ Suspension System Coordinating Colors
White Translucent	26%	Flat White
White Opaque	8%	Flat White
Color Gallery	Varies per color	Flat White or Custom as Specified by Architect


DETAILS

System Profile

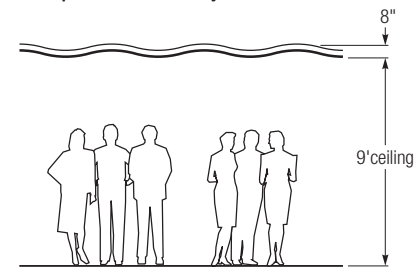

ASSEMBLY

(View From Below)

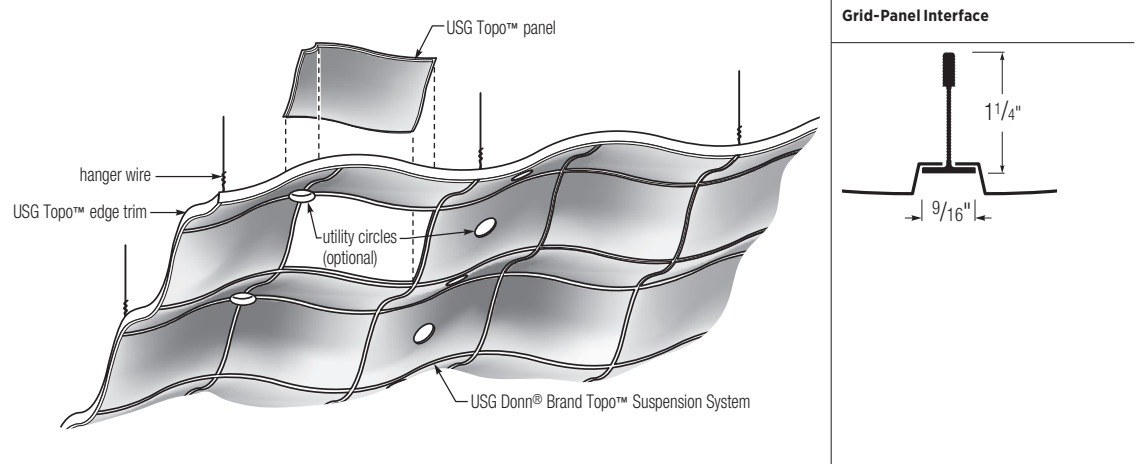

Exposed Hanger Solutions

For ceiling islands and other installations with exposed hanger wires, USG offers stainless steel wire and rope wire with a variety of connectors for an attractive alternative to standard 12-gauge wire. See installation guide IC453 for more information.

FOR MORE INFORMATION

Product literature
 System brochure: IC438
 Data sheet: IC422

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Code approval
 Infill panels meet Class B requirements for flame spread and smoke developed as defined by ASTM E1264, NFPA and IBC (UBC) as tested in accordance with ASTM E84 and CAN/ULC S102 surface-burning characteristics.

Notes
 1. For Canadian product needs, please contact your local sales representative.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC422/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, DONN, TOPO, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG TRANSLUCENTS™ LUMINOUS INFILL PANELS

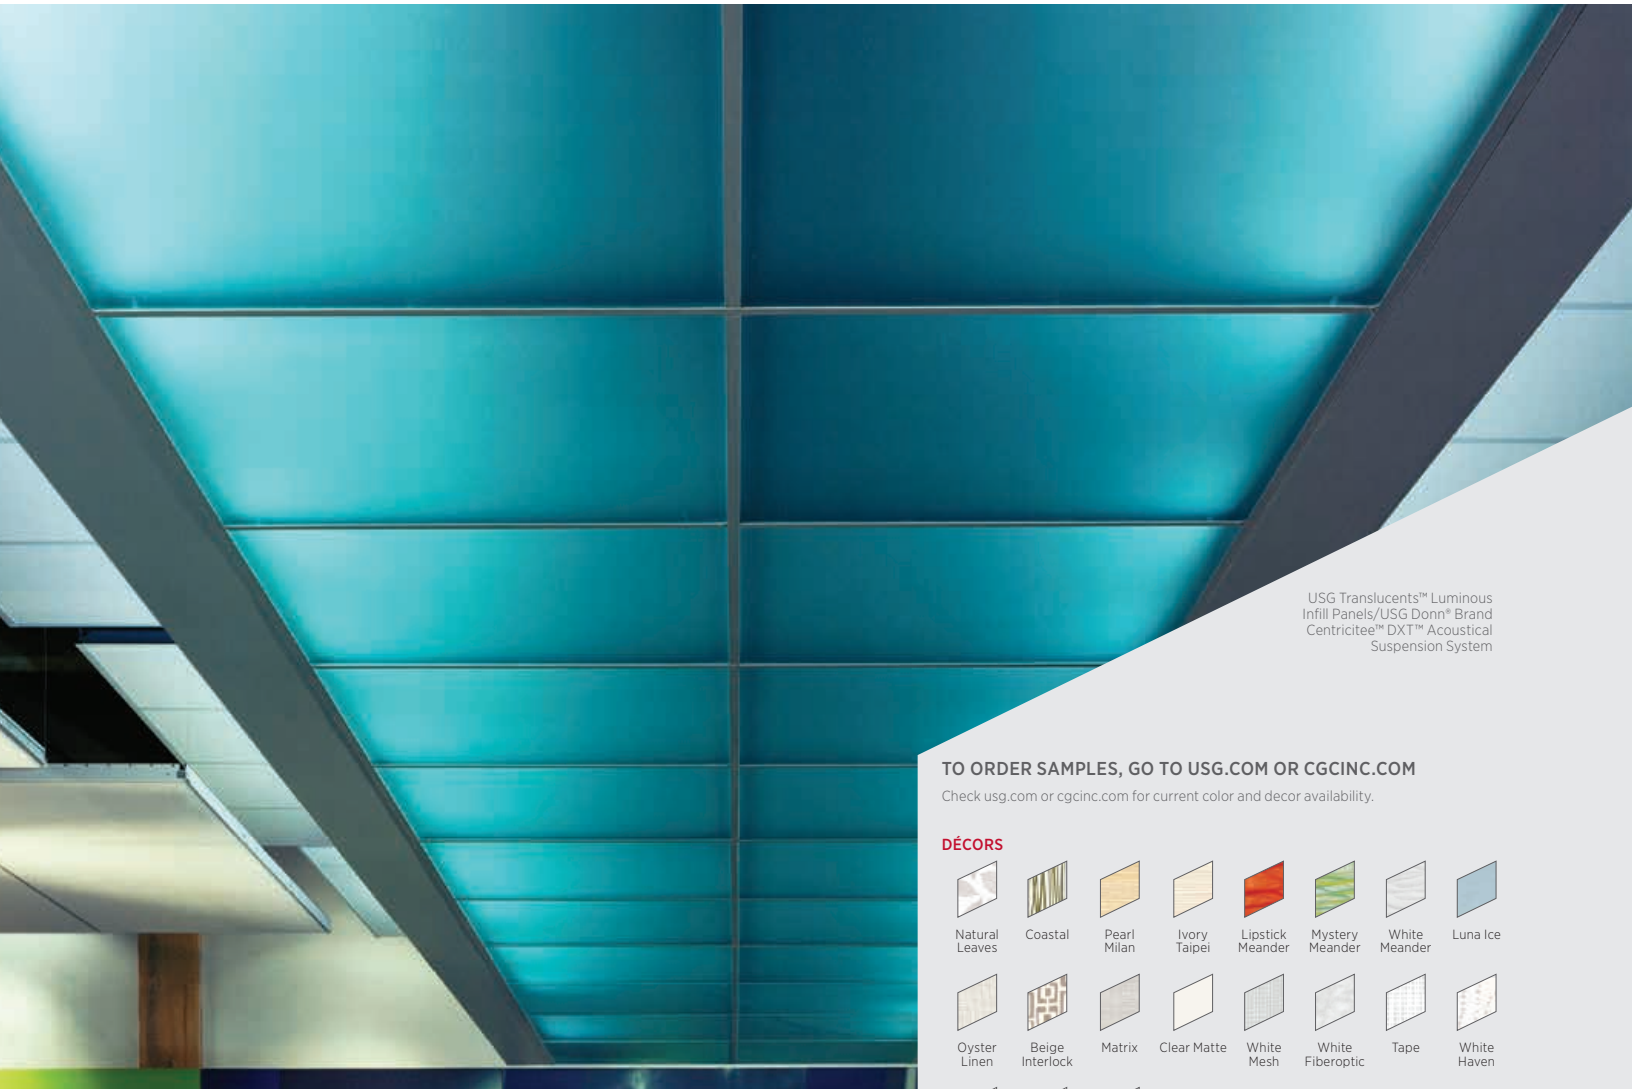

USG Transluents™ Luminous
Infill Panels/USG Donn® Brand
Centricitee™ DXT™ Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

Check usg.com or cgcinc.com for current color and decor availability.

DÉCORS



COLOR GALLERY



FEATURES AND BENEFITS

- Fully accessible translucent (luminous) infill panels.
- Panels can be used with standard USG Donn® Brand DX®/DXL™, Centricitee™ DXT™, Curvatura™ 3-Dimensional and GridWare™ Open Cell Decorative suspension systems.
- Available in a variety of decors that feature embedded fabrics and other materials as well as solid colors.
- 2'x2' panels (23-3/4"x23-3/4") in all finishes.
- 2'x6' panels (23-3/4"x71-3/4") in all finishes.
- USG Transluents™ panels contain a minimum of 40% recycled content.

APPLICATIONS

- Lobbies
- Contemporary office environments
- Entertainment
- Gaming
- High-bay areas
- Retail stores

USG TRANSLUCENTS™ LUMINOUS INFILL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

**FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION

Product	Typical Sizes		System Weight
	Nominal	Actual	
Clear Mat Polycarbonate	2'x2'	23-3/4"x23-3/4"	Approximately 0.9 lb./sq. ft.
Standard Décors – 0.118" PETG	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 0.9 lb./sq. ft.
Rain Acrylic	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 0.9 lb./sq. ft.
Color Gallery – 0.118" PETG	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 0.9 lb./sq. ft.

This product does not offer any acoustical properties.

For USG Translucents™ panels, fluorescent strip fixtures should be placed a minimum of 18" above the ceiling and 18" o.c. for best results.

Lays into standard USG Donn® Brand DX®/DXL™, Centricitee™ DXT™, Curvatura™ 3-Dimensional and GridWare™ suspension systems.

Acoustics
Lighting
Suspension Systems

FOR MORE INFORMATION

Product literature

Data sheet: IC406

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Limitations

This product is produced to order and will vary from batch-to-batch – panels ordered at the same time will be produced together and will be identical. USG cannot guarantee batch-to-batch consistency.

Code approval

USG Translucents™ panels meet Class B requirements for flame spread and smoke developed as defined by ASTM 1264 and as tested in accordance with ASTM E84 and CAN/ULC S102 surface-burning characteristics. USG Translucents™ panels also meet Class A requirements of NFPA and IBC (UBC) as interior finishes, not to be part of an air supply/return system. Designers and installers are advised to consult a fire protection engineer, NFPA 13 and their local codes for guidance where automatic fire detection and suppression systems are present.

Weight

0.374 lb./sq. ft.
(Clear Matte)
0.90 lb./sq. ft.
(All other decors)

Recycled content

Decors: min. 40% recycled content. 100% recyclable. Rain: 50% recycled content. 100% recyclable. Color Gallery: Up to 40% recycled content.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC406/rev. 11-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CURVATURA, DONN, DX, DXL, DXT, GRIDWARE, TRANSLUCENTS, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG TRANSLUCENTS™ CANOPIES

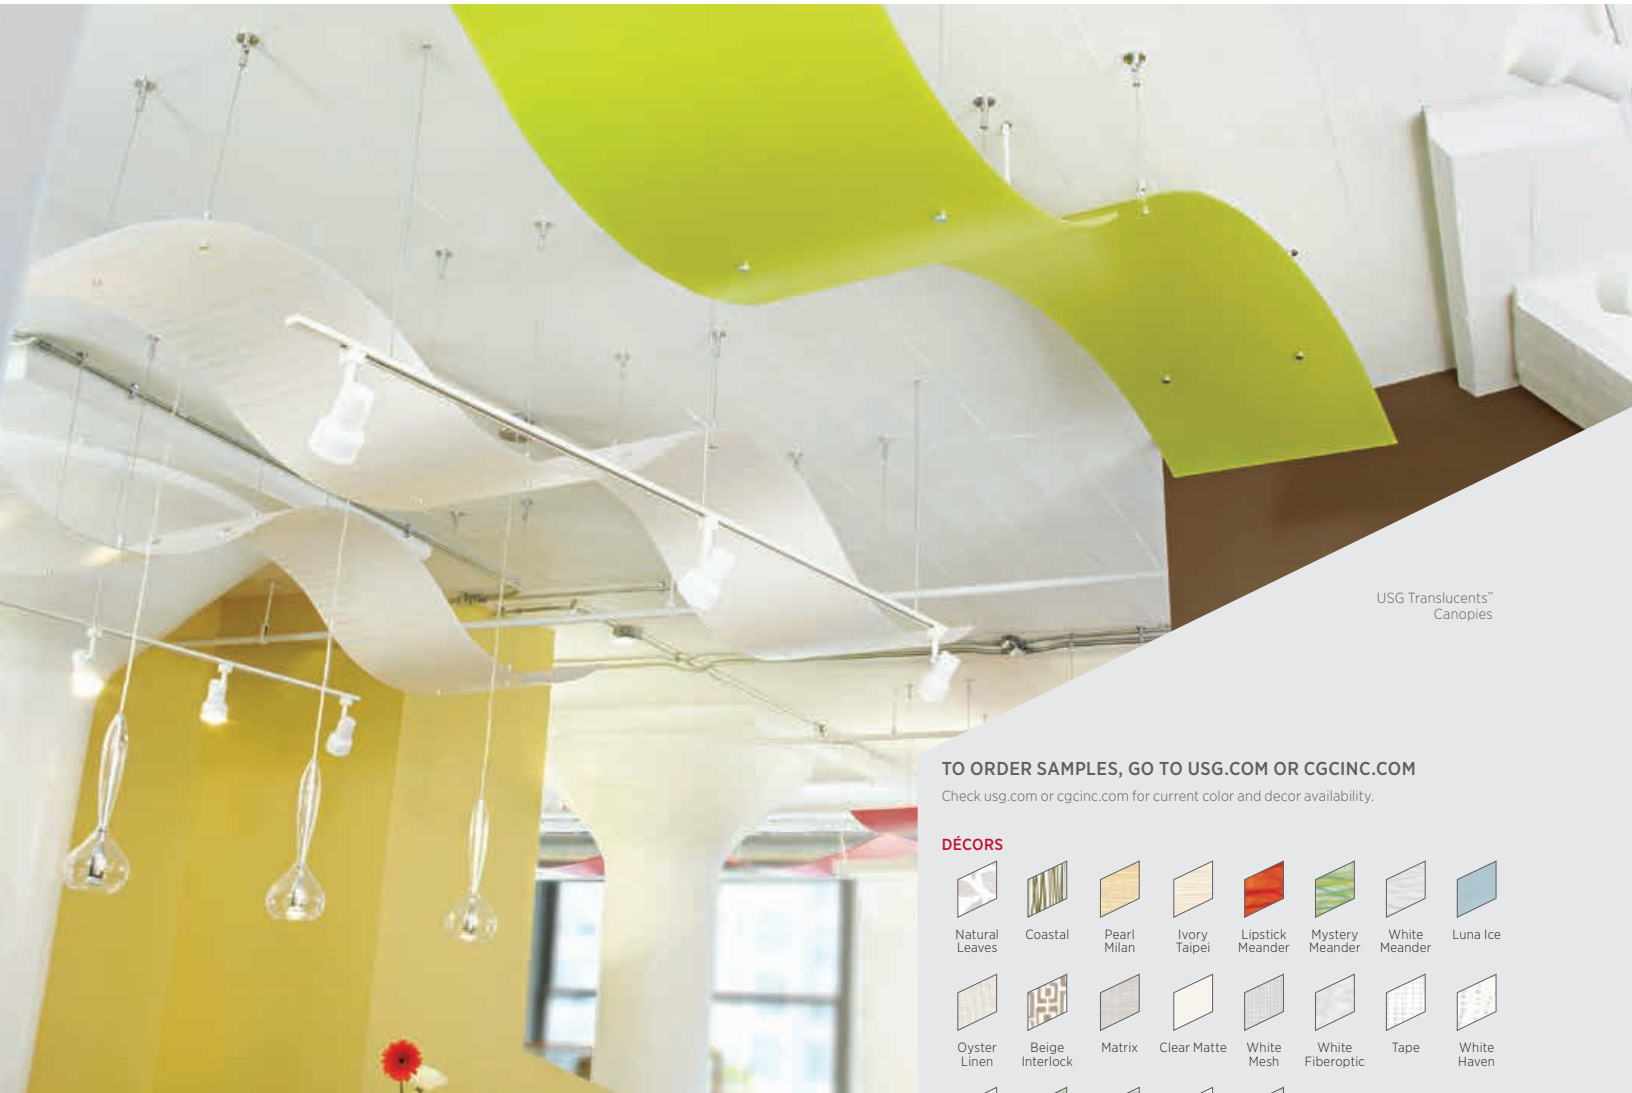

USG Translucents™
Canopies

FEATURES AND BENEFITS

- Preformed curved panels.
- Available in a variety of decors that feature embedded fabrics and other materials as well as solid colors from the color gallery.
- Whimsical elegance for retail, office, healthcare or hospitality environments.
- Three easy-to-use elements: wave, vault or valley.
- Individual suspension or connected groupings for ribbons or larger spaces.
- Four simple connection/suspension points for fast, trouble-free installation.
- 100% recyclable material; may contribute toward LEED credits in MR 2.1, 2.2, 4.1 and 4.2.
- USG Translucents™ Canopies meet Class B flame spread requirements, except Rain™ which is Class C.


APPLICATIONS

- Gaming
- Hospitality
- Healthcare
- Retail
- General office

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

Check usg.com or cgcinc.com for current color and decor availability.

DÉCORS

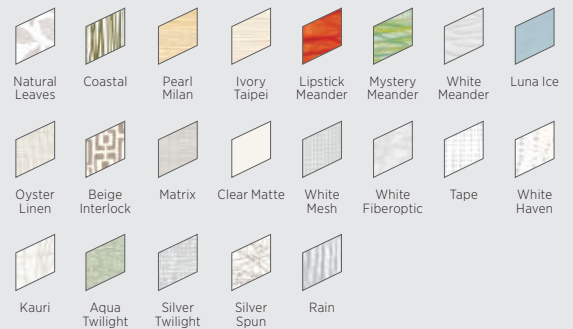

COLOR GALLERY



USG TRANSLUCENTS™ CANOPIES

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION


Shape	Typical Sizes		System Weight
	Nominal	Actual (in plan)	
Wave	2'x6'	23-3/8"x65-3/8"	Approximately 2 lb./sq. ft.
Vault	2'x6'	23-3/8"x68-1/2"	Approximately 2 lb./sq. ft.
Valley	2'x6'	23-3/8"x68-1/2"	Approximately 2 lb./sq. ft.

Acoustics


This product does not offer any acoustical properties.

Elements

USG Translucents™ Canopies Panels can be suspended under the standard troffers normally located in a suspended ceiling or can be lit from above with point-source lighting such as halogen PAR lamps or newer LED technology.

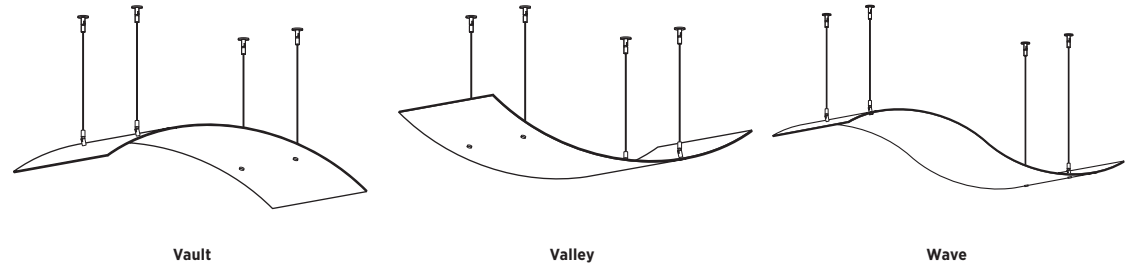

Perspective

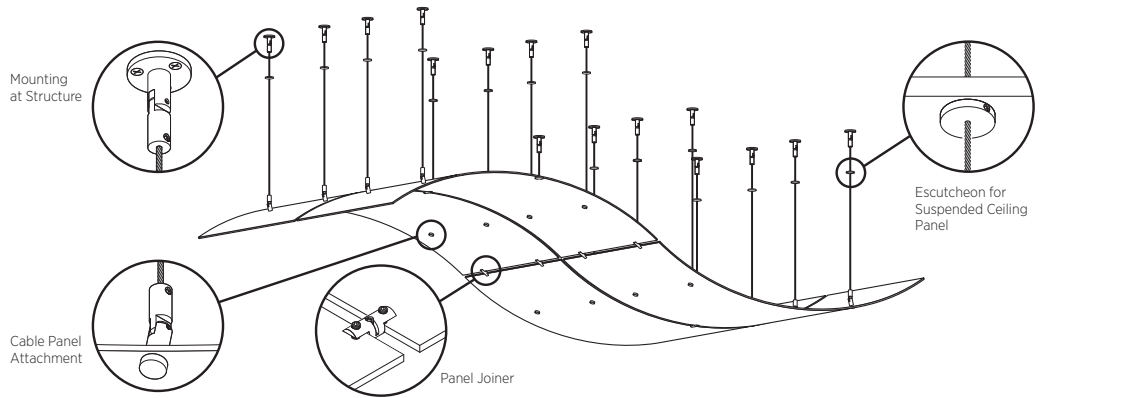

FOR MORE INFORMATION

Product literature
 Data sheet: IC596

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Limitation
 This product is produced to order and will vary from batch-to-batch — panels ordered at the same time will be produced together and will be identical. USG cannot guarantee batch-to-batch consistency.

Code approval
 USG Translucents™ Canopies panels meet Class B requirements for flame spread and smoke developed as defined by ASTM 1264 and as tested in accordance with ASTM E84 and CAN/ULC S102 surface-burning characteristics. USG Translucents™ Canopies Panels also meet Class A requirements of NFPA and IBC (UBC) as interior finishes, not to be part of an air supply/return system. Designers and installers are advised to consult a fire protection engineer, NFPA 13 and their local codes for guidance where automatic fire detection and suppression systems are present.

Seismic applications
 For installations on projects designated seismic design category C-F, suspension wires that are a minimum of no. 12 gauge galvanized, soft-annealed, mild steel wire shall be used. Please refer to SC2494 for more information about the seismic guidelines for specialty and decorative ceilings. Because codes continue to evolve, check with a local official prior to designing and installing a ceiling system. Other restrictions and exemptions may apply.

Weight
 Approximately 2 lb./sq. ft.

Recycled content
 100% recyclable.
 Décor: min. 40% recycled content, 100% recyclable. Color Gallery: Up to 40% recycled content.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC596/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, TRANSLUCENTS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG TRUE™ WOOD PANELS

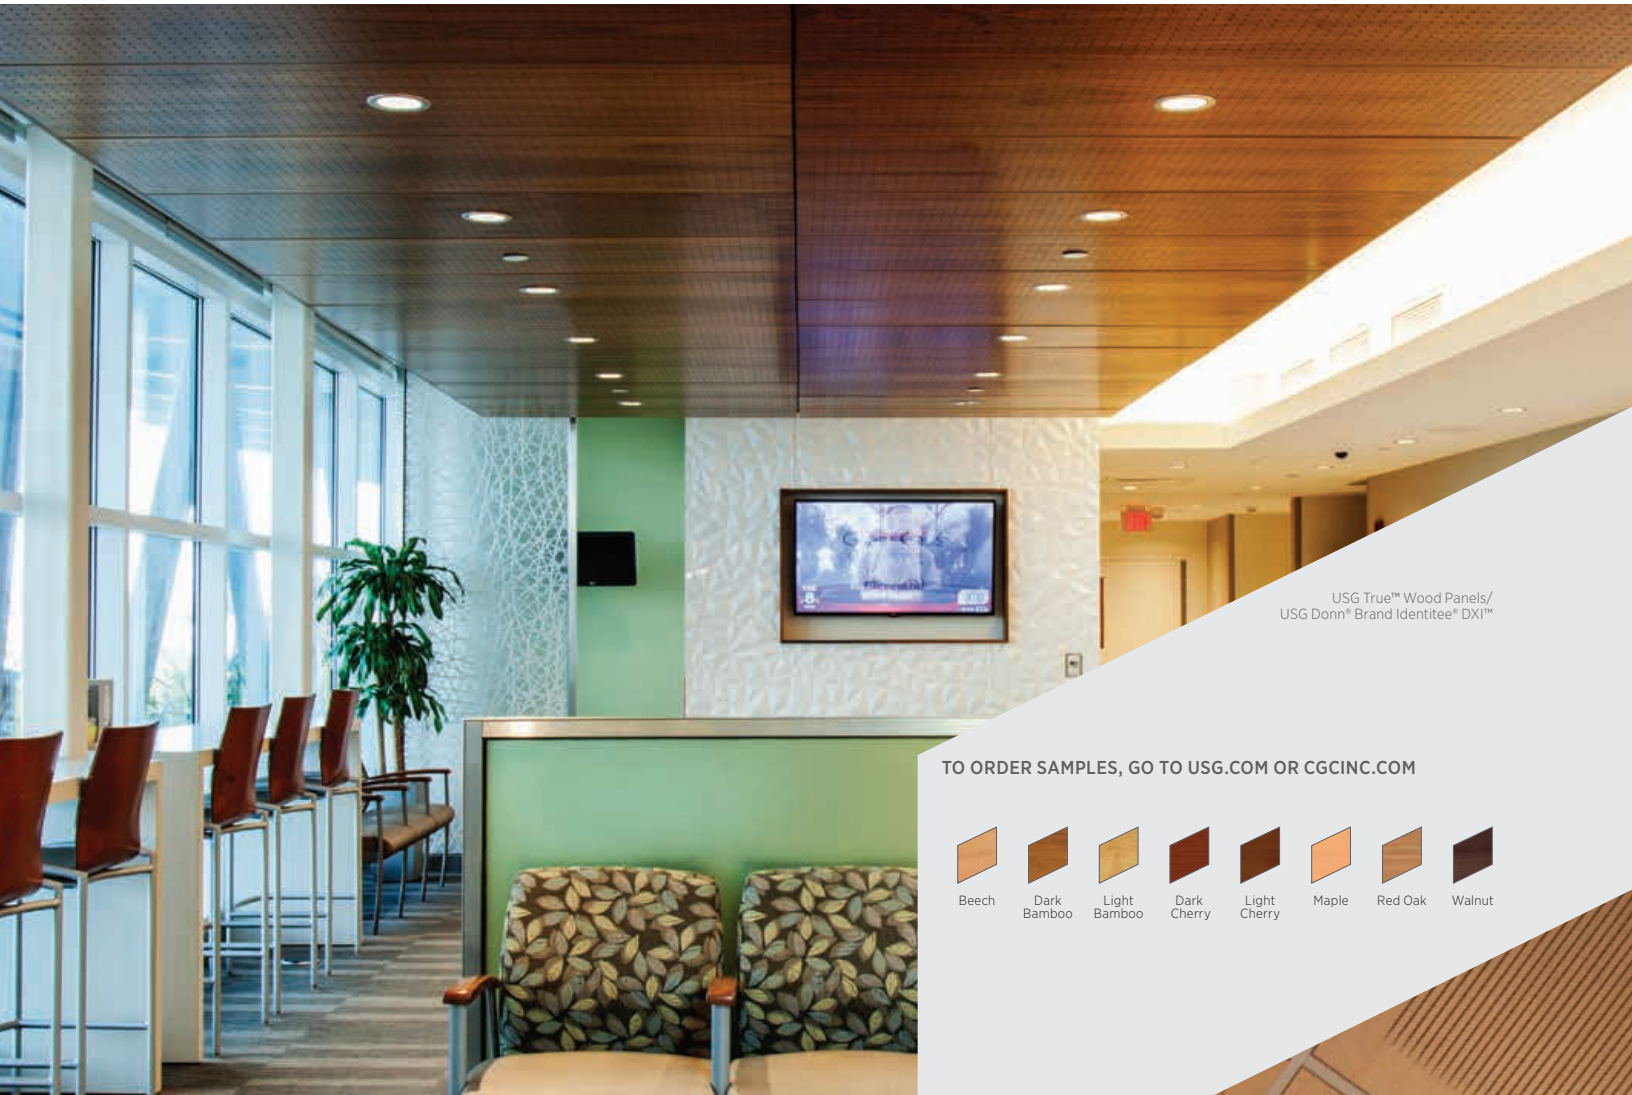

USG True™ Wood Panels/
USG Donn® Brand Identitee® DXI™

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



FEATURES AND BENEFITS

- The elegance, warmth and majesty of true wood.
- Natural wood veneers.
- Standard panel sizes of 2'x2', 2'x4' and linear.
- Plank sizes: 1'x4', 1'x5', 2'x6', 2'x8', 20"x60", 30"x60"
- Acoustical options, with an integrated acoustical backer.
- FSC® certified.
- Class A fire rating.

APPLICATIONS

- Schools
- Healthcare
- Conference rooms
- Restaurants
- Retail stores

2'x2' USG True™ Wood W500 With Border

USG TRUE™ WOOD PANELS

ORDER SAMPLES/LITERATURE
USG: samplite@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com



USG TRUE™ WOOD LAY-IN PANELS

	Lay-In Panels		Planks					
FL 	2'x2'x3/4"	2'x4'x3/4"	1'x4'x3/4"	1'x5'x3/4"	2'x6'x3/4"	2'x8'x3/4"	20" x 60" x 3/4"	30" x 60" x 3/4"
SL 								
AR 	2'x2'x3/4"	2'x4'x3/4"						

All USG True™ Wood perforated and channel panels include an integrated acoustical backer to provide a high level of sound performance without the expense and additional labor of acoustical blankets.

Note: All USG True™ Wood Plank Panels must be installed with stabilizer bars. See form # IC592.

USG TRUE™ WOOD LINEAR PANELS

Panel Size	Fire Rating	Grid Options	NRC	CAC
Nominal 4-1/2" Module 3-3/4"x8'	Class A	DWSS	0.40	—
Nominal 6" Module 5-1/4"x8'	Class A	DWSS	0.35	—

Linear panels are screw-attached to heavy duty DWSS drywall grid. They have a black fabric backing that overlaps panel-to-panel to create a clean black look in the reveal.

TRIM OPTIONS

4" Nominal (3-3/4"x8')
6" Nominal (5-1/4"x8')

GRID PROFILE OPTIONS

D USG DX®/DXL™	E USG Centricitee™ DXT™	F USG Fineline® DXF™	G USG Fineline® 1/8 DXFF™	H USG Identitee® DXI™

Note: Heavy duty suspension systems shall be used.

PERFORATION OPTIONS*

Pattern Number	Hole (mm)	Spacing (mm)	% Open Area	NRC
W100	6	16	10	0.60
W200	6	32	3	0.30
W300	8	16	20	0.70
W400	8	32	5	0.40

CHANNEL OPTIONS*

Pattern Number	Channel Width (mm)	Channel Depth (mm)	Spacing (mm centers)	Border (mm)	NRC
W500	2	3.8	10	—	N/A
W500 (border)	2	3.8	10	25.4	N/A
W600	2	3.8	5	—	N/A
W600 (border)	2	3.8	5	25.4	N/A

*Not available in linear panels.

HRC High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature
Data sheet: IC558
Finishes sheet: IC559
Tech guide: IC561

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

ASTM E1264 classification
Composite—Class A Fire Performance
ASHRAE Standard 62.1, 2013

Weight
3 lb./sq. ft.

Material
No added urea-formaldehyde core, with face cut veneers.

Notes

- Color Disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.
- Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats.
- These representations should not be used to finalize color selection(s).
- Building environmental conditions should be maintained in accordance with ASHRAE Standard 62.1, 2013.
- Refer to *CISCA Wood Ceilings Technical Guidelines* for best practices on installing wood ceilings.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC558/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, IDENTITEE, TRUE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG TRUE™ WOOD RENDITIONS™ PANELS

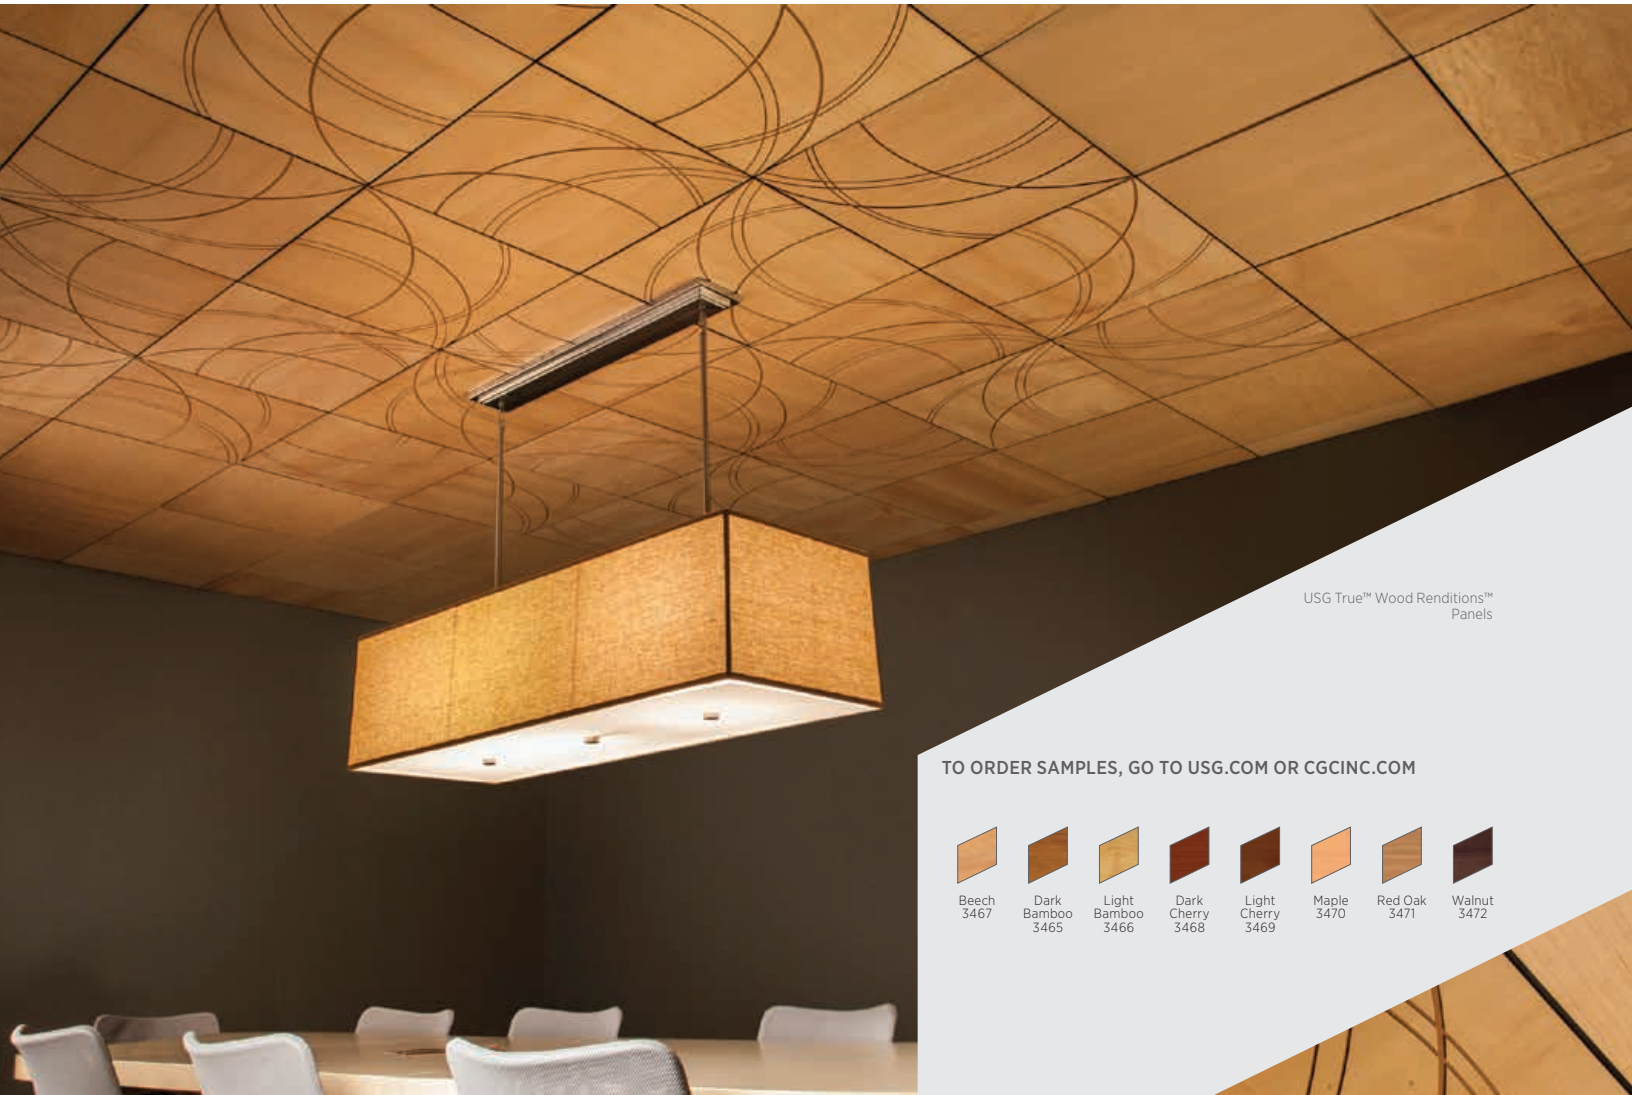

USG True™ Wood Renditions™
Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



FEATURES AND BENEFITS

- The elegance, warmth and majesty of true wood.
- Natural wood veneers.
- Eight design motifs.
- One panel design; dozens of layouts or provide your own design.
- FSC® certified.
- Class A fire rating.

APPLICATIONS

- Schools
- Healthcare
- Conference rooms
- Restaurants
- Retail stores

2'x2' USG True™ Wood W500 with Border

USG TRUE™ WOOD RENDITIONS™ PANELS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


TECHNICAL SERVICES
 800 USG.4YOU (874-4968)






2'x2' Lay-In Panels

Funnels	Rosettes	Swirls	Boxes
Tangents	Corners	Deco	Elipses

USG DX™/DXL™ only



AR Edge only

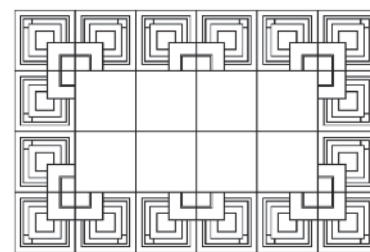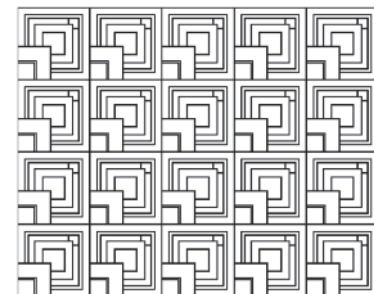

Design using 24 panels

See IC652 for more ceiling layouts.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Product literature

Data sheet: IC650
 Finishes sheet: IC559
 Tech guide: IC561
 Design guide: IC652

Online tools

usgdesignstudio.com or
cgcdesignstudio.com

ASTM E84 and CAN/ULC S102

surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Weight

3 lb./sq. ft.

Material

No added urea-formaldehyde core, with face-cut veneers.

Notes

- Color Disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.
- Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats.
- These representations should not be used to finalize color selection(s).
- Building environmental conditions should be maintained in accordance with ASHRAE Standard 62.1, 2013.
- Refer to *CISCA Wood Ceilings Technical Guidelines* for best practices on installing wood ceilings.
- For Canadian product needs, please contact your local sales representative.

USG TRUE™ WOOD ARCHITECTURAL ACCENTS PANEL OPTIONS

GRID PROFILE OPTIONS

Panel edge detail

EXAMPLE OF CEILING LAYOUT BOXES

FOR MORE INFORMATION

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC650/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, DX, DXL, RENDITIONS, TRUE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.




USG WIREWORKS™ OPEN CELL CEILING PANELS

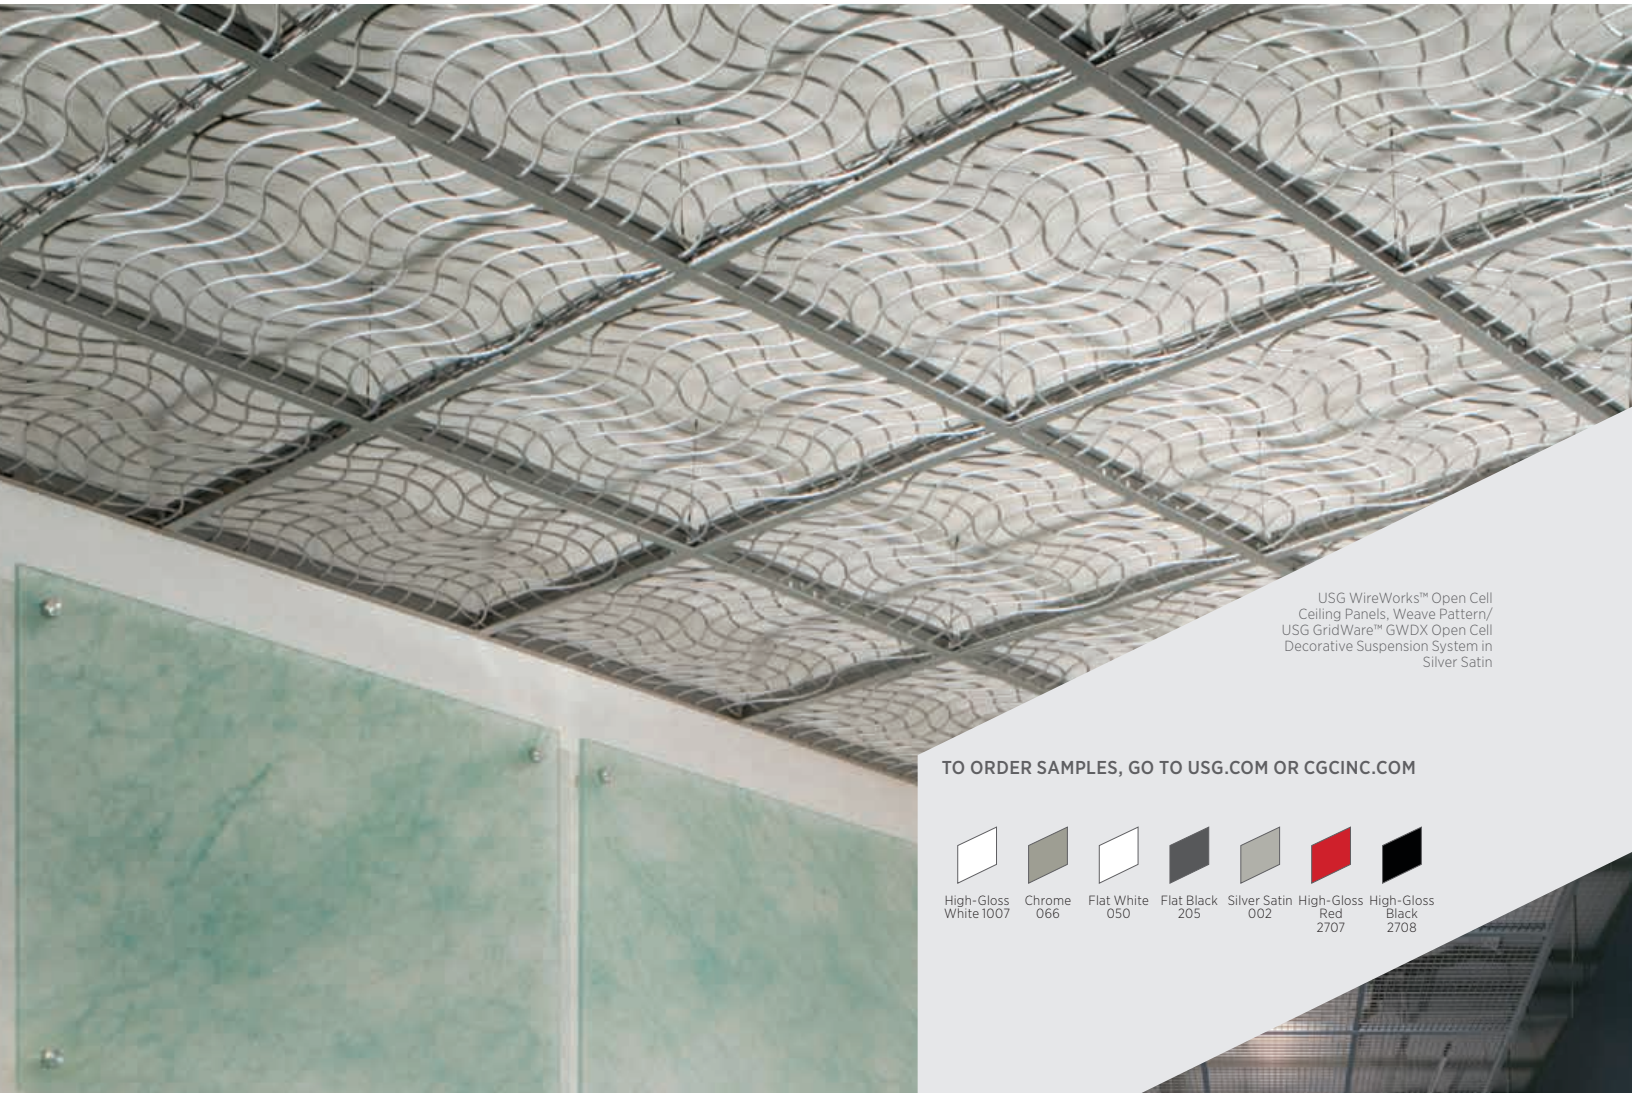

USG WireWorks™ Open Cell Ceiling Panels, Weave Pattern/
USG GridWare™ GWDX Open Cell Decorative Suspension System in Silver Satin

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



FEATURES AND BENEFITS

- Metal, woven wire lay-in panels with powder-coated finish are abuse resistant and highly durable.
- Four cell sizes, as well as unique wave designs, offer flexibility to meet design and budget needs.
- Combine with the USG GridWare™ Open Cell Decorative Suspension System to create custom ceiling system.
- Easy installation into standard USG Donn® Brand suspension systems.
- Easily accommodates lightweight signage.
- Custom colors available.

APPLICATIONS

- Accent areas
- Educational
- Healthcare
- Retail stores



USG WIREWORKS™ OPEN CELL CEILING PANELS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com



PRODUCT INFORMATION

USG WIREWORKS™ OPEN CELL CEILING PANELS 2'X2' 1/8" WIRE

Materials	Typical Sizes	Wire Thickness	
Robotically welded steel wire	2'x2'	Panels are 1/8" Forms are 3/16"	
1"x1" Cells	2"x2" Cells	3"x3" Cells	4"x4" Cells

USG WIREWORKS™ OPEN CELL FORMS 2'X2' 3/16" WIRE

Weave

Pattern	Front Profile	Side Profile

FOR MORE INFORMATION

Product literature
 Data sheet: IC325

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Metric equivalents
 Contact Technical Service for additional information.



High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC325/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, DONN, GRIDWARE, WIREWORKS, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG ASPEN™ BASIC ACOUSTICAL PANELS



USG Aspen™ Basic Acoustical Panels/USG Donn® Brand DX®/DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Random, naturally sculptured appearance offers upscale look without upscale cost.
- Sizes and performance meet most design criteria.
- Suitable for general applications.
- USDA Certified Biobased Product.⁴

APPLICATIONS

- Schools
- General offices
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Medium-Textured Panel



USG ASPEN™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)





PRODUCT CERTIFIED
 FOR LOW CHEMICAL
 EMISSIONS:
 UL/COM/GG
 UL 2818



USG ASPEN™ BASIC PANELS

USG ASPEN™ BASIC ILLUSION™ TWO/24 PANELS

FACE-CUT PATTERNS

Edge	Panel Size	Fire Rating	Item No.	UL Classified			Color	Grid Options	VOC Emissions	Recycled Content¹	Panel Cost
				NRC	CAC Min.	LR²					
 SLT	2'x2'x3/4"	Class A	650	0.55	35	0.87	White	A	Low	42%	\$\$
	2'x4'x3/4"	Class A	651	0.55	35	0.87	White	A	Low	42%	\$\$
 SLT³	2'x4'x3/4"	Class A	652	0.55	35	0.87	White	A	Low	42%	\$\$

USG Aspen™ Basic Illusion™ Two/24




The look of 2'x2' panels

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available at productguide.ulenvironment.com.

GRID PROFILE OPTIONS

A USG DX™/DXL™



PHYSICAL DATA/ FOOTNOTES

Product literature
 Data sheet: SC1809

ASTM E1264 classification

USG Aspen™ Basic: Type III, Form 2, Pattern CDFI

USG Aspen™ Basic Illusion™: Type III, Form 2, Pattern CDFIK

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance

R-1.7 (3/4" panels)

Weight

1.43 lb./sq. ft. (Class A)
 1.67 lb./sq. ft. (Illusion)

Maximum backloading

See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
 Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- Panels have a 15/16" routing.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1809/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ASPEN, DONN, DX, DXL, ILLUSION, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG ASTRO® ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

USG Astro® Acoustical Panels
with ClimaPlus™ Performance/
USG Donn® Brand Centricitee™ DXT™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Fine-textured, unperforated and nonfissured appearance offers highly desired aesthetic.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Optional Firecode® product designed to meet life-safety codes.

APPLICATIONS

- Schools
- Hospitals
- Healthcare facilities
- General offices
- Municipal buildings

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel

USG ASTRO® ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818

30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection

HRC HIGH RECYCLED
CONTENT

UL Classified

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ	2'x2'x5/8"	Class A	8221	0.55	35	0.86	White	A,B,C	Low		68%	\$\$
	2'x2'x3/4"		8122	0.50	35	0.86	White	A,D	Low		68%	\$\$
	2'x4'x5/8"	Class A	8241	0.55	35	0.86	White	A,B	Low		68%	\$\$
SLT	2'x2'x5/8"	Class A	8223	0.55	35	0.86	White	E	Low		68%	\$\$
	2'x2'x3/4"		8322	0.50	35	0.86	White	E	Low		68%	\$\$
	2'x4'x5/8"	Class A	8243	0.55	35	0.86	White	E	Low		68%	\$\$
FLB	2'x2'x5/8"	Class A	8227	0.55	35	0.86	White	F,H,I,K	Low		68%	\$\$
	2'x2'x3/4"		8722	0.50	35	0.86	White	G,J	Low		68%	\$\$
	2'x4'x5/8"	Class A	8247	0.55	35	0.86	White	F,H,I,K	Low		68%	\$\$
SLT ⁵	2'x4'x3/4"	Class A	8742	0.55	35	0.86	White	E	Low		69%	\$\$
ILT ⁶	2'x4'x3/4"	Class A	8744	0.55	35	0.86	White	L	Low		69%	\$\$

USG ASTRO® PANELS

USG ASTRO® ILLUSION™ TWO/24 PANELS

PATTERNS

USG Astro® Illusion™ Two/24



The look of 2'x2' panels

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁴
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode[®]

GRID PROFILE OPTIONS

A USG DX [®] /DXL™	B USG DXW™	C ⁷ USG Centricitee™ DXT™	D USG Centricitee™ DXLT™	E USG DX [®] /DXL™	F USG Centricitee™ DXT™	G USG Centricitee™ DXLT™	H USG Fineline [®] DXF™	I USG Fineline [®] 1/8 DXFF™	J USG Fineline [®] DXLF™	K USG Identitee [®] DXI™	L USG Centricitee™ DXT™

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2321

ASTM E1264 classification
USG Astro[®]: Type III, Form 1 and 2, Pattern G;
USG Astro[®] Illusion™: Type III, Form 1, Pattern GK

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
Astro-FR

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Weight
0.85 lb./sq. ft. (Class A)
1.10 lb./sq. ft. (Firecode[®])

Thermal resistance
R-2.0 (Class A 5/8")
R-2.4 (Class A 3/4")
R-2.4 (Firecode[®] 3/4")

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Texture
Because the manufacturing process for USG Astro[®] ceiling panels can potentially create subtle texture variations, we recommend ordering and installing this product by production lot number.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items: see UL design details.
- LR values are shown as averages.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- Panels have a 15/16" routing.
- Panels have a 9/16" routing.
- Maximum 2'x2' with SQ Edge panels.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2321/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, ASTRO, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXLF, DXLT, DXT, DXW, FINELINE, FIRECODE, IDENTITEE, ILLUSION, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG CLEAN ROOM™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG Clean Room™ Class 10M-100M Acoustical Panels with ClimaPlus™ Performance/USG Donn® Brand DXLA™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- USG Clean Room™ Class 100 and Class 10M-100M panels have an embossed, vinyl-laminated face with sealed back and edges for use in Class 100 (ISO 5) or 10M-100M (ISO 7) Clean Rooms.
- USDA Certified Biobased Product.⁸
- Firecode® product designed to meet life-safety codes.
- ClimaPlus™ 30-year limited system warranty against visible sag.

APPLICATIONS

- Clean Rooms
- Laboratories
- Surgical areas/emergency rooms
- Kitchens/food prep areas (Class 100 only)

SUBSTRATE

- Wet-formed mineral fiber

Smooth-Textured Panel, Class 100

Smooth-Textured Perforated Panel, Class 10M-100M


USG CLEAN ROOM™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)



UL Classified

Edge ⁵	Panel Size	Fire Rating ²	Item No.	NRC ⁴	CAC Min.	LR ³	Color	Grid Options	Recycled Content ¹	Panel Cost
SQ 	2'x2'x5/8" Unperforated		56099	—	35	0.79	White	A,B,C,D,E	55%	\$\$\$
	2'x4'x5/8" Unperforated		56091	—	35	0.79	White	A,B,C,D,E	55%	\$\$\$
SQ 	2'x2'x5/8" Perforated		56060	0.55	35	0.79	White	A,B,C,D,E	55%	\$\$\$
	2'x4'x5/8" Perforated		56090	0.55	35	0.79	White	A,B,C,D,E	55%	\$\$\$

HRC High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



GRID PROFILE OPTIONS

A USG DX®/DXL™	B USG DXLA™	C USG ZXLA™	D USG AX™	E ⁶ USG CE™

PHYSICAL DATA/
 FOOTNOTES

Product literature
 Data sheet: SC1811

ASTM E1264 classification
 Class 100: Type X, Pattern GI
 Class 10M-100M: Type X, Pattern CGI

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

UL Type
 M

Weight
 1.1 lb./sq. ft. (Class 100 panels)
 1.2 lb./sq. ft. (Class 10M-100M panels)

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
 R-1.6

Maximum backloading
 See *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

Maintenance
 Can be cleaned easily with a damp sponge, mild detergent and water. Do not use acetate, ammonia, or highly concentrated chlorine, bromide or other harsh chemicals.

Metric sizes available
 Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items: see UL design details.
- LR values are shown as averages.
- NRC rating for USG Clean Room™ ClimaPlus™ Class 100 panels is 0.10. USG does not consider a ceiling panel to be acoustically rated if NRC is less than 0.50.
- Field-cut edges of USG Clean Room™ panels may be sealed with white latex paint.
- Clean Room-rated applications require a suspension system with gasketed tee flanges such as USG Donn® Brand CE™.
- Not intended for kitchen/food prep applications. Use unperforated product (Class 100)—item numbers 56099 and 56091.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1811/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661


The trademarks USG, CGC, AX, CE, CLEAN ROOM, CLIMAPLUS, DONN, DX, DXL, DXLA, FIRECODE, ZXLA, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG ECLIPSE™/ECLIPSE™ HIGH-NRC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

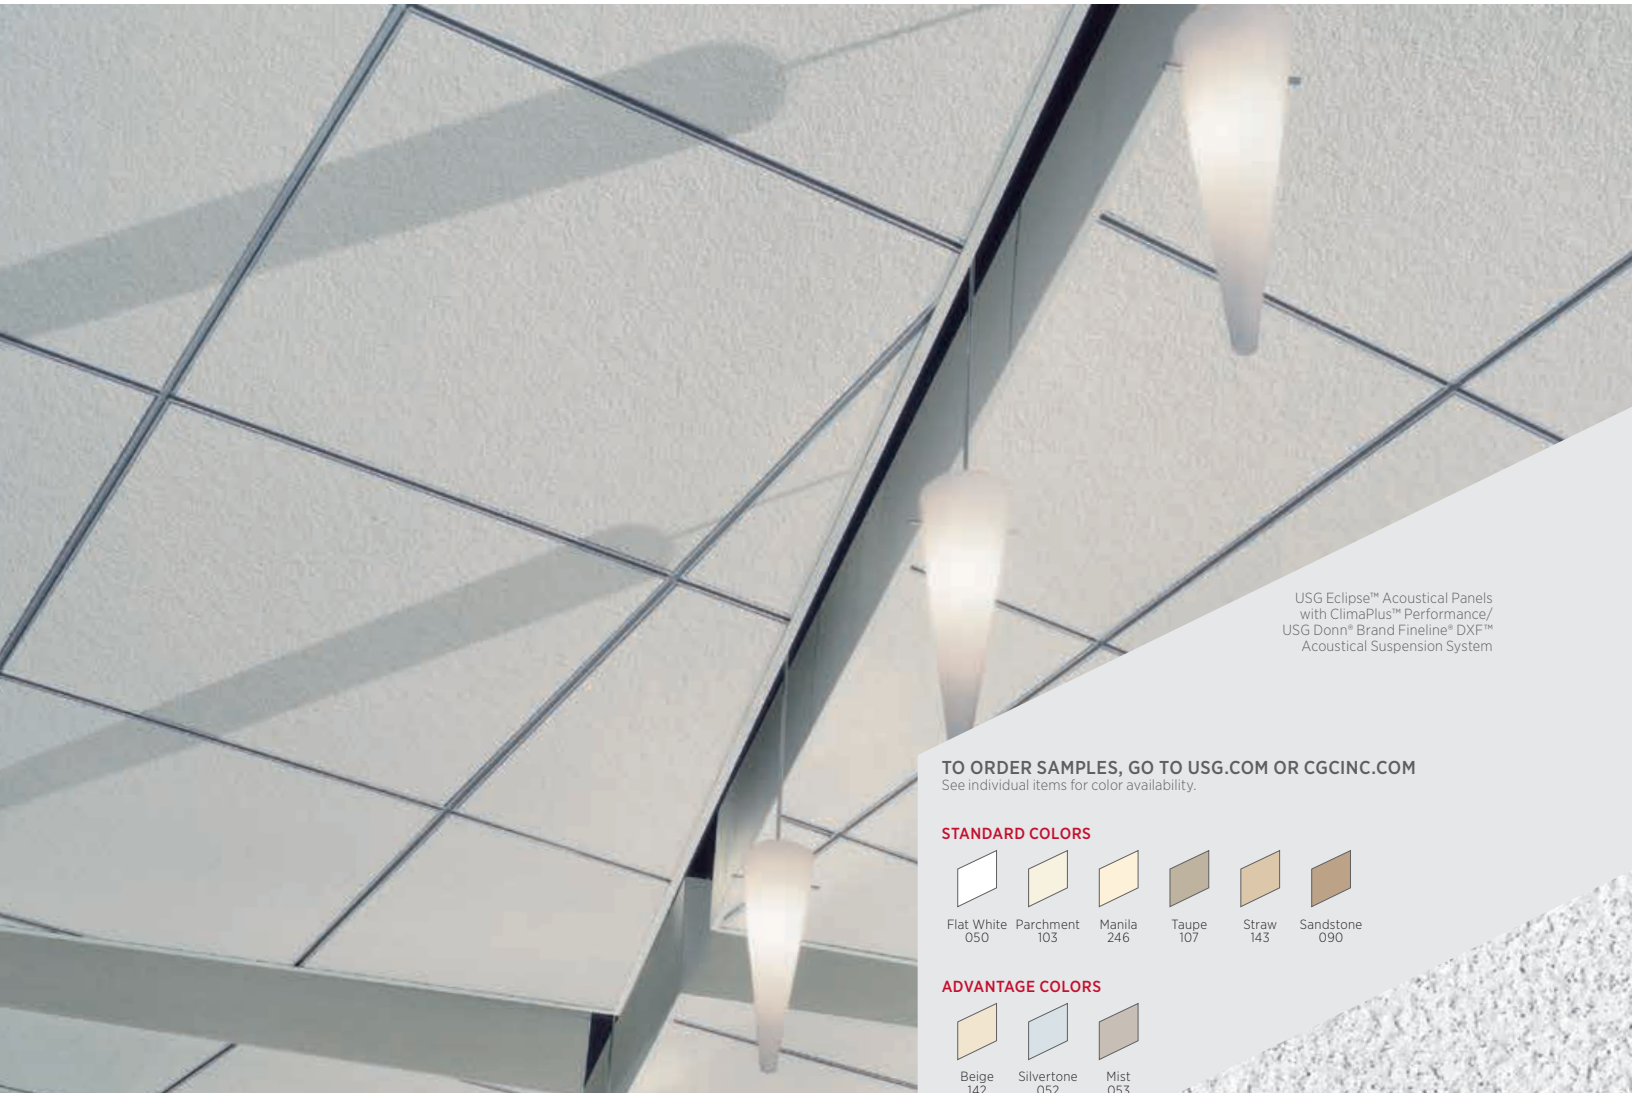


USG Eclipse™ Acoustical Panels with ClimaPlus™ Performance/USG Donn® Brand Fineline® DXF™ Acoustical Suspension System


TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

See individual items for color availability.

STANDARD COLORS



ADVANTAGE COLORS



FEATURES AND BENEFITS

- Elegant, fine-textured visual.
- Excellent noise reduction (up to NRC-0.75).
- Balanced Acoustics. High-NRC and High-CAC.
- Optional Firecode® product designed to meet life-safety codes.
- Available in Optimized Recycled Content products to help maximize LEED recycled content contribution.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Offices
- Conference areas
- Healthcare (HIPAA requirements)
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel



USG ECLIPSE™/ECLIPSE™ HIGH-NRC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818

30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection



10 YEAR AVAILABILITY
76575, 76775,
76975, 78575,
78775



USG ECLIPSE™ PANELS

Edge	Panel Size	Fire Rating ²	Item No.	UL Classified			Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
				NRC	CAC	LR ³						
SQ 	2'x2'x3/4"	Class A	76575	0.70	35	0.86	White	A, B, C	Low		79%	\$\$
	2'x2'x3/4"	Class A	76575HRC	0.70	35	0.85	White	A, B, C	Low		83%	\$\$
	2'x4'x3/4"	Class A	78575	0.70	35	0.86	White	A, B	Low		79%	\$\$
	2'x4'x3/4"	Class A	78575HRC	0.70	35	0.85	White	A, B	Low		83%	\$\$
SLT 	2'x2'x3/4"	Class A	76775	0.70	35	0.86	White ⁵ / Colors	D	Low		79%	\$\$
	2'x2'x3/4"	Class A	76775HRC	0.70	35	0.85	White	D	Low		83%	\$\$
	600x600x19	Class A	ME76775	0.70	35	0.86	White	D	Low		79%	\$\$
	2'x2'x3/4"		76779	0.60	35	0.86	White	D	Low		64%	\$\$
	2'x4'x3/4"	Class A	78775	0.70	35	0.86	White	D	Low		79%	\$\$
	2'x4'x3/4"	Class A	78775HRC	0.70	35	0.85	White	D	Low		83%	\$\$
FL 	2'x2'x3/4"	Class A	76975	0.70	35	0.86	White ⁵ / Colors	E, G, H, J	Low		79%	\$\$
	2'x2'x3/4"	Class A	76975HRC	0.70	35	0.85	White	E, G, H, J	Low		83%	\$\$
	600x600x19	Class A	ME76975	0.70	35	0.86	White	E, G, H, J	Low		79%	\$\$
	2'x2'x3/4"		76979	0.60	35	0.86	White	F, I	Low		64%	\$\$
	2'x4'x3/4"	Class A	78975	0.70	35	0.86	White	E, G, H, J	Low		79%	\$\$
	2'x4'x3/4"	Class A	78975HRC	0.70	35	0.85	White	E, G, H, J	Low		83%	\$\$
SQ 	2'x2'x7/8"	Class A	76520	0.75	35	0.86	White	A, B, C	Low		81%	\$\$\$
	2'x4'x7/8"	Class A	76521	0.75	35	0.86	White	A, B	Low		81%	\$\$\$
SLT 	2'x2'x7/8"	Class A	76522	0.75	35	0.86	White	D	Low		81%	\$\$\$
	2'x4'x7/8"	Class A	76523	0.75	35	0.86	White	D	Low		81%	\$\$\$
FL 	2'x2'x7/8"	Class A	76524	0.75	35	0.86	White	E, G, H, J	Low		81%	\$\$\$
	2'x4'x7/8"	Class A	76525	0.75	35	0.86	White	E, G, H, J	Low		81%	\$\$\$
BESK 	12"x12"x3/4"	Class A	70073	0.60	40	0.86	White	K	Low		76%	\$\$\$\$

USG ECLIPSE™ HIGH-NRC PANELS

USG ECLIPSE™ TILE^{6,7}

Low Emissions
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁴
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode[®]

GRID PROFILE OPTIONS

A USG DX [®] / DXL™	B USG DXW™	C ⁹ USG Centricitee™ DXT™	D USG DX [®] / DXL™	E USG Centricitee™ DXT™	F USG Centricitee™ DXLT™	G USG Fineline [®] DXF™	H USG Fineline [®] 1/8 DXFF™	I USG Fineline [®] DXLF™	J USG Identitee™ DXI™	K USG DX [®] / DXL™ Concealed

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1812

ASTM E1264 classification
Type III, Form 1, Pattern EI

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FR-X1

Imperial weight
1.00-1.15 lb./sq. ft. (Class A panels and tile)
1.12 lb./sq. ft. (Firecode[®] panels)

Metric weight
5.07 kg/m² (Class A panels)

Thermal resistance
R-2.0 (Class A), R-1.9 (Firecode[®])

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

- Notes**
- For details, see LEED report at usgdesignstudio.com or cgcdesignstudio.com.
 - Fire-rated items: see UL design details.
 - LR values shown as averages.

4. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).

5. See Colors selector for more information. Metric: white only.

6. Contact USG for adhesive recommendations for 12"x12" glue-up applications.

7. Not UL Classified for acoustics.

8. Maximum 2'x2' with SQ edge panels.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1812/rev. 3-17
© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXL, DXL, DXLF, DXLT, DXT, DXW, ECLIPSE, FINELINE, FIRECODE, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG ECLIPSE™ ILLUSION™ & PEDESTALS™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG Eclipse™ Pedestals™ IV Panels
with ClimaPlus™ Performance/
USG Donn® Brand Centricitee™ DXT™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- A variety of face scores creates the illusion of a smaller-scaled ceiling system without compromising accessibility.
- Solid NRC performance of up to 0.70 meets general office acoustical needs for sound absorption.
- Balanced Acoustics. High-HRC and High-CAC.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Boutiques
- Schools
- Reception lobbies
- Transportation terminals

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel



USG ECLIPSE™ ILLUSION™ & PEDESTALS™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818



UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
SLT ³	2'x4'x3/4"	Class A	78785	0.70	35	0.84	White	A	Low		79%	\$\$
ILT ⁴	2'x4'x3/4"	Class A	78085	0.70	35	0.84	White	B,C	Low		79%	\$\$
SLT ³	2'x4'x3/4"	Class A	78711	0.70	35	0.84	White	A	Low		79%	\$\$
ILT ⁴	2'x4'x3/4"	Class A	78011	0.70	35	0.84	White	B,C	Low		79%	\$\$
PE/SLT ³	2'x2'x3/4"	Class A	72715	0.65	35	0.84	White	D	Low		79%	\$\$
PE/ILT ⁴	2'x2'x3/4"	Class A	72015	0.65	35	0.84	White	E,F	Low		79%	\$\$
PE/SLT ³	2'x2'x3/4"	Class A	72716	0.65	35	0.84	White	D	Low		79%	\$\$
PE/ILT ⁴	2'x2'x3/4"	Class A	72215	0.65	35	0.84	White	E,F	Low		79%	\$\$

USG ECLIPSE™ ILLUSION™
TWO/24 PANELS

USG ECLIPSE™ ILLUSION™
FOUR/48 PANELS

USG ECLIPSE™
PEDESTALS™ I PANELS


USG ECLIPSE™
PEDESTALS™ IV PANELS

PATTERNS

USG Eclipse™ Illusion™ Two/24
The look of 2'x2' panels



USG Eclipse™ Illusion™ Four/48
The look of 48"x6" linear strips



USG Eclipse™ Pedestals™ I
Triple-step scoring



USG Eclipse™ Pedestals™ IV
Triple-step scoring in 12"x12" modules



Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁵

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

GRID PROFILE OPTIONS

A USG DX [®] /DXL™	B USG Centricitee™ DXT™	C USG Identitee® DXI™	D USG DX [®] /DXL™	E USG Centricitee™ DXT™	F USG Identitee® DXI™

PHYSICAL DATA/
FOOTNOTES

Product literature
Data sheet: SC1846

ASTM E1264 classification
Type III, Form 1, Pattern EIK (USG Eclipse™ Illusion™) or Pattern EI (USG Eclipse™ Pedestals™)

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
1.13 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-2.0

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- Panels have a 15/16" routing.
- Panels have a 9/16" routing.
- Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial additive that inhibits and retards the growth of mold/mildew. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1846/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXI, DXL, DXT, ECLIPSE, IDENTITEE, ILLUSION, PEDESTALS, IT'S YOUR WORLD, BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG "F" FISSURED™ BASIC ACOUSTICAL PANELS



USG "F" Fissured™ Basic
Acoustical Panels/USG Donn®
Brand Centricitee™ DXT™ Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Balanced Acoustics. NRC and CAC.
- Cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Zero VOC emissions exceed CA Specification 01350.
- USDA Certified Biobased Product.⁶
- 12"x12" tile with the USG Donn® Brand DX®/DXL™ Concealed Acoustical Suspension System creates a "gridless" appearance.

APPLICATIONS

- Administrative offices
- Schools
- Financial institutions
- Religious buildings

SUBSTRATE

- Cast mineral fiber

Medium-Textured Panel



USG "F" FISSURED™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content ¹	Panel Cost
SQ 	2'x2'x3/4" Paper-Back	Class A	131	0.70	35	0.79	White	A,B,C	Zero		69%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	135	0.70	35	0.79	White	A,B	Zero		69%	\$\$\$
SL 	2'x2'x3/4" Paper-Back	Class A	132	0.70	35	0.79	White	D	Zero		69%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	136	0.70	35	0.79	White	D	Zero		69%	\$\$\$
FL 	2'x2'x3/4" Paper-Back	Class A	133	0.70	35	0.79	White	E,F,G,H	Zero		69%	\$\$\$
BESK 	12"x12"x3/4"	Class A	102	0.70	25	0.79	White	I	Zero		69%	\$\$\$\$
SESK 	12"x12"x3/4"	Class A	101	0.70	25	0.79	White	J	Zero		69%	\$\$\$\$

USG "F" FISSURED™
BASIC PANELS

USG "F" FISSURED™
BASIC TILE^{3,4}

Zero Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.


High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Abuse Resistant

GRID PROFILE OPTIONS

A USG DX'/DXL™	B USG DXW™	C ⁵ USG Centricitee™ DXT™	D USG DX'/DXL™	E USG Centricitee™ DXT™	F USG Fineline® DXF™	G USG Fineline® 1/8 DXFF™	H USG Identitee® DXI™	I USG DX'/DXL™ Concealed	J USG DX'/DXL™ Concealed

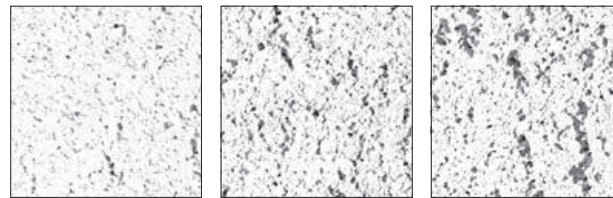

Composite of USG "F" Fissured™ Basic ceiling products shows range to be expected in a production lot and possibly in the same panel or tile. Ranges are random and cannot be specified. Texture appearance will vary based on ceiling height, installation methods and natural variations of the product.

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1816

ASTM E1264 classification
Type III, Form 4, Pattern D

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
1.70 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.7

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Texture
The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- Contact USG for adhesive recommendations for 12"x12" glue-up applications.
- Not UL Classified for acoustics.
- Maximum 2'x2' with SQ edge panels.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1816/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, "F" FISSURED, FINELINE, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG FISSURED™ BASIC ACOUSTICAL PANELS



USG Fissured™ Basic Acoustical Panels/USG Donn® Brand DX®/DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Economical, all-purpose ceiling pattern available in various panel sizes.
- Optional Firecode® product designed to meet life-safety codes.


APPLICATIONS

- Administrative offices
- Corridors
- Mass merchandisers
- Convenience stores

SUBSTRATE

- Wet-formed mineral fiber

Medium-Textured Panel

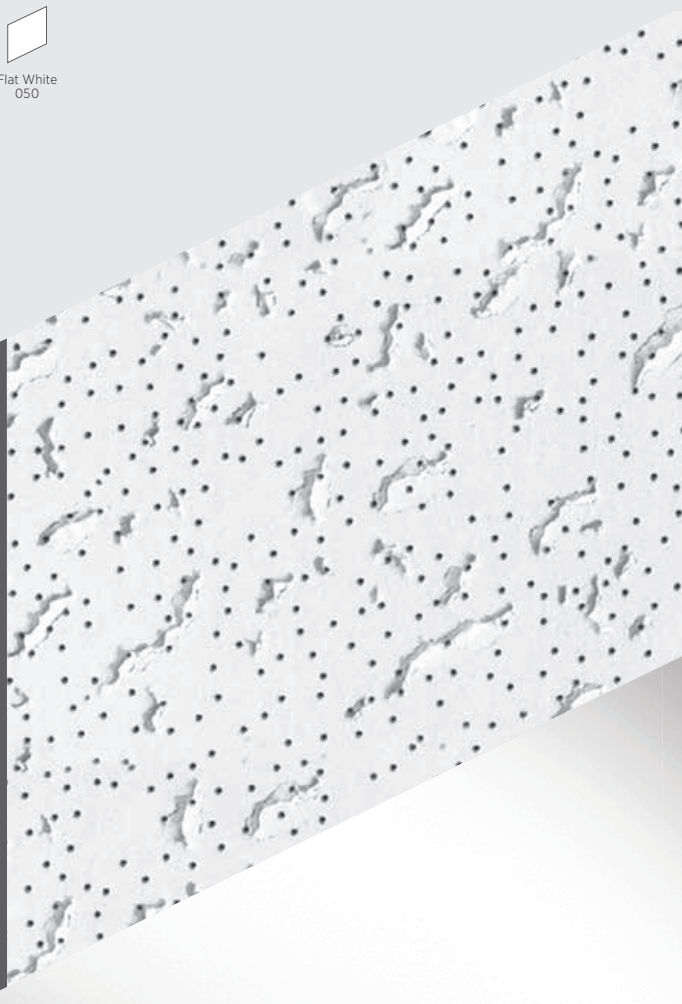

USG FISSURED™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818



HIGH RECYCLED
CONTENT



Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost
	2'x2'x5/8"	Class A	560	0.55	33	0.81	White	A,B,C	Low	25%	\$
	2'x2'x5/8"	Class A	585	0.55	35	0.81	White	A, C	Low	48-51%	\$
	2'x4'x5/8"	Class A	562	0.55	35	0.81	White	A, B	Low	25%	\$
	2'x4'x5/8"	Class A	586	0.55	35	0.81	White	A	Low	48-51%	\$
	2'x2'x5/8"	Class A	506	0.55	33	0.81	White	D	Low	25%	\$
	2'x4'x5/8"	Class A	507	0.55	35	0.81	White	D	Low	25%	\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



USG FISSURED™ BASIC PANELS

GRID PROFILE OPTIONS

PHYSICAL DATA/ FOOTNOTES

A USG DX ⁴ /DXL™	B USG DXW™	C ⁴ USG Centricitee™ DXT™/DXLT™	D USG DX ⁴ /DXL™

Product literature
Data sheet: SC1815

ASTM E1264 classification
Type III, Form 2, Pattern CD

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FR-2
FR-83

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Weight
0.61-1.2 lb./sq. ft. (Class A)
1.14-1.22 lb./sq. ft. (Firecode®)

Thermal resistance
R-1.4 (Class A)
R-1.6 (Firecode®)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes
1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

2. Fire-rated items: see UL design details.

3. LR values are shown as averages.

4. Maximum 2'x2' with SQ edge panels.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1815/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXL, DXLT, DXT, DXW, FIRECODE, FISSURED, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG FROST™ BASIC ACOUSTICAL PANELS



USG Frost™ Basic Acoustical Panels/USG Donn® Brand Fineline® DXF™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Balanced Acoustics. High-NRC and High-CAC.
- Excellent combination of noise reduction (NRC-0.70) and sound attenuation (CAC-40).
- Zero VOC emissions exceed CA Specification 01350.
- USDA Certified Biobased Product.⁴
- Damage-resistant panels with impact resistance (ASTM C367) and integral color help to reduce the overall cost of ownership.

APPLICATIONS

- Healthcare (HIPAA requirements)
- Open or closed offices
- Media centers
- Libraries
- Schools (ANSI S12.60 classroom guidelines)

SUBSTRATE

- Cast mineral fiber

Fine-Textured Panel



USG FROST™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818



UL Classified

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content ¹	Panel Cost
SLB 	2'x2'x7/8" Foil-Back	Class A	440	0.70	40	0.84	White	A	Zero		72%	\$\$\$
	2'x2'x3/4" Paper-Back		415	0.55	35	0.84	White	A	Zero		73%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	450	0.70	38	0.84	White	A	Zero		72%	\$\$\$
FL 	2'x4'x3/4" Paper-Back	Class A	460	0.70	38	0.84	White	B,C,D,E	Zero		72%	\$\$\$

Zero Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®

Abuse Resistant

GRID PROFILE OPTIONS

A USG DX [®] /DXL [™]	B USG Centricitee [™] DXT [™]	C USG Finline [®] DXF [™]	D USG Finline [®] 1/8 DXFF [™]	E USG Identitee [®] DXI [™]

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1817

ASTM E1264 classification
Type III, Form 4, Pattern E

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
AP, AP-1, AP-2, AP-3

Weight
1.65-1.85 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.7 (Class A)
R-1.1 (Firecode[®])

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Impact resistance
ASTM C367—tested to min. 190 lb./sq. ft. for 1/4" depression by a 2" steel ball.

Texture
The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Environmental conditions

All USG limited warranties are subject to use under normal conditions. Abnormal conditions include exposure to chemical fumes, vibrations, moisture from conditions such as leaks or condensation, excessive humidity due to shutoff of HVAC system, or excessive dirt or dust buildup.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items: see UL design details.
- LR values are shown as averages.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1817/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, FIRECODE, FROST, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG FROST™/USG FROST™ HIGH-NRC/ HIGH-CAC ACOUSTICAL PANELS


CLIMAPLUS™ PERFORMANCE

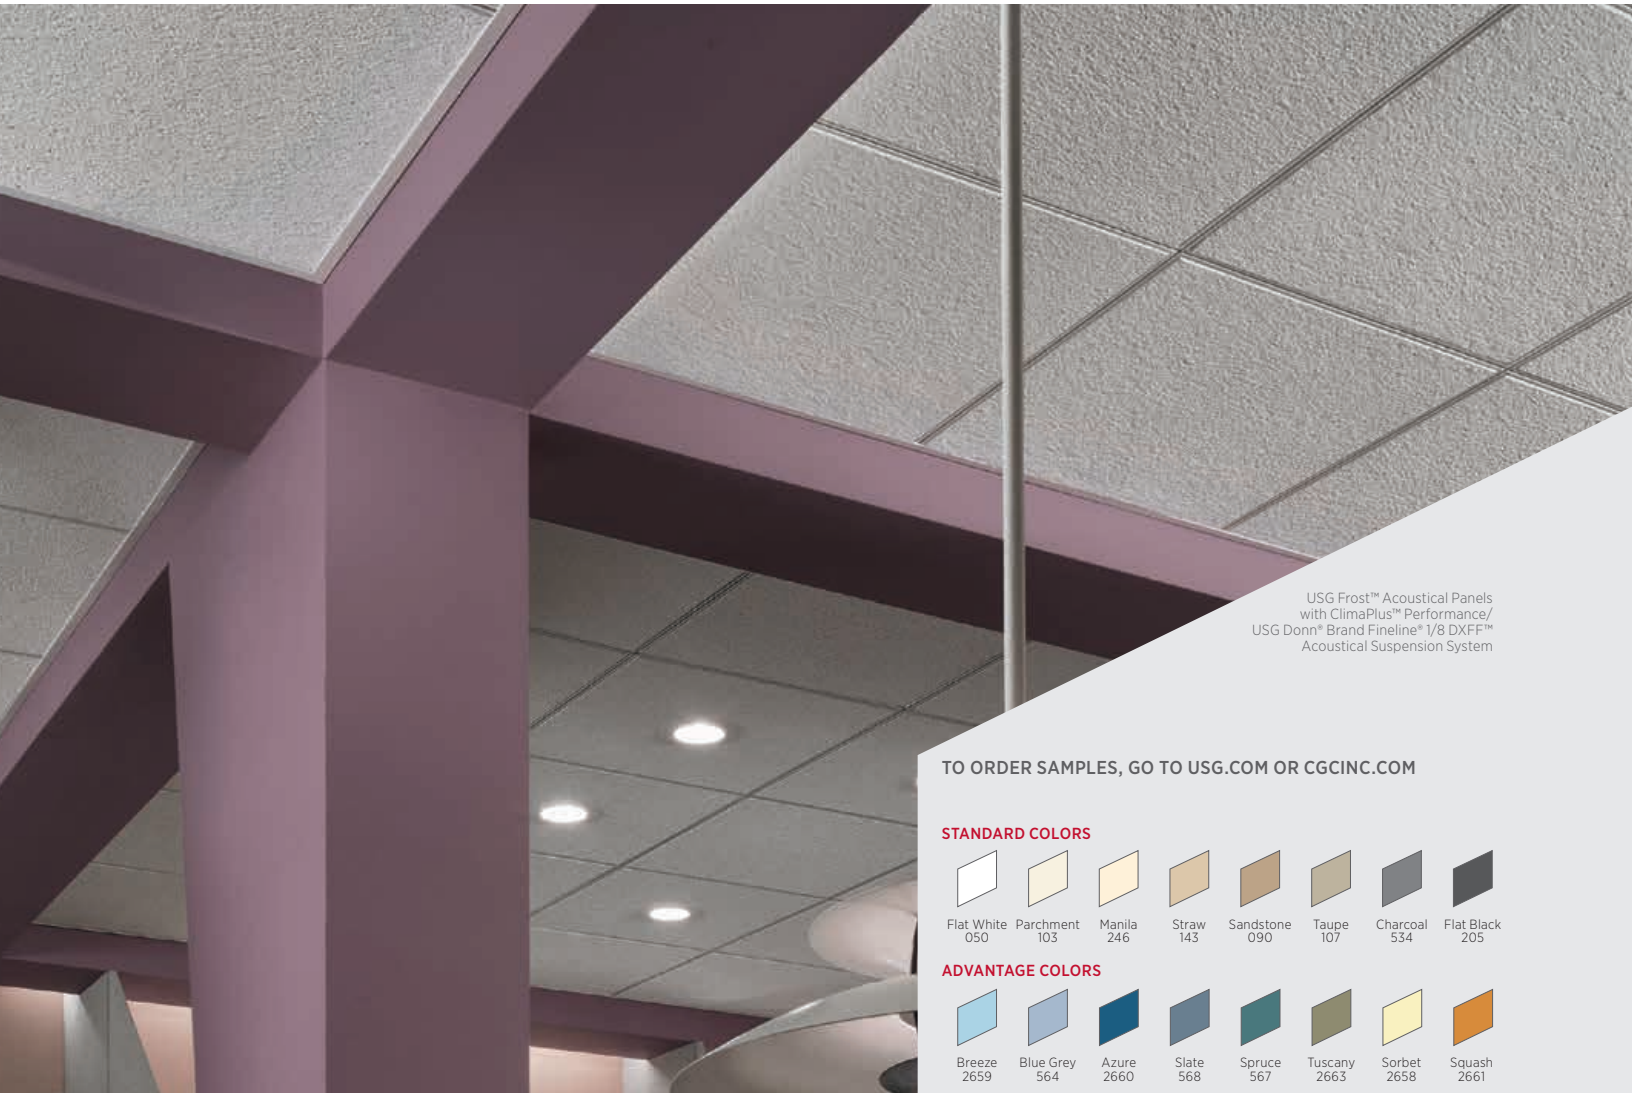


USG Frost™ Acoustical Panels
with ClimaPlus™ Performance/
USG Donn® Brand Fineline® 1/8 DXFF™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS

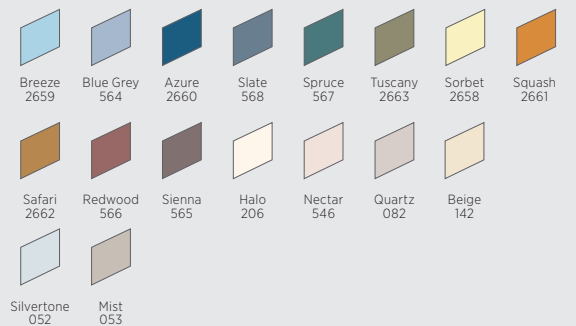

PREMIUM COLORS



FEATURES AND BENEFITS

- Balanced Acoustics. High-NRC and High-CAC.
- Excellent combination of noise reduction (up to NRC-0.80) and sound attenuation (up to CAC-40) for use in mixed (open-plan/closed-plan) office design.
- Zero VOC emissions exceed CA Specification 01350.
- USDA Certified Biobased Product.⁶
- High light-reflective finish (up to LR-0.89) reduces light fixtures and energy use.
- Damage-resistant panels with impact resistance (ASTM C367) and integral color help to reduce the overall cost of ownership.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Healthcare (HIPAA requirements)
- Schools (ANSI S12.60 classroom guidelines)
- Government projects (ACOE performance requirements)
- Mixed office design
- Closed- or open-plan offices
- Media centers/libraries

SUBSTRATE

- Cast mineral fiber

USG FROST™/USG FROST™ HIGH-NRC/ HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818



UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min. ²	LR ³	Color ⁴	Grid Options	VOC Emissions	Anti-Mold & Mildew	Abuse Resistant	Recycled Content ¹	Panel Cost
USG FROST™ PANELS	SLB 	Class A	414	0.70	36	0.84	White Standard Advantage Premium	A	Zero			72%	\$\$\$
	FL 		418	0.70	38/40	0.84	White Standard Advantage Premium	B,C,D,E	Zero			72%	\$\$\$
	FLB 		419	0.70	38/40	0.84	White Standard Advantage Premium	F,G,H,I	Zero			72%	\$\$\$
USG FROST™ HIGH-NRC/ HIGH-CAC PANELS	SLB 	Class A	484	0.80	38	0.89	White	A	Zero			73%	\$\$\$
	FL 		488	0.80	38/40	0.89	White	B,C,D,E	Zero			73%	\$\$\$
	FLB 		489	0.80	38/40	0.89	White	F,G,H,I	Zero			73%	\$\$\$
USG FROST™ HIGH-LR PANELS	SLB 	Class A	490	0.75	36	0.89	White	A	Zero			72%	\$\$\$
	FLB 		491	0.75	36	0.89	White	F,G,H,I	Zero			72%	\$\$\$

Zero Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁵

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Abuse Resistant

Abuse Resistant

GRID PROFILE OPTIONS

A USG DX™/DXL™	B USG Centricitee™ DXT™	C USG Fineline® DXF™	D USG Fineline® 1/8 DXFF™	E USG Identitee® DXI™	F USG Centricitee™ DXT™	G USG Fineline® DXF™	H USG Fineline® 1/8 DXFF™	I USG Identitee® DXI™

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1968

ASTM E1264 classification
Type III, Form 4, Pattern E

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
1.60-1.85 lb./sq. ft.

Thermal resistance
R-17

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Texture
The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variations between production dates, we recommend ordering and installing cast products by production lot number.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Item Nos. 418, 419, 488 and 489 achieve 40 CAC when installed with USG Donn® Brand Fineline™ or Fineline 1/8 suspension system.
- LR values are shown as averages.
- See Colors selector for more information.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1968/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, FROST, IDENTITEE, IT'S YOUR WORLD, BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.




USG GLACIER™ BASIC ACOUSTICAL PANELS

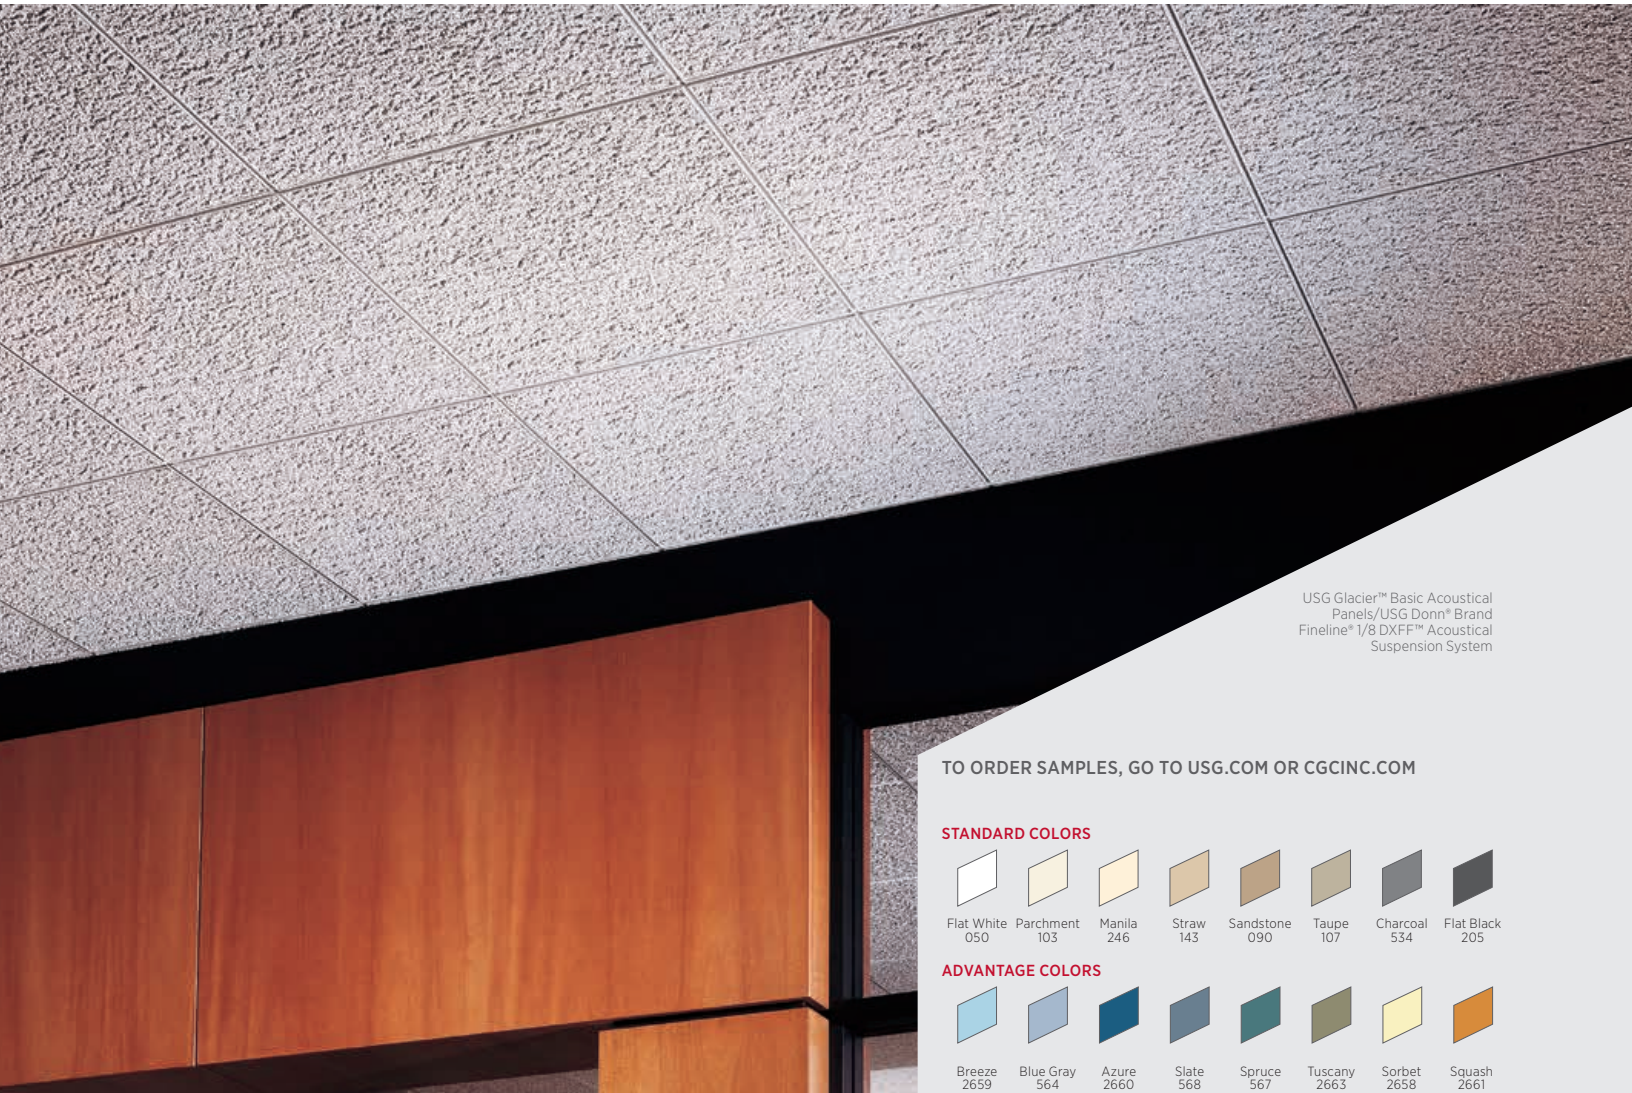


USG Glacier™ Basic Acoustical Panels/USG Donn® Brand Fineline® 1/8 DXFF™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS

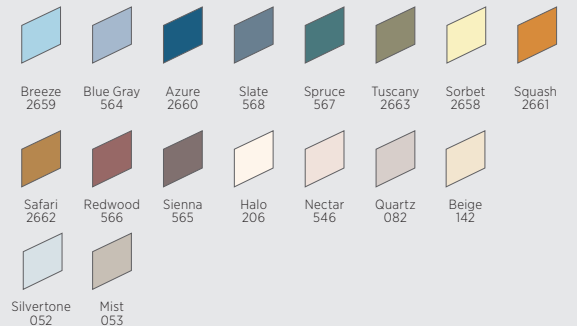

PREMIUM COLORS



FEATURES AND BENEFITS

- Heavily textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Zero VOC emissions exceed CA Specification 01350.
- USDA Certified Biobased Product.⁸
- 12"x12" tile with the USG Donn® Brand DX®/DXL™ Concealed Acoustical Suspension System creates a gridless appearance.
- Integral color masks nicks and scratches and enhances lifelong panel appearance.
- Optional Firecode® product designed to meet life-safety codes.

APPLICATIONS

- Food courts
- Hospitality
- Libraries
- Restaurants

SUBSTRATE

- Cast mineral fiber

USG GLACIER™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818



UL Classified

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color ⁴	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content ¹	Panel Cost
 USG GLACIER™ BASIC PANELS	2'x2'x3/4" Paper-Back		707	0.65	35	0.70	White Standard Advantage Premium	A	Zero		72%	\$\$\$
	2'x2'x3/4" Paper-Back		715	0.65	35	0.70	White	A	Zero		73%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	711	0.65	35	0.70	White	A	Zero		72%	\$\$\$
 USG GLACIER™ BASIC TILE ^{5, 6, 7}	2'x2'x3/4" Paper-Back	Class A	708	0.65	35	0.70	White Standard Advantage Premium	B, C, D, F	Zero		72%	\$\$\$
 USG GLACIER™ BASIC TILE ^{5, 6, 7}	12'x12"x3/4"	Class A	701	0.65	25	0.70	White	E	Zero		72%	\$\$\$\$

Zero Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®

Abuse Resistant

GRID PROFILE OPTIONS

A USG DX [®] /DXL [™]	B USG Centricitee [™] DXT [™]	C USG Fineline [®] DXF [™]	D USG Fineline [®] 1/8 DXFF [™]	E USG DX [®] /DXL [™] Concealed	F USG Identitee [®] DXI [™]

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1819

ASTM E1264 classification
Type III, Form 4, Pattern F

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
AP, AP-1, AP-2, AP-3

Weight
1.45 lb./sq. ft. (12"x12" tile)
1.50 lb./sq. ft. (Class A panels)
1.60 lb./sq. ft. (Firecode® panel)

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.7 (Class A)
R-1.3 (Firecode®)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Texture
The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items; see UL design details.
- LR values are shown as averages.
- See Colors selector for more information.
- Texture appearance will vary based on ceiling height, installation methods and natural variation of the product.
- Contact USG for adhesive recommendation for 12"x12" glue-up applications.
- Not UL Classified for acoustics.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1819/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, FIRECODE, GLACIER, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG HALCYON™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

USG Halcyon™ Acoustical Panels
with ClimaPlus™ Performance/
USG Donn® Brand Fineline® 1/8 DXFF™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

Fine-Textured Panel

FEATURES AND BENEFITS

- Exceptional noise reduction with NRC values up to 1.00 and AC values up to 200 for open-plan offices.
- High light-reflective finish (LR-0.90) reduces light fixtures and energy use.
- Washable and scrubbable finish.
- Impact and scratch resistant.
- Coordinates visually with USG Mars™ for open/closed-plan applications.
- Compatible with USG Logix™ Integrated Ceiling Systems.
- Nondirectional, monolithic visual reduces installation time and waste.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Balanced Acoustics. High NRC & High CAC with backer options.
- High postconsumer recycled content. Up to 42%.

APPLICATIONS

- Open-plan offices
- Indirect lighting
- Libraries
- Media rooms
- Waiting rooms (addresses HIPAA standards)

SUBSTRATE

- Fiberglass

USG HALCYON™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection


BA BALANCED ACOUSTICS

10 YEAR AVAILABILITY
 76975, 76775,
 76975, 78575,
 78775

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

USG HALCYON™ ACOUSTICAL PANELS

Edge	Panel Size ²	Fire Rating	Item No.	UL Classified			Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC Min.	LR ³					
SQ	2'x2'x3/4"	Class A	97221	0.90	20	0.90	White	A, B, C,	38%	\$\$\$\$	
	2'x4'x3/4"	Class A	97241	0.90	20	0.90	White	A, B	38%	\$\$\$\$	
	2'x2'x1"	Class A	98221	0.95	20	0.90	White	A, B, C	40%	\$\$\$\$	
	2'x2'x1" Foil-Back	Class A	88221	0.90	30	0.90	White	A, B, C	40%	\$\$\$\$	
	2'x4'x1"	Class A	98241	0.95	20	0.90	White	A, B	40%	\$\$\$\$	
	2'x4'x1" Foil-Back	Class A	88223	0.90	30	0.90	White	A, B	40%	\$\$\$\$	
	30"x30"x1"	Class A	98331	0.95	20	0.90	White	A, B	40%	\$\$\$\$	
	30"x60"x1"	Class A	97266	0.95	20	0.90	White	A, B	40%	\$\$\$\$	
	2'x4'x1-1/2"	Class A	99241	1.00	25	0.90	White	A, B	42%	\$\$\$\$	
	2'x4'x1-1/2" Foil-Back	Class A	88224	0.95	30	0.90	White	A, B	42%	\$\$\$\$	
	2'x2'x1-1/2"	Class A	99221	1.00	25	0.90	White	A, B, C	42%	\$\$\$\$	
	2'x2'x1-1/2" Foil-Back	Class A	97356	0.95	30	0.90	White	A,B,C	42%	\$\$\$\$	

 **ClimaPlus™ Warranty Performance⁴**
 Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

USG HALCYON™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

BA BALANCED ACOUSTICS

10 YEAR AVAILABILITY
 76375, 76775,
 76975, 78575,
 78775

USG HALCYON™ ACOUSTICAL PANELS

Edge	Panel Size ²	Fire Rating	Item No.	UL Classified			Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC Min.	LR ³					
SL	2'x2'x1"	Class A	98223	0.95	20	0.90	White	D		40%	\$\$\$\$
	2'x2'x1" Foil-Back	Class A	88225	0.90	30	0.90	White	D		40%	\$\$\$\$
	2'x4'x1"	Class A	98243	0.95	20	0.90	White	D		40%	\$\$\$\$
	2'x4'x1" Foil-Back	Class A	88226	0.90	30	0.90	White	D		40%	\$\$\$\$
	30"x30"x1"	Class A	98333	0.95	20	0.90	White	D		40%	\$\$\$\$
	30"x60"x1"	Class A	99270	0.95	20	0.90	White	D		40%	\$\$\$\$
	2'x2'x1-1/2"	Class A	99223	1.00	25	0.90	White	D		42%	\$\$\$\$
	2'x2'x1-1/2" Foil-Back	Class A	97357	0.95	30	0.90	White	D		42%	\$\$\$\$
	2'x4'x1-1/2" Foil-Back	Class A	97358	0.95	30	0.90	White	D		42%	\$\$\$\$

ClimaPlus™ Warranty Performance⁴
 Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.


USG HALCYON™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)



UL Classified

Edge	Panel Size ²	Fire Rating	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
 FL	2'x2'x1"	Class A	98225	0.95	20	0.90	White	E, F, G, H		40%	\$\$\$\$
	2'x2'x1" Foil-Back	Class A	88227	0.90	30	0.90	White	E, F, G, H		37%	\$\$\$\$
	2'x4'x1"	Class A	98245	0.95	20	0.90	White	E, F, G, H		40%	\$\$\$\$
	2'x4'x1" Foil-Back	Class A	97368	0.90	30	0.90	White	E, F, G, H		37%	\$\$\$\$
	30"x30"x1"	Class A	98335	0.95	20	0.90	White	E, F, G, H		40%	\$\$\$\$
	30"x60"x1"	Class A	98336	0.95	20	0.90	White	E, F, G, H		40%	\$\$\$\$
	2'x2'x1-1/2"	Class A	99225	1.00	25	0.90	White	E, F, G, H		42%	\$\$\$\$
	2'x2'x1-1/2" Foil-Back	Class A	97359	0.95	30	0.90	White	E, F, G, H		42%	\$\$\$\$

ClimaPlus™ Warranty Performance⁴

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

A USG DX ⁵ / DXL™	B USG DXW™	C ⁵ USG Centricitee™ DXT™	D USG DX ⁵ /DXL™	E USG Centricitee™ DXT™	F USG Fineline [®] DXF™	G USG Fineline [®] 1/8 DXFF™	H USG Identitee [®] DXI™

PHYSICAL DATA/ FOOTNOTES

Product literature
 Data sheet: SC2365

ASTM E1264 classification
 Type XII, Form 2,
 Pattern E & G

**ASTM E84 and CAN/ULC S102
 surface-burning characteristics**
 Class A

Flame spread: 25 or less
 Smoke developed: 50 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Weight
 0.38 lb./sq. ft. (3/4" panels)
 0.47 lb./sq. ft. (1" panels)
 0.68 lb./sq. ft. (1-1/2" panels)

Thermal resistance
 R-3.5 (3/4" panels),
 R-4.4 (1" panels)
 R-6.6 (1-1/2" panels)

Maximum backloading
 See *USG 30-Year Limited
 System Warranty Commercial
 Applications* (SC2102).

Maintenance
 Can be cleaned easily with a soft brush or vacuum.
 To clean panel, use a clean, white cloth with water
 or a mild detergent and wipe surface.

Treating field-cut reveal edges
 All field-cut edges "exposed to view" should be
 colored to match the factory finish. USG Halcyon™
 Touch-up Edge Paint is recommended when
 perimeter field cuts expose the yellow substrate.

Metric sizes available
 Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Custom-size panels available. Please contact your USG or CGC sales representative for details.
- LR values are shown as averages.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- Maximum 2'x2' with SQ edge panels.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2365/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved.
 Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661


The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, FINELINE, HALCYON, IDENTITEE, LOGIX, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG HALCYON™ HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

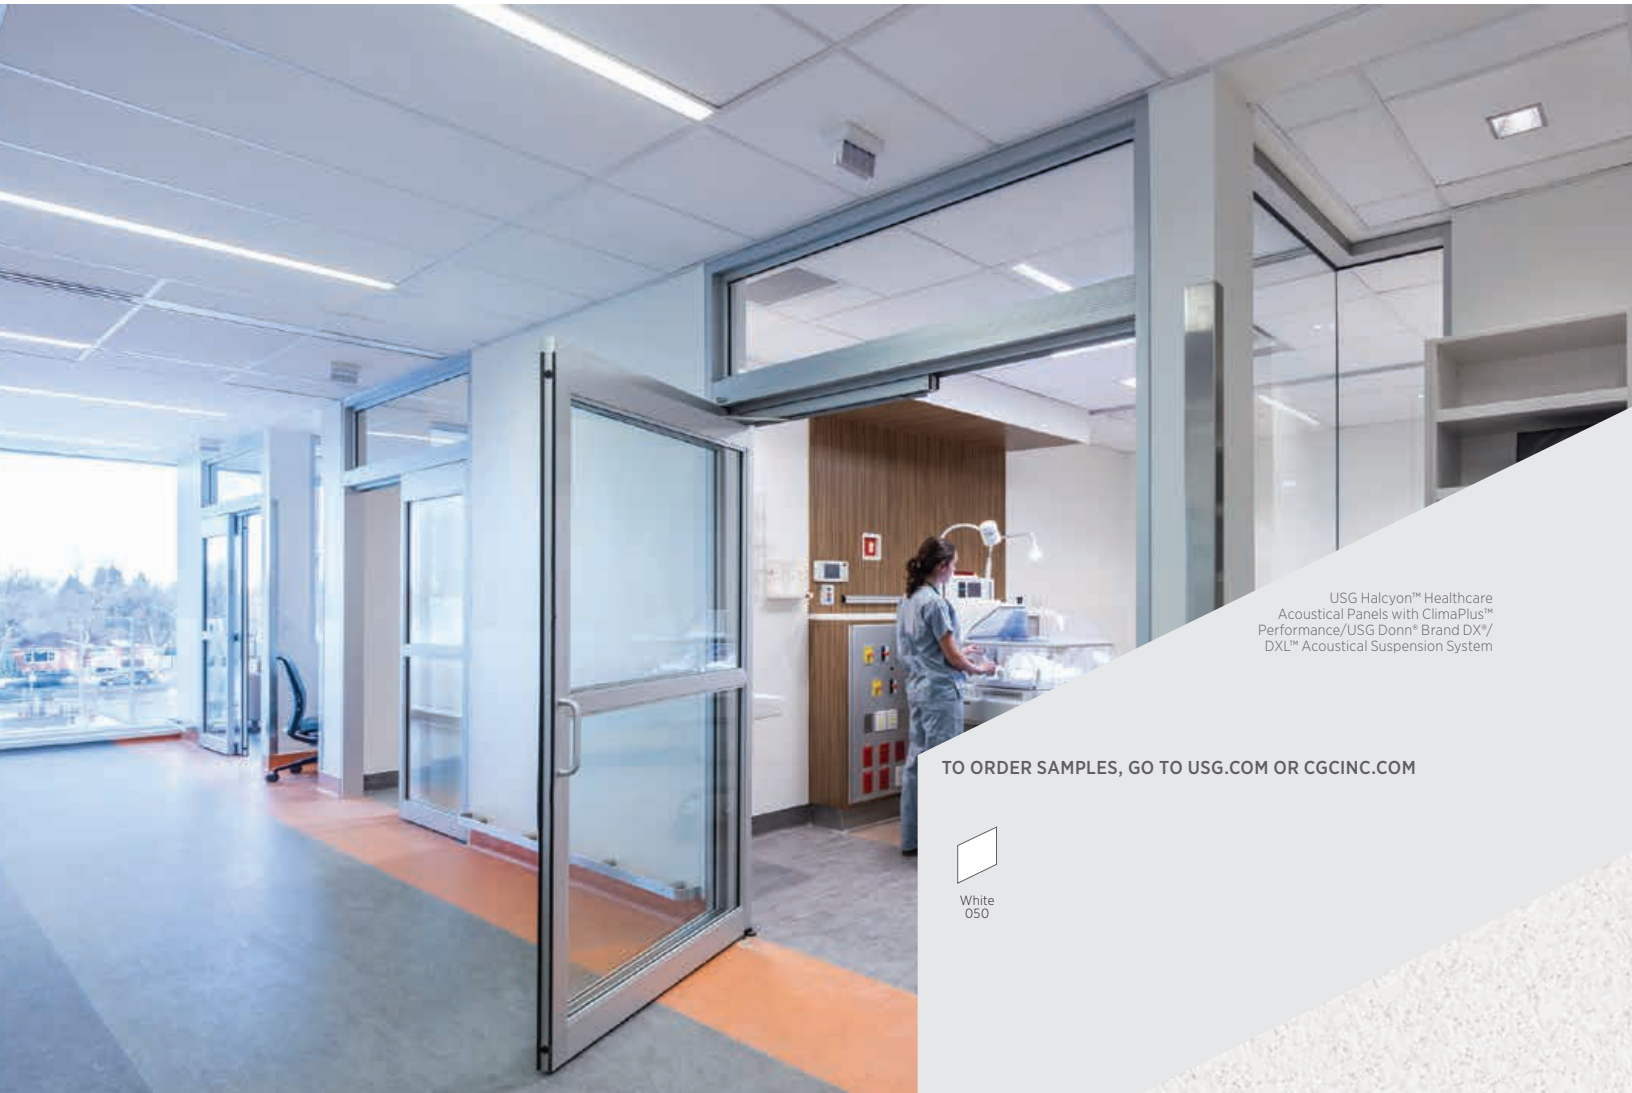

USG Halcyon™ Healthcare
Acoustical Panels with ClimaPlus™
Performance/USG Donn® Brand DX*/
DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



White
050

FEATURES AND BENEFITS

- Water-repellent membrane safe with common disinfectants.*
- Washable, scrubbable, soil-resistant finish. Impact and scratch resistant.
- Acoustics and cleanability exceed FGI guidelines for healthcare.
- Meets USDA/FSIS guidelines for use in food-processing areas.
- Achieves FDA standards for smoothness, durability and cleanability.
- Meets requirements of California Building Code table 1224.1, level 2.
- Coordinates visually with USG Mars™ and USG Halcyon™
- High light-reflective finish (LR-0.90) reduces light fixtures and energy use.
- High sound absorption NRC (0.95-1.00) AC 190 helps address HIPAA standards.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- High postconsumer recycled content.

APPLICATIONS

- Patient rooms
- Nurses' stations
- Laboratories/
Clean Rooms
- Lavatories/
restrooms
- Kitchen/food-prep
areas

SUBSTRATE

- Fiberglass

Fine-Textured Panel

USG HALCYON™ HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ 	2'x2'x1"	Class A	98232	0.95	20	0.90	White	A, B, C, D, E, F		40%	\$\$\$\$
	2'x4'x1"	Class A	98233	0.95	20	0.90	White	A, B, D, E, F		40%	\$\$\$\$
	2'x2'x1-1/2"	Class A	98234	1.00	25	0.90	White	A, B, C, D, E, F		42%	\$\$\$\$
	2'x4'x1-1/2"	Class A	98235	1.00	25	0.90	White	A, B, D, E, F		42%	\$\$\$\$
SL 	2'x2'x1"	Class A	98238	0.95	20	0.90	White	G, H, I, J		40%	\$\$\$\$
	2'x4'x1"	Class A	98239	0.95	20	0.90	White	G, H, I, J		40%	\$\$\$\$
	2'x2'x1-1/2"	Class A	98217	1.00	25	0.90	White	G, H, I, J		42%	\$\$\$\$
	2'x4'x1-1/2"	Class A	98218	1.00	25	0.90	White	G, H, I, J		42%	\$\$\$\$
FL 	2'x2'x1"	Class A	98236	0.95	20	0.90	White	K, L, M, N		40%	\$\$\$\$
	2'x4'x1"	Class A	98237	0.95	20	0.90	White	K, L, M, N		40%	\$\$\$\$

ClimaPlus™ Warranty Performance³

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

A USG DX [®] /DXL™	B USG DXW™	C USG Centricitee™ DXT™	D USG DXLA™	E USG ZXLA™	F USG AX™	G USG DX [®] /DXL™
H USG DXLA™	I USG ZXLA™	J USG AX™	K USG Centricitee™ DXT™	L USG Fineline [®] DXF™	M USG Fineline [®] 1/8 DXFF™	N USG Identitee [®] DXI™ DXT™

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2652

ASTM E1264 classification
Type XII, Form 2, Pattern E, G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A

Flame spread: 25 or less
Smoke developed: 50 or less

Weight
0.47 lb./sq. ft. (1" panels)
0.68 lb./sq. ft. (1-1/2" panels)

Thermal resistance
R-4.4 (1" panels)
R-6.6 (1-1/2" panels)

Maximum backloading
See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Online tools
usgdesignstudio.com or cgcdesignstudio.com

ASTM D2486 scrubability test
(standard test)

ASTM D4828 washability test
(modified test)

Water repellency
Cobb method (Tappi T441 om-84)
Water Drop Test

***Maintenance**
To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth. Acceptable colorless disinfectants include:
- Hydrogen peroxide
- Isopropyl alcohol
- Quaternary ammonium
- Sodium hypochlorite
Do not mix cleaners. Follow cleaner manufacturer's recommendations.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).

Treating field-cut reveal edges

All field-cut edges "exposed to view" should be colored to match the factory finish. USG Halcyon™ Ceiling Touch-up Paint is recommended when perimeter field cuts expose the yellow substrate.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2652/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, AX, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXLA, DXT, DXW, FINELINE, HALCYON, IDENTITEE, MARS, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG HALCYON™ PLANKS AND LARGE SIZE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

USG Halcyon™ Acoustical Planks
with ClimaPlus™ Performance/
USG Donn® Brand Centricitee™ DXT™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

Fine-Textured Panel

FEATURES AND BENEFITS

- Exceptional noise reduction with NRC values up to 1.00 and AC values up to 200 for open-plan offices.
- High light-reflective finish (LR-0.90) reduces light fixtures and energy use.
- Washable and scrubbable finish.
- Impact and scratch resistant.
- Coordinates visually with USG Mars™ Acoustical Panels for open- or closed-plan applications.
- Compatible with USG Logix™ Integrated Ceiling Systems.
- Nondirectional, monolithic visual reduces installation time and waste.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Balanced Acoustic options with Foil-Backed products.

APPLICATIONS

- Open-plan areas
- Areas with indirect lighting
- Corridors
- Convention halls and concourses
- Reception and lobby areas
- Libraries

SUBSTRATE

- Fiberglass

USG HALCYON™ PLANKS AND LARGE SIZE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

USG HALCYON™ ACOUSTICAL PLANKS

USG HALCYON™ LARGE SIZE ACOUSTICAL PANELS

Edge	Panel Size ²	Fire Rating	Item No.	UL Classified			Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC Min.	LR					
SQ	2'x5'x3/4"	Class A	99282	0.90	20	0.90	White	A,B		38%	\$\$\$\$
	2'x6'x3/4"	Class A	97262	0.90	20	0.90	White	A,B		38%	\$\$\$\$
	2'x8'x3/4"	Class A	97263	0.90	20	0.90	White	A,B		38%	\$\$\$\$
	2'x5'x1"	Class A	99262	0.90	20	0.90	White	A,B		40%	\$\$\$\$
SL	2'x6'x1"	Class A	99268	0.95	20	0.90	White	C		40%	\$\$\$\$
	2'x6'x1" Foil-Back	Class A	97360	0.90	30	0.90	White	C		40%	\$\$\$\$\$
	2'x8'x1"	Class A	99269	0.95	20	0.90	White	C		40%	\$\$\$\$
	2'x8'x1" Foil-Back	Class A	97361	0.90	30	0.90	White	C		40%	\$\$\$\$\$
FL	2'x6'x1"	Class A	98348	0.95	20	0.90	White	D,E,F,G		40%	\$\$\$\$
	2'x6'x1" Foil-Back	Class A	97362	0.90	30	0.90	White	D,E,F,G		40%	\$\$\$\$\$
	2'x8'x1"	Class A	98197	0.95	20	0.90	White	D,E,F,G		40%	\$\$\$\$
	2'x8'x1" Foil-Back	Class A	97367	0.90	30	0.90	White	D,E,F,G		40%	\$\$\$\$\$
SQ	4'x4'x1"	Class A	98441	0.95	20	0.90	White	A,B		40%	\$\$\$\$
	4'x4'x1" Foil-Back	Class A	97363	0.90	30	0.90	White	A,B		40%	\$\$\$\$\$
	4'x8'x1"	Class A	98481	0.95	20	0.90	White	A,B		40%	\$\$\$\$
	4'x8'x1" Foil-Back	Class A	97364	0.90	30	0.90	White	A,B		40%	\$\$\$\$\$
SL	4'x4'x1"	Class A	98443	0.95	20	0.90	White	C		40%	\$\$\$\$
	4'x4'x1" Foil-Back	Class A	97365	0.90	30	0.90	White	C		40%	\$\$\$\$\$
FL	4'x4'x1"	Class A	98445	0.95	20	0.90	White	D,E,F,G		40%	\$\$\$\$
	4'x4'x1" Foil-Back	Class A	97366	0.90	30	0.90	White	D,E,F,G		40%	\$\$\$\$\$

ClimaPlus™ Warranty Performance⁴
Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

A USG DX ² /DXL™	B USG DXW™	C USG DX ² /DXL™	D USG Centricitee™ DXT™	E USG Fineline [®] DXF™	F USG Fineline [®] 1/8 DXFF™	G USG Identitee [®] DXI™
<p>Use to stabilize grid installation without cross tees. Use in large module applications.</p>					<p>ASB24 24" Stabilizer Bar</p> <p>ASB30 30" Stabilizer Bar</p> <p>ASB48 48" Stabilizer Bar</p>	

STABILIZER BARS³

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2483

ASTM E1264 classification
Type XII, Form 2, Pattern E & G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
0.38 lb./sq. ft. (3/4" panels)
0.47 lb./sq. ft. (1" panels)

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-3.3 (3/4" panels)
R-4.4 (1" panels)

Maximum backloading
See *USG 30-Year Limited Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.
To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

Metric sizes available
Contact sales for minimum quantities and lead times.

Treating field-cut reveal edges
All field-cut edges "exposed to view" should be colored to match the factory finish. USG Halcyon™ Touch-up Edge Paint is recommended when perimeter field cuts expose the yellow substrate.

- Notes**
- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
 - Custom-size panels available. Please contact your USG sales representative for details.
 - Stabilizer bar recommended if opening $\geq 48"$ and required if opening $\geq 60"$. For more information about stabilizer bars, please refer to *Plank and Large Panel Stabilizer Bars Application Guide* (IC592).
 - For details, see *USG 30-Year Limited Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2483/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, FINELINE, HALCYON, IDENTITEE, LOGIX, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG HALCYON™ CANOPIES

CLIMAPLUS™ PERFORMANCE

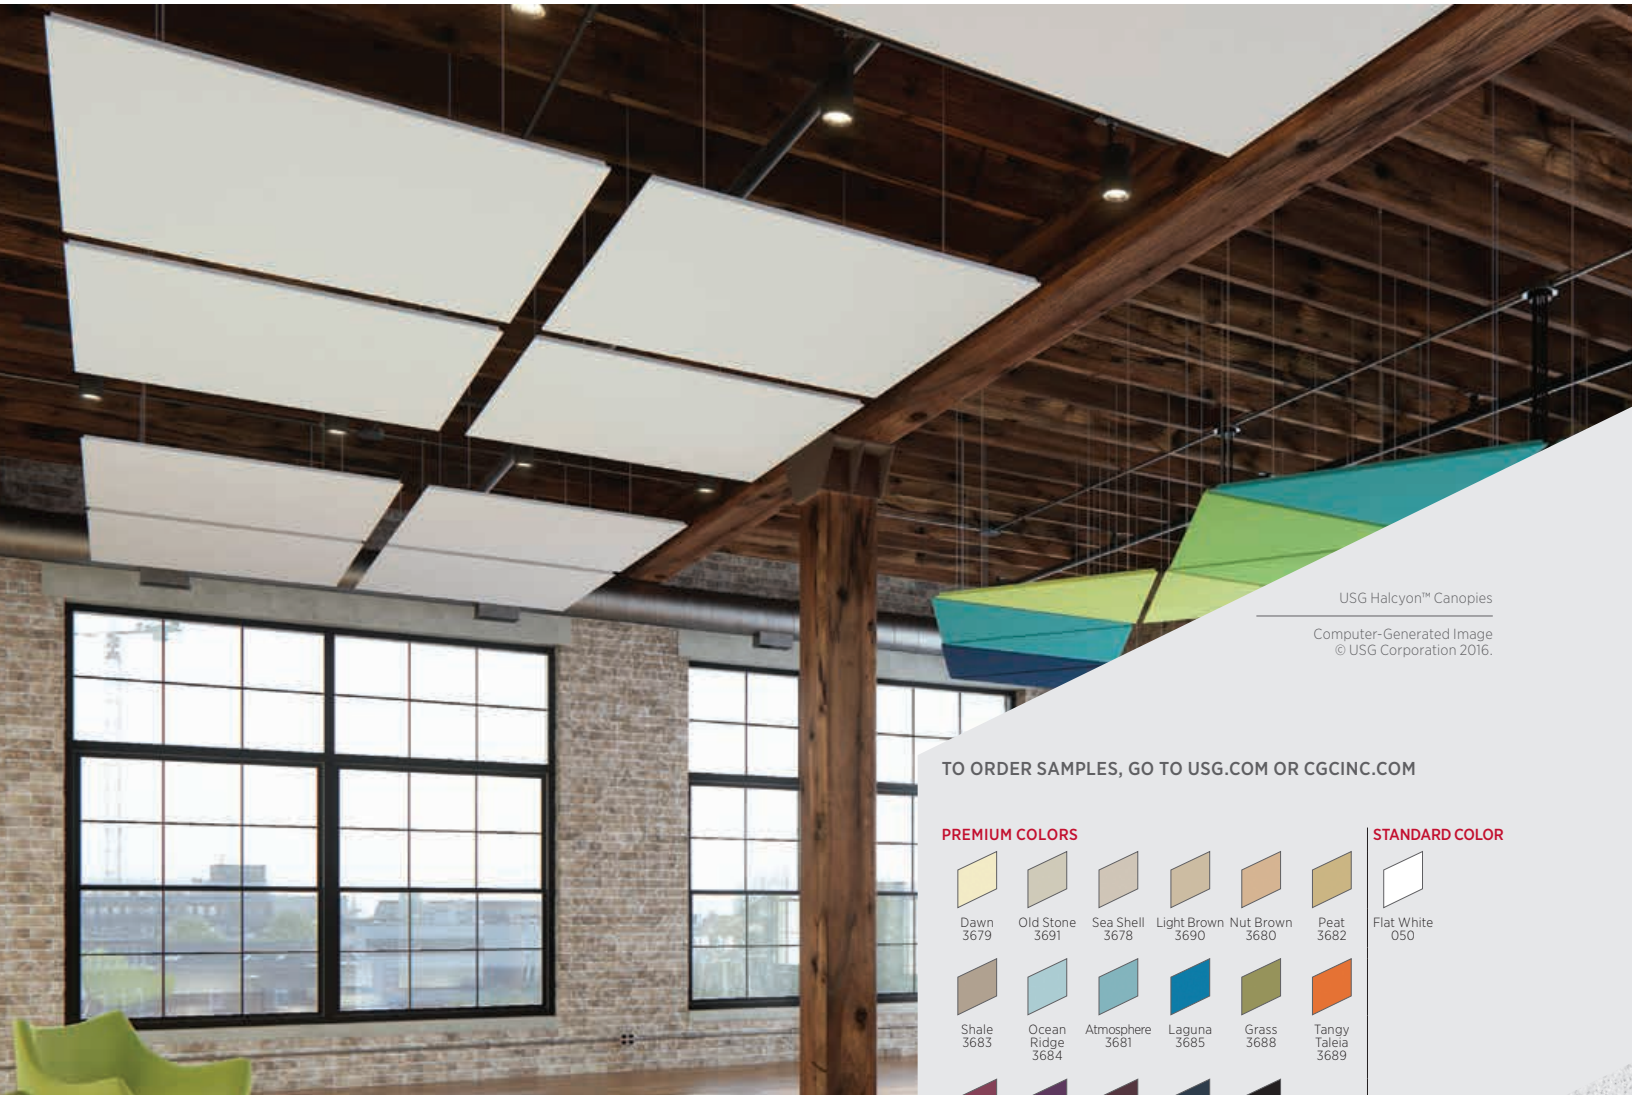


USG Halcyon™ Canopies

Computer-Generated Image
© USG Corporation 2016.

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PREMIUM COLORS

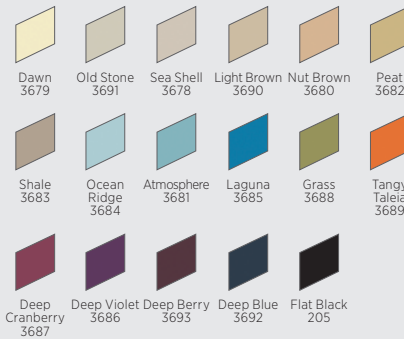

STANDARD COLOR



CUSTOM COLOR



Unlimited
Color Options

FEATURES AND BENEFITS

- Ideal for providing both visual accents and acoustical control.
- Exceptional noise reduction in a variety of designs, sizes and colors.
- High light-reflective finish on white products with glare reduction backer paint. (LR .90)
- Easy to install.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Open-plenum areas
- Convention halls and concourses
- Reception and lobby areas
- Libraries
- Restaurants
- Retail
- Hospitality

SUBSTRATE

- Fiberglass

Fine-Textured Panel

USG HALCYON™ CANOPIES

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

P PREMIUM COLOR PALETTE

CUSTOM COLOR

SIZES AND CONFIGURATIONS

Square, Item: 99140 	Square w/ Rounded Corners, Item: 99150 	Square w/ Square Corner Cutouts, Item: 99152 	Square w/ Rounded Corner Cutouts, Item: 99151
Rectangle, Item: 99136 	Rectangle, Item: 99135 	Rectangle, Item: 99134 	Rectangle, Item: 99131
Rectangle, Item: 99132 	Rectangle, Item: 99133 	Octagon, Item: 99157 	Hexagon, Item: 99156
Circle, Item: 99139 	Oval, Item: 99138 	Oval, Item: 99137 	Concave, Item: 99158
Convex, Item: 99159 	Triangle, Item: 99153 	Right Triangle, Item: 99154 	Right Triangle, Item: 99155
Trapezoid, Item: 99160 	RSL: Reverse Shadowline Edge <p>Edges are heavily textured and certain lighting conditions may accentuate this appearance.</p>	Install with USG Canopy Anchors: HCA522 <p>Unless otherwise specified, USG Halcyon™ Canopies come with a glare reducing gray backer paint. The smooth veiled face and unveiled edges are painted a matching color based on selection.</p>	

ClimaPlus™ Warranty Performance

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

PHYSICAL DATA/ FOOTNOTES

Product literature
 usgdesignstudio.com or
 cgcdesignstudio.com

ASTM E1264 classification
 Type XII, Form 2, Pattern E & G

Weight
 0.47 lb./sq. ft. (1" panels)

Recycled Content:
 40%

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Online tools
 usgdesignstudio.com or
 cgcdesignstudio.com

Thermal resistance
 R-4.4 (1" panels)

Maintenance
 Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

Seismic applications
 Refer to *Seismic Technical Guide, Specialty Decorative Ceilings (SC2494)* for more information on architectural components.

Additional Information

- USG Halcyon™ Canopies are flat, however will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 1/8". However local environmental conditions may increase this variance.
- Care should be taken to minimize movement due to air flow within a space.
- USG Halcyon™ Canopy Anchors (HCA522) are included with each panel. Dots represent anchor points.
- Hanger wire (12 ga) or clear acrylic rod (max 1/8" diameter) to be used as horizontal spacer when appropriate.
- Panels must be ordered in multiples of two.
- Custom size, shape and color options are available. Consult your USG sales associate.
- Acoustical Performance: 1.20 Sabins per square foot (white).
- Do not backload.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2797/3-17
 © 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, HALCYON, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG MARS™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH NEW CLEAN ROOM OPTIONS



USG Mars™ Acoustical Panels
with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Excellent noise reduction. Up to NRC-0.75.
- High light-reflective finish (LR-0.90) reduces light fixtures and energy use.
- Washable, scrubbable finish, and impact and scratch resistant.
- Available in Optimized Recycled Content formulations to help maximize LEED recycled content contribution.
- Nondirectional, monolithic visual reduces installation time and waste.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Clean Rooms up to ISO Class 5 (Class 100).
- GREENGUARD Gold Certified for low-emitting performance.
- Balanced Acoustics. High-NRC and High-CAC.

APPLICATIONS

- Offices and conference rooms
- Healthcare (HIPAA requirements)
- Classrooms
- Dining rooms and food-prep areas
- Clean Rooms (86185CR & 88185CR)

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel



USG MARS™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH NEW CLEAN ROOM OPTIONS


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



USG MARS™ PANELS

Edge	Panel Size	Fire Rating	Item No.	UL Classified			Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC Min.	LR ²						
SQ	2'x2'x3/4"	Class A	86185	0.75	35	0.90	White	A,B,C	Low		69%	\$\$
	2'x2'x3/4"	Class A	86185HRC	0.70	35	0.90	White	A,B,C	Low		81%	\$\$
	2'x4'x3/4"	Class A	88185	0.75	35	0.90	White	A,B	Low		69%	\$\$
	2'x4'x3/4"	Class A	88185HRC	0.70	35	0.90	White	A,B	Low		81%	\$\$
SLT	2'x2'x3/4"	Class A	86785	0.75	35	0.90	White	D	Low		69%	\$\$
	2'x2'x3/4"	Class A	86785HRC	0.70	35	0.90	White	D	Low		81%	\$\$
	2'x4'x3/4"	Class A	88785	0.75	35	0.90	White	D	Low		69%	\$\$
	2'x4'x3/4"	Class A	88785HRC	0.70	35	0.90	White	D	Low		81%	\$\$
	30"x30"x3/4"	Class A	86875	0.75	35	0.90	White	D	Low		69%	\$\$
FLB	2'x2'x3/4"	Class A	86985	0.75	35	0.90	White	E,F,G,H	Low		69%	\$\$
	2'x2'x3/4"	Class A	86985HRC	0.70	35	0.90	White	E,F,G,H	Low		81%	\$\$
	2'x4'x3/4"	Class A	88985	0.75	35	0.90	White	E,F,G,H	Low		69%	\$\$
	2'x4'x3/4"	Class A	88985HRC	0.70	35	0.90	White	E,F,G,H	Low		81%	\$\$
	30"x30"x3/4"	Class A	86830	0.75	35	0.90	White	E,F,G,H	Low		69%	\$\$
SQ	2'x2'x3/4"	Class A	86185CR ⁵	0.75	35	0.90	White	I	Low		69%	\$\$
	2'x4'x3/4"	Class A	88185CR ⁵	0.75	35	0.90	White	I	Low		69%	\$\$

VOC Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v.1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

HRC High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

GRID PROFILE OPTIONS

A USG DX'/DXL™	B USG DXW™	C ⁴ USG Centricitee™ DXT™	D USG DX'/DXL™	E USG Centricitee™ DXT™	F USG Fineline® DXF™	G USG Fineline® 1/8 DXFF™	H USG Identitee® DXI™	I USG Clean Room™ CE™

Product literature
Data sheet: SC1966

ASTM E1264 classification
Type IV, Form 1 and 2, Pattern E, G

ASTM E84 and CAN/ULC S102
surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
1.03 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-2.2

Maximum backloading
See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

Metric sizes available
Contact sales for minimum quantities and lead times.

- Notes
- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
 - LR values are shown as averages.
 - Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial additive that inhibits and retards the growth of mold, mildew and bacteria. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
 - Maximum 2'x2' with SQ edge panels.
 - Clean Room ISO 5 (Class 100). Field-cut edges of USG Mars™ Clean Room™ panels may be sealed with white latex paint.

PHYSICAL DATA/ FOOTNOTES

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1966/rev. 5-18
© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CE, CENTRICITEE, CLEAN ROOM, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, FINELINE, IDENTITEE, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG MARS™ HEALTHCARE ACOUSTICAL PANELS CLIMAPLUS™ PERFORMANCE NEW CLEAN ROOM, HIGH-NRC AND AIRCARE™ COATING OPTIONS



USG Mars™ Healthcare
Acoustical Panels with ClimaPlus™
Performance/USG Donn® Brand DX*/
DXL™ Acoustical Suspension System

Photo this page:
© Andrew Latreille
Architects: Perkins+Will/KRA/Group2

TO ORDER SAMPLES,
GO TO USG.COM OR CGCINC.COM



White
050

FEATURES AND BENEFITS

- Water-repellent membrane designed to be durable and safe with common disinfectants.**
- Washable and soil-resistant finish. Impact and scratch resistant.
- Acoustics and cleanability exceed FGI guidelines for healthcare.
- Meets USDA/FSIS guidelines for use in food-processing areas.
- Achieves FDA standards for smoothness, durability and cleanability.
- Clean Room tested to ISO 5 (Class 100) (Items 86169CR, 88189CR, 86684CR, 88683CR).
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- AirCare™ coating applied to face and back reduces 75% of formaldehyde over a 10-year period.⁴
- GREENGUARD Gold certified for low emitting performance.
- Balanced Acoustics. High-NRC and High-CAC provide excellent sound control that assist in addressing HIPAA standards.


APPLICATIONS

- Kitchen and food-prep areas
- Lavatories and restrooms
- Laboratories and Clean Rooms
- Nurses' stations/ waiting rooms
- Treatment/patient rooms

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel

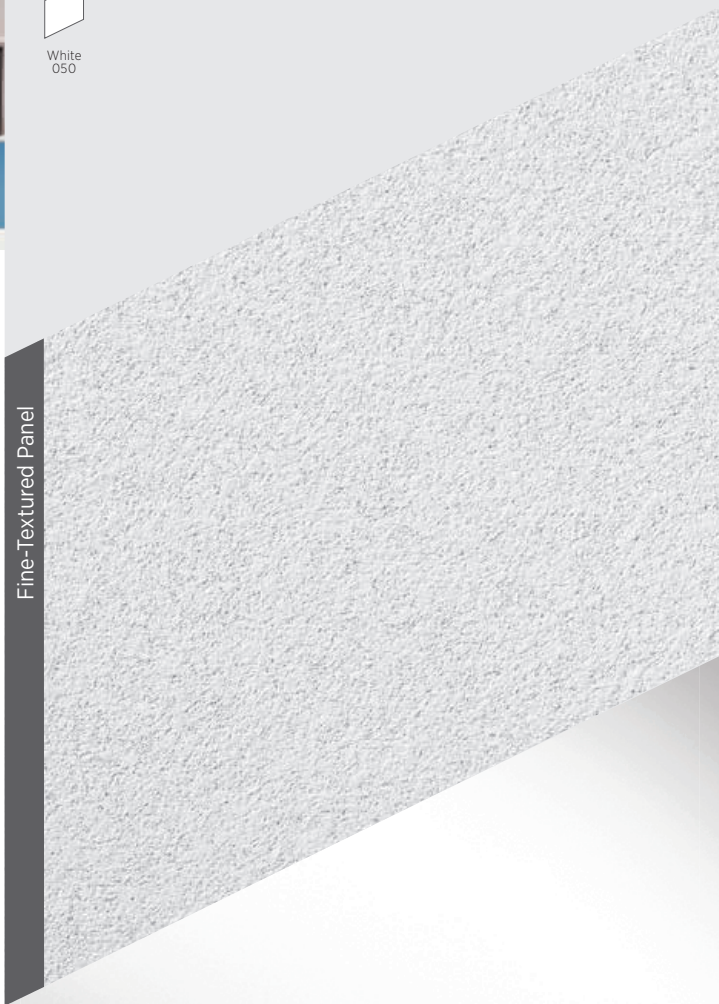

USG MARS™ HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE – NEW CLEAN ROOM, HIGH-NRC AND AIRCARE™
COATING OPTIONS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



Edge	Panel Size	Fire Rating	Item No.	UL Classified			Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost		
				NRC	CAC Min.	LR ²								
USG MARS™ HEALTHCARE HIGH-NRC PANELS 85/35 Plant-Based Binder	SQ	2'x2'x7/8"	Class A	86256	0.85	35	0.90	White	A,B,C,D,E,F	Low		68%	\$\$	
		2'x4'x7/8"	Class A	88256	0.85	35	0.90	White	A,B,D,E,F	Low		68%	\$\$	
	SLT	2'x2'x7/8"	Class A	86257	0.85	35	0.90	White	G,H,I,J	Low		68%	\$\$	
	FLB	2'x2'x7/8"	Class A	86258	0.85	35	0.90	White	K,L,M,N	Low		68%	\$\$	
USG MARS™ HEALTHCARE HIGH-NRC/HIGH-CAC PANELS 80/40 Plant-Based Binder	SQ	2'x2'x1"	Class A	86115	0.80	40	0.90	White	A,B,C,D,E,F	Low		69%	\$\$	
		2'x4'x1"	Class A	88115	0.80	40	0.90	White	A,B,D,E,F	Low		69%	\$\$	
		SLT	2'x2'x1"	Class A	86343	0.80	40	0.90	White	G,H,I,J	Low		69%	\$\$
			2'x4'x1"	Class A	88343	0.80	40	0.90	White	G,H,I,J	Low		69%	\$\$
		FLB	2'x2'x1"	Class A	86344	0.80	40	0.90	White	K,L,M,N	Low		69%	\$\$
			2'x4'x1"	Class A	88344	0.80	40	0.90	White	K,L,M,N	Low		69%	\$\$
USG MARS™ HEALTHCARE HIGH-NRC PANELS 80/35 Plant-Based Binder	SQ	2'x2'x7/8"	Class A	86152	0.80	35	0.90	White	A,B,C,D,E,F	Low		69%	\$\$	
		2'x4'x7/8"	Class A	86340	0.80	35	0.90	White	A,B,D,E,F	Low		69%	\$\$	
		SLT	2'x2'x7/8"	Class A	86470	0.80	35	0.90	White	G,H,I,J	Low		69%	\$\$
		FLB	2'x2'x7/8"	Class A	86750	0.80	35	0.90	White	K,L,M,N	Low		69%	\$\$
USG MARS™ HEALTHCARE PANELS 75/35	SQ	2'x2'x3/4"	Class A	86169	0.75	35	0.90	White	A,B,C,D,E,F	Low		68%	\$\$	
		2'x4'x3/4"	Class A	88189	0.75	35	0.90	White	A,B,D,E,F	Low		68%	\$\$	
		SLT	2'x2'x3/4"	Class A	86684	0.75	35	0.90	White	G,H,I,J	Low		68%	\$\$
			2'x4'x3/4"	Class A	88683	0.75	35	0.90	White	G,H,I,J	Low		68%	\$\$
		FLB	2'x2'x3/4"	Class A	86984	0.75	35	0.90	White	K,L,M,N	Low		68%	\$\$
			2'x4'x3/4"	Class A	88983	0.75	35	0.90	White	K,L,M,N	Low		68%	\$\$
USG MARS™ HEALTHCARE HIGH-CAC PANELS 60/40	SQ	2'x2'x3/4"	Class A	86270	0.60	40	0.90	White	A,B,C,D,E,F	Low		79%	\$\$	
		2'x4'x3/4"	Class A	88271	0.60	40	0.90	White	A,B,D,E,F	Low		79%	\$\$	
		SLT	2'x2'x3/4"	Class A	86272	0.60	40	0.90	White	G,H,I,J	Low		79%	\$\$
		FLB	2'x2'x3/4"	Class A	86273	0.60	40	0.90	White	K,L,M,N	Low		79%	\$\$
			2'x4'x3/4"	Class A	88273	0.60	40	0.90	White	K,L,M,N	Low		79%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE – NEW CLEAN ROOM, HIGH-NRC AND AIRCARE™ COATING OPTIONS

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ 	2'x2'x3/4"	Class A	86169AIR	0.75	35	0.90	White	A,B,C,D,E,F	Low		68%	\$\$
	2'x4'x3/4"	Class A	88189AIR	0.75	35	0.90	White	A,B,D,E,F	Low		68%	\$\$
SLT 	2'x2'x3/4"	Class A	86684AIR	0.75	35	0.90	White	G,H,I,J	Low		68%	\$\$
	2'x4'x3/4"	Class A	88683AIR	0.75	35	0.90	White	G,H,I,J	Low		68%	\$\$
FLB 	2'x2'x3/4"	Class A	86984AIR	0.75	35	0.90	White	K,L,M,N	Low		68%	\$\$
	2'x4'x3/4"	Class A	88983AIR	0.75	35	0.90	White	K,L,M,N	Low		68%	\$\$
SQ 	2'x2'x3/4"	Class A	86169CR	0.75	35	0.90	White	O	Low		68%	\$\$
	2'x4'x3/4"	Class A	88189CR	0.75	35	0.90	White	O	Low		68%	\$\$
SLT 	2'x2'x3/4"	Class A	86684CR	0.75	35	0.90	White	O	Low		68%	\$\$
	2'x4'x3/4"	Class A	88683CR	0.75	35	0.90	White	O	Low		68%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). *Certificates of Compliance² for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HEALTHCARE
WITH AIRCARE™ COATING⁴
75/35

USG MARS™ HEALTHCARE
CLEAN ROOM PANELS
75/35

USG MARS™ HEALTHCARE ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE — NEW CLEAN ROOM, HIGH-NRC AND AIRCARE™
COATING OPTIONS


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



GRID PROFILE OPTIONS

A USG DX [®] /DXL™	B USG DXW™	C⁵ USG Centricitee™ DXT™	D USG DXLA™	E USG ZXLA™
F USG AX™	G USG DX [®] /DXL™	H USG DXLA™	I USG ZXLA™	J USG AX™
K USG Centricitee™ DXT™	L USG Fineline [®] DXF™	M USG Fineline [®] 1/8 DXFF™	N USG Identitee [®] DXI™	O USG CE™

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2585

ASTM E1264 classification
Type IV, Form 1 and 2, Pattern E, G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
1.03-1.24 lb./sq. ft.

Thermal resistance
R-2.2

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Online tools
usgdesignstudio.com or cgcdesignstudio.com

ASTM D2486 scrubability test
(standard test)

ASTM D4828 washability test
(modified test)

Water repellency
Cobb method (Tappi T441 om-84) Water Drop Test

**Maintenance

To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth. Acceptable colorless disinfectants include:

- Hydrogen peroxide
- Isopropyl alcohol
- Quaternary ammonium
- Sodium hypochlorite

Do not mix cleaners. Follow cleaner manufacturer's recommendations.

USG Mars™ Healthcare Clean Room

- Field-cut edges of USG Mars™ Healthcare Clean Room panels may be sealed with white latex paint. Use square edge panels for all lay-in field-cut perimeter panels.

- Clean Room-rated applications require a suspension system with gasketed tee flanges such as USG Donn® Brand CE™.

- Tested to ISO Class 5 particle emissions, per ISO 14644, by UL Environment. Rating may decrease to ISO Class 7 or greater with airflow above 1 ACH, pressure fluctuations, or vibrations in the ceiling system.

- For more information, please reference test report from UL Environment.

Metric sizes available

Contact sales for minimum quantities and lead times.

Footnotes

1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
2. LR values are shown as averages.
3. Panel face and back surfaces treated with a proprietary broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold and mildew. For details, see *USG 30-Year Limited System Warranty Commercial Applications (SC2102)* and *ClimaPlus™ Ceilings Certification of Performance (SC2451)*.
4. AirCare™ coating removes formaldehyde by an average of 75% over 10 years at an average indoor concentration of 13 ppb.
5. Maximum 2'x2' with SQ edge panels.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2585/rev. 10-18
© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, AIRCARE, AX, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXLA, DXT, DXW, FINELINE, IDENTITEE, MARS, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

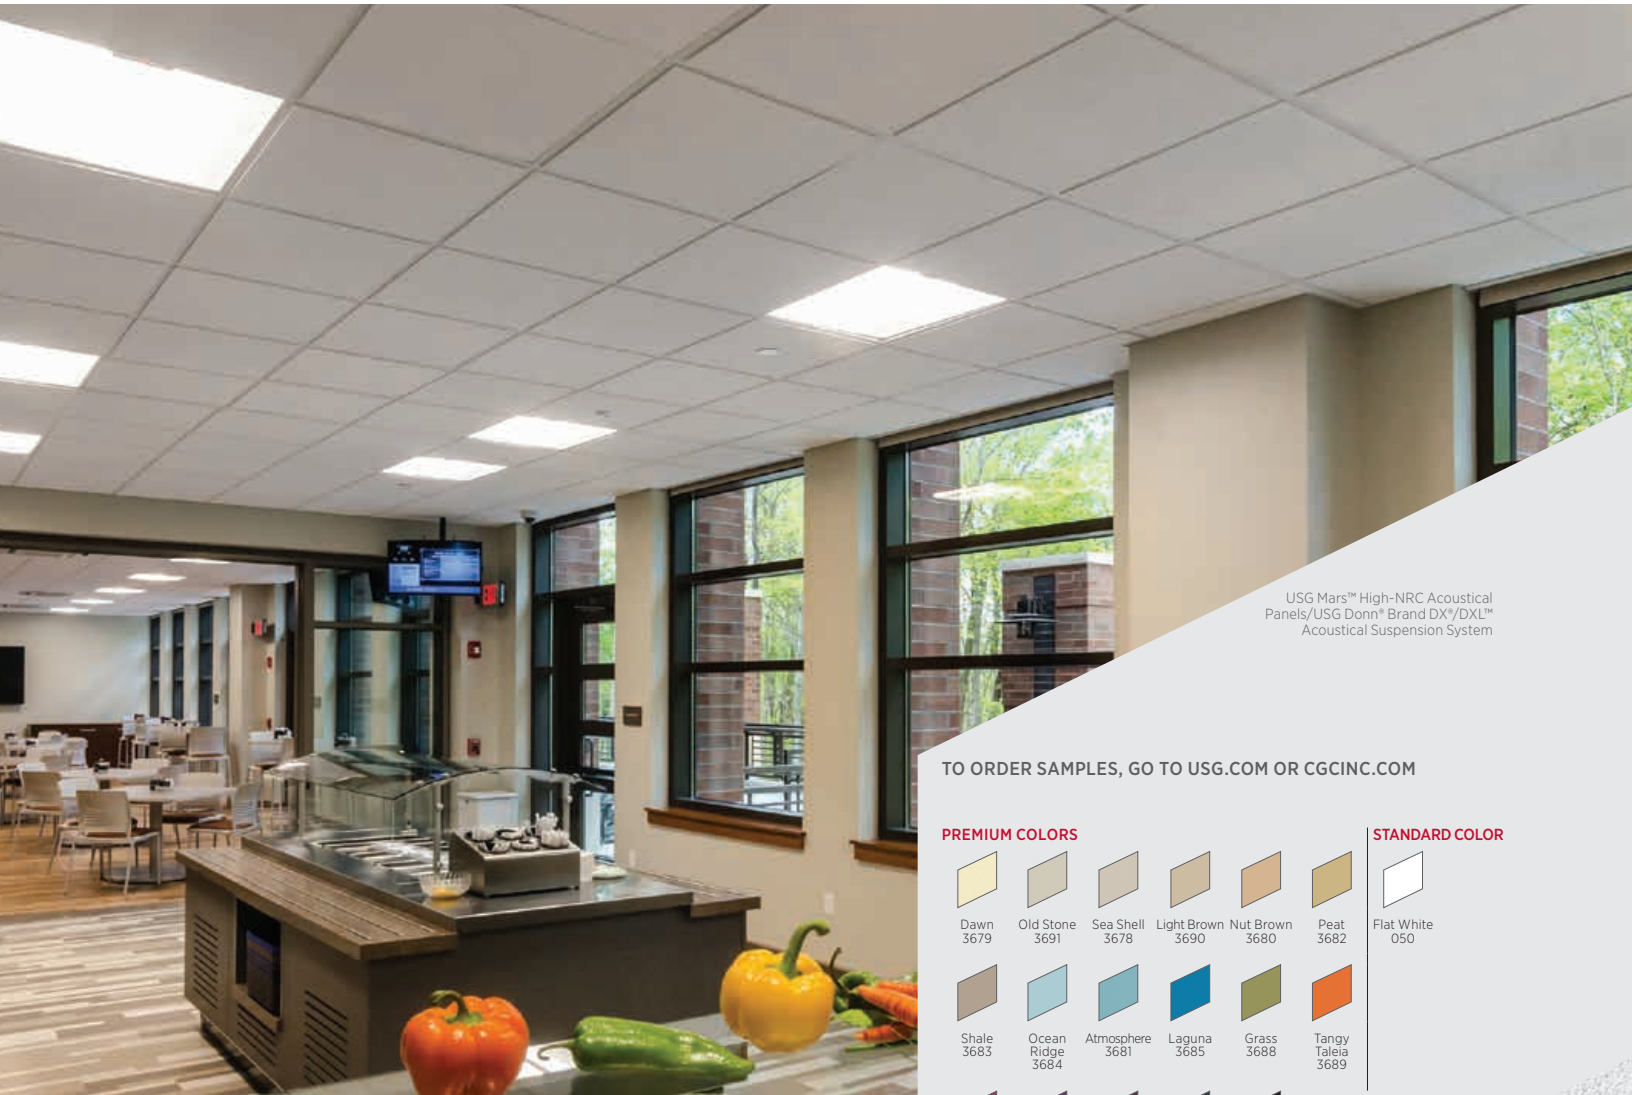

USG Mars™ High-NRC Acoustical Panels/USG Donn® Brand DX®/DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PREMIUM COLORS



STANDARD COLOR



CUSTOM COLOR



FEATURES AND BENEFITS

- Balanced Acoustics. Wide range of options. Sound absorption NRC up to 0.90 and sound attenuation CAC up to 40.
- High light-reflective finish (LR-0.90 White products).
- Washable and scrubbable finish.⁶
- Impact and scratch resistant.⁶
- Coordinates visually with USG Halcyon™ Acoustical Panels for open- or closed-plan applications.
- Nondirectional, monolithic visual reduces installation time and waste.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- GREENGUARD Gold certified for low emitting performance.


APPLICATIONS

- Offices
- Healthcare
- Classrooms and corridors
- Reception areas and lobbies
- Department stores and retail
- Restaurants and hospitality

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel

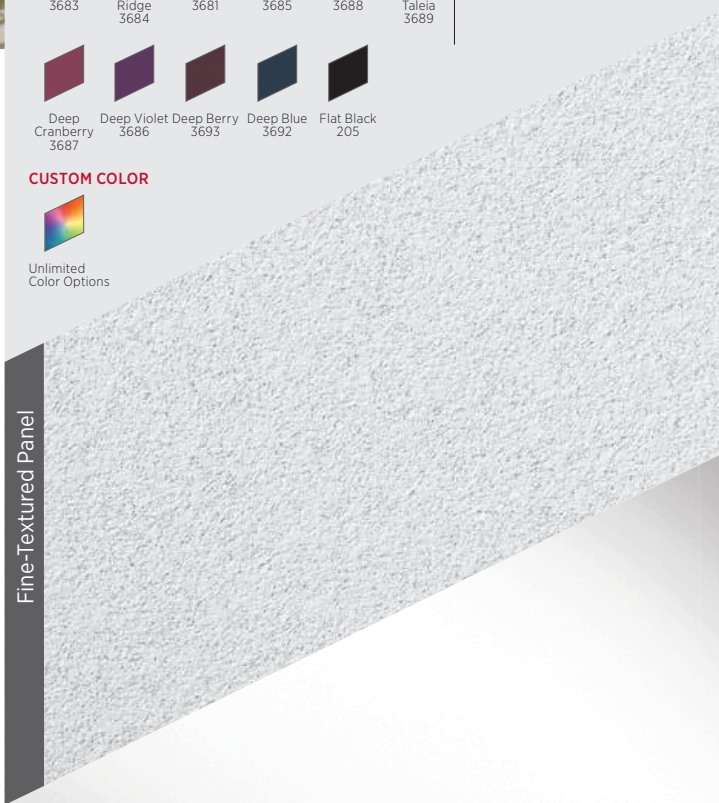

USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818



**USG MARS™
HIGH-NRC PANELS
90/30**
Plant-Based Binder

**USG MARS™
HIGH-NRC PANELS
85/35**
Plant-Based Binder



Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ	2'x2'x1"	Class A	88137	0.90	30	0.90	White, color ⁷	A,B,C	Low		67%	\$\$\$
	2'x4'x1"	Class A	89137	0.90	30	0.90	White	A,B	Low		67%	\$\$\$
	30"x30"x1"	Class A	80213	0.90	30	0.90	White	A,B	Low		67%	\$\$\$
	30"x60"x1"	Class A	89143	0.90	30	0.90	White	A,B	Low		67%	\$\$\$
SLT	2'x2'x1"	Class A	88138	0.90	30	0.90	White, color ⁷	D	Low		67%	\$\$\$
	2'x4'x1"	Class A	89138	0.90	30	0.90	White	D	Low		67%	\$\$\$
	30"x30"x1"	Class A	80239	0.90	30	0.90	White	D	Low		67%	\$\$\$
	30"x60"x1"	Class A	89144	0.90	30	0.90	White	D	Low		67%	\$\$\$
FLB	2'x2'x1"	Class A	88139	0.90	30	0.90	White, color ⁷	E,F,G,H	Low		67%	\$\$\$
	2'x4'x1"	Class A	89139	0.90	30	0.90	White	E,F,G,H	Low		67%	\$\$\$
	30"x30"x1"	Class A	80265	0.90	30	0.90	White	E,F,G,H	Low		67%	\$\$\$
	30"x60"x1"	Class A	89145	0.90	30	0.90	White	E,F,G,H	Low		67%	\$\$\$
SQ	2'x2'x7/8"	Class A	88134	0.85	35	0.90	White, color ⁷	A,B,C	Low		68%	\$\$\$
	2'x4'x7/8"	Class A	89134	0.85	35	0.90	White	A,B	Low		68%	\$\$\$
	30"x30"x7/8"	Class A	80113	0.85	35	0.90	White	A,B	Low		68%	\$\$\$
	30"x60"x7/8"	Class A	89140	0.85	35	0.90	White	A,B	Low		68%	\$\$\$
SLT	2'x2'x7/8"	Class A	88135	0.85	35	0.90	White, color ⁷	D	Low		68%	\$\$\$
	2'x4'x7/8"	Class A	89135	0.85	35	0.90	White	D	Low		68%	\$\$\$
	30"x30"x7/8"	Class A	80139	0.85	35	0.90	White	D	Low		68%	\$\$\$
	30"x60"x7/8"	Class A	89141	0.85	35	0.90	White	D	Low		68%	\$\$\$
FLB	2'x2'x7/8"	Class A	88136	0.85	35	0.90	White, color ⁷	E,F,G,H	Low		68%	\$\$\$
	2'x4'x7/8"	Class A	89136	0.85	35	0.90	White	E,F,G,H	Low		68%	\$\$\$
	30"x30"x7/8"	Class A	80165	0.85	35	0.90	White	E,F,G,H	Low		68%	\$\$\$
	30"x60"x7/8"	Class A	89142	0.85	35	0.90	White	E,F,G,H	Low		68%	\$\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



USG MARS™ HIGH-NRC/HIGH-CAC PANELS 80/40

Plant-Based Binder

USG MARS™ HIGH-NRC PANELS 80/35

Plant-Based Binder

USG MARS™ HIGH-CAC PANELS 60/40

Edge	Panel Size	Fire Rating	Item No.	UL Classified		LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC Min.							
SQ	2'x2'x1"	Class A	86345	0.80	40	0.90	White	A,B,C	Low		69%	\$\$
	2'x4'x1"	Class A	88345	0.80	40	0.90	White	A,B	Low		69%	\$\$
SLT	2'x2'x1"	Class A	86346	0.80	40	0.90	White	D	Low		69%	\$\$
	2'x4'x1"	Class A	88346	0.80	40	0.90	White	D	Low		69%	\$\$
FLB	2'x2'x1"	Class A	86347	0.80	40	0.90	White	E,F,G,H	Low		69%	\$\$
	2'x4'x1"	Class A	88347	0.80	40	0.90	White	E,F,G,H	Low		69%	\$\$
SQ	2'x2'x7/8"	Class A	86100	0.80	35	0.90	White	A,B,C	Low		69%	\$\$
	2'x4'x7/8"	Class A	86300	0.80	35	0.90	White	A,B	Low		69%	\$\$
	30"x30"x7/8"	Class A	86426	0.80	35	0.90	White	A,B	Low		69%	\$\$
	30"x60"x7/8"	Class A	86429	0.80	35	0.90	White	A,B	Low		69%	\$\$
SLT	2'x2'x7/8"	Class A	87200	0.80	35	0.90	White	D	Low		69%	\$\$
	2'x4'x7/8"	Class A	89600	0.80	35	0.90	White	D	Low		69%	\$\$
	30"x30"x7/8"	Class A	86500	0.80	35	0.90	White	D	Low		69%	\$\$
	30"x60"x7/8"	Class A	86466	0.80	35	0.90	White	D	Low		69%	\$\$
FLB	2'x2'x7/8"	Class A	87100	0.80	35	0.90	White	E,F,G,H	Low		69%	\$\$
	2'x4'x7/8"	Class A	89500	0.80	35	0.90	White	E,F,G,H	Low		69%	\$\$
	30"x30"x7/8"	Class A	86400	0.80	35	0.90	White	E,F,G,H	Low		69%	\$\$
	30"x60"x7/8"	Class A	86497	0.80	35	0.90	White	E,F,G,H	Low		69%	\$\$
SQ	2'x2'x3/4"	Class A	86186	0.60	40	0.90	White, color ⁷	A,B,C	Low		79%	\$\$\$
	2'x4'x3/4"	Class A	87187	0.60	40	0.90	White	A,B	Low		79%	\$\$\$
SLT	2'x2'x3/4"	Class A	86786	0.60	40	0.90	White, color ⁷	D	Low		79%	\$\$\$
	2'x4'x3/4"	Class A	88786	0.60	40	0.90	White	D	Low		79%	\$\$\$
FLB	2'x2'x3/4"	Class A	86986	0.60	40	0.90	White, color ⁷	E,F,G,H	Low		79%	\$\$\$
	2'x4'x3/4"	Class A	88986	0.60	40	0.90	White	E,F,G,H	Low		79%	\$\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

**FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818

GRID PROFILE OPTIONS

PHYSICAL DATA/ FOOTNOTES



Declare.

A USG DX ^o /DXL™	B USG DXW™	C ⁴ USG Centricitee™ DXT™	D USG DX ^o /DXL™	E USG Centricitee™ DXT™	F USG Fineline® DXF™	G ⁸ USG Fineline® 1/8 DXFF™	H USG Identitee® DXI™

Product literature
Data sheet: SC2487

ASTM E1264 classification
Type IV, Form 1 and 2, Pattern E, G

**ASTM E84 and CAN/ULC S102
surface-burning characteristics**
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
1.05-1.26 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-2.2

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean white panels, use a clean, white cloth with water or a mild detergent and wipe surface.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial additive that inhibits and retards the growth of mold, mildew and bacteria. For details, see *USG 30-Year Limited System Warranty Commercial Applications (SC2102)* and *Ceilings Certification of Performance (SC2451)*.
- Maximum 2'x2' with SQ edge panels.
- Acoustic values are for white only. Colored values are lower depending on specific color selected.
- White panels only.
- Available in Premium and Custom Colors.
- Not available in Premium or Custom Colors.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2487/rev. 11-18
© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, FINELINE, HALCYON, IDENTITEE, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG MARS™ PLANKS/USG MARS™ HIGH-NRC PLANKS AND LARGE SIZES

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER



USG Mars™ High-NRC Planks
with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

Photo this page:
© Andrew Latreille
Architects: Perkins+Will/KRA/Group2

TO ORDER SAMPLES,
GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Highest NRC (0.90) mineral fiber plank offering available.
- High light-reflective finish (LR-0.90) reduces light fixtures and energy use.
- Washable and scrubbable finish.
- Impact and scratch resistant.
- Available in Optimized Recycled Content formulations to help maximize LEED recycled content contribution.
- Nondirectional, monolithic visual reduces installation time and waste.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Balanced Acoustics. High-NRC and High-CAC.
- GREENGUARD Gold certified for low-emitting performance.

APPLICATIONS

- Offices
- Classrooms
- Healthcare
- Corridors
- Reception and lobby areas
- Convention halls and concourses

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel



USG MARS™ PLANKS/USG MARS™ HIGH-NRC PLANKS AND LARGE SIZES

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplite@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



UL Classified

Edge	Panel Size ⁴	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ 	2'x5'x3/4"	Class A	86221	0.75	35	0.90	White	A,B	Low		69%	\$\$
	2'x6'x3/4"	Class A	86223	0.75	35	0.90	White	A,B	Low		69%	\$\$
SLT 	2'x5'x3/4"	Class A	86161	0.75	35	0.90	White	C	Low		69%	\$\$
	2'x6'x3/4"	Class A	86166	0.75	35	0.90	White	C	Low		69%	\$\$
	2'x6'x3/4"	Class A	86166HRC	0.70	35	0.90	White	C	Low		81%	\$\$
FLB 	2'x5'x3/4"	Class A	88984	0.75	35	0.90	White	D,E,F,G	Low		69%	\$\$
	2'x6'x3/4"	Class A	88996	0.75	35	0.90	White	D,E,F,G	Low		69%	\$\$
	2'x6'x3/4"	Class A	88996HRC	0.70	35	0.90	White	D,E,F,G	Low		81%	\$\$
SQ 	2'x5'x1"	Class A	89673	0.90	30	0.90	White	A,B	Low		66%	\$\$
	2'x6'x1"	Class A	89674	0.90	30	0.90	White	A,B	Low		66%	\$\$
	2'x5'x7/8"	Class A	89662	0.85	35	0.90	White	A,B	Low		65%	\$\$
	2'x6'x7/8"	Class A	89663	0.85	35	0.90	White	A,B	Low		65%	\$\$
	2'x5'x7/8"	Class A	86350	0.80	35	0.90	White	A,B	Low		65%	\$\$
	2'x6'x7/8"	Class A	86360	0.80	35	0.90	White	A,B	Low		65%	\$\$

USG MARS™
PLANKS

USG MARS™
HIGH-NRC PLANKS
Plant-Based Binder

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ PLANKS/USG MARS™ HIGH-NRC PLANKS AND LARGE SIZES


CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 fax: 888.874.2348 | usg.com
 CGC: contact Sales Representative
 usgdesignstudio.com
 cgcdesignstudio.com

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: ULCOM/GG UL2818



UL Classified

Edge	Panel Size ⁴	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SLT 	2'x5'x1"	Class A	89675	0.90	30	0.90	White	C	Low		66%	\$\$
	2'x6'x1"	Class A	89676	0.90	30	0.90	White	C	Low		66%	\$\$
	2'x5'x7/8"	Class A	89664	0.85	35	0.90	White	C	Low		65%	\$\$
	2'x6'x7/8"	Class A	89665	0.85	35	0.90	White	C	Low		65%	\$\$
	2'x5'x7/8"	Class A	89650	0.80	35	0.90	White	C	Low		65%	\$\$
	2'x6'x7/8"	Class A	89660	0.80	35	0.90	White	C	Low		65%	\$\$
FLB 	2'x5'x1"	Class A	89677	0.90	30	0.90	White	D,E, F,G	Low		66%	\$\$
	2'x6'x1"	Class A	89678	0.90	30	0.90	White	D,E, F,G	Low		66%	\$\$
	2'x5'x7/8"	Class A	89667	0.85	35	0.90	White	D,E, F,G	Low		65%	\$\$
	2'x6'x7/8"	Class A	89668	0.85	35	0.90	White	D,E, F,G	Low		65%	\$\$
	2'x5'x7/8"	Class A	89550	0.80	35	0.90	White	D,E, F,G	Low		70%	\$\$
	2'x6'x7/8"	Class A	89670	0.80	35	0.90	White	D,E, F,G	Low		70%	\$\$

Low Emissions (VOC)
 Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). *Certificates of Compliance* for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
 Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
 Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™
 HIGH-NRC PLANKS CONT.
 Plant-Based Binder

USG MARS™ PLANKS/USG MARS™ HIGH-NRC PLANKS AND LARGE SIZES

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



GRID PROFILE OPTIONS

A USG DX [®] /DXL [™]	B USG DXW [™]	C USG DX [®] /DXL [™]	D USG Centricitee [™] DXT [™]	E USG Finline [®] DXF [™]	F USG Finline [®] 1/8 DXFF [™]	G USG Identitee [®] DXI [™]

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2509

ASTM E1264 classification
Type IV, Form 1 and 2, Pattern E, G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
1.03 lb./sq. ft. (3/4" panels)
1.05-1.12 lb./sq. ft. (7/8" panels)
1.26 lb./sq. ft. (1" panels)

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-2.2 (3/4" panel)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth.

Metric sizes available
Contact sales for minimum quantities and lead times.

- Notes**
- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
 - LR values are shown as averages.
 - Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial additive that inhibits and retards the growth of mold and mildew. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
 - Stabilizer bar required if opening $\geq 60^\circ$. For more information about stabilizer bars, please refer to *Plank and Large Panel Stabilizer Bars Application Guide* (IC592).

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2509/rev. 3-17
© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, FINELINE, IDENTITEE, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG MILLENNIA®/USG MILLENNIA® HIGH-NRC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

USG Millennia® Acoustical Panels with ClimaPlus™ Performance/USG Donn® Brand DX®/DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Balanced Acoustics. Wide range of options. Sound absorption NRC up to 0.75 and sound attenuation CAC up to 40.
- NRC of 0.75 meets the demanding sound control needs of open-plan offices.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Retail stores
- Hospitality
- Office and conference areas
- Transportation terminals
- Libraries
- Reception and lobby areas

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel

USG MILLENNIA®/USG MILLENNIA® HIGH-NRC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



• No Visible Sag
• Mold/Mildew Protection



UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
SQ	2'x2'x3/4"	Class A	76505	0.70	35	0.85	White	A,B,C	Low		79%	\$\$
	2'x4'x3/4"	Class A	78505	0.70	35	0.85	White	A, B	Low		79%	\$\$
SLT	2'x2'x3/4"	Class A	76705	0.70	35	0.85	White	D	Low		79%	\$\$
	2'x4'x3/4"	Class A	78705	0.70	35	0.85	White	D	Low		79%	\$\$
FLB	2'x2'x3/4"	Class A	76907	0.70	35	0.85	White	E,F,G,H	Low		79%	\$\$
	2'x4'x3/4"	Class A	76901	0.70	35	0.85	White	E,F,G,H	Low		79%	\$\$
SLT	2'x2'x3/4"	Class A	76201	0.75	30	0.85	White	A	Low		80%	\$\$
FLB	2'x2'x3/4"	Class A	76302	0.75	30	0.85	White	E,F,G,H	Low		80%	\$\$
BESK	12"x12"x3/4"	Class A	70003	0.60	40	0.85	White	I	Low		79%	\$\$\$\$
SLT ⁵	2'x4'x3/4"	Class A	78780	0.70	35	0.85	White	D	Low		79%	\$\$
ILT ⁶	2'x4'x3/4"	Class A	78080	0.70	35	0.85	White	J,K	Low		79%	\$\$

USG MILLENNIA® PANELS

USG MILLENNIA® HIGH-NRC PANELS

USG MILLENNIA® TILE^{3,4}

USG MILLENNIA® ILLUSION™ TWO/24 PANELS

PATTERNS

Illusion™ Two/24



The look of 2'x2' panels

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁷

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

GRID PROFILE OPTIONS

A USG DX®/DXL™	B USG DXW™	C® USG Centricitee™ DXT™	D USG DX®/DXL™	E USG Centricitee™ DXT™	F USG Fineline® DXF™	G USG Fineline® 1/8 DXFF™	H USG Identitee® DXI™	I USG DX®/DXL™ Concealed	J USG Centricitee™ DXT™	K USG Identitee® DXI™

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1824

ASTM E1264 classification
Type III, Form 1, Pattern E, G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
1.02-1.05 lb./sq. ft. (panels and tile)

Thermal resistance
R-2.0

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Proprietary technology
This product's unique combination of sag resistance and sound performance results from a proprietary technology.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- Contact USG for adhesive recommendations for 12"x12" glue-up applications.
- Not UL Classified for acoustics.
- Panels have a 15/16" routing.
- Panels have a 9/16" routing.
- Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial addition that inhibits and retards the growth of mold and mildew. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- Maximum 2'x2' with SQ edge panels.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1824/rev. 3-17
© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, FINELINE, IDENTITEE, ILLUSION, MILLENNIA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG OLYMPIA™ MICRO™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

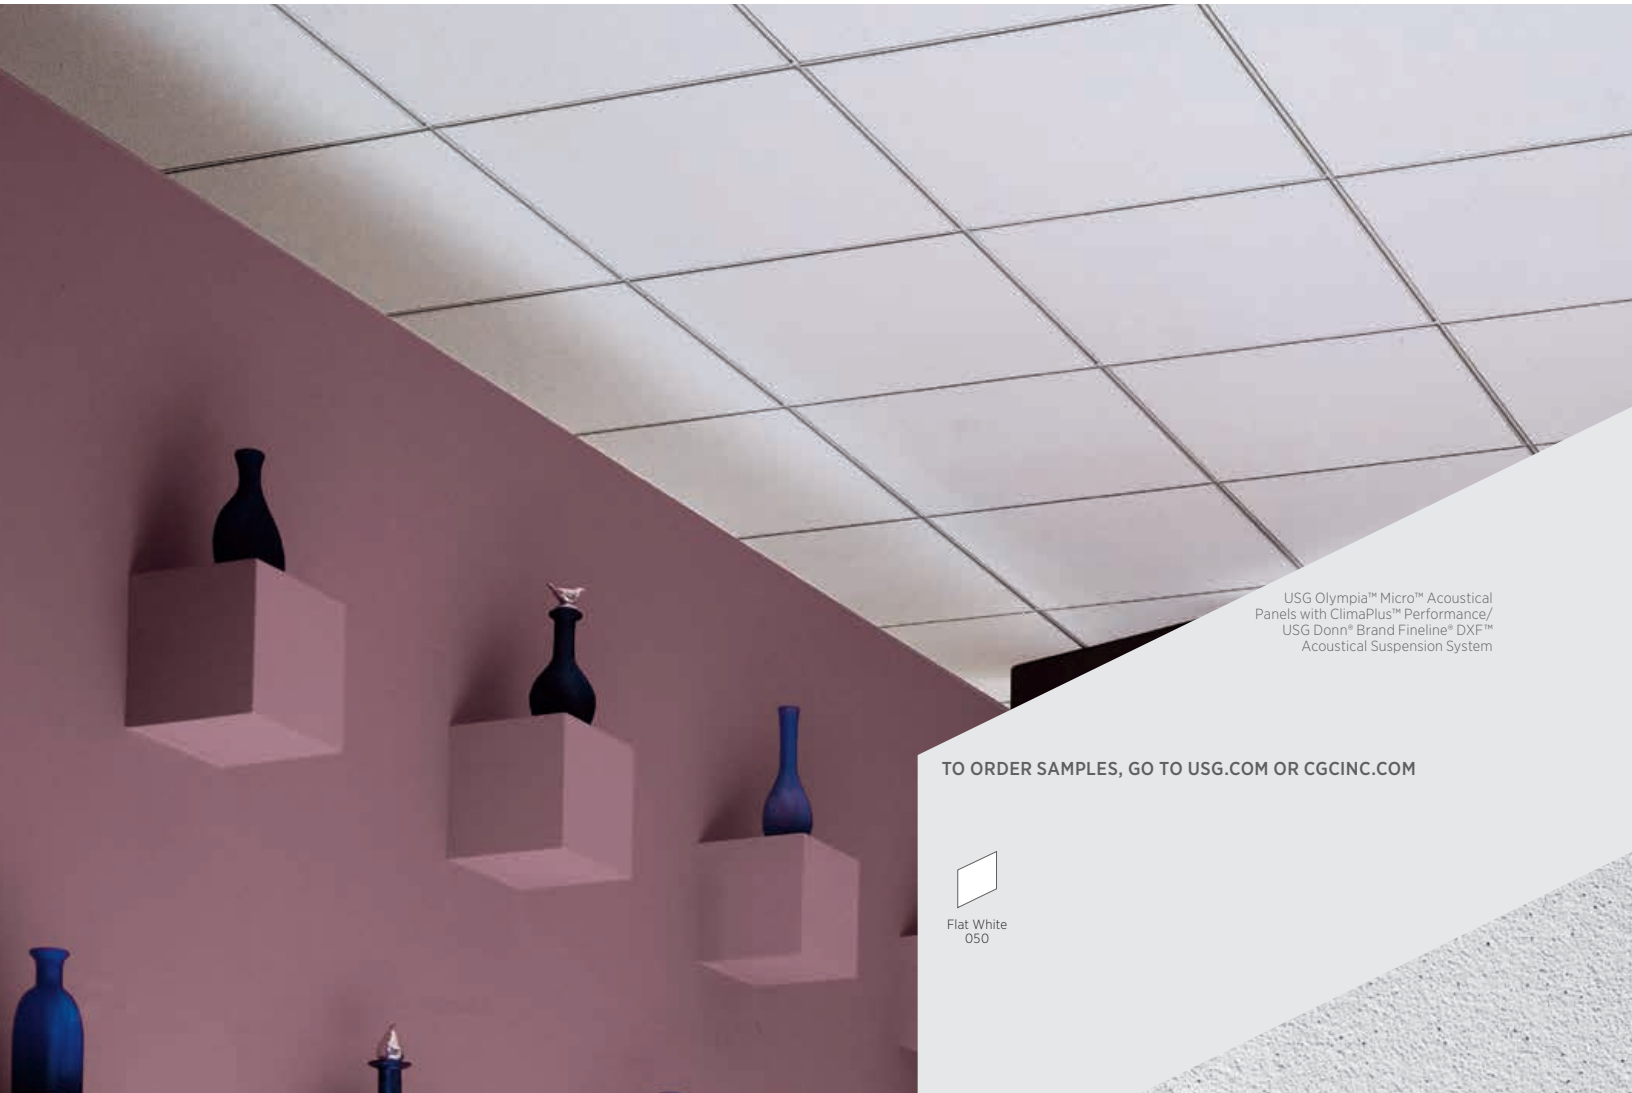

USG Olympia™ Micro™ Acoustical Panels with ClimaPlus™ Performance/USG Donn® Brand Fineline® DXF™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Nondirectional pattern reduces installation time and waste.
- Economical, fine-textured panel.
- Excellent light-reflective finish (LR-0.86) reduces light fixtures and energy use.
- Available in Optimized Recycled Content formulations to help maximize LEED recycled content contribution.
- USDA Certified Biobased Product.⁷
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Offices
- Classrooms
- Reception/lobby areas
- Hotels
- Conference areas
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel

USG OLYMPIA™ MICRO™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818

30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection

10 YEAR
AVAILABILITY
4211, 4221, 4231,
4411, 4421, 4742,
4744

HRC HIGH RECYCLED
CONTENT



USG OLYMPIA™ MICRO™ PANELS UNPERFORATED

USG OLYMPIA™ MICRO™ PANELS 50 NRC⁶


USG OLYMPIA™ MICRO™ PANELS 60 NRC⁶

USG OLYMPIA™ MICRO™ ILLUSION™ TWO/24 PANELS

PATTERNS

Edge	Panel Size	Fire Rating	Item No.	UL Classified			Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
				NRC	CAC Min.	LR ²						
SQ	2'x2'x5/8"	Class A	4210	—	35	0.86	White	A,B,C	Low		44%	\$\$
	2'x4'x5/8"		4913	—	35	0.86	White	A,B	Low		44%	\$\$
SQ	2'x2'x5/8"	Class A	4211	0.50	30	0.86	White	A,B,C	Low		44%	\$\$
	2'x4'x5/8"		4411	0.50	30	0.86	White	A,B	Low		44%	\$\$
	2'x4'x5/8"		4411HRC	0.50	30	0.86	White	A,B	Low		53%	\$\$
SLT	2'x2'x5/8"	Class A	4221	0.50	35	0.86	White	D	Low		44%	\$\$
	2'x2'x5/8"		4221HRC	0.50	35	0.86	White	D	Low		53%	\$\$
	2'x4'x5/8"		4421	0.50	35	0.86	White	D	Low		44%	\$\$
FLB	2'x2'x5/8"	Class A	4231	0.50	35	0.86	White	E,F,G,H	Low		44%	\$\$
	2'x2'x5/8"		4231HRC	0.50	35	0.86	White	E,F,G,H	Low		53%	\$\$
	2'x4'x5/8"		4431	0.50	35	0.86	White	E,F,G,H	Low		44%	\$\$
SQ	2'x2'x3/4"	Class A	4750	0.60	33	0.86	White	A,B,C	Low		61%	\$\$
	2'x4'x3/4"		4751	0.60	33	0.86	White	A,B	Low		61%	\$\$
SLT	2'x2'x3/4"	Class A	4752	0.60	35	0.86	White	D	Low		61%	\$\$
	2'x4'x3/4"		4753	0.60	35	0.86	White	D	Low		61%	\$\$
FLB	2'x2'x3/4"	Class A	4754	0.60	35	0.86	White	E,F,G,H	Low		61%	\$\$
	2'x4'x3/4"		4755	0.60	35	0.86	White	E,F,G,H	Low		61%	\$\$
SLT ⁴	2'x4'x3/4"	Class A	4742	0.50	35	0.86	White	D	Low		61%	\$\$
ILT ⁵	2'x4'x3/4"	Class A	4744	0.50	35	0.86	White	I,J	Low		61%	\$\$

USG Illusion™ Two/24



GRID PROFILE OPTIONS

A USG DX™/DXL™	B USG DXW™	C ⁷ USG Centricitee™ DXT™	D USG DX™/DXL™	E USG Centricitee™ DXT™	F USG Identitee® DXI™	G USG FineLine® DXF™	H USG FineLine® 1/8 DXFF™	I USG Centricitee™ DXT™	J USG Identitee® DXI™

PHYSICAL DATA/ FOOTNOTES

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2180/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Product literature
Data sheet: SC2180

ASTM E1264 classification
Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A

Flame spread: 25 or less
Smoke developed: 50 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Weight
0.78-1.03 lb./sq. ft.

Thermal resistance
R-1.4 (5/8" panels)
R-1.7 (3/4" panels)

Maximum backloading
See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- Panels have 15/16" routing.
- Panels have 9/16" routing.

6. Mixing 0.50 and 0.60 NRC panels in the same ceiling plane is not recommended.

7. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXL, DXL, DXT, DXW, FINELINE, IDENTITEE, ILLUSION, MICRO, OLYMPIA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG ORION™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

USG Orion™ Acoustical Panels
with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Excellent noise reduction.
- High light-reflective finish (LR-0.87) reduces light fixtures and energy use.
- Nondirectional, monolithic visual reduces installation time and waste.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Wide range of acoustical performance.

APPLICATIONS

- Offices
- Conference rooms
- Healthcare (HIPAA requirements)
- Classrooms
- Corridors
- Reception/lobby areas
- Dining rooms

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel

USG ORION™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



Edge	Panel Size	Fire Rating	Item No.	UL Classified			Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	
				NRC	CAC	LR ²					Total RC	Panel Cost
USG ORION™ 60	SQ 	Class A	62156	0.60	23	0.87	White	A,B,C	Low		67%	\$
			62157	0.60	23	0.87	White	A,B	Low		67%	\$
USG ORION™ 75	SQ 	Class A	62150	0.75	24	0.87	White	A,B,C	Low		65%	\$\$
			62151	0.75	24	0.87	White	A,B	Low		65%	\$\$
	SLT 	Class A	62152	0.75	24	0.87	White	D	Low		65%	\$\$
			62153	0.75	24	0.87	White	D	Low		65%	\$\$
	FLB 	Class A	62154	0.75	24	0.87	White	E,F,G,H	Low		65%	\$\$
			62155	0.75	24	0.87	White	E,F,G,H	Low		65%	\$\$
USG ORION™ 85	SQ 	Class A	62162	0.85	24	0.87	White	A,B,C	Low		67%	\$\$
			62163	0.85	24	0.87	White	A,B	Low		67%	\$\$
	SLT 	Class A	62164	0.85	24	0.87	White	D	Low		67%	\$\$
			62165	0.85	24	0.87	White	D	Low		67%	\$\$
	FLB 	Class A	62166	0.85	24	0.87	White	E,F,G,H	Low		67%	\$\$
			62167	0.85	24	0.87	White	E,F,G,H	Low		67%	\$\$

Low Emissions

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

GRID PROFILE OPTIONS

A USG DX ⁴ /DXL™	B USG DXW™	C ⁴ USG Centricitee™ DXT™	D USG DX ⁴ / DXL™	E USG Centricitee™ DXT™	F USG Fineline ⁶ DXF™	G USG Fineline ⁶ 1/8 DXFF™	H USG Identitee™ DXI™

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2648

ASTM E1264 classification
Mineral Fiber: Type IV, Form 1 and 2, Pattern E,G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
0.71 lb./sq. ft. 1/2" Mineral Fiber
0.64 lb./sq. ft. 5/8" Mineral Fiber

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.8

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial additive that inhibits and retards the growth of mold, mildew and bacteria. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- Maximum 2'x2' with SQ edge panels.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2648/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXFF, DXI, DXL, DXT, DXW, FINELINE, IDENTITEE, ORION, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG PEBBLED™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG Pebbled™ Acoustical Panels
with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Economical, medium-textured ceiling panel has upscale appearance.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Schools
- Corridors
- General offices
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Medium-Textured Panel



USG PEBBLED™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com








TECHNICAL SERVICES
 800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
 FOR LOW CHEMICAL
 EMISSIONS:
 UL/COM/GG
 UL 2818

30 YEAR LIMITED SYSTEM
 WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
SQ 	2'x2'x5/8"	Class A	4801	0.55	35	0.86	White	A,B,C	Low		44%	\$\$
	2'x4'x5/8"	Class A	4800	0.55	35	0.86	White	A,B	Low		44%	\$\$
SLT 	2'x2'x5/8"	Class A	4805	0.55	35	0.86	White	D	Low		44%	\$\$
FLB 	2'x2'x5/8"	Class A	4867	0.55	35	0.86	White	E,F,G,H	Low		44%	\$\$

USG PEBBLED™ PANELS

GRID PROFILE OPTIONS









PHYSICAL DATA/ FOOTNOTES

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

A USG DX*/DXL™	B USG DXW™	C ⁴ USG Centricitee™ DXT™	D USG DX*/DXL™	E USG Centricitee™ DXT™	F USG Fineline* DXF™	G USG Fineline* 1/8 DXFF™	H USG Identitee* DXI™
							

Product literature
 Data sheet: SC1836

ASTM E1264 classification
 Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Weight
 0.70-0.79 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
 R-1.4

Maximum backloading
 See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
 Contact sales for minimum quantities and lead times.

- Notes**
1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
 2. LR values are shown as averages.
 3. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
 4. Maximum 2'x2' with SQ edge panels.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1836/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, FINELINE, IDENTITEE, PEBBLED, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG PREMIER HI-LITE™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

USG Premier Hi-Lite™ Twill Panels
with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050



Flat Black
205

FEATURES AND BENEFITS

- Washable vinyl face for easy maintenance.
- Excellent noise reduction with NRC of 0.70 for greater sound control in open-plan spaces.
- Lightweight fiberglass basemat makes installation fast and easy.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Discount stores
- Grocery stores
- Mass merchandisers
- Retail stores

SUBSTRATE

- Fiberglass

Medium-Textured Panel, Kapok Perforated and Unperforated

Medium-Textured Panel, Twill Perforated and Unperforated

USG PREMIER HI-LITE™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE


















ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color ⁴	Grid Options	Anti-Mold & Mildew/ Sag Resistance	Recycled Content ¹	Panel Cost
SQ 	2'x2'x5/8" Perforated	Class A 	7050G	0.70 	20 	0.76 	White	A, B, C, D 		64% 	\$ 
	2'x2'x5/8" Unperforated	Class A	7052G	0.50	20	0.76	White	A, B, C, D		64%	\$
	2'x4'x5/8" Perforated	Class A	7051G	0.70	20	0.76	White	A, B, C, D		64%	\$
	2'x4'x5/8" Unperforated	Class A	7053G	0.50	20	0.76	White	A, B, C, D		64%	\$
SQ 	2'x2'x5/8" Perforated	Class A	7054G	0.70	20	0.76	White and Black	A, B, C, D		64%	\$
	2'x2'x5/8" Unperforated	Class A	7056G	0.50	20	0.76	White and Black	A, B, C, D		64%	\$
	2'x4'x5/8" Perforated	Class A	7055G	0.70	20	0.76	White and Black	A, B, C, D		64%	\$
	2'x4'x5/8" Unperforated	Class A	7057G	0.50	20	0.76	White and Black	A, B, C, D		64%	\$





 **High Recycled Content**

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

 **ClimaPlus™ Warranty Performance³**

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

A USG DX™/DXL™	B USG DXW™	C USG ZXLA™	D USG AX™
			

Product literature
Data sheet: SC1838

ASTM E1264 classification
Type XII, Form 1, Pattern CE (Perforated), Pattern E (Unperforated)

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Weight
0.20 lb./sq. ft.

Thermal resistance
R-2.7

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a damp sponge.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC245).
- See Colors selector for more information.

**PHYSICAL DATA/
FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1838/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, AX, CLIMAPLUS, DONN, DX, DXL, DXW, PREMIER HI-LITE, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG PREMIER NUBBY™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG Premier Nubby™ Acoustical Panels with ClimaPlus™ Performance/USG Donn® Brand Centricitee™ DXT™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- High-quality nubby cloth facing offers consistent, fine-textured appearance.
- Excellent noise reduction with NRC of 0.85 or 0.90 meets the demanding sound-control needs of open-plan spaces.
- Lightweight fiberglass basemat makes installation fast and easy.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Conference rooms and executive areas
- Gymnasiums and auditoriums
- Open-office plans
- Retail stores

SUBSTRATE

- Fiberglass

Lightly Textured Panel



USG PREMIER NUBBY™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE







ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection




UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
SQ 	2'x2'x3/4"	Class A	7000G	0.85	—	0.87	White	A,B,C		30%	\$\$\$
	2'x2'x1"	Class A	7002G	0.90	—	0.87	White	A,B,C		33%	\$\$\$
	2'x2'x1" Foil-Back	Class A	7012G	0.90	25	0.87	White	A,B,C		33%	\$\$\$
	2'x4'x1"	Class A	7003G	0.90	—	0.87	White	A,B		33%	\$\$\$
	2'x4'x1" Foil-Back	Class A	7013G	0.90	25	0.87	White	A,B		33%	\$\$\$

ClimaPlus™ Warranty Performance³

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

A USG DX™/DXL™	B USG DXW™	C ⁴ USG Centricitee™ DXT™
		

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1839

ASTM E1264 classification
Type XII, Form 2, Pattern E

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
0.29-0.36 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

AC information
170 for item #7003G,
190 for item #7013G.

Thermal resistance
R-3.3 (3/4" panels)
R-4.4 (1" panels)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

- Notes**
- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
 - LR values are shown as averages.
 - For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
 - Maximum 2'x2' with SQ edge panels.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1839/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXL, DXT, DXW, PREMIER NUBBY, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG RADAR™ BASIC ACOUSTICAL PANELS



USG Radar™ Basic Acoustical Panels/USG Donn® Brand DX*/DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Nondirectional pattern with a fresh, clean appearance offers fast, efficient installation.
- Economical, all-purpose ceiling pattern offered in many sizes.
- Optional Firecode® product designed to meet life-safety codes.
- USDA Certified Biobased Product.⁸


APPLICATIONS

- Schools
- Corridors
- Offices
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Lightly Textured Panel

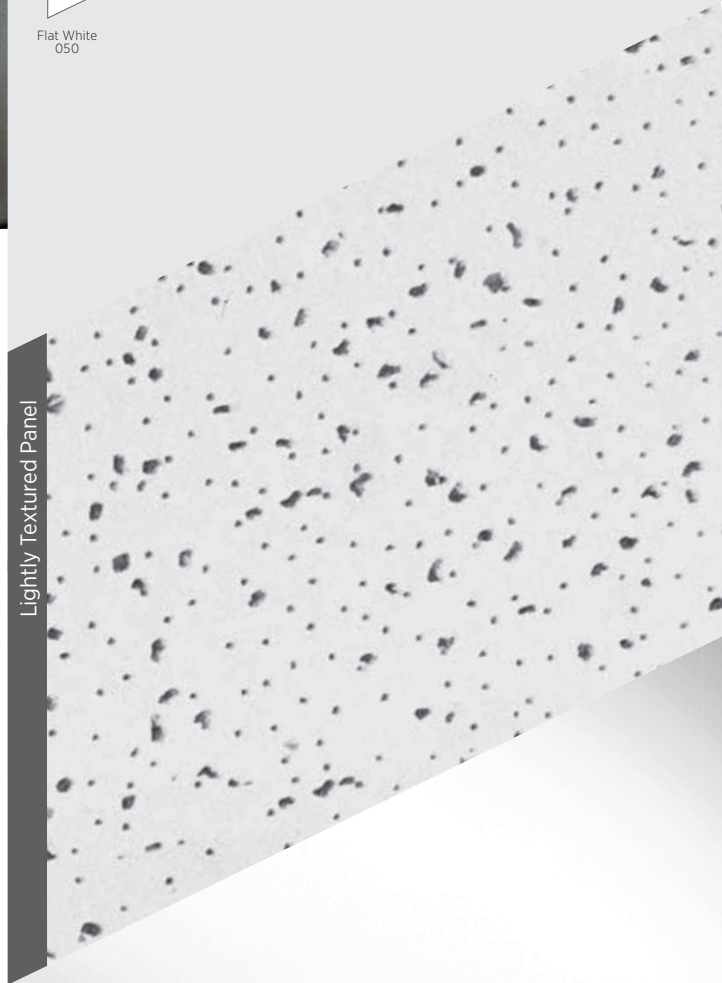

USG RADAR™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818



UL Classified

Edge	Panel Size Imperial Metric (mm)	Fire Rating ²	Item No. Imperial Metric (mm)	NRC	CAC Min.	LR ³	Color ⁶	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost
SQ 	2'x2'x5/8" 600x600x15		2110 ME2110	0.55	33	0.83	White	A,B	Low	25%	\$
	2'x2'x5/8"		2115	0.55	35	0.83	White	A	Low	48-51%	\$
	2'x4'x5/8" 600x1200x15	Class A	2310 ME2310	0.55	35	0.83	White	A,B	Low	25%	\$
	2'x4'x5/8"		2315	0.55	35	0.83	White	A	Low	48-51%	\$
	2'x5'x5/8"	Class A	2619	0.55	35	0.83	White	A,B	Low	25%	\$
	20"x60"x5/8" 500x1500x15	Class A	2617 ME2617	0.55	35	0.83	White	A,B	Low	25%	\$
	30"x60"x3/4"	Class A	2618	0.60	35	0.83	White	A,B	Low	25%	\$
SLT 	2'x2'x5/8" 600x600x15	Class A	2120 ME2120	0.55	33	0.83	White	C	Low	25%	\$
	2'x2'x5/8"		2125	0.55	35	0.83	White	C	Low	51-59% ⁷	\$
	2'x4'x5/8"	Class A	2320	0.55	35	0.83	White	C	Low	25%	\$
	20"x60"x5/8"	Class A	2627	0.55	35	0.83	White	C	Low	25%	\$
FLB 	2'x2'x5/8"	Class A	2130	0.55	33	0.83	White	D,E,F,G	Low	25%	\$
USG RADAR™ BASIC TILE ^{4,5} BESK 	12"x12"x5/8"	Class A	2990	0.50 ⁵	40 ⁵	0.83	White	H	Low	44%	\$\$\$
USG RADAR™ ILLUSION BASIC TWO/24 PANEL SLT 	2'x4'x3/4"	Class A	2742	0.55	35	0.83	White	C	Low	25-26%	\$\$


USG RADAR™
BASIC PANEL

USG RADAR™ BASIC TILE^{4,5}

USG RADAR™ ILLUSION
BASIC TWO/24 PANEL

PATTERNS

Illusion™ Two/24



Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®

GRID PROFILE OPTIONS

A USG DX*/DXL™	B USG DXW™	C USG DX*/DXL™	D USG Centricitee™ DXT™	E USG Finline® DXF™	F USG Finline® 1/8 DXFF™	G USG Identitee® DXI™	H USG DX*/DXL™ Concealed

PHYSICAL DATA/
FOOTNOTES

Product literature
Data sheet: SC2288

ASTM E1264 classification
Type III, Form 2, Pattern C, E
and C, E, K

ASTM E84 and CAN/ULC S102
surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FR-83

Weight
0.61-1.15 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.4 (Class A, 5/8" panels and tile)
R-1.7 (Class A, 3/4" panels)
R-1.4 (Class A, 15 mm panels)
R-1.6 (Firecode®, 5/8" panels)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items: see UL design details.
- LR values are shown as averages.
- Contact USG for adhesive recommendation for 12"x12" glue-up applications.
- Not UL Classified for acoustics.
- No Flat Black or 'Deeptones' are available on any reveal edge or USG Radar™ Firecode® panel.
- Recycled content not available at all plants.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2288/rev. 8-18
© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, FINELINE, FIRECODE, IDENTITEE, RADAR, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG RADAR™ CERAMIC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

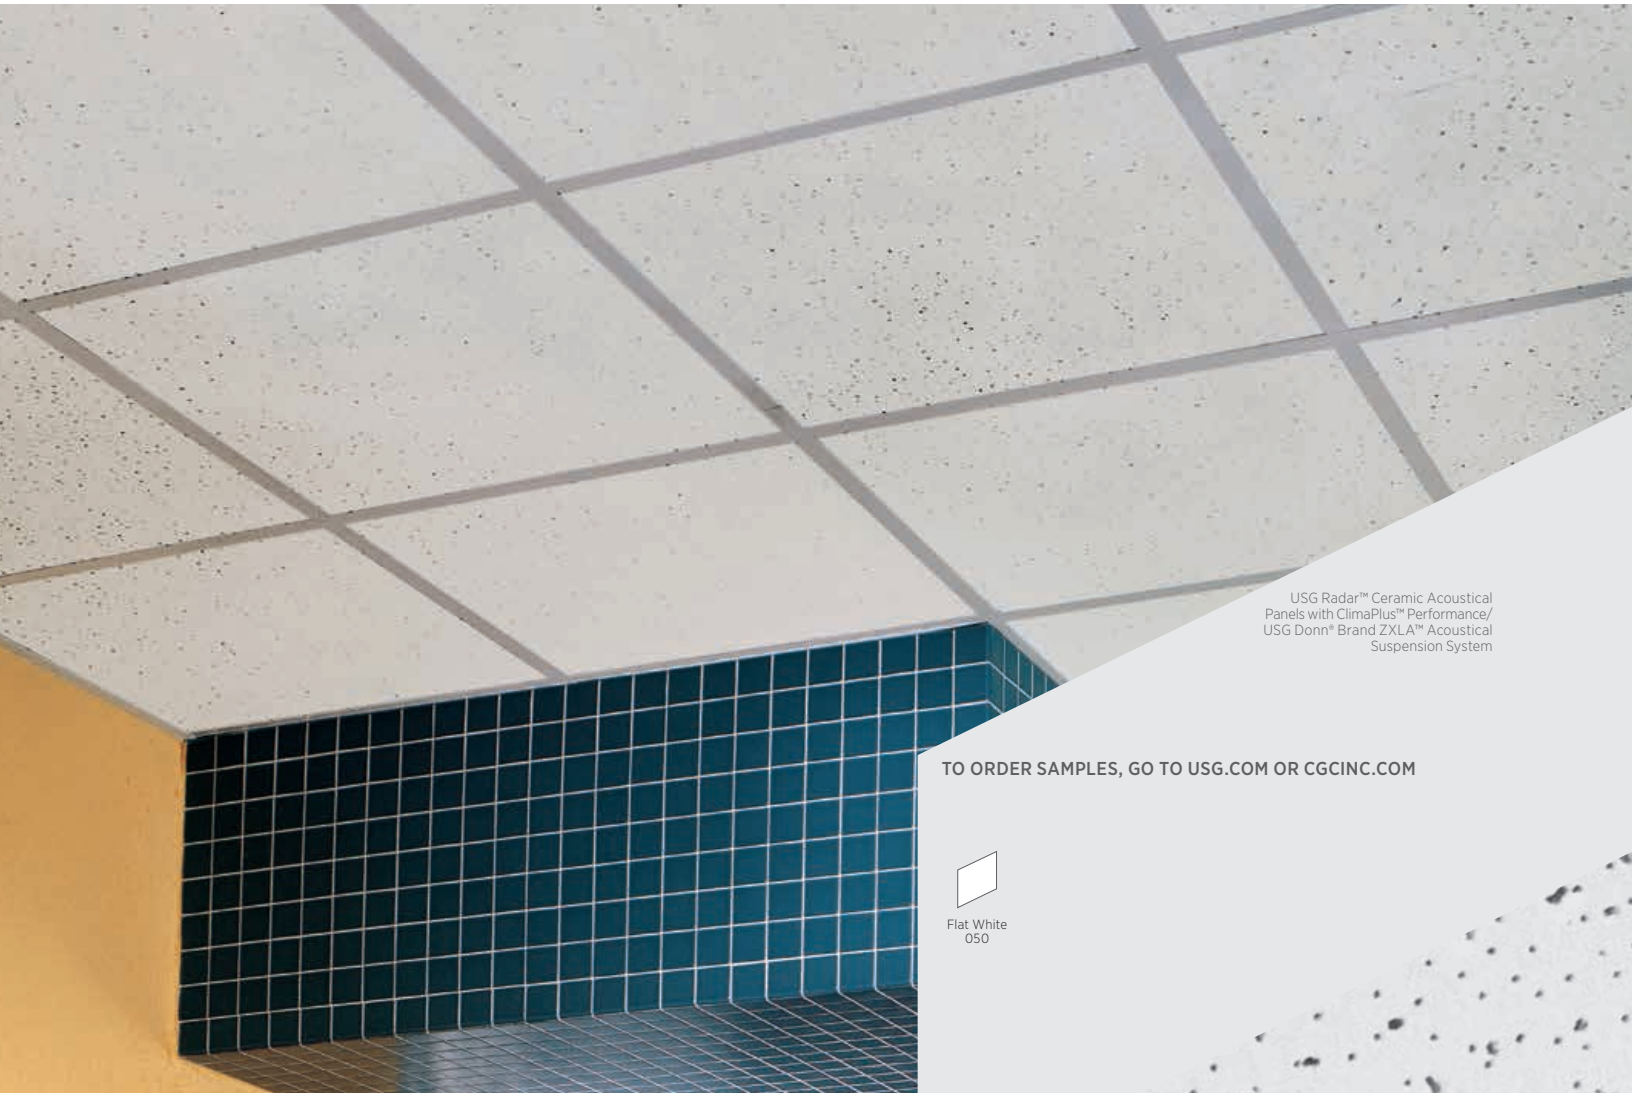

USG Radar™ Ceramic Acoustical Panels with ClimaPlus™ Performance/USG Donn® Brand ZXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- 100% ceramic-bonded mineral fiber withstands high heat, high humidity, corrosive chemical fumes and steam.
- Tested in live steam to withstand applications such as saunas and steam rooms.
- Meets U.S. Coast Guard standards and can be used in high-humidity marine applications.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Firecode® product designed to meet life-safety codes.


APPLICATIONS

- Pools and shower areas
- Saunas and steam rooms

SUBSTRATE

- Wet-formed, ceramic-bonded mineral fiber

Lightly Textured Panel

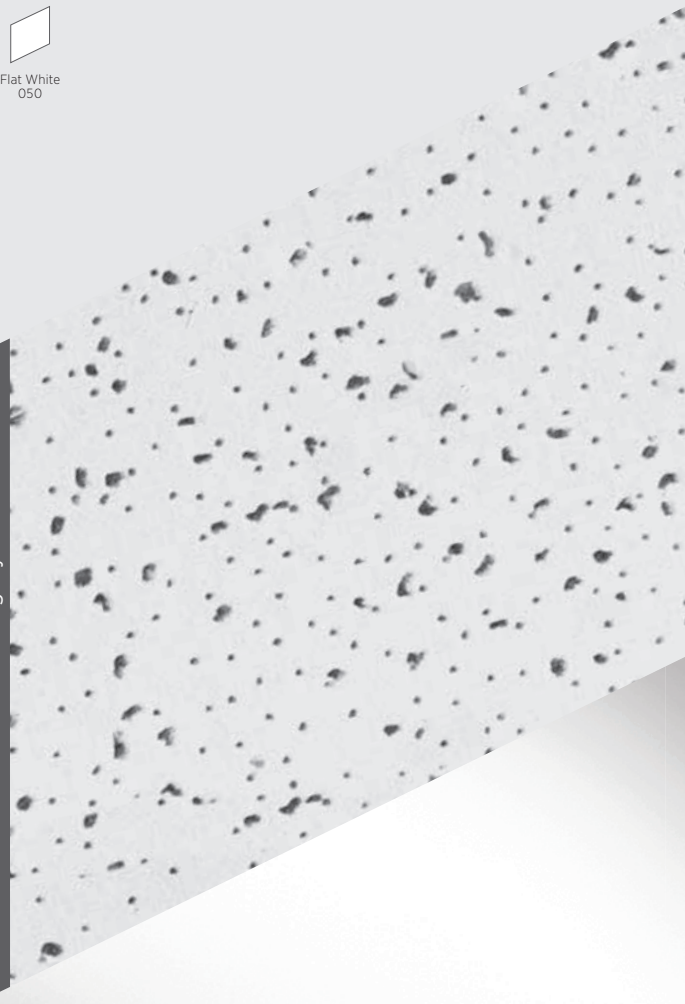

USG RADAR™ CERAMIC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
 FOR LOW CHEMICAL
 EMISSIONS:
 ULCOM/GG
 UL2818

30 YEAR LIMITED SYSTEM
 WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

10 YEAR
 AVAILABILITY
 56644, 56645

UL Classified

Edge	Panel Size	Fire Rating ⁴	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ	2'x2'x5/8"		56644	0.50	40	0.82	White	A,B	Low		44%	\$\$\$\$
	2'x4'x5/8"		56645	0.50	40	0.82	White	A,B	Low		44%	\$\$\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Totally inorganic product; resistant to the growth of mold and mildew. Includes sag-resistance performance.

Firecode®

Approved for use on merchant ships (No. 164.009/212/0).

USG RADAR™ CERAMIC PERFORATED PANELS

GRID PROFILE OPTIONS

PHYSICAL DATA/ FOOTNOTES

A USG ZXLA™	B USG DXLA™

Product literature
 Data sheet: SC2293

ASTM E1264 classification
 Perforated: Type XX, Pattern CEG

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 0
 Smoke developed: 0

UL Type
 FR-4

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Weight
 1.6-1.7 lb./sq. ft.

Thermal resistance
 R-1.3

Maximum backloading
 See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
 Can be cleaned easily with a damp sponge.

U.S. Coast Guard acceptance
 Approved for use on merchant ships (No. 164.009/212/0).

Metric sizes available
 Contact sales for minimum quantities and lead times.

- Notes**
- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
 - LR values are shown as averages.
 - For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
 - Fire-rated items: see UL design details.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2293/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661


The trademarks USG, CGC, DXLA, CLIMAPLUS, DONN, FIRECODE, RADAR, ZXLA, IT'S YOUR WORLD. BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG RADAR™ ACOUSTICAL PANELS


CLIMAPLUS™ PERFORMANCE

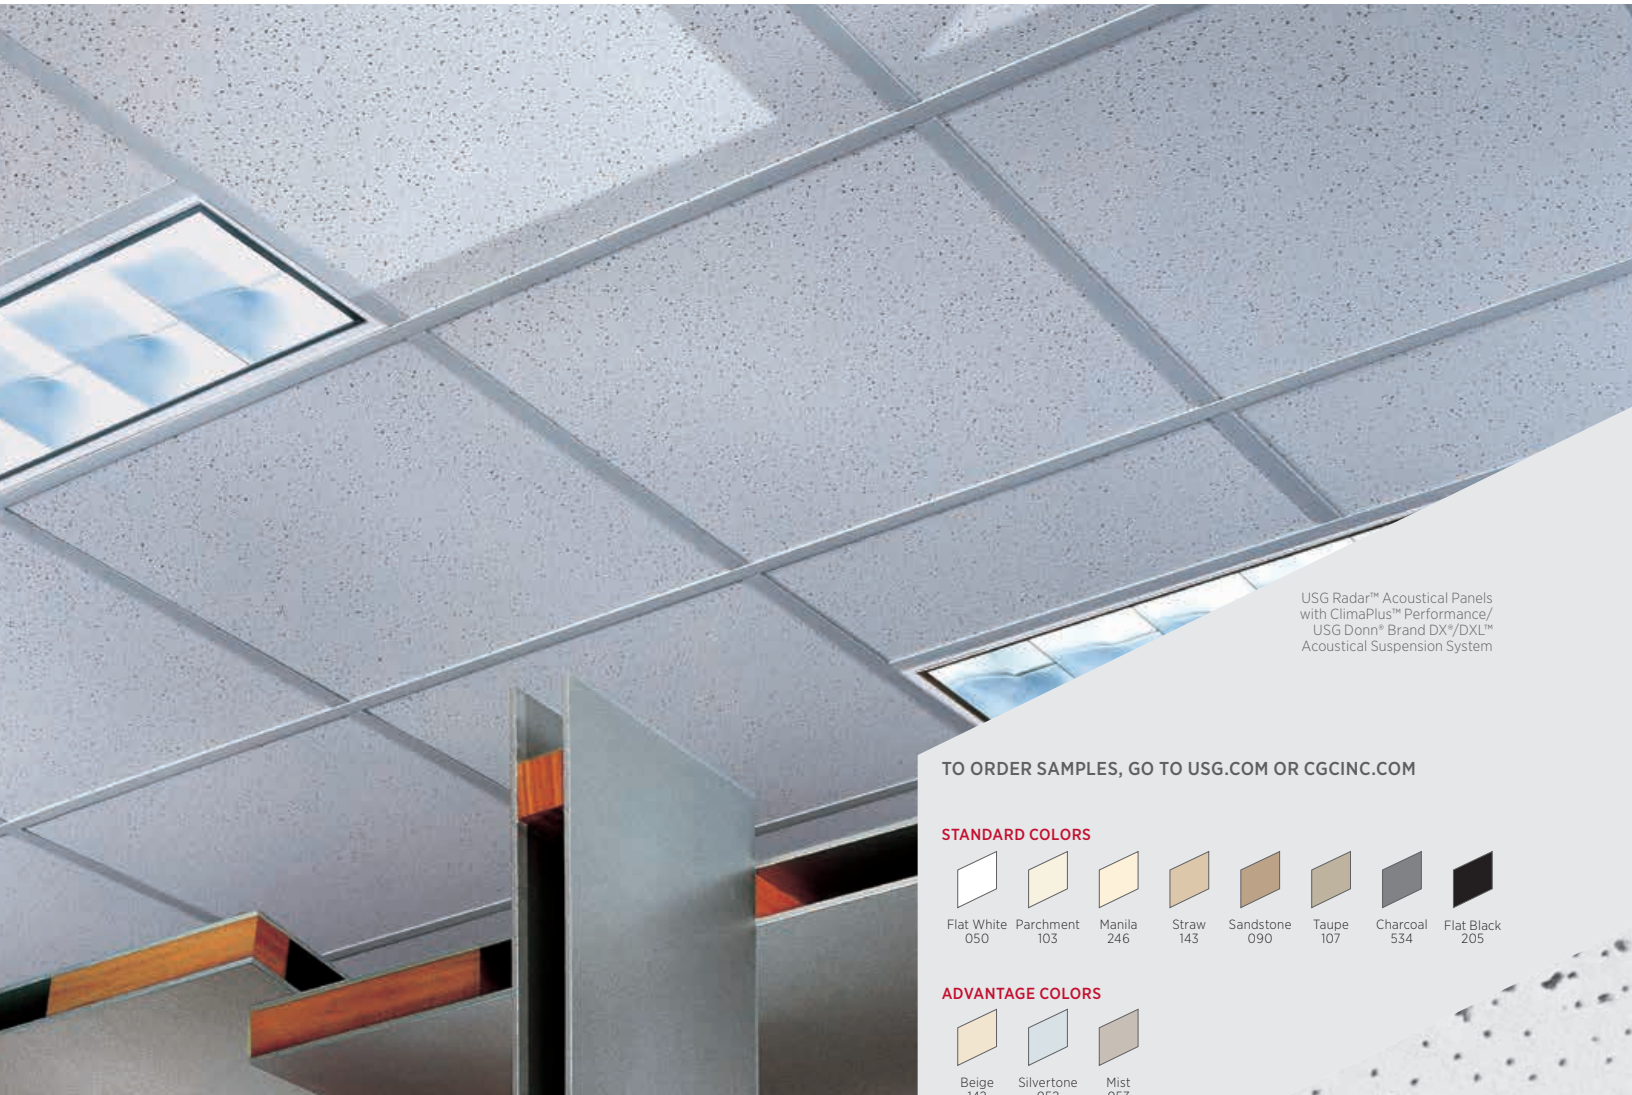


USG Radar™ Acoustical Panels
with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS



FEATURES AND BENEFITS

- Nondirectional pattern.
- High-durability panels are 55% more durable than standard panels.
- USDA Certified Biobased Product.¹²
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Optional Firecode® product designed to meet life-safety codes.


APPLICATIONS

- Schools
- Corridors
- Lobby areas
- Offices
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Lightly Textured Panel

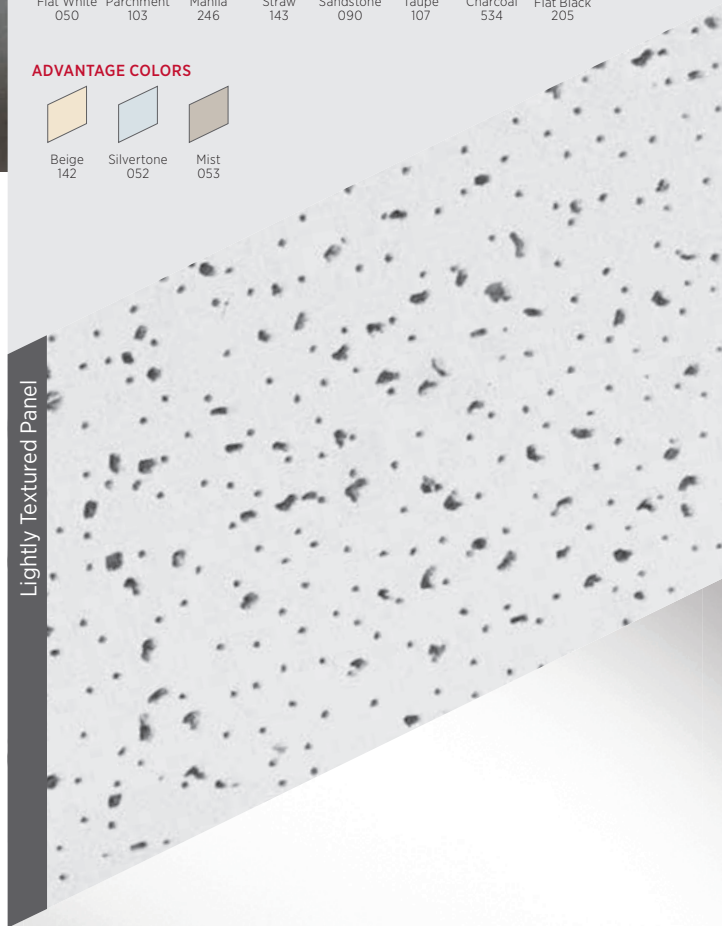

USG RADAR™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com



PRODUCT CERTIFIED
 FOR LOW CHEMICAL
 EMISSIONS:
 UL COM/CGC
 UL 2818

30 YEAR LIMITED SYSTEM
 WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

10 YEAR AVAILABILITY
 2210, 2215, 2220,
 2225, 2230, 2410,
 2415

HRC HIGH RECYCLED
 CONTENT



UL Classified

Edge	Panel Size Imperial Metric (mm)	Fire Rating ²	Item No. Imperial Metric (mm)	NRC	CAC Min.	LR ³	Color ^{5,6}	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
SQ 	2'x2'x5/8"	Class A	2210	0.55	33	0.84	White, Standard Beige, Mist, Silvertone	A, B, J	Low			25-34%	\$
	2'x2'x5/8"	Class A	2215	0.55	35	0.84	White	A	Low			48-51%	\$
	2'x4'x5/8" 600x1200x15	Class A	2410 ME2410	0.55	35	0.84	White, Standard Beige, Mist, Silvertone	A, J	Low			25-34%	\$
	2'x4'x5/8"	Class A	2415	0.55	35	0.84	White	A	Low			48-51%	\$
	2'x4'x5/8"	Class A	2410P ⁷	0.55	35	0.85	White	A, J	Low			25-34%	\$
SLT 	2'x2'x5/8" 600x600x15	Class A	2220 ME2220	0.55	33	0.84	White, Standard Beige, Mist, Silvertone (Flat Black or Charcoal Not Available)	C	Low			25-34%	\$
	2'x2'x5/8"	Class A	2225	0.55	35	0.84	White	C	Low			51-59% ¹⁰	\$
	2'x4'x5/8"	Class A	2420	0.55	35	0.84	White	C	Low			25-34%	\$
	2'x4'x5/8"	Class A	2425	0.55	35	0.84	White	C	Low			51-59% ¹⁰	\$
FLB 	2'x2'x5/8"	Class A	2230	0.55	33	0.84	White	D, F, G, I	Low			26-34%	\$
	2'x2'x5/8"	Class A	2235	0.55	35	0.84	White	E, H	Low			51-59% ¹⁰	\$
SQ 	2'x2'x5/8"	Class A	2207	0.55	35	0.84	White	A, B, J	Low			26%	\$
	2'x4'x5/8"	Class A	2407	0.55	35	0.84	White	A, J	Low			26%	\$
SLT 	2'x2'x5/8"	Class A	2227	0.55	35	0.84	White	C	Low			26%	\$
SF 	12'x12'x5/8"	Class A	2570	0.45	35	0.84	White	Adhesive Staple	Low			34-44%	\$\$\$

USG RADAR™ PANELS

USG RADAR™ HIGH-DURABILITY PANELS

USG RADAR™ TILE^{8,9}

Low Emissions (VOC)
 Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance*
 Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
 Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®
Abuse Resistant

GRID PROFILE OPTIONS

A USG DX™/DXL™	B ¹¹ USG Centricitee™ DXT™	C USG DX™/DXL™	D USG Centricitee™ DXT™	E USG Centricitee™ DXLT™	F USG Fineline® DXF™	G USG Fineline® 1/8 DXFF™	H USG Fineline® DXLF™	I USG Identitee® DXI™	J USG DXW™

PHYSICAL DATA/ FOOTNOTES

Product literature
 Data sheet: SC2127

ASTM E1264 classification
 Type III, Form 2, Pattern C, E

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A

Flame spread: 25 or less
 Smoke developed: 50 or less

UL Type
 FR-83

Weight
 0.61-1.15 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
 R-1.4 (5/8" Class A panels and tile)
 R-1.6 (Firecode® panels)

Maximum backloading
 See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

High-durability panels
 ASTM D1037—falling-ball impact test.

Metric sizes available
 Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items: see UL design details.
- LR values are shown as averages.
- For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- Metric available in White only.
- See Colors selector for more information.
- Includes plastic coating. Gardner Scrubbability tested to 3,000 cycles (ASTM D246).
- SF = staple flange.
- Not UL Classified for acoustics.
- High recycled content not available at all plants.
- Maximum 2'x2' with SQ edge panels.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2127/rev. 8-18
 © 2019 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXL, DXL, DXLF, DXLT, DXW, FINELINE, FIRECODE, IDENTITEE, RADAR, IT'S YOUR WORLD. BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG RADAR™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

USG Radar™ High-NRC Acoustical
Panels with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

Lightly Textured Panel

FEATURES AND BENEFITS

- Nondirectional all-purpose ceiling pattern.
- Balanced Acoustics available with 40 CAC for increased room-to-room speech privacy and 0.70 NRC for greater sound control in open-plan areas.
- High-NRC/High-CAC formulation helps comply with ANSI S12.60 classroom guidelines.⁵
- USDA Certified Biobased Product.⁸
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Firecode® product designed to meet life-safety codes.

APPLICATIONS

- Classrooms
- Conference rooms
- Open-office plans
- Privacy rooms

SUBSTRATE

- Wet-formed mineral fiber

USG RADAR™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



USG RADAR™
HIGH-CAC PANEL

USG RADAR™
HIGH-NRC PANEL⁵

USG RADAR™
HIGH-NRC/HIGH-CAC
PANELS⁵

UL Classified												
Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color ⁶	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
SQ	2'x4'x5/8"		22310	0.55	40	0.84	White	A,C	Low		48%	\$\$
SQ	2'x2'x7/8"		22421	0.70	35	0.84	White	A,B,C	Low		40%	\$\$
	2'x2'x3/4"		22111	0.70	35	0.84	White	A,B	Low		57%	\$\$
	2'x4'x3/4"		22311	0.70	35	0.84	White	A	Low		57%	\$\$
SLT	2'x2'x7/8"		22350	0.70	35	0.84	White	D	Low		37%	\$\$
	2'x2'x3/4"		22121	0.70	35	0.84	White	D	Low		57%	\$\$
	2'x4'x3/4"		22122	0.70	35	0.84	White	D	Low		57%	\$\$
FLB	2'x2'x7/8"		22370	0.70	35	0.84	White	E,F,H,I	Low		37%	\$\$
	2'x2'x3/4"		22127	0.70	35	0.84	White	E,G	Low		57%	\$\$
SQ	2'x2'x3/4"		22521	0.70	40	0.84	White	A,B	Low		57%	\$\$
	2'x4'x7/8"		22441	0.70	40	0.84	White	A,C	Low		37%	\$\$
	2'x4'x3/4"		22541	0.70	40	0.84	White	A	Low		57%	\$\$
SLT	2'x2'x3/4"		22523	0.70	40	0.84	White	D	Low		57%	\$
	2'x4'x7/8"		22360	0.70	40	0.84	White	D	Low		37%	\$\$
FLB	2'x2'x3/4"		22527	0.70	40	0.84	White	E,G	Low		57%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁴
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode[®]

GRID PROFILE OPTIONS

A USG DX*/DXL™	B ⁷ USG Centricitee™ DXT™/DXLT™	C USG DXW™	D USG DX*/DXL™	E USG Centricitee™ DXT™/DXLT™	F USG Fineline® DXF™	G USG Fineline® DXLF™	H USG Fineline® 1/8 DXFF™	I USG Identitee® DXI™

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2290

ASTM E1264 classification
Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FR-83

Online tools
usgdesignstudio.com or
cgcdesignstudio.com

Weight
1.15-1.36 lb./sq. ft.

Thermal resistance
R-1.6 (5/8" panels)
R-1.9 (3/4" panels)
R-1.8 (7/8" panels)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Panels can be cleaned easily with a soft brush or vacuum.

Notes
1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
2. Fire-rated items: see UL design details.
3. LR values are shown as averages.
4. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).

5. Helps comply with ANSI S12.60 classroom guidelines.

6. No Flat Black or "Deeptones" are available on reveal edge or USG Radar™ Firecode® panel.

7. Maximum 2'x2' with SQ edge panels.

8. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2290/rev. 8-18
© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXLF, DXLT, DXT, DXW, FINELINE, FIRECODE, IDENTITEE, RADAR, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG RADAR™ ILLUSION™ ACOUSTICAL PANELS


CLIMAPLUS™ PERFORMANCE



USG Radar™ Illusion™ Four/48 Panels
with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS



FEATURES AND BENEFITS

- Nondirectional pattern offers fast, efficient installation.
- Face scores create illusion of a smaller-scaled ceiling system.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Optional Firecode® product designed to meet life-safety codes.


APPLICATIONS

- Schools
- Corridors
- General offices
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Lightly Textured Panel

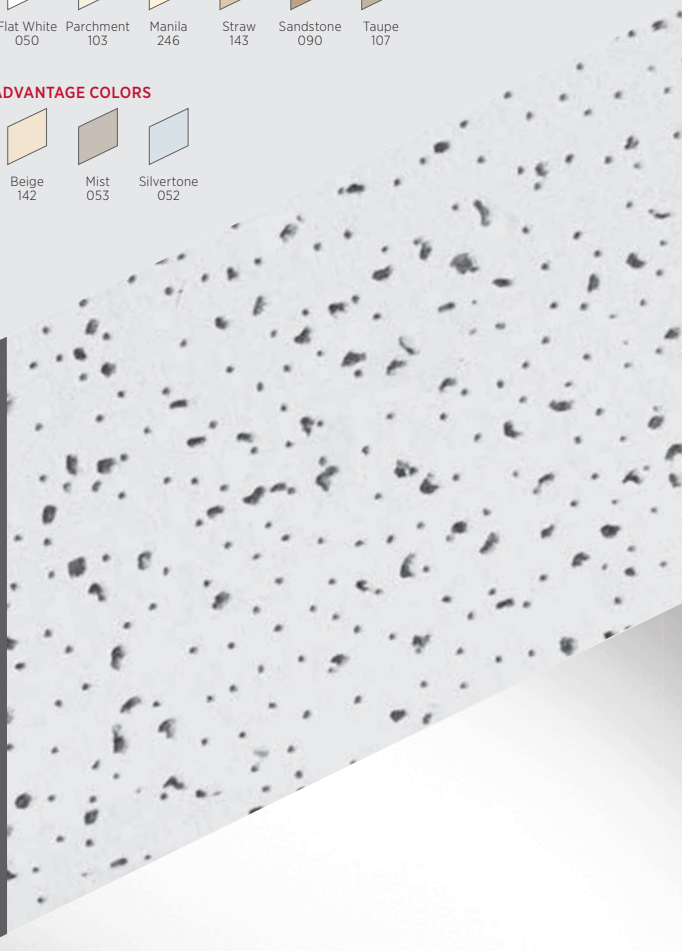

USG RADAR™ ILLUSION™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/CG
UL2818

30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection

10 YEAR
AVAILABILITY
2942, 2952, 2862,
2882

HRC HIGH RECYCLED
CONTENT

UL Classified

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
USG RADAR™ ILLUSION™ TWO/24 PANELS	SLT ⁶	Class A	2842	0.55	35	0.84	Standard colors (Flat Black and Charcoal not available) Advantage: Beige, Mist and Silvertone only.	A	Low		25-26%	\$\$
			2'x4'x3/4"	2846	0.55	35	0.84	White	A	Low		57%
USG RADAR™ ILLUSION™ FOUR/48 PANELS	ILT ⁷	Class A	2844	0.55	35	0.84	White	B,C	Low		25%	\$\$
	SLT ⁶		2'x4'x3/4"	2882	0.50	35	0.84	White	A	Low		25%
USG RADAR™ ILLUSION™ EIGHT/12 PANELS	ILT ⁷	Class A	2884	0.50	35	0.84	White	B,C	Low		25%	\$\$
	SLT ⁶		2'x4'x3/4"	2852	0.55	35	0.84	White	A	Low		25%
USG RADAR™ ILLUSION™ 32/6 PANELS	ILT ⁷	Class A	2854	0.55	35	0.84	White	B,C	Low		25%	\$\$
	SLT ⁶		2'x4'x3/4"	2862	0.50	35	0.84	White	A	Low		25%
	ILT ⁷	Class A	2864	0.50	35	0.84	White	B,C	Low		25%	\$\$

PATTERNS

Illusion™ Two/24	Illusion™ Four/48	Illusion™ Eight/12	Illusion™ 32/6
The look of 2'x2' panels	The look of 48"x6" linear strips	The look of 12"x12" tile	The look of 6"x6" tile

<p>Low Emissions (VOC) Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.</p>	<p>ClimaPlus™ Warranty Performance* Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.</p>	<p>High Recycled Content Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.</p>	<p>Firecode®</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------

GRID PROFILE OPTIONS

A USG DX®/DXL™	B USG Centricitee™ DXT™	C USG Identitee™ DXI™

PHYSICAL DATA/ FOOTNOTES

<p>Product literature Data sheet: SC2126</p> <p>ASTM E1264 classification Type III, Form 2, Pattern CEK</p> <p>ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A Flame spread: 25 or less Smoke developed: 50 or less</p> <p>UL Type FR-83</p> <p>Weight 0.87-1.2 lb./sq. ft.</p>	<p>Online tools usgdesignstudio.com or cgcdesignstudio.com</p> <p>Thermal resistance R-1.7 (Class A) R-1.9 (Firecode®)</p> <p>Maximum backloading See <i>USG 30-Year Limited System Warranty Commercial Applications (SC2102)</i>.</p> <p>Maintenance Can be cleaned easily with a soft brush or vacuum.</p> <p>Metric sizes available Contact sales for minimum quantities and lead times.</p>	<p>Notes</p> <ol style="list-style-type: none"> For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com. Fire-rated items: see UL design details. LR values are shown as averages. For details, see <i>USG 30-Year Limited System Warranty Commercial Applications (SC2102)</i> and <i>ClimaPlus™ Ceilings Certification of Performance (SC2451)</i>. See Colors selector for more information. No Flat Black or "Deeptones" are available on reveal edge or USG Radar™ Firecode® panel. Panels have a 15/16" routing. Panels have a 9/16" routing.
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2126/rev. 9-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXI, DXL, DXT, FIRECODE, IDENTITEE, ILLUSION, RADAR, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG RADAR™ EDUCATION ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

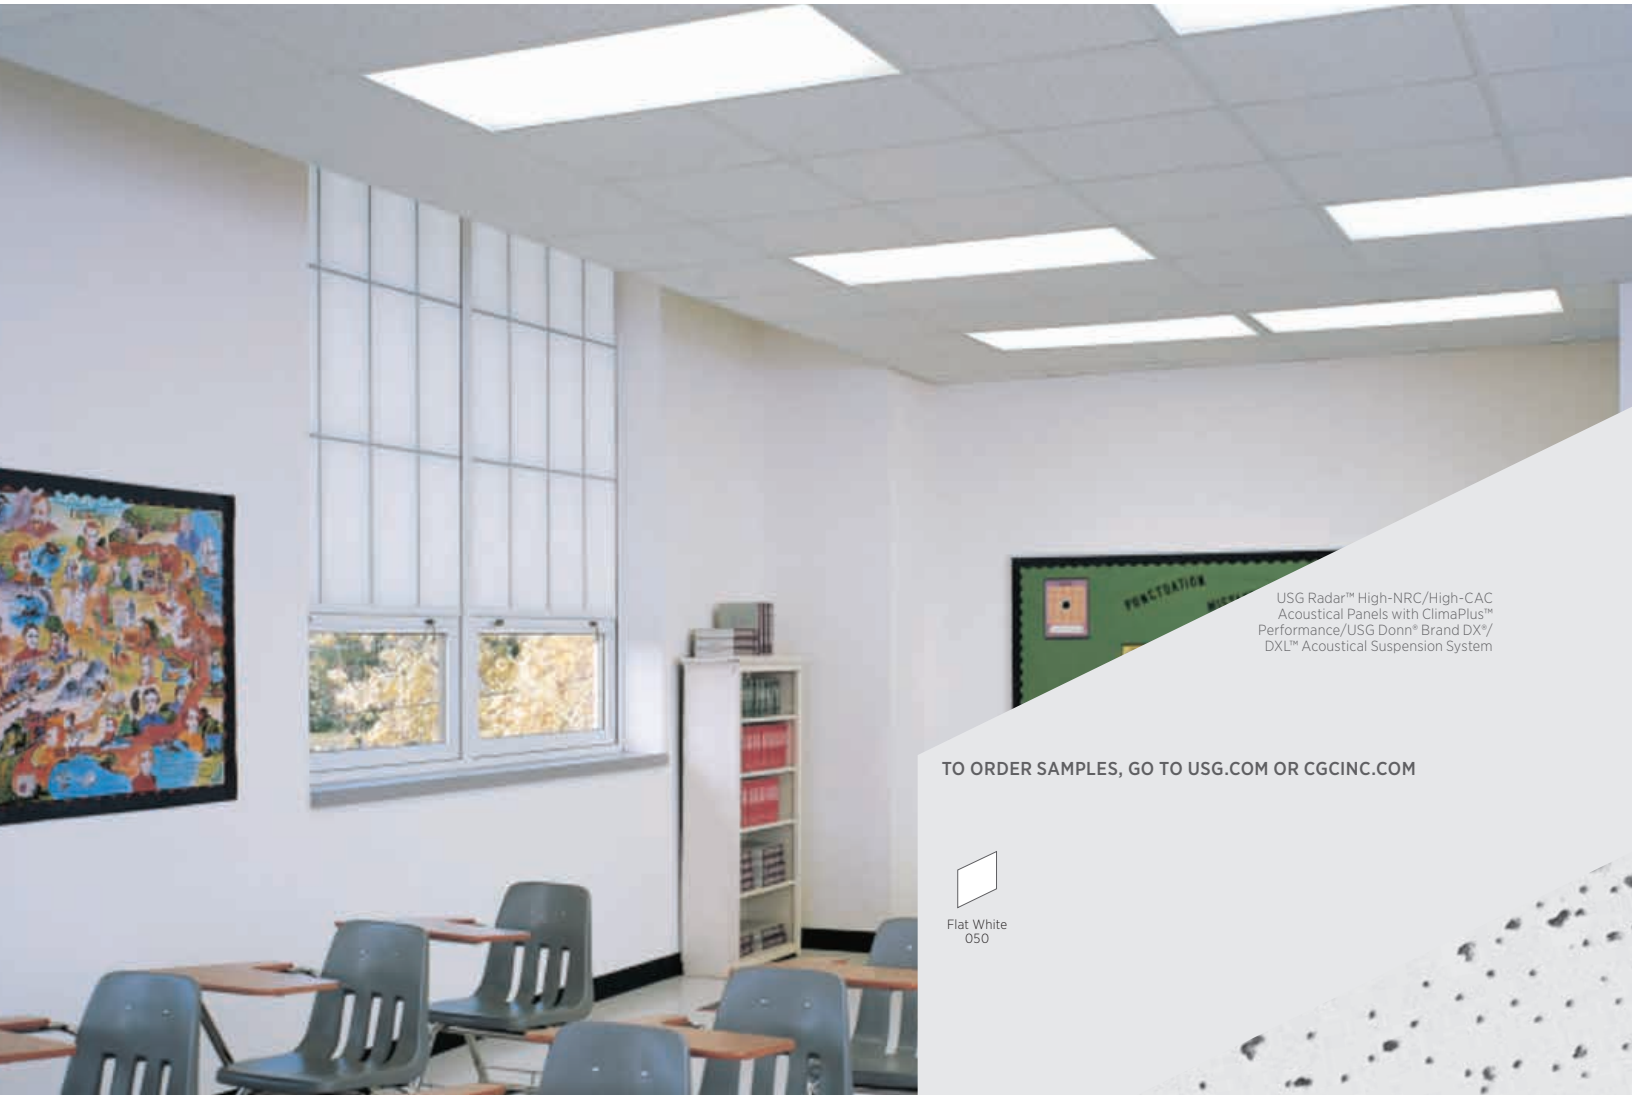

USG Radar™ High-NRC/High-CAC
Acoustical Panels with ClimaPlus™
Performance/USG Donn® Brand DX*/
DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Nondirectional pattern reduces installation time and waste.
- Excellent sound absorption.
- Balanced Acoustics. High-NRC and High-CAC.
- Available with 40 CAC for increased room-to-room speech privacy and 0.70 NRC for greater sound control in classrooms.
- High-NRC/High-CAC formulation helps comply with ANSI S12.60 classroom guidelines (LEED for Schools).⁶
- High-durability panels are 55% more durable than standard panels.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Optional Firecode® product designed to meet life-safety codes.
- USDA Certified Biobased Product.⁷

APPLICATIONS

- Classrooms
- Offices
- Cafeterias
- Music rooms
- Corridors
- Libraries/media rooms

SUBSTRATE

- Wet-formed mineral fiber

Lightly Textured Panel



USG RADAR™ EDUCATION ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



UL Classified

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
SQ 	2'x2'x5/8"	Class A	2207	0.55	35	0.84	White	A,B,C	Low			26%	\$\$
	2'x4'x5/8"	Class A	2407	0.55	35	0.84	White	A,C	Low			26%	\$\$
SLT 	2'x2'x5/8"	Class A	2227	0.55	35	0.84	White	D	Low			26%	\$\$
SQ 	2'x2'x7/8"	Class A	22421	0.70	35	0.84	White	A,B,C	Low		—	40%	\$\$
	2'x2'x3/4"		22111	0.70	35	0.84	White	A,B	Low		—	57%	\$\$
SLT 	2'x2'x7/8"	Class A	22350	0.70	35	0.84	White	D	Low		—	37%	\$\$
	2'x2'x3/4"		22121	0.70	35	0.84	White	D	Low		—	57%	\$\$
FLB 	2'x4'x3/4"		22122	0.70	35	0.84	White	D	Low		—	57%	\$\$
	2'x2'x7/8"	Class A	22370	0.70	35	0.84	White	E,F,G,H	Low		—	37%	\$\$
SQ 	2'x2'x3/4"		22127	0.70	35	0.84	White	E,I	Low		—	57%	\$\$
	2'x4'x7/8"	Class A	22441	0.70	40	0.84	White	A,C	Low		—	37%	\$\$
SLT 	2'x4'x3/4"		22541	0.70	40	0.84	White	A	Low		—	57%	\$\$
	2'x2'x3/4"		22523	0.70	40	0.84	White	D	Low		—	57%	\$\$
SQ 	2'x4'x7/8"	Class A	22360	0.70	40	0.84	White	D	Low		—	37%	\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®

Abuse Resistant

GRID PROFILE OPTIONS

A USG DX®/DXL™	B ⁸ USG Centricitee™ DXLT™	C USG DXW™	D USG DX®/DXL™	E USG Centricitee™ DXT™/DXLT™	F USG Fineline® DXF™	G USG Fineline® 1/8 DXFF™	H USG Identitee® DXI™	I USG Fineline® DXLI™

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2514

ASTM E1264 classification
Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A

Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FR-83

Weight
1.15–1.36 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.6 (5/8" panels)
R-1.9 (3/4" panels)
R-1.8 (7/8" panels)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Panels can be cleaned easily with a soft brush or vacuum.

High-durability panels
Ball hardness as tested per ASTM C367.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items: see UL design details.
- LR values are shown as averages.
- Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold and mildew. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).

- No Flat Black or "Deeptones" are available on reveal edge or USG Radar™ Firecode® panel.
- Helps comply with ANSI S12.60 classroom guidelines and LEED for Schools EQ prerequisite 3: Min. Acoustical Performance.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.
- Maximum 2'x2' with SQ edge panels.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2514/rev. 9-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXL, DXL, DXLF, DXLT, DXW, FINELINE, FIRECODE, IDENTITEE, RADAR, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG RADAR™ OPEN PLAN ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG Radar™ Open Plan
Acoustical Panels with ClimaPlus™
Performance/USG Donn® Brand
DX®/DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Balanced Acoustics.
- Nondirectional all-purpose ceiling pattern.
- 0.75 NRC for increased sound control in open-plan areas.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- High-NRC product helps comply with ANSI S12.60 classroom guidelines.


APPLICATIONS

- Open-office plans
- Classrooms
- Conference rooms
- Privacy rooms

SUBSTRATE

- Wet-formed mineral fiber

Lightly Textured Panel

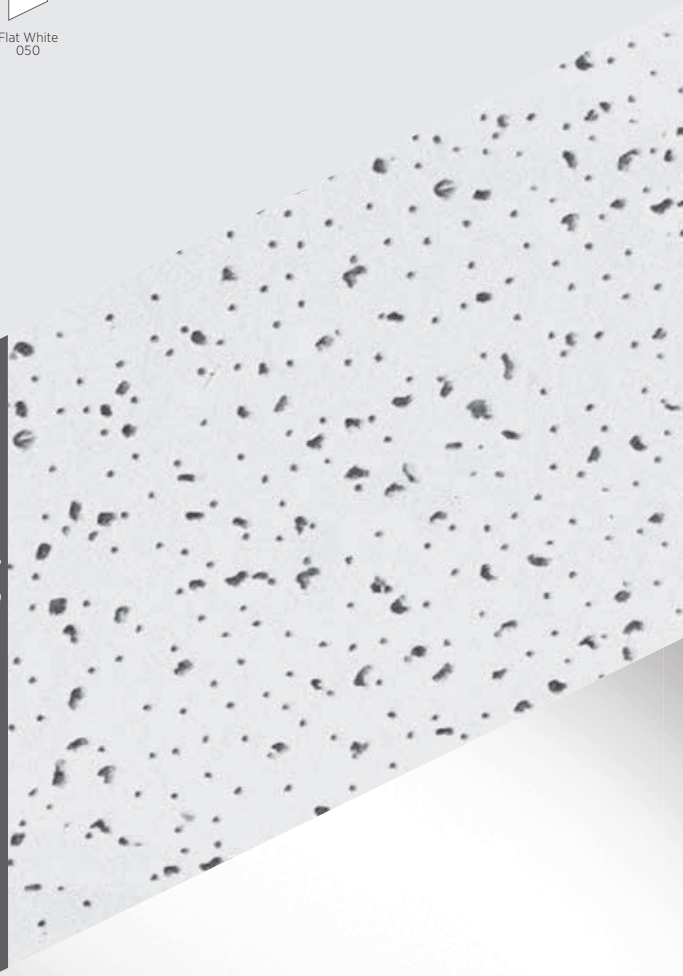

USG RADAR™ OPEN PLAN ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection

BA BALANCED ACOUSTICS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/CG
UL2818

USG RADAR™ OPEN PLAN PANELS

Edge	Panel Size	Fire Rating	Item No.	UL Classified				Color ⁴	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC Min.	LR ²							
 SQ	2'x2'x7/8"	Class A	22320	0.75	35	0.84	White	A,B,C	Low		38%	\$\$	
	2'x4'x7/8"	Class A	22325	0.75	35	0.84	White	A,C	Low		38%	\$\$	
 SLT	2'x2'x7/8"	Class A	22340	0.75	35	0.84	White	D	Low		38%	\$\$	
	2'x4'x7/8"	Class A	22345	0.75	35	0.84	White	D	Low		38%	\$\$	
 FLB	2'x2'x7/8"	Class A	22330	0.75	35	0.84	White	E,F,G,H	Low		38%	\$\$	
	2'x4'x7/8"	Class A	22335	0.75	35	0.84	White	E,F,G,H	Low		38%	\$\$	









Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

A USG DX"/DXL™	B ⁵ USG Centricitee™ DXT™	C USG DXW™	D USG DX"/DXL™	E USG Centricitee™ DXT™	F USG Finline® DXF™	G USG Finline® 1/8 DXFF™	H USG Identitee® DXI™
							

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2565

ASTM E1264 classification
Type III, Form 2, Pattern C, E

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
0.97 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.8 (7/8" panels)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Panels can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- No Flat Black or "Deeptones" are available on any reveal edge USG Radar™ panel.
- Maximum 2'x2' with SQ edge panels.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2565/rev. 9-18
© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, DXW, FINELINE, IDENTITEE, RADAR, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.




USG RENDITIONS™ ANIMATIONS ACOUSTICAL PANELS

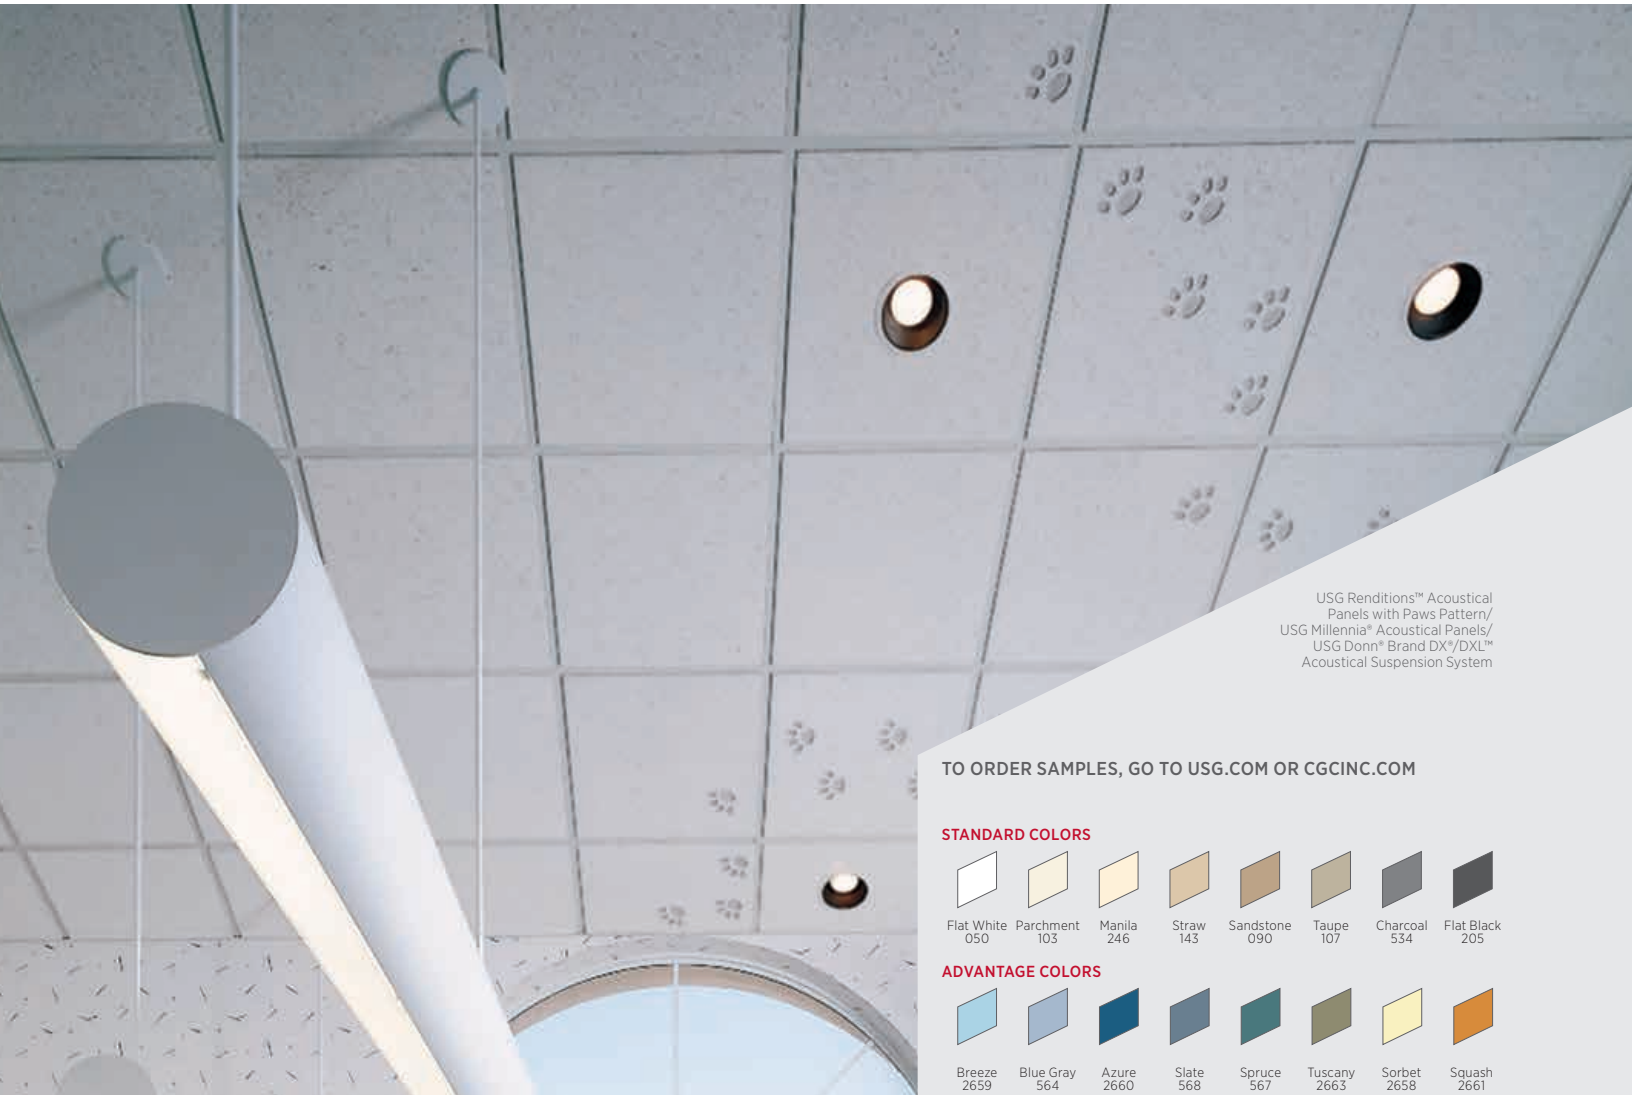


USG Renditions™ Acoustical Panels with Paws Pattern/
USG Millennia® Acoustical Panels/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS

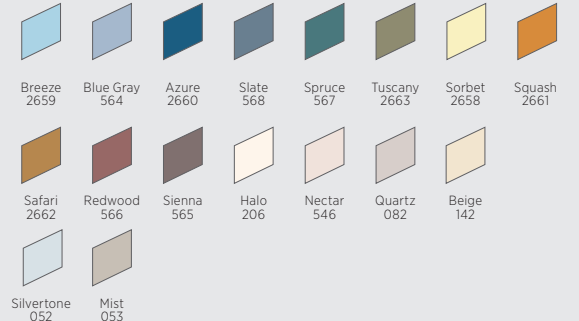

PREMIUM COLORS



FEATURES AND BENEFITS

- Computer-generated, face-routed designs combined with the beautiful fine texture of USG Eclipse™, Frost™ or Millennia® Acoustical Panels.
- Numbered ceiling panels match shop drawings for easy installation.
- Custom designs are available.
- All panels available in Flat White. USG Frost panels available in Standard, Advantage, Premium and custom colors.
- Ceiling panels can be made from your sketches, AutoCAD® or Revit® drawings.

APPLICATIONS

- Childcare
- Educational
- Healthcare
- Theme and whimsical areas

SUBSTRATES

- Wet-formed mineral fiber (USG Millennia, USG Eclipse)
- Cast mineral fiber (USG Frost)

USG RENDITIONS™ ANIMATIONS ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative











FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

PRODUCT INFORMATION

Fire Rating	Color ²	Typical Sizes	Available Panels and Edges					
Class A	All panels available in Flat White. USG Frost™ panels available in Standard, Advantage, Premium and custom colors.	2'x2'		SQ	SLT	SLB	FL	FLB
			USG Eclipse™	•	•	—	•	—
			USG Frost™	—	—	•	•	•
			USG Millennia®	•	•	—	—	•

PATTERNS¹

Aquarium Five-Panel Series	Barefootin' 12-Panel Series	Blocks 13-Panel Series	Fast Food Six-Panel Series	Flying Things 13-Panel Series
				
Leaves 13-Panel Series	Night Sky Eight-Panel Series	Paws 29-Panel Series	Railway 26-Panel Series	Stuffed Animals Four-Panel Series
				

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: IC327

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Notes

- For all panels in each of the series in PDF, AutoCAD® or Revit®, visit usgdesignstudio.com or cgcdesignstudio.com.
- See Colors selector for more information.

Notice

Panels with USG Renditions™ face routing do not carry USG ClimaPlus™ nonsag limited system warranty. Refer to standard commercial ceilings systems warranty.

AutoCAD and Revit are trademarks of Autodesk Inc.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC327/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, DONN, DX, DXL, ECLIPSE, FROST, MILLENNIA, RENDITIONS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.


USG RENDITIONS™ BOUNDARIES ACOUSTICAL PANELS




USG Renditions™ Acoustical Panels
with Boundaries Pattern/
USG Frost™ Acoustical Panels/
USG Donn® Brand Centricitee™ DXT™/
DXLT™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS

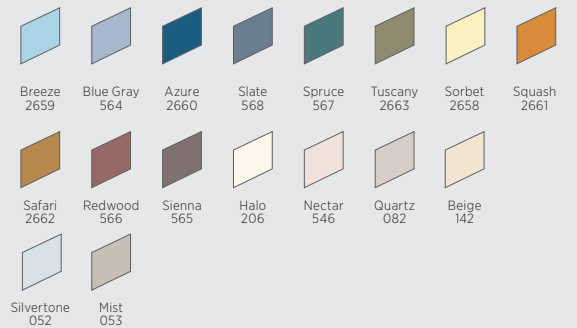

PREMIUM COLORS



FEATURES AND BENEFITS

- Computer-generated, face-routed designs combined with the beautiful fine texture of USG Eclipse™, Frost™ or Millennia® Acoustical Panels.
- Numbered ceiling panels match shop drawings for easy installation.
- Available in Square, Finline and Shadowline edges.
- Custom designs available.
- All panels available in Flat White. USG Frost panels available in Standard, Advantage, Premium and custom colors.
- Ceiling panels can be made from your sketches, AutoCAD® or Revit® drawings.

APPLICATIONS

- Educational
- Healthcare
- Retail space
- Theme and whimsical areas

SUBSTRATES

- Wet-formed mineral fiber (USG Millennia, USG Eclipse)
- Cast mineral fiber (USG Frost)

USG RENDITIONS™ BOUNDARIES ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative



















TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION

Fire Rating	Color ²	Typical Sizes	Available Panels and Edges					
Class A	All panels available in Flat White. USG Frost™ panels available in Standard, Advantage, Premium and custom colors.	2'x2'		SQ	SLT	SLB	FL	FLB
			USG Eclipse™	•	•	—	•	—
			USG Frost™	—	—	•	•	•
			USG Millennia®	•	•	—	—	•

PATTERNS¹

USG Renditions™ I Outside Corner	USG Renditions™ I Inside Corner	USG Renditions™ II Outside Corner	USG Renditions™ II Inside Corner
			
USG Renditions™ III Outside Corner	USG Renditions™ III Inside Corner	Straight Line	
			
Curls-S	Curls-SE	Deco-SE	Deco-S
			
Dentil-2	Dentil-SE	Dentil-S	
			
Diagonal-SE	Diagonal-S	Tara-SE	Tara-S
			

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: IC332

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Notes
1. For all panels in each of the series in PDF, AutoCAD® or Revit®, visit usgdesignstudio.com or cgcdesignstudio.com.
2. See Colors selector for more information.

Notice
Panels with USG Renditions™ face routing do not carry the USG ClimaPlus™ nonsag limited system warranty. Refer to standard commercial ceilings systems warranty.

AutoCAD and Revit are trademarks of Autodesk Inc.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.


IC332/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DXLT, DXT, ECLIPSE, FROST, MILLENNIA, RENDITIONS, IT'S YOUR WORLD, BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.


USG RENDITIONS™ CUSTOM ACOUSTICAL PANELS

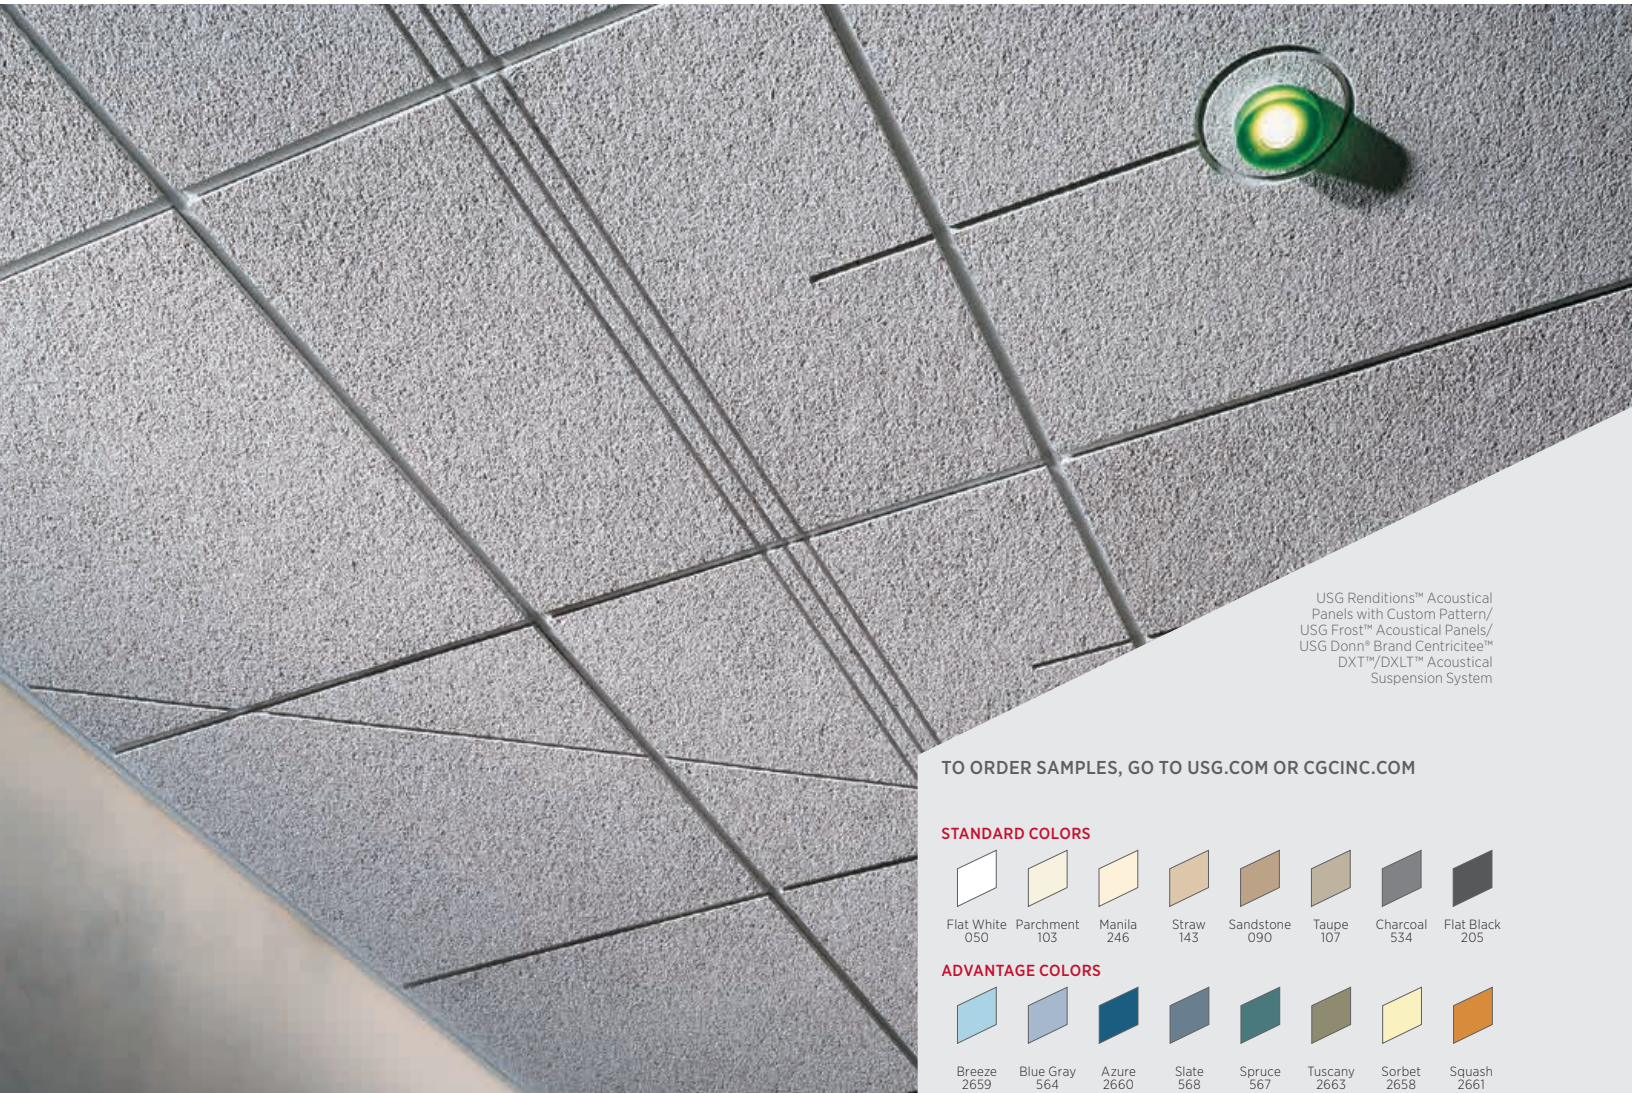


USG Renditions™ Acoustical Panels with Custom Pattern/
USG Frost™ Acoustical Panels/
USG Donn® Brand Centricitee™
DXT™/DXLT™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS

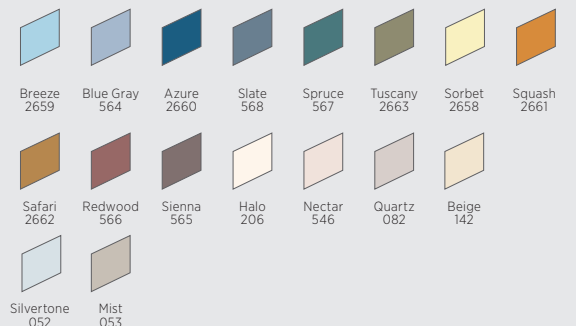

PREMIUM COLORS



FEATURES AND BENEFITS

- Computer-generated, face-routed designs combined with the beautiful fine texture of USG Eclipse™, Frost™ or Millennia® Acoustical Panels.
- Custom patterns allow a unique ceiling statement.
- Numbered ceiling panels match shop drawings for easy installation.
- Available in Square, Finline and Shadowline edges.
- Ceiling panels can be made from your sketches, AutoCAD® or Revit® drawings.
- All panels available in Flat White. USG Frost panels available in Standard, Advantage, Premium and custom colors.

APPLICATIONS

- Educational
- Healthcare
- Retail space
- Theme and whimsical areas

SUBSTRATES

- Wet-formed mineral fiber (USG Millennia, USG Eclipse)
- Cast mineral fiber (USG Frost)

USG RENDITIONS™ CUSTOM ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative




TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION

Fire Rating	Color ²	Typical Sizes	Available Panels and Edges					
Class A	All panels are available in Flat White. USG Frost™ panels are available in Standard, Advantage, Premium and custom colors.	2'x2'		SQ	SLT	SLB	FL	FLB
			USG Eclipse™	•	•	—	•	—
			USG Frost™	—	—	•	•	•
			USG Millennia®	•	•	—	—	•

PATTERNS¹

Crystal	Square to Square	Custom Logo
		

PHYSICAL DATA/ FOOTNOTES

Product literature
 Data sheet: IC356

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Notes
 1. For all panels in each of the series in PDF, AutoCAD® or Revit®, visit usgdesignstudio.com or cgcdesignstudio.com.

2. See Colors selector for more information.

Notice
 Panels with USG Renditions™ face routing do not carry the USG ClimaPlus™ nonsag limited system warranty. Refer to standard commercial ceilings systems warranty.

AutoCAD and Revit are trademarks of Autodesk Inc.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC356/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DXLT, DXT, ECLIPSE, FROST, MILLENNIA, RENDITIONS, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG ROCK FACE® ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG Rock Face® Acoustical Panels
with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Specially compounded textured surface with hard core.
- Perfect for increased abuse resistance and sag resistance.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Firecode® product designed to meet life-safety codes.


APPLICATIONS

- Athletic areas and exercise rooms
- Schools
- Corridors
- Dormitory rooms

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel

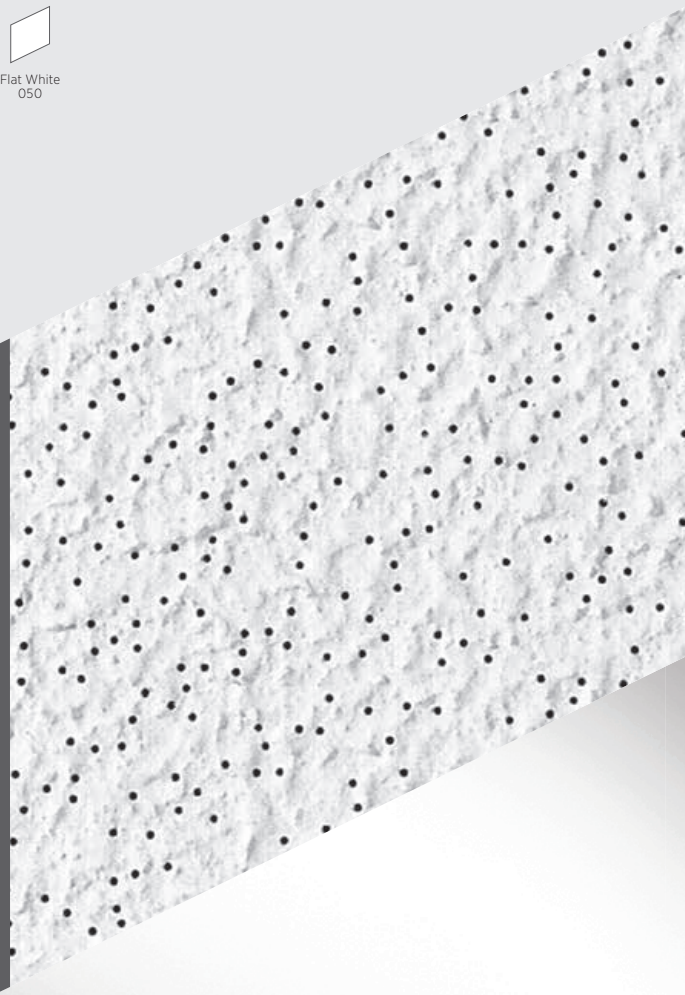

USG ROCK FACE® ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818

30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection

HRC HIGH RECYCLED
CONTENT

UL Classified

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
SQ	2'x2'x5/8"		56335	0.55	35	0.86	White	A,B,C	Low			50%	\$\$
	2'x4'x5/8"		56380	0.55	35	0.86	White	A,B,C	Low			50%	\$\$
SLT	2'x2'x3/4"		55483	0.55	35	0.86	White	D,E,F	Low			50%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance*
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode*
Abuse Resistant


USG ROCK FACE® PANELS

GRID PROFILE OPTIONS

A USG DX™/DXL™	B USG DXLA™	C USG ZXLA™	D USG DX™/DXL™	E USG DXLA™	F USG ZXLA™

PANEL RETENTION CLIP 20428

Attaches to 1-1/2" main tees and cross tees behind lay-in ceilings. The retention clips help prevent panel displacement from incidental contact. Recommended with USG Rock Face® ceiling panels for impaction-resistant systems.



See this clip and other accessories in the Accessory Guide AC2396.

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1840

ASTM E1264 classification
Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FR-83

Weight
1.0-1.3 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.6 (5/8" panels)
R-1.9 (3/4" panels)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Durability tests
ASTM D1037: Tested to 45 lbf. for a 1/4" depression by a Janka ball.
ASTM D5420: Tested to 3.5 in./lbf. for impaction.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items: see UL design details.
- LR values are shown as averages.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications (SC2102)* and *ClimaPlus™ Ceilings Certification of Performance (SC2451)*.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1840/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, CLIMAPLUS, DONN, DX, DXL, DXLA, FIRECODE, ROCK FACE, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG SANDRIFT™ ACOUSTICAL PANELS


CLIMAPLUS™ PERFORMANCE

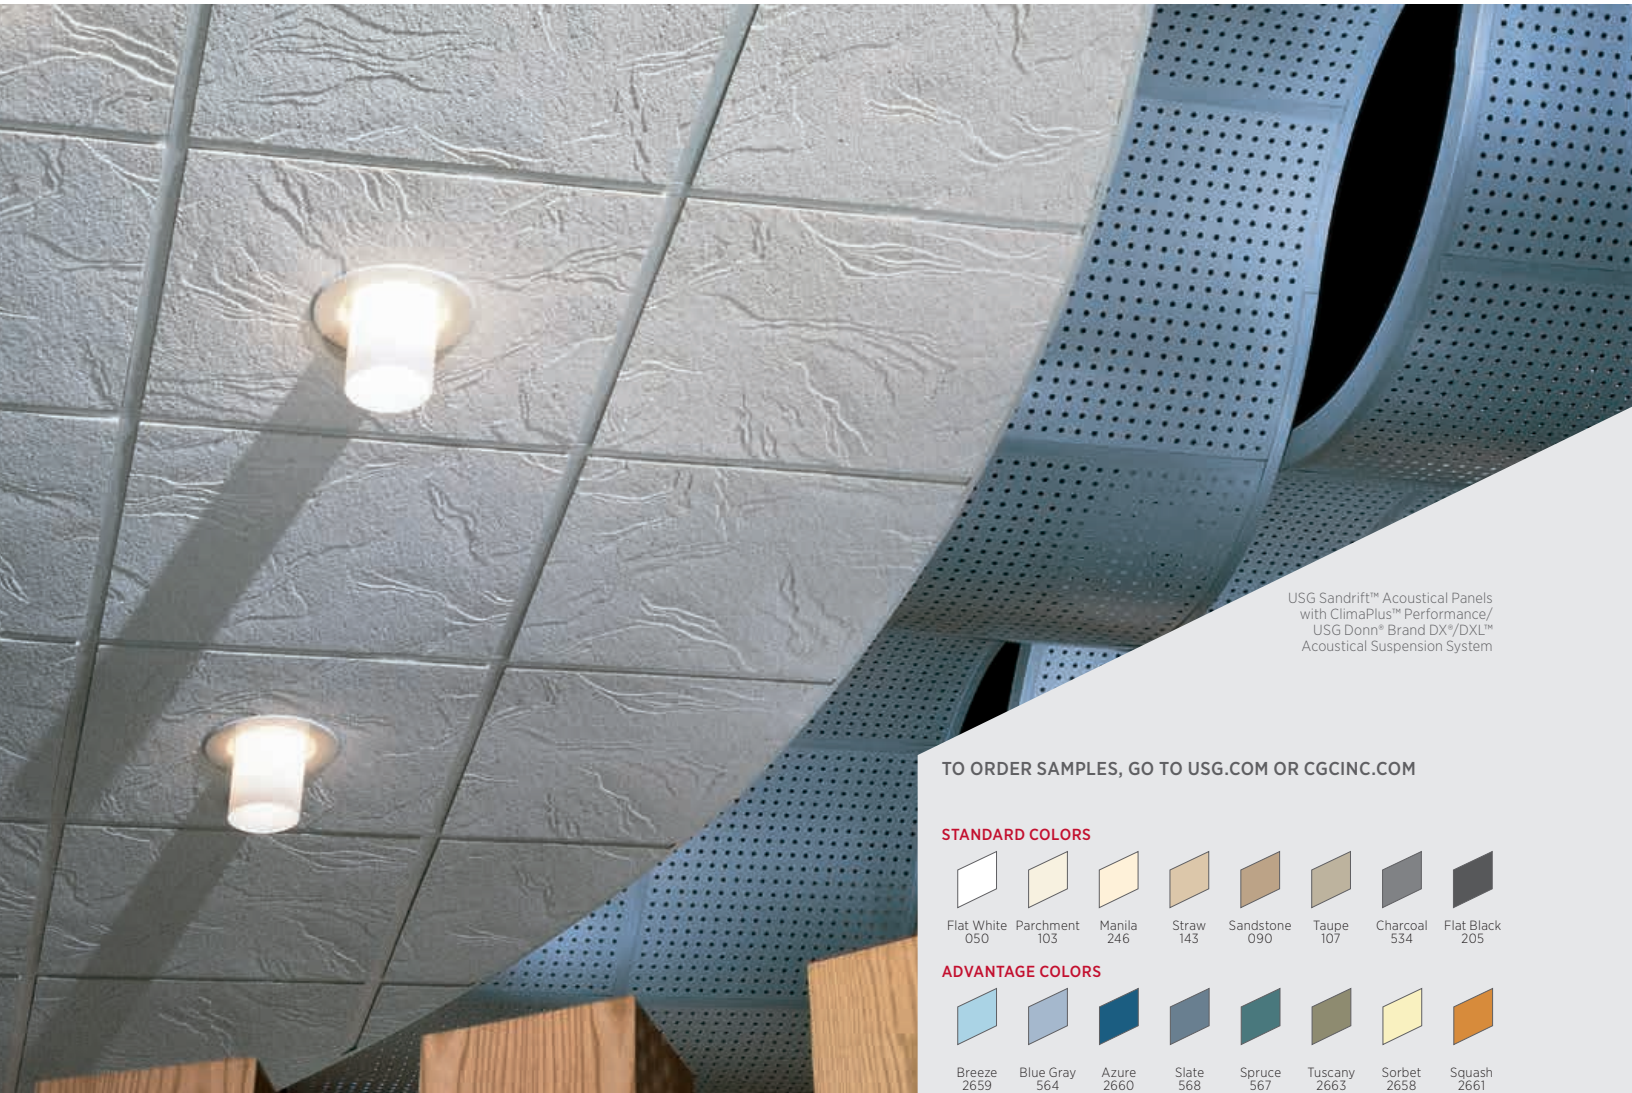


USG Sandrift™ Acoustical Panels with ClimaPlus™ Performance/USG Donn® Brand DX®/DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS

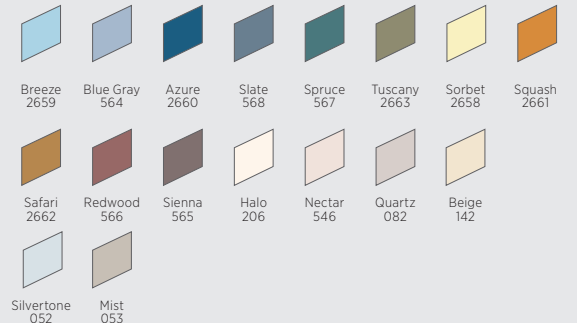

PREMIUM COLORS



FEATURES AND BENEFITS

- Uniquely textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Integral color masks nicks and scratches.
- Optional Firecode® product designed to meet life-safety codes.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- USDA Certified Biobased Product.⁶
- Zero VOC emissions exceed CA Specification 01350.
- Balanced Acoustics. High-NRC and High-CAC.

APPLICATIONS

- Conference and lobby areas
- Department stores
- Entertainment and gaming areas
- Executive offices
- Restaurants

SUBSTRATE

- Cast mineral fiber

USG SANDRIFT™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE


ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS:
 ULCOM/GG
 UL 2818



USG SANDRIFT™ PANELS

USG SANDRIFT™ BASIC PANELS

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
SL	2'x2'x3/4" Paper-Back	Class A	808	0.70	38	0.83	White Standard Advantage Premium	A	Zero			72%	\$\$\$
FL	2'x2'x3/4" Paper-Back	Class A	809	0.70	38	0.83	White Standard Advantage Premium	B,C,D,E	Zero			72%	\$\$\$
SL	2'x2'x3/4" Paper-Back	Class A	815	0.55	35	0.83	White	A	Zero	—		73%	\$\$\$

Zero Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®

Abuse Resistant

GRID PROFILE OPTIONS

A	B	C	D	E
USG DX™/DXL™	USG Centricitee™ DXT™	USG Fineline™ DXF™	USG Fineline™ 1/8 DXFF™	USG Identitee™ DXI™

PHYSICAL DATA/ FOOTNOTES

Product literature
 Data sheet: SC1841

ASTM E1264 classification
 Type III, Form 4, Pattern Z

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

UL Type
 AP, AP-1, AP-2, AP-3

Weight
 1.60 lb./sq. ft. (Class A)
 1.75 lb./sq. ft. (Firecode® weight)

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
 R-1.7 (Class A)
 R-1.3 (Firecode®)

Maximum backloading
 See *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

Texture
 The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

- Notes**
- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
 - Fire-rated items: see UL design details.
 - LR values are shown as averages.
 - For details, see *USG 30-Year Limited System Warranty Commercial Applications (SC2102)* and *ClimaPlus™ Ceilings Certification of Performance (SC2451)*.
 - To highlight the unique texture of USG Sandrift™ Acoustical Panels with ClimaPlus™ Performance, choose light colors. See Colors selector for more information.
 - This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1841/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, FIRECODE, IDENTITEE, SANDRIFT, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG SHEETROCK® BRAND LAY-IN GYPSUM CEILING PANELS

CLIMAPLUS™ PERFORMANCE



USG Sheetrock® Brand
Lay-In Gypsum Ceiling Panel
with ClimaPlus™ Performance/
USG Donn® Brand ZXLA™ Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- USG Clean Room™ panels have a vinyl-laminated face with sealed back and edges for use in Clean Room environments up to Class 100/ISO 5.
- Washable and scrubbable finish—impact and scratch resistant.
- USDA Certified Biobased Product.⁷
- Panels meet USDA/FSIS requirements for food processing areas.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Kitchens and food preparation areas
- Restrooms and utility areas
- Locker rooms
- Parking garages
- Exterior protected soffits

SUBSTRATE

- Gypsum panel

Smooth-Textured Panel - Vinyl

USG SHEETROCK® BRAND LAY-IN GYPSUM CEILING PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



UL Classified

Edge	Panel Size	Fire Rating ²	Item No.	NRC ⁴	CAC Min.	LR ³	Color	Abuse Resistant	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost
SQ 	2'x2'x1/2"		3260	-	35	0.77	White		A, B, C, D	Low	80%	\$
	2'x4'x1/2"		3270	-	40	0.77	White		A, B, C, D	Low	80%	\$
SQ 	2'x4'x1/2"		3200	-	40	0.77	White		A, B, C, D	Low	80%	\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®



USG SHEETROCK® BRAND LAY-IN CEILING PANEL

USG SHEETROCK® BRAND LAY-IN CEILING PANEL CLEAN ROOM™⁵

GRID PROFILE OPTIONS

PHYSICAL DATA/
FOOTNOTES

A USG DX®/DXL™	B USG DXLA™	C USG ZXLA™	D ⁶ USG CE™

Product literature
Data sheet: SC1820

ASTM E1264 classification
Type XX, Pattern G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FC-CB

Weight
1/2" = 2.00 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
1/2" = R-0.45

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a damp sponge. Use mild detergent and water—do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

Application considerations
Product is directional. Install with all manufactured edges parallel and in the same direction.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items: see UL design details.
- LR values are shown as averages.
- NRC rating is 0.10. USG does not consider a ceiling panel to be acoustically rated if NRC is less than 0.50.
- Field-cut edges of USG Clean Room™ panels must be sealed with white latex paint.
- Clean Room-rated applications require a suspension system with gasketed tee flanges such as USG Donn® Brand CE™.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1820/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
United States Gypsum Company
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, CE, CLEAN ROOM, CLIMAPLUS, DONN, DX, DXL, DXLA, FIRECODE, SHEETROCK, ZXLA, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG CEILINGS® KITCHEN LAY-IN PANEL

CLIMAPLUS™ PERFORMANCE

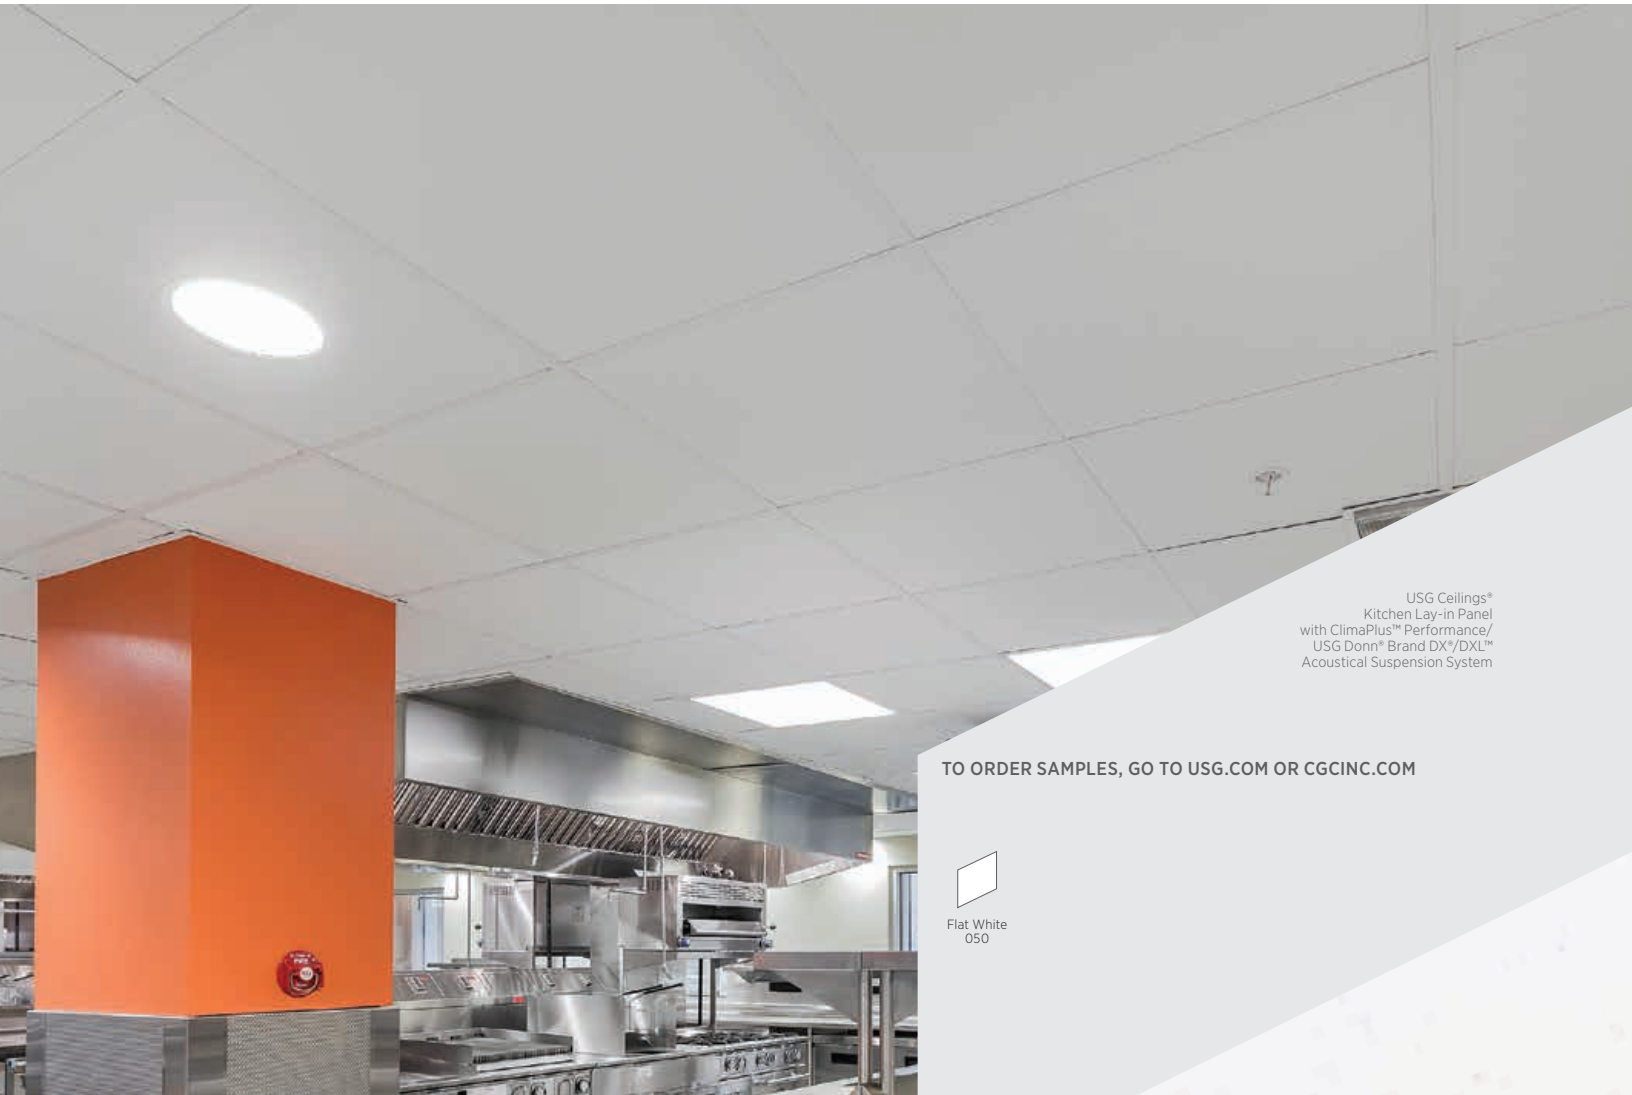

USG Ceilings®
Kitchen Lay-in Panel
with ClimaPlus™ Performance/
USG Donn® Brand DX®/DXL™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Lightweight alternative to vinyl-covered gypsum.
- Meets USDA/FSIS guidelines for use in food-processing areas.
- High light reflectance.
- Washable, water repellent, scratch and soil resistant finish
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Kitchens and food preparation areas
- Restrooms and utility areas
- Locker rooms

SUBSTRATE

- Wet-formed mineral fiber

Smooth-Textured Panel

USG CEILINGS® KITCHEN LAY-IN PANEL

CLIMAPLUS™ PERFORMANCE


















ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
**TECHNICAL INFORMATION
 AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM
 WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection




 **UL Classified**

Edge	Panel Size	Fire Rating	Item No.	NRC ⁴	CAC Min.	LR ³	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ 	2'x2'x5/8"	 Class A	3210	 -	 35	 0.90	White	 A,B,C		 24%	 \$
	2'x4'x5/8"	 Class A	3410	 -	 35	 0.90	White	 A,B,C		 24%	 \$

USG CEILINGS® KITCHEN LAY-IN PANEL²

GRID PROFILE OPTIONS

PHYSICAL DATA/
 FOOTNOTES

A USG DX [®] /DXL [™]	B USG DXLA [™]	C USG ZXLA [™]
		

Product literature
 Data sheet: SC3226

ASTM E1264 classification
 Type IX, Form 2, Pattern G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Weight
 0.79 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
 R-1.4

Maximum backloading
 See *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

Maintenance
 Can be cleaned easily with a damp sponge. Use mild detergent and water—do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

Notes

1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
2. Do not use this product in close proximity to grease ducts.
3. LR values are shown as averages.
4. USG does not consider a ceiling panel to be acoustically rated if NRC is less than 0.50.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC3226/rev. 10-18
 © 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
 United States Gypsum Company
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CE, CLEAN ROOM, CLIMAPLUS, DONN, DX, DXL, DXLA, FIRECODE, SHEETROCK, ZXLA, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG TOUCHSTONE™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG Touchstone™ Acoustical Panels with ClimaPlus™ Performance/USG Donn® Brand DX*/DXL™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Panels are scuff and abuse resistant and can withstand day-to-day activity in high traffic areas.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Firecode® product designed to meet life-safety codes.


APPLICATIONS

- Schools
- General offices
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Medium-Textured Panel

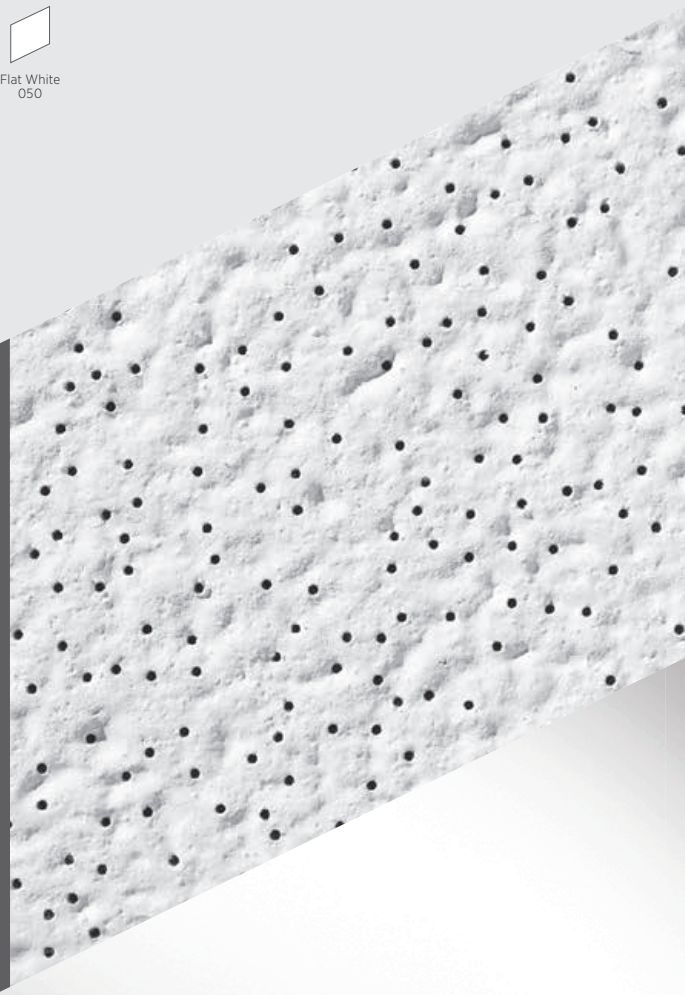

USG TOUCHSTONE™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)











































PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818


30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection


HRC HIGH RECYCLED
CONTENT

UL Classified

Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
SQ 	2'x2'x5/8"		5893				White	A,B					
	2'x4'x5/8"		5894				White	A					
SLT 	2'x2'x5/8"		5896				White	C					
FLB 	2'x2'x5/8"		5899				White	D,E					






 **Low Emissions (VOC)**
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v.1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

 **ClimaPlus™ Warranty Performance⁴**
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

 **High Recycled Content**
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

 **Firecode[®]**
 **Abuse Resistant**

GRID PROFILE OPTIONS

A USG DX [®] /DXL™	B ⁵ USG Centricitee™ DXT™/DXLT™	C USG DX [®] /DXL™	D USG Centricitee™ DXLT™	E USG Finline [®] DXLF™
				

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC2214

ASTM E1264 classification
Type III, Form 2, Pattern CEI

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FR-83

Weight
1.0-1.3 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.6

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- Fire-rated items: see UL design details.
- LR values are shown as averages.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
- Maximum 2'x2' with SQ edge panels.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2214/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXL, DXLF, DXLT, DXT, FINELINE, FIRECODE, TOUCHSTONE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.





USG LOGIX™
INTEGRATED CEILING SYSTEM

MODERN DESIGN MEETS FORWARD THINKING

The inventive USG Logix™ Integrated Ceiling System combines the best of aesthetics and performance by transforming the ceiling plane into a dramatic design element. Giving you the freedom to create elegant, modern and sophisticated ceilings that match your vision without the constraints of traditional acoustical ceiling designs.

To learn more, visit usg.com/logix

Computer-Generated Image © USG Corporation 2016.

USG HALCYON™ LOGIX™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE



USG Halcyon™ Logix™
Field Panels with FL Edge/
USG Donn® Brand Centricitee™ DXT™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Compatible with USG Logix™ Integrated System.
- Monolithic, structured ceiling visual using standard components.
- High light-reflective finish (LR-0.90) reduces light fixtures and energy use.
- Washable and scrubbable finish—impact and scratch resistant.
- Coordinates visually with USG Mars™ Logix™ Acoustical Panels for open/closed-plan applications.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- High sound absorption with an NRC of up to 0.95 and an AC of up to 200.
- High postconsumer recycled content.

APPLICATIONS

- Open-plan offices
- Conference rooms
- Reception and lobby areas
- Media centers and libraries
- Airports
- Spaces with indirect or natural lighting

SUBSTRATE

- Fiberglass

Fine-Textured Panel



USG HALCYON™ LOGIX™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative
 usgdesignstudio.com
 cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ 	20"x54"x1"	Class A	97407	0.95	20	0.90	White	A		40%	\$\$\$\$
	20"x56"x1"	Class A	97408	0.95	20	0.90	White	A		40%	\$\$\$\$
	20"x60"x1"	Class A	98261	0.95	20	0.90	White	A		40%	\$\$\$\$
	21"x24"x1"	Class A	97411	0.95	20	0.90	White	A, B		40%	\$\$\$\$
	21"x48"x1"	Class A	97412	0.95	20	0.90	White	A		40%	\$\$\$\$
	22"x24"x1"	Class A	97413	0.95	20	0.90	White	A, B		40%	\$\$\$\$
	22"x48"x1"	Class A	97414	0.95	20	0.90	White	A		40%	\$\$\$\$
	24"x24"x1"	Class A	98221	0.95	20	0.90	White	A, B		40%	\$\$\$\$
	24"x42"x1"	Class A	97277	0.95	20	0.90	White	A		40%	\$\$\$\$
	24"x44"x1"	Class A	97416	0.95	20	0.90	White	A		40%	\$\$\$\$
	24"x48"x1"	Class A	98241	0.95	20	0.90	White	A		40%	\$\$\$\$
	24"x72"x1"	Class A	99234	0.95	20	0.90	White	A		40%	\$\$\$\$
	24"x96"x1"	Class A	98351	0.95	20	0.90	White	A		40%	\$\$\$\$
	24"x120"x1"	Class A	98368	0.95	20	0.90	White	A		40%	\$\$\$\$
	27"x30"x1"	Class A	97417	0.95	20	0.90	White	A		40%	\$\$\$\$
	27"x60"x1"	Class A	97418	0.95	20	0.90	White	A		40%	\$\$\$\$
	28"x30"x1"	Class A	97419	0.95	20	0.90	White	A		40%	\$\$\$\$
	28"x60"x1"	Class A	97420	0.95	20	0.90	White	A		40%	\$\$\$\$
	30"x30"x1"	Class A	98331	0.95	20	0.90	White	A		40%	\$\$\$\$
	30"x54"x1"	Class A	97422	0.95	20	0.90	White	A		40%	\$\$\$\$
30"x56"x1"	Class A	97423	0.95	20	0.90	White	A		40%	\$\$\$\$	
30"x60"x1"	Class A	97266	0.95	20	0.90	White	A		40%	\$\$\$\$	
48"x42"x1"	Class A	97424	0.95	20	0.90	White	A		40%	\$\$\$\$	
48"x44"x1"	Class A	97425	0.95	20	0.90	White	A		40%	\$\$\$\$	
48"x45"x1"	Class A	97426	0.95	20	0.90	White	A		40%	\$\$\$\$	
48"x46"x1"	Class A	97427	0.95	20	0.90	White	A		40%	\$\$\$\$	
48"x48"x1"	Class A	98441	0.95	20	0.90	White	A		40%	\$\$\$\$	
48"x54"x1"	Class A	97428	0.95	20	0.90	White	A		40%	\$\$\$\$	
48"x96"x1"	Class A	98481	0.95	20	0.90	White	A		40%	\$\$\$\$	
SQ 	4"x48"x1"	Class A	97402	0.95	20	0.90	White	A		40%	\$\$\$\$
	4"x60"x1"	Class A	97403	0.95	20	0.90	White	A		40%	\$\$\$\$
	4"x72"x1"	Class A	97404	0.95	20	0.90	White	A		40%	\$\$\$\$
	6"x48"x1"	Class A	97227	0.95	20	0.90	White	A		40%	\$\$\$\$
	6"x60"x1"	Class A	97228	0.95	20	0.90	White	A		40%	\$\$\$\$
	6"x72"x1"	Class A	97405	0.95	20	0.90	White	A		40%	\$\$\$\$
	12"x48"x1"	Class A	97491	0.95	20	0.90	White	A		40%	\$\$\$\$
	12"x60"x1"	Class A	97492	0.95	20	0.90	White	A		40%	\$\$\$\$
12"x72"x1"	Class A	97406	0.95	20	0.90	White	A		40%	\$\$\$\$	
SL 	20"x54"x1"	Class A	97436	0.95	20	0.90	White	C		40%	\$\$\$\$
	20"x56"x1"	Class A	97437	0.95	20	0.90	White	C		40%	\$\$\$\$
	20"x60"x1"	Class A	99267	0.95	20	0.90	White	C		40%	\$\$\$\$

ClimaPlus™ Warranty Performance⁵
 Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

USG HALCYON™ LOGIX™
 FIELD PANELS

USG HALCYON™ LOGIX™
 CHANNEL PANELS

USG HALCYON™ LOGIX™
 FIELD PANELS

USG HALCYON™ LOGIX™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE





















































ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 fax: 888.874.2348 | usg.com
 CGC: contact Sales Representative


FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
											
SL 	21"x24"x1"	Class A	98220	0.95	20	0.90	White	C		40%	\$\$\$\$
	21"x48"x1"	Class A	97439	0.95	20	0.90	White	C		40%	\$\$\$\$
	22"x24"x1"	Class A	97440	0.95	20	0.90	White	C		40%	\$\$\$\$
	22"x48"x1"	Class A	97441	0.95	20	0.90	White	C		40%	\$\$\$\$
	24"x24"x1"	Class A	98223	0.95	20	0.90	White	C		40%	\$\$\$\$
	24"x42"x1"	Class A	97443	0.95	20	0.90	White	C		40%	\$\$\$\$
	24"x44"x1"	Class A	97444	0.95	20	0.90	White	C		40%	\$\$\$\$
	24"x48"x1"	Class A	98243	0.95	20	0.90	White	C		40%	\$\$\$\$
	24"x72"x1"	Class A	99268	0.95	20	0.90	White	C		40%	\$\$\$\$
	24"x96"x1"	Class A	99269	0.95	20	0.90	White	C		40%	\$\$\$\$
	24"x120"x1"	Class A	97446	0.95	20	0.90	White	C		40%	\$\$\$\$
	27"x30"x1"	Class A	97447	0.95	20	0.90	White	C		40%	\$\$\$\$
	27"x60"x1"	Class A	97448	0.95	20	0.90	White	C		40%	\$\$\$\$
	28"x30"x1"	Class A	97449	0.95	20	0.90	White	C		40%	\$\$\$\$
	28"x60"x1"	Class A	97450	0.95	20	0.90	White	C		40%	\$\$\$\$
	30"x30"x1"	Class A	98333	0.95	20	0.90	White	C		40%	\$\$\$\$
	30"x54"x1"	Class A	98337	0.95	20	0.90	White	C		40%	\$\$\$\$
	30"x56"x1"	Class A	97453	0.95	20	0.90	White	C		40%	\$\$\$\$
	30"x60"x1"	Class A	99270	0.95	20	0.90	White	C		40%	\$\$\$\$
	48"x42"x1"	Class A	97454	0.95	20	0.90	White	C		40%	\$\$\$\$
48"x44"x1"	Class A	97455	0.95	20	0.90	White	C		40%	\$\$\$\$	
48"x45"x1"	Class A	97456	0.95	20	0.90	White	C		40%	\$\$\$\$	
48"x46"x1"	Class A	97457	0.95	20	0.90	White	C		40%	\$\$\$\$	
48"x48"x1"	Class A	98443	0.95	20	0.90	White	C		40%	\$\$\$\$	
48"x54"x1"	Class A	97458	0.95	20	0.90	White	C		40%	\$\$\$\$	
48"x96"x1"	Class A	98483	0.95	20	0.90	White	C		40%	\$\$\$\$	
SL 	4"x48"x1"	Class A	97430	0.95	20	0.90	White	C		40%	\$\$\$\$
	4"x60"x1"	Class A	97431	0.95	20	0.90	White	C		40%	\$\$\$\$
	4"x72"x1"	Class A	97432	0.95	20	0.90	White	C		40%	\$\$\$\$
	6"x48"x1"	Class A	99271	0.95	20	0.90	White	C		40%	\$\$\$\$
	6"x60"x1"	Class A	99272	0.95	20	0.90	White	C		40%	\$\$\$\$
	6"x72"x1"	Class A	97433	0.95	20	0.90	White	C		40%	\$\$\$\$
	12"x24"x1"	Class A	99263	0.95	20	0.90	White	C		40%	\$\$\$\$
	12"x48"x1"	Class A	97571	0.95	20	0.90	White	C		40%	\$\$\$\$
	12"x60"x1"	Class A	97434	0.95	20	0.90	White	C		40%	\$\$\$\$
12"x72"x1"	Class A	97435	0.95	20	0.90	White	C		40%	\$\$\$\$	
FL 	20"x54"x1"	Class A	98360	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	20"x56"x1"	Class A	97464	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	20"x60"x1"	Class A	98194	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	21"x24"x1"	Class A	98195	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	21"x48"x1"	Class A	97466	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$

 ClimaPlus™ Warranty Performance⁵
 Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

USG HALCYON™ LOGIX™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection

UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
FL 	22"x24"x1"	Class A	97467	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	22"x48"x1"	Class A	97468	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x24"x1"	Class A	98225	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x42"x1"	Class A	98196	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x44"x1"	Class A	97470	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x48"x1"	Class A	98245	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x57"x1"	Class A	98341	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x60"x1"	Class A	96271	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x72"x1"	Class A	98348	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x96"x1"	Class A	98197	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	24"x120"x1"	Class A	99213	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	27"x30"x1"	Class A	97333	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	27"x60"x1"	Class A	98440	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	28"x30"x1"	Class A	97335	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	28"x60"x1"	Class A	97355	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	30"x30"x1"	Class A	98335	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	30"x54"x1"	Class A	98359	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	30"x56"x1"	Class A	97473	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	30"x60"x1"	Class A	98336	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x42"x1"	Class A	98343	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x44"x1"	Class A	97475	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x45"x1"	Class A	97476	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x46"x1"	Class A	97477	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	48"x48"x1"	Class A	98445	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
48"x54"x1"	Class A	98344	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$	
FL 	4"x48"x1"	Class A	97460	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	4"x60"x1"	Class A	97461	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	4"x72"x1"	Class A	97462	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x42"x1"	Class A	99197	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x48"x1"	Class A	98198	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x54"x1"	Class A	98131	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x60"x1"	Class A	98199	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x72"x1"	Class A	97574	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	6"x96"x1"	Class A	98216	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x24"x1"	Class A	98191	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x48"x1"	Class A	98192	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x60"x1"	Class A	97576	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x72"x1"	Class A	97463	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$
	12"x96"x1"	Class A	99265	0.95	20	0.90	White	D,E,F		40%	\$\$\$\$

USG HALCYON™ LOGIX™
FIELD PANELS CONT.

USG HALCYON™ LOGIX™
CHANNEL PANELS

GRID PROFILE OPTIONS

A USG DX ⁴ /DXL™	B ⁴ USG Centricitee™ DXT™	C USG DX ⁴ /DXL™	D USG Centricitee™ DXT™	E USG Fineline® DXF™	F USG Identitee® DXI™

ClimaPlus™ Warranty Performance³
Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

PHYSICAL DATA/ FOOTNOTES

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

Product literature
Data sheet: IS272
System guide: IS268

ASTM E1264 classification
Type XII, Form 2, Pattern E, G
ASTM E84 and CAN/ULC S102 surface burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Weight
0.47 lb./sq. ft.
Thermal resistance
R-4.4

Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean white cloth with water or a mild detergent and wipe surface.

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Treating field-cut reveal edges
All field-cut edges "exposed to view" should be colored to match the factory finish. USG Halcyon™ Ceiling Touch-Up Paint is recommended when perimeter field cuts expose the yellow substrate.

Notes
1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
2. LR values are shown as averages.
3. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *USG CimaPlus™ Ceilings Certification of Performance* (SC2451).
4. Maximum 2'x2' with SQ edge panels.
5. Stabilizer bar required if opening ≥ 60".

IS272/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXI, DXL, DXT, FINELINE, HALCYON, IDENTITEE, LOGIX, MARS, IT'S YOUR WORLD. BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

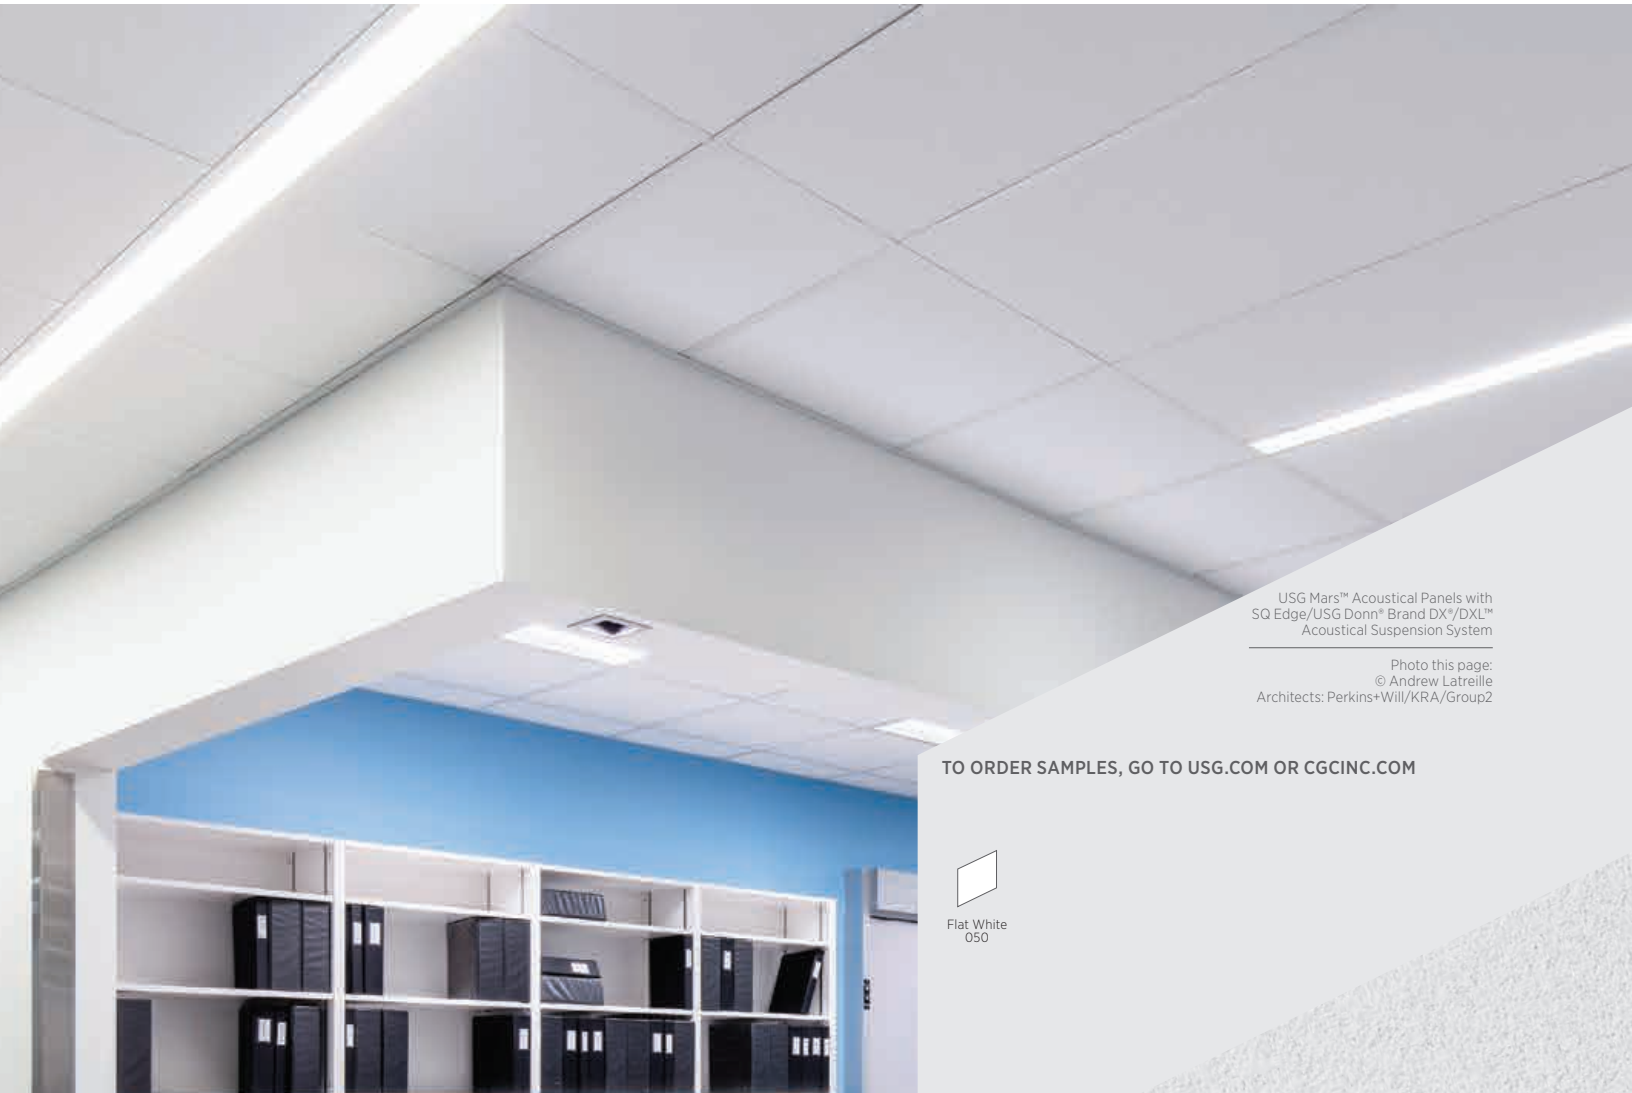

USG Mars™ Acoustical Panels with
SQ Edge/USG Donn® Brand DX®/DXL™
Acoustical Suspension System

Photo this page:
© Andrew Latreille
Architects: Perkins+Will/KRA/Group2

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Compatible with USG Logix™ Integrated System.
- Monolithic, structured ceiling visual using standard components.
- High light-reflective finish (LR-0.90) reduces light fixtures and energy use.
- Washable and scrubbable finish—impact and scratch resistant.
- Coordinates visually with USG Halcyon™ Logix™ Acoustical Panels for open/closed-plan applications.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- GREENGUARD Gold Certified for low-emitting performance.
- Balanced Acoustics. High-NRC and High-CAC.

APPLICATIONS

- Open-plan offices
- Conference rooms
- Reception and lobby areas
- Media centers and libraries
- Airports
- Spaces with indirect or natural lighting

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel



USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 75/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ <input type="checkbox"/>	20"x54"x3/4"	Class A	86519	0.75	35	0.90	White	A	Low		69%	\$\$
	20"x56"x3/4"	Class A	86520	0.75	35	0.90	White	A	Low		69%	\$\$
	20"x60"x3/4"	Class A	86160	0.75	35	0.90	White	A	Low		69%	\$\$
	21"x24"x3/4"	Class A	86522	0.75	35	0.90	White	A, B	Low		69%	\$\$
	21"x48"x3/4"	Class A	86523	0.75	35	0.90	White	A	Low		69%	\$\$
	22"x24"x3/4"	Class A	86524	0.75	35	0.90	White	A, B	Low		69%	\$\$
	22"x48"x3/4"	Class A	86525	0.75	35	0.90	White	A	Low		69%	\$\$
	24"x24"x3/4"	Class A	86185	0.75	35	0.90	White	A, B	Low		69%	\$\$
	24"x42"x3/4"	Class A	86527	0.75	35	0.90	White	A	Low		69%	\$\$
	24"x44"x3/4"	Class A	86528	0.75	35	0.90	White	A	Low		69%	\$\$
	24"x48"x3/4"	Class A	88185	0.75	35	0.90	White	A	Low		69%	\$\$
	24"x72"x3/4"	Class A	86223	0.75	35	0.90	White	A	Low		69%	\$\$
	27"x30"x3/4"	Class A	86530	0.75	35	0.90	White	A	Low		69%	\$\$
	27"x60"x3/4"	Class A	86531	0.75	35	0.90	White	A	Low		69%	\$\$
	28"x30"x3/4"	Class A	86532	0.75	35	0.90	White	A	Low		69%	\$\$
	28"x60"x3/4"	Class A	86533	0.75	35	0.90	White	A	Low		69%	\$\$
	30"x30"x3/4"	Class A	86815	0.75	35	0.90	White	A	Low		69%	\$\$
	30"x54"x3/4"	Class A	86503	0.75	35	0.90	White	A	Low		69%	\$\$
	30"x56"x3/4"	Class A	86535	0.75	35	0.90	White	A	Low		69%	\$\$
	30"x60"x3/4"	Class A	86536	0.75	35	0.90	White	A	Low		69%	\$\$
SQ <input type="checkbox"/>	4"x48"x3/4"	Class A	86514	0.75	35	0.90	White	A	Low		69%	\$\$
	4"x60"x3/4"	Class A	86515	0.75	35	0.90	White	A	Low		69%	\$\$
	4"x72"x3/4"	Class A	86537	0.75	35	0.90	White	A	Low		69%	\$\$
	6"x48"x3/4"	Class A	86325	0.75	35	0.90	White	A	Low		69%	\$\$
	6"x60"x3/4"	Class A	86507	0.75	35	0.90	White	A	Low		69%	\$\$
	6"x72"x3/4"	Class A	86538	0.75	35	0.90	White	A	Low		69%	\$\$
	12"x12"x3/4"	Class A	86134	0.75	35	0.90	White	A	Low		69%	\$\$
	12"x24"x3/4"	Class A	86289	0.75	35	0.90	White	A	Low		69%	\$\$
	12"x48"x3/4"	Class A	86516	0.75	35	0.90	White	A	Low		69%	\$\$
	12"x60"x3/4"	Class A	86517	0.75	35	0.90	White	A	Low		69%	\$\$
12"x72"x3/4"	Class A	86518	0.75	35	0.90	White	A	Low		69%	\$\$	

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ LOGIX™
FIELD PANELS
75/35

USG MARS™ LOGIX™
CHANNEL PANELS
75/35

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 75/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER


ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



USG MARS™ LOGIX™ FIELD PANELS 75/35

USG MARS™ LOGIX™ CHANNEL PANELS 75/35

Edge	Panel Size ⁵	Fire Rating	Item No.	UL Classified		LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC Min.							
SLT	20"x54"x3/4"	Class A	86547	0.75	35	0.90	White	C	Low	69%	\$\$	
	20"x56"x3/4"	Class A	86548	0.75	35	0.90	White	C	Low	69%	\$\$	
	20"x60"x3/4"	Class A	86905	0.75	35	0.90	White	C	Low	69%	\$\$	
	21"x24"x3/4"	Class A	86550	0.75	35	0.90	White	C	Low	69%	\$\$	
	21"x48"x3/4"	Class A	86551	0.75	35	0.90	White	C	Low	69%	\$\$	
	22"x24"x3/4"	Class A	86552	0.75	35	0.90	White	C	Low	69%	\$\$	
	22"x48"x3/4"	Class A	86553	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x24"x3/4"	Class A	86785	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x42"x3/4"	Class A	86555	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x44"x3/4"	Class A	86556	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x48"x3/4"	Class A	88785	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x72"x3/4"	Class A	86166	0.75	35	0.90	White	C	Low	69%	\$\$	
	27"x30"x3/4"	Class A	86557	0.75	35	0.90	White	C	Low	69%	\$\$	
	27"x60"x3/4"	Class A	86558	0.75	35	0.90	White	C	Low	69%	\$\$	
	28"x30"x3/4"	Class A	86559	0.75	35	0.90	White	C	Low	69%	\$\$	
	28"x60"x3/4"	Class A	86560	0.75	35	0.90	White	C	Low	69%	\$\$	
	30"x30"x3/4"	Class A	86875	0.75	35	0.90	White	C	Low	69%	\$\$	
	30"x54"x3/4"	Class A	88686	0.75	35	0.90	White	C	Low	69%	\$\$	
	30"x56"x3/4"	Class A	86563	0.75	35	0.90	White	C	Low	69%	\$\$	
	30"x60"x3/4"	Class A	86564	0.75	35	0.90	White	C	Low	69%	\$\$	
SLT	4"x48"x3/4"	Class A	86540	0.75	35	0.90	White	C	Low	69%	\$\$	
	4"x60"x3/4"	Class A	86541	0.75	35	0.90	White	C	Low	69%	\$\$	
	4"x72"x3/4"	Class A	86565	0.75	35	0.90	White	C	Low	69%	\$\$	
	6"x48"x3/4"	Class A	86542	0.75	35	0.90	White	C	Low	69%	\$\$	
	6"x60"x3/4"	Class A	86543	0.75	35	0.90	White	C	Low	69%	\$\$	
	6"x72"x3/4"	Class A	86566	0.75	35	0.90	White	C	Low	69%	\$\$	
	12"x12"x3/4"	Class A	86135	0.75	35	0.90	White	C	Low	69%	\$\$	
	12"x24"x3/4"	Class A	86245	0.75	35	0.90	White	C	Low	69%	\$\$	
	12"x48"x3/4"	Class A	86544	0.75	35	0.90	White	C	Low	69%	\$\$	
	12"x60"x3/4"	Class A	86545	0.75	35	0.90	White	C	Low	69%	\$\$	
	12"x72"x3/4"	Class A	86546	0.75	35	0.90	White	C	Low	69%	\$\$	

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 75/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection



BALANCED
ACOUSTICS



HIGH
RECYCLED
CONTENT



Plant-Based
Binder

UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
FLB	20"x54"x3/4"	Class A	88845	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	20"x56"x3/4"	Class A	86571	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	20"x60"x3/4"	Class A	86164	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	21"x24"x3/4"	Class A	88840	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	21"x48"x3/4"	Class A	86573	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	22"x24"x3/4"	Class A	86574	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	22"x48"x3/4"	Class A	86575	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x24"x3/4"	Class A	86985	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x42"x3/4"	Class A	86577	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x44"x3/4"	Class A	86578	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x48"x3/4"	Class A	88985	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x72"x3/4"	Class A	88996	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	27"x30"x3/4"	Class A	86850	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	27"x60"x3/4"	Class A	86579	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	28"x30"x3/4"	Class A	86834	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	28"x60"x3/4"	Class A	86580	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x30"x3/4"	Class A	86830	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x54"x3/4"	Class A	86831	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x56"x3/4"	Class A	86583	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x60"x3/4"	Class A	86267	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
FLB	4"x48"x3/4"	Class A	86568	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	4"x60"x3/4"	Class A	86569	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	4"x72"x3/4"	Class A	86584	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	6"x48"x3/4"	Class A	88887	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	6"x60"x3/4"	Class A	86835	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	6"x72"x3/4"	Class A	86567	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x12"x3/4"	Class A	86136	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x24"x3/4"	Class A	86242	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x48"x3/4"	Class A	86321	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x60"x3/4"	Class A	88885	0.75	35	0.90	White	D,E,F	Low		69%	\$\$
12"x72"x3/4"	Class A	86570	0.75	35	0.90	White	D,E,F	Low		69%	\$\$	

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ LOGIX™
FIELD PANELS
75/35

USG MARS™ LOGIX™
CHANNEL PANELS
75/35

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 80/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ <input type="checkbox"/>	20"x54"x7/8"	Class A	86410	0.80	35	0.90	White	A	Low		70%	\$\$
	20"x56"x7/8"	Class A	86411	0.80	35	0.90	White	A	Low		70%	\$\$
	20"x60"x7/8"	Class A	89501	0.80	35	0.90	White	A	Low		70%	\$\$
	21"x24"x7/8"	Class A	86414	0.80	35	0.90	White	A, B	Low		70%	\$\$
	21"x48"x7/8"	Class A	86415	0.80	35	0.90	White	A	Low		70%	\$\$
	22"x24"x7/8"	Class A	86416	0.80	35	0.90	White	A, B	Low		70%	\$\$
	22"x48"x7/8"	Class A	86417	0.80	35	0.90	White	A	Low		70%	\$\$
	24"x24"x7/8"	Class A	86100	0.80	35	0.90	White	A, B	Low		70%	\$\$
	24"x42"x7/8"	Class A	86419	0.80	35	0.90	White	A	Low		70%	\$\$
	24"x44"x7/8"	Class A	86420	0.80	35	0.90	White	A	Low		70%	\$\$
	24"x48"x7/8"	Class A	86300	0.80	35	0.90	White	A	Low		70%	\$\$
	24"x72"x7/8"	Class A	86360	0.80	35	0.90	White	A	Low		70%	\$\$
	27"x30"x7/8"	Class A	86421	0.80	35	0.90	White	A	Low		70%	\$\$
	27"x60"x7/8"	Class A	86422	0.80	35	0.90	White	A	Low		70%	\$\$
	28"x30"x7/8"	Class A	86423	0.80	35	0.90	White	A	Low		70%	\$\$
	28"x60"x7/8"	Class A	86424	0.80	35	0.90	White	A	Low		70%	\$\$
	30"x30"x7/8"	Class A	86426	0.80	35	0.90	White	A	Low		70%	\$\$
	30"x54"x7/8"	Class A	86427	0.80	35	0.90	White	A	Low		70%	\$\$
	30"x56"x7/8"	Class A	86428	0.80	35	0.90	White	A	Low		70%	\$\$
	30"x60"x7/8"	Class A	86429	0.80	35	0.90	White	A	Low		70%	\$\$
SQ <input type="checkbox"/>	4"x60"x7/8"	Class A	86403	0.80	35	0.90	White	A	Low		70%	\$\$
	4"x72"x7/8"	Class A	86405	0.80	35	0.90	White	A	Low		70%	\$\$
	6"x48"x7/8"	Class A	86404	0.80	35	0.90	White	A	Low		70%	\$\$
	6"x60"x7/8"	Class A	86145	0.80	35	0.90	White	A	Low		70%	\$\$
	6"x72"x7/8"	Class A	86406	0.80	35	0.90	White	A	Low		70%	\$\$
	12"x48"x7/8"	Class A	86407	0.80	35	0.90	White	A	Low		70%	\$\$
	12"x60"x7/8"	Class A	86408	0.80	35	0.90	White	A	Low		70%	\$\$
	12"x72"x7/8"	Class A	86409	0.80	35	0.90	White	A	Low		70%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC
LOGIX™ FIELD PANELS
80/35

Plant-Based Binder

USG MARS™ HIGH-NRC
LOGIX™ CHANNEL PANELS
80/35

Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 80/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



• No Visible Sag
• Mold/Mildew Protection



UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SLT	20"x54"x7/8"	Class A	86447	0.80	35	0.90	White	C	Low		70%	\$\$
	20"x56"x7/8"	Class A	86448	0.80	35	0.90	White	C	Low		70%	\$\$
	20"x60"x7/8"	Class A	86449	0.80	35	0.90	White	C	Low		70%	\$\$
	21"x24"x7/8"	Class A	86451	0.80	35	0.90	White	C	Low		70%	\$\$
	21"x48"x7/8"	Class A	86452	0.80	35	0.90	White	C	Low		70%	\$\$
	22"x24"x7/8"	Class A	86453	0.80	35	0.90	White	C	Low		70%	\$\$
	22"x48"x7/8"	Class A	86454	0.80	35	0.90	White	C	Low		70%	\$\$
	24"x24"x7/8"	Class A	87200	0.80	35	0.90	White	C	Low		70%	\$\$
	24"x42"x7/8"	Class A	86456	0.80	35	0.90	White	C	Low		70%	\$\$
	24"x44"x7/8"	Class A	86457	0.80	35	0.90	White	C	Low		70%	\$\$
	24"x48"x7/8"	Class A	89600	0.80	35	0.90	White	C	Low		70%	\$\$
	24"x72"x7/8"	Class A	89660	0.80	35	0.90	White	C	Low		70%	\$\$
	27"x30"x7/8"	Class A	86458	0.80	35	0.90	White	C	Low		70%	\$\$
	27"x60"x7/8"	Class A	86460	0.80	35	0.90	White	C	Low		70%	\$\$
	28"x30"x7/8"	Class A	86459	0.80	35	0.90	White	C	Low		70%	\$\$
	28"x60"x7/8"	Class A	86461	0.80	35	0.90	White	C	Low		70%	\$\$
	30"x30"x7/8"	Class A	86500	0.80	35	0.90	White	C	Low		70%	\$\$
	30"x54"x7/8"	Class A	86464	0.80	35	0.90	White	C	Low		70%	\$\$
	30"x56"x7/8"	Class A	86465	0.80	35	0.90	White	C	Low		70%	\$\$
	30"x60"x7/8"	Class A	86466	0.80	35	0.90	White	C	Low		70%	\$\$
SLT	4"x48"x7/8"	Class A	86440	0.80	35	0.90	White	C	Low		70%	\$\$
	4"x60"x7/8"	Class A	86441	0.80	35	0.90	White	C	Low		70%	\$\$
	4"x72"x7/8"	Class A	86467	0.80	35	0.90	White	C	Low		70%	\$\$
	6"x48"x7/8"	Class A	86442	0.80	35	0.90	White	C	Low		70%	\$\$
	6"x60"x7/8"	Class A	86443	0.80	35	0.90	White	C	Low		70%	\$\$
	6"x72"x7/8"	Class A	86468	0.80	35	0.90	White	C	Low		70%	\$\$
	12"x48"x7/8"	Class A	86444	0.80	35	0.90	White	C	Low		70%	\$\$
	12"x60"x7/8"	Class A	86445	0.80	35	0.90	White	C	Low		70%	\$\$
12"x72"x7/8"	Class A	86446	0.80	35	0.90	White	C	Low		70%	\$\$	

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC
LOGIX™ FIELD PANELS
80/35

Plant-Based Binder

USG MARS™ HIGH-NRC
LOGIX™ CHANNEL PANELS
80/35

Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 80/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative
TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818

30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection



USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 80/35

Plant-Based Binder

USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 80/35

Plant-Based Binder

Edge	Panel Size ⁵	Fire Rating	Item No.	UL Classified		LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC Min.							
FLB	20"x54"x7/8"	Class A	86479	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	20"x56"x7/8"	Class A	86480	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	20"x60"x7/8"	Class A	86481	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	21"x24"x7/8"	Class A	86483	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	21"x48"x7/8"	Class A	86484	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	22"x24"x7/8"	Class A	86485	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	22"x48"x7/8"	Class A	86486	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	24"x24"x7/8"	Class A	87100	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	24"x42"x7/8"	Class A	86488	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	24"x44"x7/8"	Class A	86489	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	24"x48"x7/8"	Class A	89500	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	24"x72"x7/8"	Class A	89670	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	27"x30"x7/8"	Class A	86490	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	27"x60"x7/8"	Class A	86491	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	28"x30"x7/8"	Class A	86492	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	28"x60"x7/8"	Class A	86493	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	30"x30"x7/8"	Class A	86400	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	30"x54"x7/8"	Class A	86501	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	30"x56"x7/8"	Class A	86496	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	30"x60"x7/8"	Class A	86497	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
FLB	4"x48"x7/8"	Class A	86475	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	4"x60"x7/8"	Class A	86476	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	4"x72"x7/8"	Class A	86473	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	6"x48"x7/8"	Class A	86331	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	6"x48"x7/8"	Class A	86333	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	6"x72"x7/8"	Class A	86474	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	12"x48"x7/8"	Class A	86505	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	12"x60"x7/8"	Class A	86477	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$
	12"x72"x7/8"	Class A	86478	0.80	35	0.90	White	D, E, F	Low	70%	70%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 85/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ <input type="checkbox"/>	20"x54"x7/8"	Class A	80100	0.85	35	0.90	White	A	Low		65%	\$\$
	20"x56"x7/8"	Class A	80101	0.85	35	0.90	White	A	Low		65%	\$\$
	20"x60"x7/8"	Class A	80102	0.85	35	0.90	White	A	Low		65%	\$\$
	21"x24"x7/8"	Class A	80103	0.85	35	0.90	White	A,B	Low		65%	\$\$
	21"x48"x7/8"	Class A	80104	0.85	35	0.90	White	A	Low		65%	\$\$
	22"x24"x7/8"	Class A	80105	0.85	35	0.90	White	A,B	Low		65%	\$\$
	22"x48"x7/8"	Class A	80106	0.85	35	0.90	White	A	Low		65%	\$\$
	24"x24"x7/8"	Class A	88134	0.85	35	0.90	White	A,B	Low		65%	\$\$
	24"x42"x7/8"	Class A	80107	0.85	35	0.90	White	A	Low		65%	\$\$
	24"x44"x7/8"	Class A	80108	0.85	35	0.90	White	A	Low		65%	\$\$
	24"x48"x7/8"	Class A	89134	0.85	35	0.90	White	A	Low		65%	\$\$
	24"x72"x7/8"	Class A	89663	0.85	35	0.90	White	A	Low		65%	\$\$
	27"x30"x7/8"	Class A	80109	0.85	35	0.90	White	A	Low		65%	\$\$
	27"x60"x7/8"	Class A	80110	0.85	35	0.90	White	A	Low		65%	\$\$
	28"x30"x7/8"	Class A	80111	0.85	35	0.90	White	A	Low		65%	\$\$
	28"x60"x7/8"	Class A	80112	0.85	35	0.90	White	A	Low		65%	\$\$
	30"x30"x7/8"	Class A	80113	0.85	35	0.90	White	A	Low		65%	\$\$
	30"x54"x7/8"	Class A	80114	0.85	35	0.90	White	A	Low		65%	\$\$
	30"x56"x7/8"	Class A	80115	0.85	35	0.90	White	A	Low		65%	\$\$
	30"x60"x7/8"	Class A	89140	0.85	35	0.90	White	A	Low		65%	\$\$
SQ <input type="checkbox"/>	4"x48"x7/8"	Class A	80116	0.85	35	0.90	White	A	Low		65%	\$\$
	4"x60"x7/8"	Class A	80117	0.85	35	0.90	White	A	Low		65%	\$\$
	4"x72"x7/8"	Class A	80118	0.85	35	0.90	White	A	Low		65%	\$\$
	6"x48"x7/8"	Class A	80119	0.85	35	0.90	White	A	Low		65%	\$\$
	6"x60"x7/8"	Class A	80120	0.85	35	0.90	White	A	Low		65%	\$\$
	6"x72"x7/8"	Class A	80121	0.85	35	0.90	White	A	Low		65%	—
	12"x12"x7/8"	Class A	80122	0.85	35	0.90	White	A	Low		65%	\$\$
	12"x24"x7/8"	Class A	86665	0.85	35	0.90	White	A	Low		65%	\$\$
	12"x48"x7/8"	Class A	80123	0.85	35	0.90	White	A	Low		65%	\$\$
	12"x60"x7/8"	Class A	80124	0.85	35	0.90	White	A	Low		65%	\$\$
12"x72"x7/8"	Class A	80125	0.85	35	0.90	White	A	Low		65%	\$\$	

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC
LOGIX™ FIELD PANELS
85/35
Plant-Based Binder

USG MARS™ HIGH-NRC
LOGIX™ CHANNEL PANELS
85/35
Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 85/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SLT	20"x54"x7/8"	Class A	80126	0.85	35	0.90	White	C	Low		65%	\$\$
	20"x56"x7/8"	Class A	80127	0.85	35	0.90	White	C	Low		65%	\$\$
	20"x60"x7/8"	Class A	80128	0.85	35	0.90	White	C	Low		65%	\$\$
	21"x24"x7/8"	Class A	80129	0.85	35	0.90	White	C	Low		65%	\$\$
	21"x48"x7/8"	Class A	80130	0.85	35	0.90	White	C	Low		65%	\$\$
	22"x24"x7/8"	Class A	80131	0.85	35	0.90	White	C	Low		65%	\$\$
	22"x48"x7/8"	Class A	80132	0.85	35	0.90	White	C	Low		65%	\$\$
	24"x24"x7/8"	Class A	88135	0.85	35	0.90	White	C	Low		65%	\$\$
	24"x42"x7/8"	Class A	80133	0.85	35	0.90	White	C	Low		65%	\$\$
	24"x44"x7/8"	Class A	80134	0.85	35	0.90	White	C	Low		65%	\$\$
	24"x48"x7/8"	Class A	89135	0.85	35	0.90	White	C	Low		65%	\$\$
	24"x72"x7/8"	Class A	89665	0.85	35	0.90	White	C	Low		65%	\$\$
	27"x30"x7/8"	Class A	80135	0.85	35	0.90	White	C	Low		65%	\$\$
	27"x60"x7/8"	Class A	80136	0.85	35	0.90	White	C	Low		65%	\$\$
	28"x30"x7/8"	Class A	80137	0.85	35	0.90	White	C	Low		65%	\$\$
28"x60"x7/8"	Class A	80138	0.85	35	0.90	White	C	Low		65%	\$\$	
30"x30"x7/8"	Class A	80139	0.85	35	0.90	White	C	Low		65%	\$\$	
30"x54"x7/8"	Class A	80140	0.85	35	0.90	White	C	Low		65%	\$\$	
30"x56"x7/8"	Class A	80141	0.85	35	0.90	White	C	Low		65%	\$\$	
30"x60"x7/8"	Class A	89141	0.85	35	0.90	White	C	Low		65%	\$\$	
SLT	4"x48"x7/8"	Class A	80142	0.85	35	0.90	White	C	Low		65%	\$\$
	4"x60"x7/8"	Class A	80143	0.85	35	0.90	White	C	Low		65%	\$\$
	4"x72"x7/8"	Class A	80144	0.85	35	0.90	White	C	Low		65%	\$\$
	6"x48"x7/8"	Class A	80145	0.85	35	0.90	White	C	Low		65%	\$\$
	6"x60"x7/8"	Class A	80146	0.85	35	0.90	White	C	Low		65%	\$\$
	6"x72"x7/8"	Class A	80147	0.85	35	0.90	White	C	Low		65%	\$\$
	12"x12"x7/8"	Class A	80148	0.85	35	0.90	White	C	Low		65%	\$\$
	12"x24"x7/8"	Class A	86664	0.85	35	0.90	White	C	Low		65%	\$\$
	12"x48"x7/8"	Class A	80149	0.85	35	0.90	White	C	Low		65%	\$\$
	12"x60"x7/8"	Class A	80150	0.85	35	0.90	White	C	Low		65%	\$\$
	12"x72"x7/8"	Class A	80151	0.85	35	0.90	White	C	Low		65%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v.1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC
LOGIX™ FIELD PANELS
85/35
Plant-Based Binder

USG MARS™ HIGH-NRC
LOGIX™ CHANNEL PANELS
85/35
Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 85/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/CG
UL2818



YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection



BALANCED
ACOUSTICS



HIGH
RECYCLED
CONTENT



Plant-Based
Binder



Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
FLB	20"x54"x7/8"	Class A	80152	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	20"x56"x7/8"	Class A	80153	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	20"x60"x7/8"	Class A	80154	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	21"x24"x7/8"	Class A	80155	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	21"x48"x7/8"	Class A	80156	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	22"x24"x7/8"	Class A	80157	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	22"x48"x7/8"	Class A	80158	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x24"x7/8"	Class A	88136	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x42"x7/8"	Class A	80159	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x44"x7/8"	Class A	80160	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x48"x7/8"	Class A	89136	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	24"x72"x7/8"	Class A	89668	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	27"x30"x7/8"	Class A	80161	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	27"x60"x7/8"	Class A	80162	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	28"x30"x7/8"	Class A	80163	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	28"x60"x7/8"	Class A	80164	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	30"x30"x7/8"	Class A	80165	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	30"x54"x7/8"	Class A	80166	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	30"x56"x7/8"	Class A	80167	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	30"x60"x7/8"	Class A	89142	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
FLB	4"x48"x7/8"	Class A	80168	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	4"x60"x7/8"	Class A	80169	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	4"x72"x7/8"	Class A	80170	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	6"x48"x7/8"	Class A	80171	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	6"x60"x7/8"	Class A	80172	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	6"x72"x7/8"	Class A	80173	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	12"x12"x7/8"	Class A	80174	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	12"x24"x7/8"	Class A	86663	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	12"x48"x7/8"	Class A	80175	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
	12"x60"x7/8"	Class A	80176	0.85	35	0.90	White	D,E,F	Low		65%	\$\$
12"x72"x7/8"	Class A	80177	0.85	35	0.90	White	D,E,F	Low		65%	\$\$	

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 85/35

Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 90/30


CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/CG
UL2818



UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ <input type="checkbox"/>	20"x54"x1"	Class A	80200	0.90	30	0.90	White	A	Low		66%	\$\$
	20"x56"x1"	Class A	80201	0.90	30	0.90	White	A	Low		66%	\$\$
	20"x60"x1"	Class A	80202	0.90	30	0.90	White	A	Low		66%	\$\$
	21"x24"x1"	Class A	80203	0.90	30	0.90	White	A,B	Low		66%	\$\$
	21"x48"x1"	Class A	80204	0.90	30	0.90	White	A	Low		66%	\$\$
	22"x24"x1"	Class A	80205	0.90	30	0.90	White	A,B	Low		66%	\$\$
	22"x48"x1"	Class A	80206	0.90	30	0.90	White	A	Low		66%	\$\$
	24"x24"x1"	Class A	88137	0.90	30	0.90	White	A,B	Low		66%	\$\$
	24"x42"x1"	Class A	80207	0.90	30	0.90	White	A	Low		66%	\$\$
	24"x44"x1"	Class A	80208	0.90	30	0.90	White	A	Low		66%	\$\$
	24"x48"x1"	Class A	89137	0.90	30	0.90	White	A	Low		66%	\$\$
	24"x72"x1"	Class A	89674	0.90	30	0.90	White	A	Low		66%	\$\$
	27"x30"x1"	Class A	80209	0.90	30	0.90	White	A	Low		66%	\$\$
	27"x60"x1"	Class A	80210	0.90	30	0.90	White	A	Low		66%	\$\$
	28"x30"x1"	Class A	80211	0.90	30	0.90	White	A	Low		66%	\$\$
	28"x60"x1"	Class A	80212	0.90	30	0.90	White	A	Low		66%	\$\$
	30"x30"x1"	Class A	80213	0.90	30	0.90	White	A	Low		66%	\$\$
	30"x54"x1"	Class A	80214	0.90	30	0.90	White	A	Low		66%	\$\$
	30"x56"x1"	Class A	80215	0.90	30	0.90	White	A	Low		66%	\$\$
	30"x60"x1"	Class A	89143	0.90	30	0.90	White	A	Low		66%	\$\$
SQ <input type="checkbox"/>	4"x48"x1"	Class A	80216	0.90	30	0.90	White	A	Low		66%	\$\$
	4"x60"x1"	Class A	80217	0.90	30	0.90	White	A	Low		66%	\$\$
	4"x72"x1"	Class A	80218	0.90	30	0.90	White	A	Low		66%	\$\$
	6"x48"x1"	Class A	80219	0.90	30	0.90	White	A	Low		66%	\$\$
	6"x60"x1"	Class A	80220	0.90	30	0.90	White	A	Low		66%	\$\$
	6"x72"x1"	Class A	80221	0.90	30	0.90	White	A	Low		66%	\$\$
	12"x12"x1"	Class A	80222	0.90	30	0.90	White	A	Low		66%	\$\$
	12"x24"x1"	Class A	86137	0.90	30	0.90	White	A	Low		66%	\$\$
	12"x48"x1"	Class A	80223	0.90	30	0.90	White	A	Low		66%	\$\$
	12"x60"x1"	Class A	80224	0.90	30	0.90	White	A	Low		66%	\$\$
	12"x72"x1"	Class A	80225	0.90	30	0.90	White	A	Low		66%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v.1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 90/30

Plant-Based Binder

USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 90/30

Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 90/30

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818



• No Visible Sag
• Mold/Mildew Protection



UL Classified

Edge	Panel Size ⁵	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SLT	20"x54"x1"	Class A	80226	0.90	30	0.90	White	C	Low		66%	\$\$
	20"x56"x1"	Class A	80227	0.90	30	0.90	White	C	Low		66%	\$\$
	20"x60"x1"	Class A	80228	0.90	30	0.90	White	C	Low		66%	\$\$
	21"x24"x1"	Class A	80229	0.90	30	0.90	White	C	Low		66%	\$\$
	21"x48"x1"	Class A	80230	0.90	30	0.90	White	C	Low		66%	\$\$
	22"x24"x1"	Class A	80231	0.90	30	0.90	White	C	Low		66%	\$\$
	22"x48"x1"	Class A	80232	0.90	30	0.90	White	C	Low		66%	\$\$
	24"x24"x1"	Class A	88138	0.90	30	0.90	White	C	Low		66%	\$\$
	24"x42"x1"	Class A	80233	0.90	30	0.90	White	C	Low		66%	\$\$
	24"x44"x1"	Class A	80234	0.90	30	0.90	White	C	Low		66%	\$\$
	24"x48"x1"	Class A	89138	0.90	30	0.90	White	C	Low		66%	\$\$
	24"x72"x1"	Class A	89675	0.90	30	0.90	White	C	Low		66%	\$\$
	27"x30"x1"	Class A	80235	0.90	30	0.90	White	C	Low		66%	\$\$
	27"x60"x1"	Class A	80236	0.90	30	0.90	White	C	Low		66%	\$\$
	28"x30"x1"	Class A	80237	0.90	30	0.90	White	C	Low		66%	\$\$
	28"x60"x1"	Class A	80238	0.90	30	0.90	White	C	Low		66%	\$\$
	30"x30"x1"	Class A	80239	0.90	30	0.90	White	C	Low		66%	\$\$
	30"x54"x1"	Class A	80240	0.90	30	0.90	White	C	Low		66%	\$\$
	30"x56"x1"	Class A	80241	0.90	30	0.90	White	C	Low		66%	\$\$
	30"x60"x1"	Class A	89144	0.90	30	0.90	White	C	Low		66%	\$\$
SLT	4"x48"x1"	Class A	80242	0.90	30	0.90	White	C	Low		66%	\$\$
	4"x60"x1"	Class A	80243	0.90	30	0.90	White	C	Low		66%	\$\$
	4"x72"x1"	Class A	80244	0.90	30	0.90	White	C	Low		66%	\$\$
	6"x48"x1"	Class A	80245	0.90	30	0.90	White	C	Low		66%	\$\$
	6"x60"x1"	Class A	80246	0.90	30	0.90	White	C	Low		66%	\$\$
	6"x72"x1"	Class A	80247	0.90	30	0.90	White	C	Low		66%	\$\$
	12"x12"x1"	Class A	80248	0.90	30	0.90	White	C	Low		66%	\$\$
	12"x24"x1"	Class A	86138	0.90	30	0.90	White	C	Low		66%	\$\$
	12"x48"x1"	Class A	80249	0.90	30	0.90	White	C	Low		66%	\$\$
	12"x60"x1"	Class A	80250	0.90	30	0.90	White	C	Low		66%	\$\$
	12"x72"x1"	Class A	80251	0.90	30	0.90	White	C	Low		66%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC
LOGIX™ FIELD PANELS
90/30
Plant-Based Binder

USG MARS™ HIGH-NRC
LOGIX™ CHANNEL PANELS
90/30
Plant-Based Binder

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 90/30


CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/CG
UL2818



USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 90/30

Plant-Based Binder

USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 90/30

Plant-Based Binder

Edge	Panel Size ⁵	Fire Rating	Item No.	UL Classified		LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC Min.							
FLB	20"x54"x1"	Class A	80252	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	20"x56"x1"	Class A	80253	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	20"x60"x1"	Class A	80254	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	21"x24"x1"	Class A	80255	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	21"x48"x1"	Class A	80256	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	22"x24"x1"	Class A	80257	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	22"x48"x1"	Class A	80258	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	24"x24"x1"	Class A	88139	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	24"x42"x1"	Class A	80259	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	24"x44"x1"	Class A	80260	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	24"x48"x1"	Class A	89139	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	24"x72"x1"	Class A	89678	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	27"x30"x1"	Class A	80261	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	27"x60"x1"	Class A	80262	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	28"x30"x1"	Class A	80263	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	28"x60"x1"	Class A	80264	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	30"x30"x1"	Class A	80265	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	30"x54"x1"	Class A	80266	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	30"x56"x1"	Class A	80267	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	30"x60"x1"	Class A	89145	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
FLB	4"x48"x1"	Class A	80268	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	4"x60"x1"	Class A	80269	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	4"x72"x1"	Class A	80270	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	6"x48"x1"	Class A	80271	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	6"x60"x1"	Class A	80272	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	6"x72"x1"	Class A	80273	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	12"x12"x1"	Class A	80274	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	12"x24"x1"	Class A	86139	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	12"x48"x1"	Class A	80275	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	12"x60"x1"	Class A	80276	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$
	12"x72"x1"	Class A	80277	0.90	30	0.90	White	D,E,F	Low	Green	66%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance³
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

**FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818

GRID PROFILE OPTIONS

PHYSICAL DATA/ FOOTNOTES



A USG DX [®] /DXL™	B ⁴ USG Centricitee™ DXT™	C USG DX [®] /DXL™	D USG Centricitee™ DXT™	E USG Fineline [®] DXF™	F USG Identitee [®] DXI™

Product literature

Data sheet: IS274
System guide: IS268

ASTM E1264 classification

Type IV, Form 1 and 2, Pattern E, G

ASTM E84 and CAN/ULC S102

surface-burning characteristics

Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight

1.03 lb./sq. ft. (3/4")
1.05-1.12 lb./sq. ft. (7/8")
1.26 lb./sq. ft. (1")

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance

R-2.2 (3/4")

Maintenance

Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean white cloth with water or a mild detergent and wipe surface.

Maximum backloading

See *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

Notes

1. For details see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
2. LR values are shown as averages.
3. Panel face and back surfaces treated with a proprietary broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold and mildew. For details, see *USG 30-Year Limited System Warranty Commercial Applications (SC2102)* and *USG ClimaPlus™ Ceilings Certification of Performance (SC2451)*.
4. Maximum 2'x2' with SQ edge panels.
5. Stabilizer bar required if opening ≥ 60".

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IS274/rev. 3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXI, DXL, DXT, FINELINE, HALCYON, IDENTITEE, LOGIX, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG LOGIX™

SUSPENSION SYSTEMS, ACCESSORIES, USG PANZ® METAL PANELS
AND CONNECTOR PANELS



2'x4' USG Halcyon™ Acoustical Panels/USG Donn® Brand Centricitee™ DXT™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM




Flat White
050

PROFILE



EDGE DETAIL



FEATURES AND BENEFITS

- Compatible with USG Logix™ Integrated System.
- Monolithic, structured ceiling visual using standard components.
- Designed to be compatible with a wide selection of 4", 6" and 12" utilities.
- Narrow-profile USG Donn® Brand Centricitee™ 9/16" DXT™ exposed grid system offers clean aesthetic.
- Concentrate utilities on narrow 4", 6" and 12" channels.
- Wide variety of connector panels offers many options, allowing the freedom to transform the utilities into dramatic design elements.
- The USG Logix™ yoke is compatible with all Imperial and Metric utility channel options and with a wide selection of 4", 6" and 12" Luminaires.

APPLICATIONS

- Interior general-use areas
- Open-plan offices
- Conference rooms
- Reception and lobby areas
- Media centers and libraries
- Airports

USG LOGIX™ SUSPENSION SYSTEMS

USG DONN® BRAND DX® AND CENTRICITEE™ DXT™ SYSTEMS (IMPERIAL)

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


TECHNICAL SERVICES
800 USG.4YOU (874-4968)




System meets or exceeds load compliance specifications per ASTM C635

USG DONN® BRAND DX® 15/16" TEE SYSTEM

Main Tee




Cross Tee




USG DONN® BRAND CENTRICITEE™ DXT™ 9/16" TEE SYSTEM

Main Tee



Cross Tee



ASTM Class	Length	Height	Item No.	Post-consumer RC	Total RC	Description	
Intermediate Duty	144"	1.64"	DX/DXL24 DX24SP101 DX24SP104 DX24SP106 DX24SP110	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with CT hole, 6" o.c. USG Donn® Brand DX® Main Tee with 4" paired CT holes, 48" o.c. USG Donn® Brand DX® Main Tee with 4" paired CT holes, for 46", 48", 46" Large Panels USG Donn® Brand DX® Main Tee with 6" paired CT holes, for 46", 48", 46" Large Panels USG Donn® Brand DX® Main Tee with 4" paired CT holes, for 72" Large Panels	
	120"	1.64"	DX24SP102 DX24SP109	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 4" paired CT holes, 30" o.c. USG Donn® Brand DX® Main Tee with 6" paired CT holes, 60" o.c.	
	104"	1.64"	DX24SP103	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 4" paired CT holes, 52" o.c.	
	128"	1.64"	DX24SP107	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 4" paired CT holes, 64" o.c.	
	100"	1.64"	DX24SP108	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 4" paired CT holes, 100" o.c.	
	96"	1.64"	DX24SP105	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 6" paired CT holes, 21" o.c.	
	Intermediate Duty	21"	1-1/2"	DX2116	up to 26%	up to 33%	21" USG Donn® Brand DX® Cross Tee
		24"	1-1/2"	DX216	up to 26%	up to 33%	24" USG Donn® Brand DX® Cross Tee
		22"	1-1/2"	DX2216	up to 26%	up to 33%	22" USG Donn® Brand DX® Cross Tee
		28"	1-1/2"	DX2816	up to 26%	up to 33%	28" USG Donn® Brand DX® Cross Tee
30"		1-1/2"	DX3016	up to 26%	up to 33%	30" USG Donn® Brand DX® Cross Tee	
48"		1-1/2"	DX422	up to 26%	up to 33%	48" USG Donn® Brand DX® Cross Tee	
44"		1-1/2"	DX4416	up to 26%	up to 33%	44" USG Donn® Brand DX® Cross Tee	
60"		1-1/2"	DX524	up to 26%	up to 33%	60" USG Donn® Brand DX® Cross Tee	
56"		1-1/2"	DX5616	up to 26%	up to 33%	56" USG Donn® Brand DX® Cross Tee	
72"		1-1/2"	DX624	up to 26%	up to 33%	72" USG Donn® Brand DX® Cross Tee	
Intermediate Duty	144"	1-1/2"	DXT24 DXT24SP101 DXT24SP104 DXT24SP106 DXT24SP110	up to 40%	up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with CT hole, 6" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes, 48" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes, for 46", 48", 46" Large Panels USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes, for 46", 48", 46" Large Panels USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes, for 72" Large Panels	
	120"	1-1/2"	DXT24SP102 DXT24SP109	up to 40%	up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes, 30" o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes, 60" o.c.	
	104"	1-1/2"	DXT24SP103	up to 40%	up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes, 52" o.c.	
	128"	1-1/2"	DXT24SP107	up to 40%	up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes, 64" o.c.	
	100"	1-1/2"	DXT24SP108	up to 40%	up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4" paired CT holes, 100" o.c.	
	96"	1-1/2"	DXT24SP105	up to 40%	up to 47%	USG Donn® Brand Centricitee™ DXT™ Main Tee with 6" paired CT holes, 21" o.c.	
	Intermediate Duty	21"	1-1/2"	DXT2122	up to 26%	up to 33%	21" USG Donn® Brand Centricitee™ DXT™ Cross Tee
		24"	1-1/2"	DXT222	up to 26%	up to 33%	24" USG Donn® Brand Centricitee™ DXT™ Cross Tee
		22"	1-1/2"	DXT2222	up to 26%	up to 33%	22" USG Donn® Brand Centricitee™ DXT™ Cross Tee
		28"	1-1/2"	DXT2822	up to 26%	up to 33%	28" USG Donn® Brand Centricitee™ DXT™ Cross Tee
30"		1-1/2"	DXT3022	up to 26%	up to 33%	30" USG Donn® Brand Centricitee™ DXT™ Cross Tee	
48"		1-1/2"	DXT424	up to 26%	up to 33%	48" USG Donn® Brand Centricitee™ DXT™ Cross Tee	
44"		1-1/2"	DXT4422	up to 26%	up to 33%	44" USG Donn® Brand Centricitee™ DXT™ Cross Tee	
60"		1-1/2"	DXT524	up to 26%	up to 33%	60" USG Donn® Brand Centricitee™ DXT™ Cross Tee	
56"		1-1/2"	DXT5622	up to 26%	up to 33%	56" USG Donn® Brand Centricitee™ DXT™ Cross Tee	
72"		1-1/2"	DXT624	up to 26%	up to 33%	72" USG Donn® Brand Centricitee™ DXT™ Cross Tee	
96"	1-1/2"	DXT824	up to 26%	up to 33%	96" USG Donn® Brand Centricitee™ DXT™ Cross Tee		

USG LOGIX™ SUSPENSION SYSTEMS

USG DONN® BRAND IDENTITEE® DXI™ (IMPERIAL) AND DX® (METRIC) SYSTEMS

ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 fax: 888.874.2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com


TECHNICAL SERVICES
 800.USG.4YOU (874-4968)




USG LOGIX™ SUSPENSION SYSTEMS - IMPERIAL

USG DONN® BRAND IDENTITEE® DXI™ 9/16" TEE SYSTEM

Main Tee



Cross Tee




ASTM Class	Length	Height	Item No.	Post-consumer RC	Total RC	Description
Intermediate Duty	144"	1-13/16"	DXI24 DXI24SP101 DXI24SP104 DXI24SP106 DXI24SP110	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with CT hole, 6" o.c. USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 48" o.c. USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, for 46"; 48"; 46" Large Panels USG Donn® Brand Identitee® DXI™ Main Tee with 6" paired CT holes, for 46"; 48"; 46" Large Panels USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, for 72" Large Panels
	120"	1-13/16"	DXI24SP102 DXI24SP109	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 30" o.c. USG Donn® Brand Identitee® DXI™ Main Tee with 6" paired CT holes, 60" o.c.
	104"	1-13/16"	DXI24SP103	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 52" o.c.
	128"	1-13/16"	DXI24SP107	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 64" o.c.
	100"	1-13/16"	DXI24SP108	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 100" o.c.
	96"	1-13/16"	DXI24SP105	up to 50.4%	up to 61%	USG Donn® Brand Identitee® DXI™ Main Tee with 6" paired CT holes, 21" o.c.
	21"	1-13/16"	DXI2124	up to 50.4%	up to 33%	21" USG Donn® Brand Identitee® DXI™ Cross Tee
	22"	1-13/16"	DXI2224	up to 50.4%	up to 33%	22" USG Donn® Brand Identitee® DXI™ Cross Tee
	24"	1-13/16"	DXI224	up to 50.4%	up to 33%	24" USG Donn® Brand Identitee® DXI™ Cross Tee
	28"	1-13/16"	DXI2824	up to 50.4%	up to 33%	28" USG Donn® Brand Identitee® DXI™ Cross Tee
	30"	1-13/16"	DXI3024	up to 50.4%	up to 33%	30" USG Donn® Brand Identitee® DXI™ Cross Tee
	48"	1-13/16"	DXI424	up to 50.4%	up to 33%	48" USG Donn® Brand Identitee® DXI™ Cross Tee
	44"	1-13/16"	DXI4424	up to 50.4%	up to 33%	44" USG Donn® Brand Identitee® DXI™ Cross Tee
	60"	1-13/16"	DXI524	up to 50.4%	up to 33%	60" USG Donn® Brand Identitee® DXI™ Cross Tee
	56"	1-13/16"	DXI5624	up to 50.4%	up to 33%	56" USG Donn® Brand Identitee® DXI™ Cross Tee
	72"	1-13/16"	DXI624	up to 50.4%	up to 33%	72" USG Donn® Brand Identitee® DXI™ Cross Tee
	96"	1-13/16"	DXI824	up to 50.4%	up to 33%	96" USG Donn® Brand Identitee® DXI™ Cross Tee


USG LOGIX™ SUSPENSION SYSTEMS – METRIC

USG DONN® BRAND DX® 24 MM TEE SYSTEM

Main Tee



Cross Tee



ASTM Class	Length	Height	Item No.	Post-consumer RC	Total RC	Description
Intermediate Duty	3600 mm	42 mm	MEDX3600	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with CT hole, 150 mm o.c.
	2400 mm	42 mm	MEDX24SP201 MEDX24SP204	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 100 mm paired CT holes, 1200 mm o.c. USG Donn® Brand DX® Main Tee with 150 mm paired CT holes, 1200 mm o.c.
	2600 mm	42 mm	MEDX24SP203	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 100 mm paired CT holes, 1300 mm o.c.
	3000 mm	42 mm	MEDX24SP205 MEDX24SP206	up to 40%	up to 47%	USG Donn® Brand DX® Main Tee with 100 mm paired CT holes, 1500 mm o.c. USG Donn® Brand DX® Main Tee with 150 mm paired CT holes, 1500 mm o.c.
	1000 mm	38 mm	MEDX1000	up to 26%	up to 33%	1000 mm USG Donn® Brand DX® Cross Tee
	1050 mm	38 mm	MEDX1050	up to 26%	up to 33%	1050 mm USG Donn® Brand DX® Cross Tee
	1100 mm	38 mm	MEDX1100	up to 26%	up to 33%	1100 mm USG Donn® Brand DX® Cross Tee
	1200 mm	38 mm	MEDX1200	up to 26%	up to 33%	1200 mm USG Donn® Brand DX® Cross Tee
	1350 mm	38 mm	MEDX1350	up to 26%	up to 33%	1350 mm USG Donn® Brand DX® Cross Tee
	1400 mm	38 mm	MEDX1400	up to 26%	up to 33%	1400 mm USG Donn® Brand DX® Cross Tee
	1500 mm	38 mm	MEDX1500	up to 26%	up to 33%	1500 mm USG Donn® Brand DX® Cross Tee
	1800 mm	38 mm	MEDX1800	up to 26%	up to 33%	1800 mm USG Donn® Brand DX® Cross Tee
	1900 mm	38 mm	MEDX1900	up to 26%	up to 33%	1900 mm USG Donn® Brand DX® Cross Tee
	525 mm	38 mm	MEDX525	up to 26%	up to 33%	525 mm USG Donn® Brand DX® Cross Tee
	550 mm	38 mm	MEDX550	up to 26%	up to 33%	550 mm USG Donn® Brand DX® Cross Tee
	600 mm	38 mm	MEDX600	up to 26%	up to 33%	600 mm USG Donn® Brand DX® Cross Tee
	675 mm	38 mm	MEDX675	up to 26%	up to 33%	675 mm USG Donn® Brand DX® Cross Tee
	700 mm	38 mm	MEDX700	up to 26%	up to 33%	700 mm USG Donn® Brand DX® Cross Tee

USG LOGIX™ SUSPENSION SYSTEMS

USG DONN® BRAND CENTRICITEE™ AND IDENTITEE™ DXI™ (METRIC) SYSTEMS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


TECHNICAL SERVICES
800 USG.4YOU (874-4968)




System meets or
exceeds load compliance
specifications per
ASTM C635

USG DONN® BRAND CENTRICITEE™ DXI™ 15 MM TEE SYSTEM

Main Tee




Cross Tee




USG DONN® BRAND IDENTITEE™ DXI™ 15 MM TEE SYSTEM

Main Tee



Cross Tee



ASTM Class	Length	Height	Item No.	Post-consumer RC	Total RC	Description
Intermediate Duty	3600 mm	46 mm	MEDX3600	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with CT hole, 150 mm o.c.
	2400 mm	46 mm	MEDXT24SP201 MEDXT24SP204	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with 100 mm paired CT holes, 1200 mm o.c. USG Donn® Brand Centricitee™ Main Tee with 150 mm paired CT holes, 1200 mm o.c.
	2600 mm	46 mm	MEDXT24SP203	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with 100 mm paired CT holes, 1300 mm o.c.
	3000 mm	46 mm	MEDXT24SP205 MEDXT24SP206	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with 100 mm paired CT holes, 1500 mm o.c. USG Donn® Brand Centricitee™ Main Tee with 150 mm paired CT holes, 1500 mm o.c.
Intermediate Duty	1000 mm	38 mm	MEDXT1000	up to 26%	up to 33%	1000 mm USG Donn® Brand Centricitee™ Cross Tee
	1050 mm	38 mm	MEDXT1050	up to 26%	up to 33%	1050 mm USG Donn® Brand Centricitee™ Cross Tee
	1100 mm	38 mm	MEDXT1100	up to 26%	up to 33%	1100 mm USG Donn® Brand Centricitee™ Cross Tee
	1200 mm	38 mm	MEDXT1200	up to 26%	up to 33%	1200 mm USG Donn® Brand Centricitee™ Cross Tee
	1350 mm	38 mm	MEDXT1350	up to 26%	up to 33%	1350 mm USG Donn® Brand Centricitee™ Cross Tee
	1400 mm	38 mm	MEDXT1400	up to 26%	up to 33%	1400 mm USG Donn® Brand Centricitee™ Cross Tee
	1500 mm	38 mm	MEDXT1500	up to 26%	up to 33%	1500 mm USG Donn® Brand Centricitee™ Cross Tee
	1800 mm	38 mm	MEDXT1800	up to 26%	up to 33%	1800 mm USG Donn® Brand Centricitee™ Cross Tee
	1900 mm	38 mm	MEDXT1900	up to 26%	up to 33%	1900 mm USG Donn® Brand Centricitee™ Cross Tee
	525 mm	38 mm	MEDXT525	up to 26%	up to 33%	525 mm USG Donn® Brand Centricitee™ Cross Tee
	550 mm	38 mm	MEDXT550	up to 26%	up to 33%	550 mm USG Donn® Brand Centricitee™ Cross Tee
	600 mm	38 mm	MEDXT600	up to 26%	up to 33%	600 mm USG Donn® Brand Centricitee™ Cross Tee
	675 mm	38 mm	MEDXT675	up to 26%	up to 33%	675 mm USG Donn® Brand Centricitee™ Cross Tee
	700 mm	38 mm	MEDXT700	up to 26%	up to 33%	700 mm USG Donn® Brand Centricitee™ Cross Tee
Intermediate Duty	3600 mm	46 mm	MEDXI3600	up to 50.4%	up to 61%	USG Donn® Brand Identitee® Main Tee with CT hole, 150 mm o.c.
	2400 mm	46 mm	MEDXI24SP201 MEDXI24SP204	up to 50.4%	up to 61%	USG Donn® Brand Identitee® Main Tee with 100 mm paired CT holes, 1200 mm o.c. USG Donn® Brand Identitee® Main Tee with 150 mm paired CT holes, 1200 mm o.c.
	2600 mm	46 mm	MEDXI24SP203	up to 50.4%	up to 61%	USG Donn® Brand Identitee® Main Tee with 100 mm paired CT holes, 1300 mm o.c.
	3000 mm	46 mm	MEDXI24SP205 MEDXI24SP206	up to 50.4%	up to 61%	USG Donn® Brand Identitee® Main Tee with 100 mm paired CT holes, 1500 mm o.c. USG Donn® Brand Identitee® Main Tee with 150 mm paired CT holes, 1500 mm o.c.
Intermediate Duty	1000 mm	46 mm	MEDXI1000	up to 50.4%	up to 61%	1000 mm USG Donn® Brand Identitee® Cross Tee
	1050 mm	46 mm	MEDXI1050	up to 50.4%	up to 61%	1050 mm USG Donn® Brand Identitee® Cross Tee
	1100 mm	46 mm	MEDXI1100	up to 50.4%	up to 61%	1100 mm USG Donn® Brand Identitee® Cross Tee
	1200 mm	46 mm	MEDXI1200	up to 50.4%	up to 61%	1200 mm USG Donn® Brand Identitee® Cross Tee
	1350 mm	46 mm	MEDXI1350	up to 50.4%	up to 61%	1350 mm USG Donn® Brand Identitee® Cross Tee
	1400 mm	46 mm	MEDXI1400	up to 50.4%	up to 61%	1400 mm USG Donn® Brand Identitee® Cross Tee
	1500 mm	46 mm	MEDXI1500	up to 50.4%	up to 61%	1500 mm USG Donn® Brand Identitee® Cross Tee
	1800 mm	46 mm	MEDXI1800	up to 50.4%	up to 61%	1800 mm USG Donn® Brand Identitee® Cross Tee
	1900 mm	46 mm	MEDXI1900	up to 50.4%	up to 61%	1900 mm USG Donn® Brand Identitee® Cross Tee
	525 mm	46 mm	MEDXI1525	up to 50.4%	up to 61%	525 mm USG Donn® Brand Identitee® Cross Tee
	550 mm	46 mm	MEDXI1550	up to 50.4%	up to 61%	550 mm USG Donn® Brand Identitee® Cross Tee
	600 mm	46 mm	MEDXI1600	up to 50.4%	up to 61%	600 mm USG Donn® Brand Identitee® Cross Tee
	675 mm	46 mm	MEDXI1675	up to 50.4%	up to 61%	675 mm USG Donn® Brand Identitee® Cross Tee
	700 mm	46 mm	MEDXI1700	up to 50.4%	up to 61%	700 mm USG Donn® Brand Identitee® Cross Tee

USG LOGIX™ ACCESSORIES

IMPERIAL AND METRIC














ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

USG LOGIX™ INTEGRATED CEILING SYSTEMS


Yoke and Cross Members

Accessories	Item No.	Description	Color	Accessories	Item No.	Description	Color
	LGXUNVYK	USG Logix™ Universal Yoke 4", 6", 100 mm, 150 mm, HDG, 2-part yoke	N/A		LGXDXT6	USG Logix™ 6" channel cross member USG Donn® Brand Centricitee™ DXT™ systems	Flat White
	LGXD4	USG Logix™ 4" channel cross member for USG Donn® Brand DX® systems	Flat White		LGXDXT100	USG Logix™ 100 mm channel cross member USG Donn® Brand Centricitee™ DXT™ systems	Flat White
	LGXD6	USG Logix™ 6" channel cross member USG Donn® Brand DX® systems	Flat White		LGXDXT150	USG Logix™ 150 mm channel cross member USG Donn® Brand Centricitee™ DXT™ systems	Flat White
	LGXD100	USG Logix™ 100 mm channel cross member USG Donn® Brand DX® systems	Flat White		LGDXI4C	USG Logix™ 4" channel cross member cover for USG Donn® Brand Identitee® DXI™ systems. Used with LGXD4	Flat White
	LGXD150	USG Logix™ 150 mm channel cross member USG Donn® Brand DX® systems	Flat White		LGDXI6C	USG Logix™ 6" channel cross member Cover USG Donn® Brand Identitee® DXI™ systems. Used with LGXD6	Flat White
	LGXDXT4	USG Logix™ 4" channel cross member for USG Donn® Brand Centricitee™ DXT™ systems	Flat White		LGDXI100C	USG Logix™ 100 mm channel cross member cover USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT100	Flat White
					LGDXI150C	USG Logix™ 150 mm channel cross member cover USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT150	Flat White

CROSS MEMBER COVER

To Create a DXI Cross Tee	Use Channel Cross Member (Item No.)	Use Channel Cross Member Cover (Item No.)
USG Logix™ 4"	LGXDXT4	LGDXI4C
USG Logix™ 6"	LGXDXT6	LGDXI6C
USG Logix™ 100 mm	LGXDXT100	LGDXI100C
USG Logix™ 150 mm	LGXDXT150	LGDXI150C

Creating a Channel Cross Member for USG Logix™ DXI™ Systems


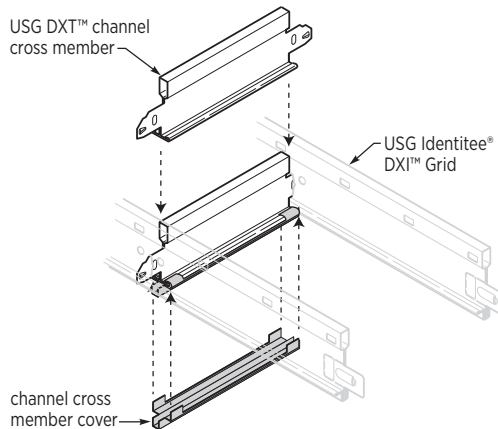


**USG LOGIX™ INTEGRATED
CEILING SYSTEMS
STABILIZER BARS**

Features

- Versatile engineered design provides support, security and accessibility.
- Factory-engineered solution provides system rigidity in large module applications and offers quick installation reducing field labor time.
- Available in six different dimensions to facilitate fast delivery.
- Durable galvanized steel construction.
- Factory-engineered capture tabs prevent panel detachment and lip out.
- Adjustable stab tabs secure bars onto the panel.
- Bulb tabs hook over the grid to prevent detachment, maintain lateral alignment and provide access.


Products



Item No.	Description	Profile
ASB24	24 in. Accessible Stabilizer Bar	2' (24") center to center notch spacing
ASB30	30 in. Accessible Stabilizer Bar	2'-6" (30") center to center notch spacing
ASB48	48 in. Accessible Stabilizer Bar	4 ft. (48") center to center notch spacing
ASB600	600 mm Accessible Stabilizer Bar	600 mm center to center notch spacing
ASB900	900 mm Accessible Stabilizer Bar	900 mm center to center notch spacing
ASB1200	1200 mm Accessible Stabilizer Bar	1200 mm center to center notch spacing


Installation

Panels ≥ 60"

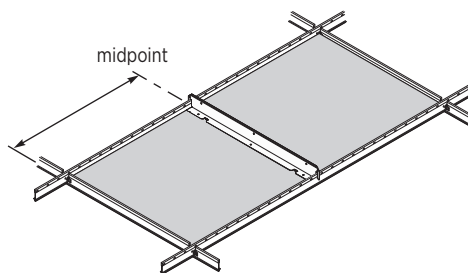

If opening is ≥ 60" then one stabilizer bar is required at midpoint.

Panels ≥ 96"

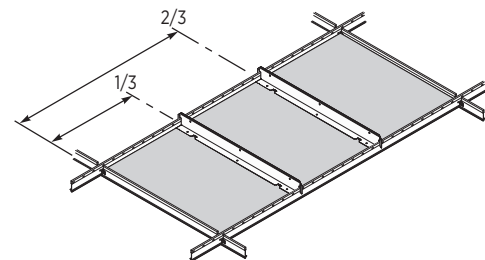

If opening is ≥ 96" then two stabilizer bars are required at the 1/3 and 2/3 points.

USG PANZ® LOGIX™ METAL PANELS





IMPERIAL AND METRIC

ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative







FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com




TECHNICAL SERVICES
 800 USG.4YOU (874-4968)







PRODUCT INFORMATION USG PANZ®

Materials	Available Sizes	Panel Edge Profile
Aluminum	Field Panels 20" x 54"; 20" x 60"; 24" x 24"; 24" x 48"; 24" x 72"; 24" x 96"; 27" x 30"; 30" x 30"; 30" x 54"; 30" x 60"; 48" x 48"	FL Edge 
Aluminum	Channel Panels 4" x 48"; 4" x 60"; 4" x 72"; 6" x 12"; 6" x 48"; 6" x 60"; 6" x 72"; 12" x 48"; 12" x 60"; 12" x 72"	FL Edge SQ Edge   SL Edge 






USG PANZ®

Edge Details					Finish
USG DXT™ Grid, FL Edge	USG DXI™ Grid, FL Edge	USG DXF™ Grid, FL Edge	USG DX® Grid, SQ Edge	USG DX® Grid, SL Edge	
					






Materials	Available Sizes	Panel Edge Profile
Aluminum	Field Panels 600 mm x 550 mm, 600 mm x 600 mm, 675 mm x 500 mm, 750 mm x 700 mm, 1050 mm x 600 mm, 1100 mm x 600 mm, 1800 mm x 600 mm, 1200 mm x 600 mm, 1350 mm x 750 mm, 1400 mm x 500 mm, 1400 mm x 750 mm, 1350 mm x 500 mm	FL Edge SQ Edge   SL Edge 
Aluminum	Channel Panels 1500 mm x 100 mm, 1200 mm x 100 mm, 1000 mm x 100 mm, 1200 mm x 150 mm, 1000 mm x 150 mm, 1800 mm x 300 mm	

Edge Details					Finish
USG DXT™ Grid, FL Edge	USG DXI™ Grid, FL Edge	USG DXF™ Grid, FL Edge	USG DX® Grid, SQ Edge	USG DX® Grid, SL Edge	
					

USG PANZ® PERFORATED C116

Materials	Available Sizes	Panel Edge Profile			
Aluminum	Channel Panels 6" x 48"; 6" x 60"	FL Edge 			
Edge Details					Finish
USG DXT™ Grid, FL Edge	USG DXI™ Grid, FL Edge	USG DXF™ Grid, FL Edge			
					

USG PANZ® PERFORATED C116D

Materials	Available Sizes	Panel Edge Profile			
Aluminum	Channel Panels 6" x 48"; 6" x 60"	FL Edge 			
Edge Details					Finish
USG DXT™ Grid, FL Edge	USG DXI™ Grid, FL Edge	USG DXF™ Grid, FL Edge			
					




USG LOGIX™ CONNECTOR PANELS

IMPERIAL

ORDER SAMPLES/LITERATURE
 USG: samplite@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

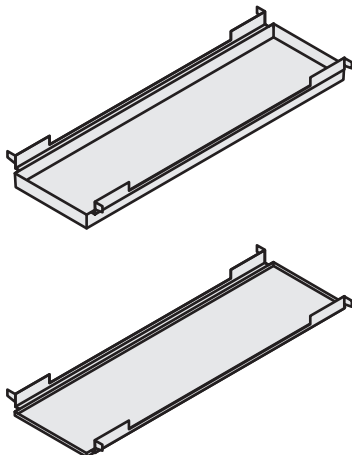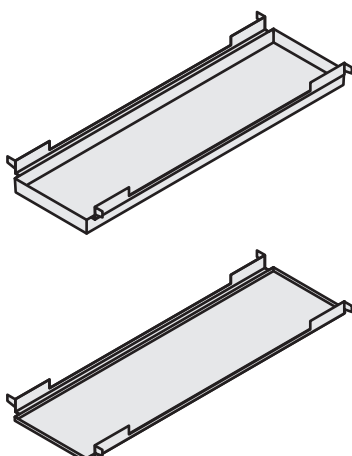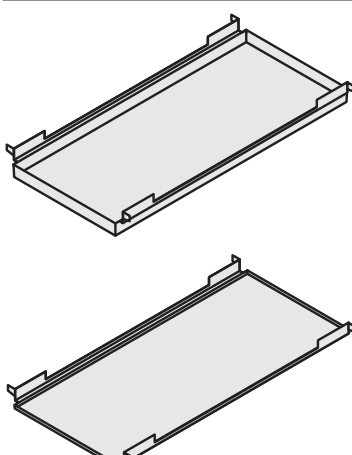USG Logix™ Connector Panels	Item No.	Description ¹	Color
	LCP412-S-FL	USG Logix™ 4" x 12" FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP412-S-FM	USG Logix™ 4" x 12" FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP412-C116-FL	USG Logix™ 4" x 12" FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP412-C116-FM	USG Logix™ 4" x 12" FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP412-C116D-FL	USG Logix™ 4" x 12" FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP412-C116D-FM	USG Logix™ 4" x 12" FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP424-S-FL	USG Logix™ 4" x 24" FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP424-S-FM	USG Logix™ 4" x 24" FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP424-C116-FL	USG Logix™ 4" x 24" FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP424-C116-FM	USG Logix™ 4" x 24" FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP424-C116D-FL	USG Logix™ 4" x 24" FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP424-C116D-FM	USG Logix™ 4" x 24" FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP612-S-FL	USG Logix™ 6" x 12" FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP612-S-FM	USG Logix™ 6" x 12" FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP612-C116-FL	USG Logix™ 6" x 12" FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP612-C116-FM	USG Logix™ 6" x 12" FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP612-C116D-FL	USG Logix™ 6" x 12" FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP612-C116D-FM	USG Logix™ 6" x 12" FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White




USG LOGIX™ CONNECTOR PANELS



METRIC

ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 fax: 888.874.2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

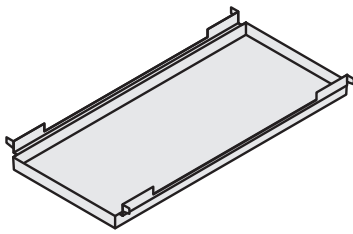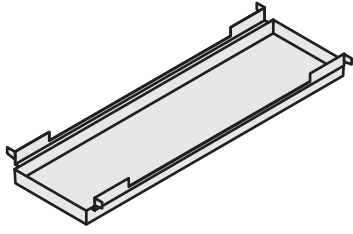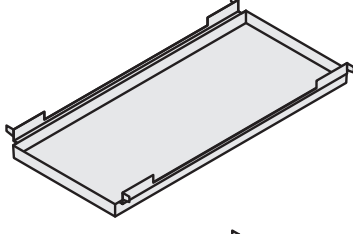USG Logix™ Connector Panels	Item No.	Description ¹	Color
	LCP624-S-FL	USG Logix™ 6" x 24" FW Connector Panel with Finline® (FL) edge, smooth, unperforated	Flat White
	LCP624-S-FM	USG Logix™ 6" x 24" FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP624-C116-FL	USG Logix™ 6" x 24" FW Connector Panel with Finline® (FL) edge, perforated C116	Flat White
	LCP624-C116-FM	USG Logix™ 6" x 24" FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP624-C116D-FL	USG Logix™ 6" x 24" FW Connector Panel with Finline® (FL) edge, perforated C116D	Flat White
	LCP624-C116D-FM	USG Logix™ 6" x 24" FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP100300-S-FL	USG Logix™ 100 mm x 300 mm FW Connector Panel with Finline® (FL) edge, smooth, unperforated	Flat White
	LCP100300-S-FM	USG Logix™ 100 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP100300-C116-FL	USG Logix™ 100 mm x 300 mm FW Connector Panel with Finline® (FL) edge, perforated C116	Flat White
	LCP100300-C116-FM	USG Logix™ 100 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP100300-C116D-FL	USG Logix™ 100 mm x 300 mm FW Connector Panel with Finline® (FL) edge, perforated C116D	Flat White
	LCP100300-C116D-FM	USG Logix™ 100 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP100600-S-FL	USG Logix™ 100 mm x 600 mm FW Connector Panel with Finline® (FL) edge, smooth, unperforated	Flat White
	LCP100600-S-FM	USG Logix™ 100 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP100600-C116-FL	USG Logix™ 100 mm x 600 mm FW Connector Panel with Finline® (FL) edge, perforated C116	Flat White
	LCP100600-C116-FM	USG Logix™ 100 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP100600-C116D-FL	USG Logix™ 100 mm x 600 mm FW Connector Panel with Finline® (FL) edge, perforated C116D	Flat White
	LCP100600-C116D-FM	USG Logix™ 100 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White

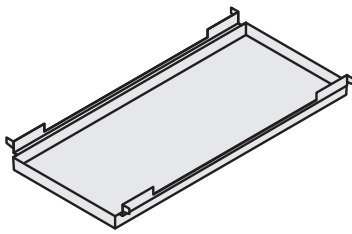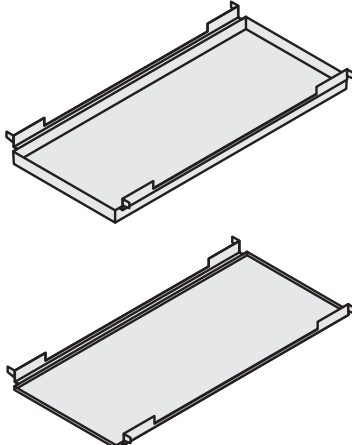USG Logix™ Connector Panels	Item No.	Description ¹	Color
	LCP150300-S-FL	USG Logix™ 150 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP150300-S-FM	USG Logix™ 150 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP150300-C116-FL	USG Logix™ 150 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP150300-C116-FM	USG Logix™ 150 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP150300-C116D-FL	USG Logix™ 150 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP150300-C116D-FM	USG Logix™ 150 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
	LCP150600-S-FL	USG Logix™ 150 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP150600-S-FM	USG Logix™ 150 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP150600-C116-FL	USG Logix™ 150 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP150600-C116-FM	USG Logix™ 150 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP150600-C116D-FL	USG Logix™ 150 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP150600-C116D-FM	USG Logix™ 150 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White

PHYSICAL DATA/
 FOOTNOTES

Product literature

USG Logix™ systems guide: IS268
 USG Logix™ architectural design guide: IS287
 USG Logix™ critical system dimensions: IC609
 See usg.com or cgccinc.com for the most up-to-date product information.

Material

Min. G30 hot-dipped galvanized steel.

Product Evaluation Report

PER-12056

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Installation

Must be installed in compliance with ASTM C636, ASTM E580, CISCA and standard industry practices, within all applicable code requirements. Alternative assemblies and installation methods may be utilized when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system.

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Notice

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Note

1. The connector panels are unique in size and function. They are designed to link various utilities in the utility channel such as luminaires and channel panels without cross tees. Refer to *USG Logix™ Integrated Ceiling Systems Critical System Dimensions* (IC609) for actual dimensions, details and layouts.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IS283/rev. 6-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXI, DXT, FINELINE, HALCYON, IDENTITEE, LOGIX, PANZ, IT'S YOUR WORLD, BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG DONN® BRAND ADVANCESPAN™

USG DONN® BRAND DXAS™ AND DXTAS™ PROFILES



USG Donn® Brand DXAS™
AdvanceSpan™ Main Tees/
USG Mars™ Square Edge Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



Flat White
050

ADVANTAGE COLOR



Coordinating
Matte White
3756

POWDER-COATED FINISH




Powder
White 3767


PROFILE




USG DONN® BRAND DXAS™ EDGE PROFILES




Square Edge




Shadowline Tapered




Shadowline




Shadowline Beveled




USG DONN® BRAND DXTAS™ EDGE PROFILES



Square Edge



Fineline



Fineline: Bevel

FEATURES AND BENEFITS

- Spans up to 8' with no hanger wires.
- Ideal for healthcare, hospitality and multifamily applications with crowded plenum spaces.
- Successfully tested for seismic category D-F installations.
- USG Donn® Brand DX®-15/16" and USG Donn® Brand Centricitee™ DXT™-9/16" face profiles available.
- Reversible structural wall channel works with both USG DX® and DXT™ profiles.
- Compatible with all standard USG DX® and DXT™ cross tees.
- Available in 8'-6", 10'-6" and 12'-6" standard lengths.

APPLICATIONS

- Schools
- Hospitals
- Multifamily dwellings
- Hotels
- General interior use applications

USG DONN® BRAND ADVANCESPAN™

USG DONN® BRAND DXAS™ AND DXTAS™ PROFILES

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

Max Unsupported Span at Rated Load

Item No	Fire Rating	Intermediate Duty (12 lb./LF)	Heavy Duty (16 lb./LF)	Recycled Content	Face Profile	Height	Standard Lengths	Color
DXAS	Class A	8'-0"	7'-0"	HRC	15/16"	2-3/4"	8'-6" 10'-6" 12'-6"	Flat White 050
DXTAS	Class A	8'-0"	7'-0"	HRC	9/16"	2-3/4"	8'-6" 10'-6" 12'-6"	Flat White 050
US44	Class A	—	—	HRC	Reversible for 15/16" or 9/16"	2-7/8"	10'	Flat White 050


*Tested in accordance with ASTM C635 modified.

High Recycled Content
 Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

ACCESSORIES

ASMTSP Splice Plate	US44CC Channel Clip	ASCBC Cross Brace Clip

USG DONN® BRAND ADVANCESPAN™ MAIN TEE DETAILS

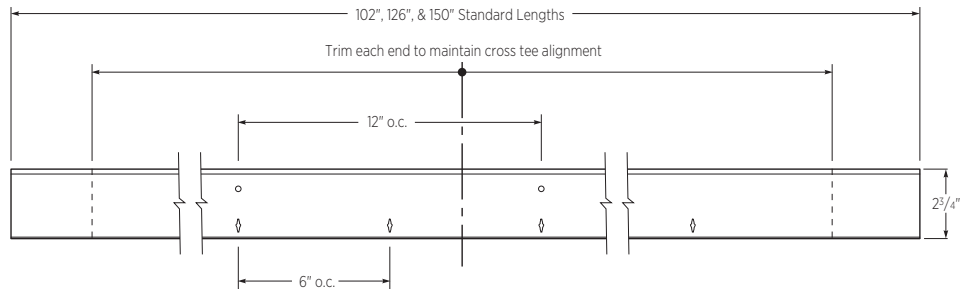

PHYSICAL DATA/ FOOTNOTES

Product literature and samples

Data sheet: AC3324
 Installation guide: AC3325
 USG DXAS™ sample: 259499
 USG DXTAS™ sample: 259500

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint or powder-coated finish.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Compliance

Third-party tested by Progressive Engineering Inc. in accordance with ASTM C635 (modified). Full-scale seismic testing conducted by University of California, Berkeley, Pacific Earthquake Engineering Research Center. Performance validation - PEI Product Evaluation Report PER-16100. Local building codes may vary; check with code official for compliance prior to installing.

Limitations

Interior applications only.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3324/rev. 8-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ADVANCESPAN, CENTRICITEE, DONN, DX, DXAS, DXT, DXTAS, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND AX™/AXCE™ ACOUSTICAL SUSPENSION SYSTEM

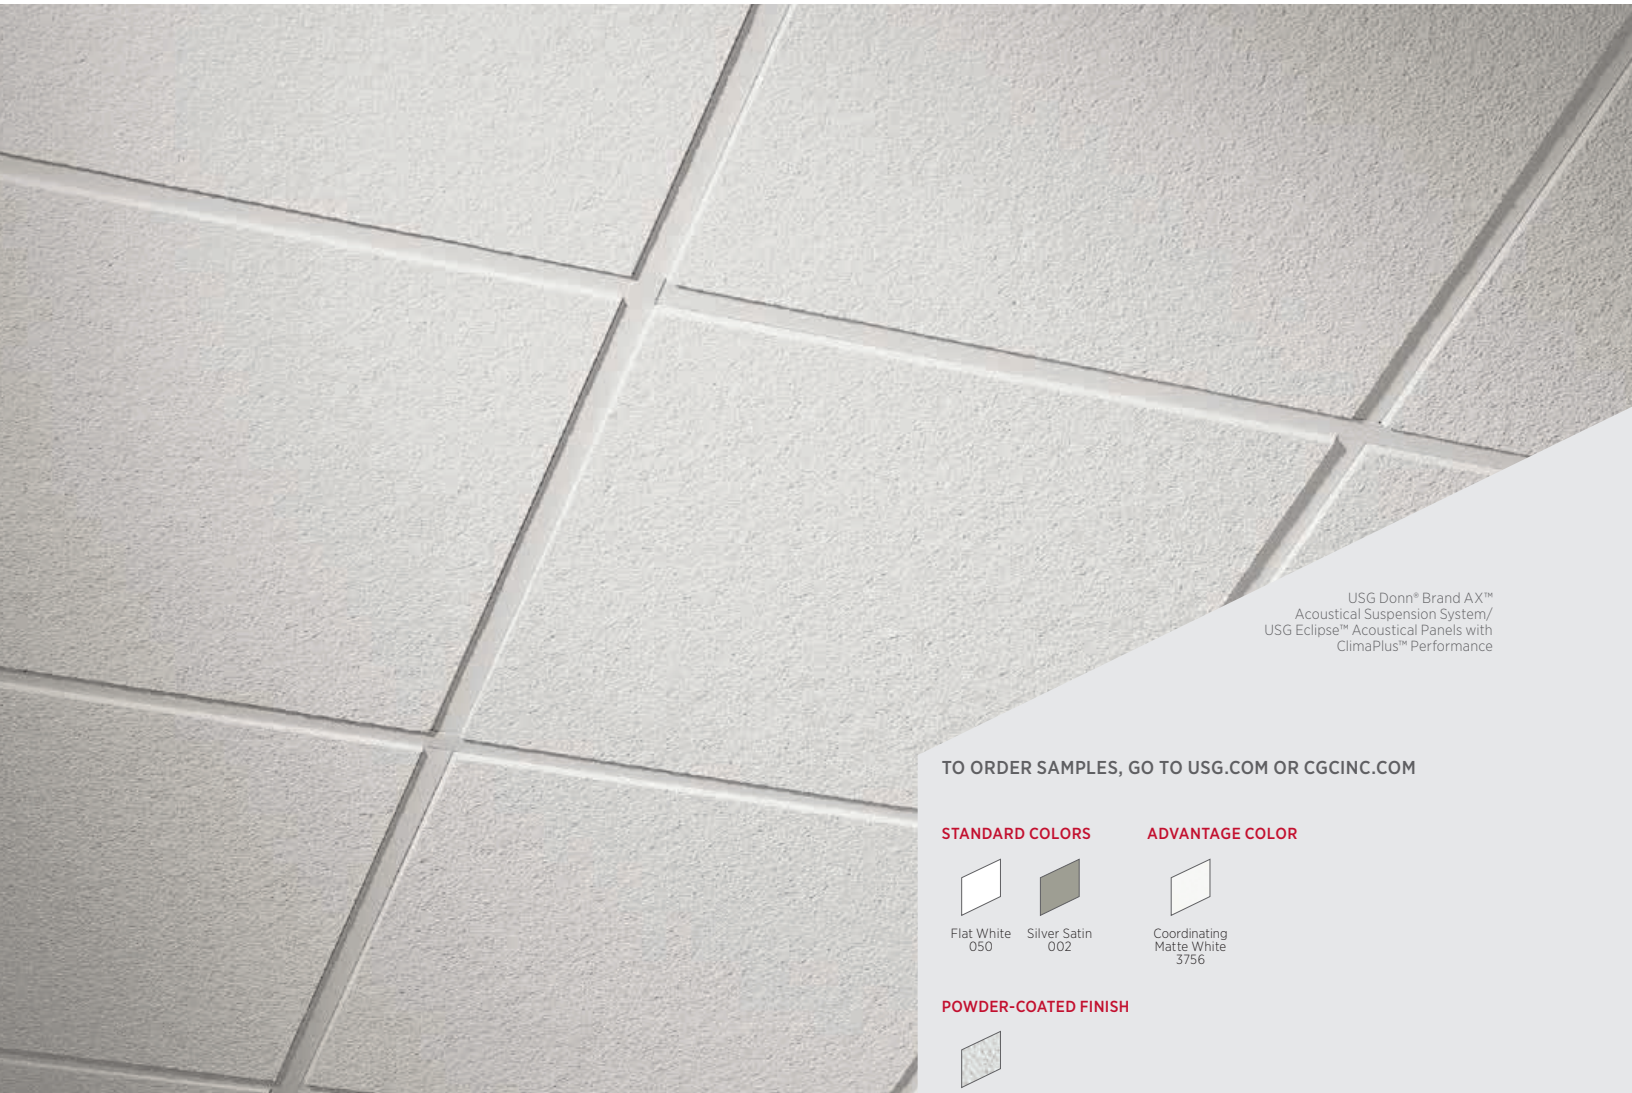

USG Donn® Brand AX™
Acoustical Suspension System/
USG Eclipse™ Acoustical Panels with
ClimaPlus™ Performance

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



Flat White
050



Silver Satin
002



Coordinating
Matte White
3756

POWDER-COATED FINISH



Powder
White 3767

ADVANTAGE COLOR

FEATURES AND BENEFITS

- Meets 2014 *Guidelines For Healthcare Facilities*.
- Noncorrosive aluminum 15/16" exposed grid system with stainless steel clip, ideal for high-humidity or wet-cleaned areas.
- Capable of withstanding cleaning and/or disinfecting chemicals as tested in accordance with ASTM D5402.
- Tested for environmental conditions in accordance with ASTM C635.
- Aluminum components can be used in nonmagnetic environments and meet USDA/FSIS requirements.
- Cross-tee override-ends resist twisting and give a professionally finished look.
- Proprietary stainless steel Quick-Release™ clip.
- Up to 90% recycled content.
- Factory-applied white, closed-cell foam gasket.


APPLICATIONS

- Healthcare facilities, restricted and semirestricted areas
- MRI rooms
- Magnetic-free zones
- High-humidity areas
- Food processing areas
- Certified to meet ISO 14644-1 Class 5 (Fed. Standard 209E Class 100)

PROFILE




USG Donn® Brand
AX™




USG Donn® Brand
AXCE™


EDGE DETAIL




Square Edge




Shadowline Tapered



Shadowline



Shadowline Beveled




Square Edge w/Gasket

USG DONN® BRAND AX™/AXCE™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)




USG DONN® BRAND AX™ 15/16" TEE SYSTEM⁴

Main Tee




Cross Tee




USG DONN® BRAND AXCE™ 15/16" TEE SYSTEM⁴



Main Tee



Cross Tee



MOLDING^{2,3,4}



PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3041/rev. 4-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

ASTM Class	Length	Height	Item No.	Fire Rating	Color	Recycled Content	Rated Load ¹								
							2' Hanger Spacing	30" Hanger Spacing	4' Hanger Spacing						
Light Duty	12'	1-1/2" 38 mm	AX26	Class A	Flat White		49 lb./LF	28 lb./LF	7 lb./LF						
										2'	1-1/2" 38 mm	AX224	Class A	Flat White	
										4'	1-1/2" 38 mm	AX424	Class A	Flat White	
Light Duty	12'	1-1/2" 38 mm	AXCE26	Class A	Flat White		49 lb./LF	28 lb./LF	7 lb./LF						
										2'	1-1/2" 38 mm	AXCE224	Class A	Flat White	
										4'	1-1/2" 38 mm	AXCE424	Class A	Flat White	

Wall Angle	Length	Item No.	Color	Recycled Content	Wall Angle	Length	Item No.	Color	Recycled Content
	12'	M7A	Flat White	up to 65%		10'	UA25	Flat White	up to 65%
	12'	M7ACE	Flat White	up to 65%		10'	UA25CE	Flat White	up to 65%

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Product literature and samples

Data sheet: AC3041
USG Donn® Brand AX™ sample: 272638
USG Donn® Brand AXCE™ sample: 216857

Product information

See usg.com for the most up-to-date product information.

Material

Double-web aluminum tee with aluminum cap and stainless steel Quick-Release™ clip. Baked-on polyester paint or powder-coated finish.

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Limitations

Non-fire-rated applications only. Finish is not UV-resistant; should not be installed where direct exposure to sun or weather will occur, such as fascias or facades. Indirect exposure to severe environmental conditions may shorten the lifespan of the product. The gasket face applied to USG Donn® Brand AXCE™ contains a protective strip that must be removed prior to panel installation. The standard gasket is not recommended for installations with metal panels. If metal panels are desired, a special gasket suitable for metal panels may be applied to the USG Donn® Brand AXCE™ suspension system through special order.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Seismic and heavy duty applications

See SC2499.

Notes

1. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
2. Perimeter panels must be trimmed so that the edge extends completely over the gasket
3. UA25CE molding and L15 and C8 hold-down clips are required for ISO Class 5 Clean Room applications.
4. Metric sizes available by RTQ.

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, AX, AXCE, CLIMAPLUS, DONN, ECLIPSE, QUICK-RELEASE, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND CE™ ACOUSTICAL SUSPENSION SYSTEM

USG Donn® Brand CE™
Acoustical Suspension System/
USG Clean Room™ Acoustical
Panels with ClimaPlus™
Performance-Class 100

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS




Flat White
050

POWDER-COATED FINISH




Powder
White 3767

PROFILE




USG Donn® Brand



USG Donn® Brand

EDGE DETAIL



Square Edge

FEATURES AND BENEFITS

- Grid system with factory-applied white, closed-cell foam gaskets for controlled environments.
- Min. G30 hot-dipped galvanized body provides corrosion protection.
- Supports Clean Room HEPA filters and lights.
- ICC-ES evaluated for building code compliance and seismic installations (ICC-ESR-1222).
- Capable of withstanding cleaning and/or disinfecting chemicals as tested in accordance with ASTM D402.

APPLICATIONS

- Clean rooms
- Hospitals
- Food processing areas
- Healthcare facilities
- Certified to meet ISO 14644-1 Class 5 (Fed. Standard 209E Class 100)

USG DONN® BRAND CE™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL

TECHNICAL SERVICES
800 USG.4YOU (874-4968)


30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection

HRC HIGH RECYCLED CONTENT


1-1/2" TEE SYSTEM⁷ Main Tee




Cross Tee 1-1/2"





15/16" TEE SYSTEM Main Tee



Cross Tee 1-1/2"



MOLDING^{4,5,7}



ASTM Class	Length	Height	Item No.	Fire Rating	Color	Seismic Design Category		Rated Load ^{1,2,3}		
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
Heavy Duty	12'	1-1/2" 38 mm	DXWCE26 		Flat White	A-F		16 lb./LF	7.3 lb./LF	4.9 lb./LF
	2'	1-1/2" 38 mm	DXWCE224	Class A	Flat White	—	—	36 lb./LF		
	4'	1-1/2" 38 mm	DXWCE424	Class A	Flat White	—	—	13 lb./LF		
Intermediate Duty	12'	1.64" 42 mm	DXCE24	Class A	Flat White	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.1 lb./LF	3.6 lb./LF
	Heavy Duty	12'	1.64" 42 mm	DXCE26	Class A	Flat White	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF
	2'	1-1/2" 38 mm	DXCE224	Class A	Flat White					
	4'	1-1/2" 38 mm	DXCE424	Class A	Flat White					
Wall Angle	Length	Item No.	Color	Hold-Down Clips ⁶						
	12'	M7CE 	Flat White							
	10'	US28CE	Flat White							

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

PHYSICAL DATA/ FOOTNOTES

Product literature and samples

Data sheet: AC3129
DXCE sample: 207901

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint or powder-coated finish.

Installation

Must be installed in compliance with ASTM C636, ASTM E580, CISCA and standard industry practices, within all applicable code requirements. Class 5 (Fed. Standard 209E Class 100) installations require hold-down clips and US28CE molding. Install a L15 hold-down clip within 3 in. of each panel corner. For a 2' x 4' system install an additional L15 hold-down clip centered on the 4' side. Border panels shall have a C-8 hold-down clip within 3 in. of each panel corner. For a 2' x 4' system install an additional C-8 hold-down clip centered on the 4' side. Alternative assemblies and installation methods may be utilized when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Limitations

Interior applications only. The gasket face contains a protective strip that must be removed prior to panel installation. The standard gasket is not recommended for installations with metal panels. If metal panels are desired, a special gasket suitable for metal panels may be applied to the USG Donn® Brand CE™ Acoustical Suspension System through special order.

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Healthcare facilities

– Capable of withstanding cleaning and/or disinfecting chemicals as tested in accordance with ASTM D402-93.

Testing

Tested in accordance with Federal Standard 209E.

Notes

1. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
2. When required, lay-in light fixtures used in Clean Room ceiling assemblies shall be certified for Clean Room applications.
3. HEPA filters must be supported at all four corners of grid module.
4. For more information on moldings, see Perimeter Interface selector.
5. Panels must be field-cut to size at the perimeter.
6. US28CE molding and L15 and C-8 hold-down clips required for Clean Room ISO Class 5 (Fed. Standard 209E Class 100) applications.
7. Metric sizes available by RTQ.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3129/rev. 2-18


© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CE, CLEAN ROOM, CLIMAPLUS, DONN, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.


USG DONN® BRAND CENTRICITEE™ DXT™/DXLT™ ACOUSTICAL SUSPENSION SYSTEM

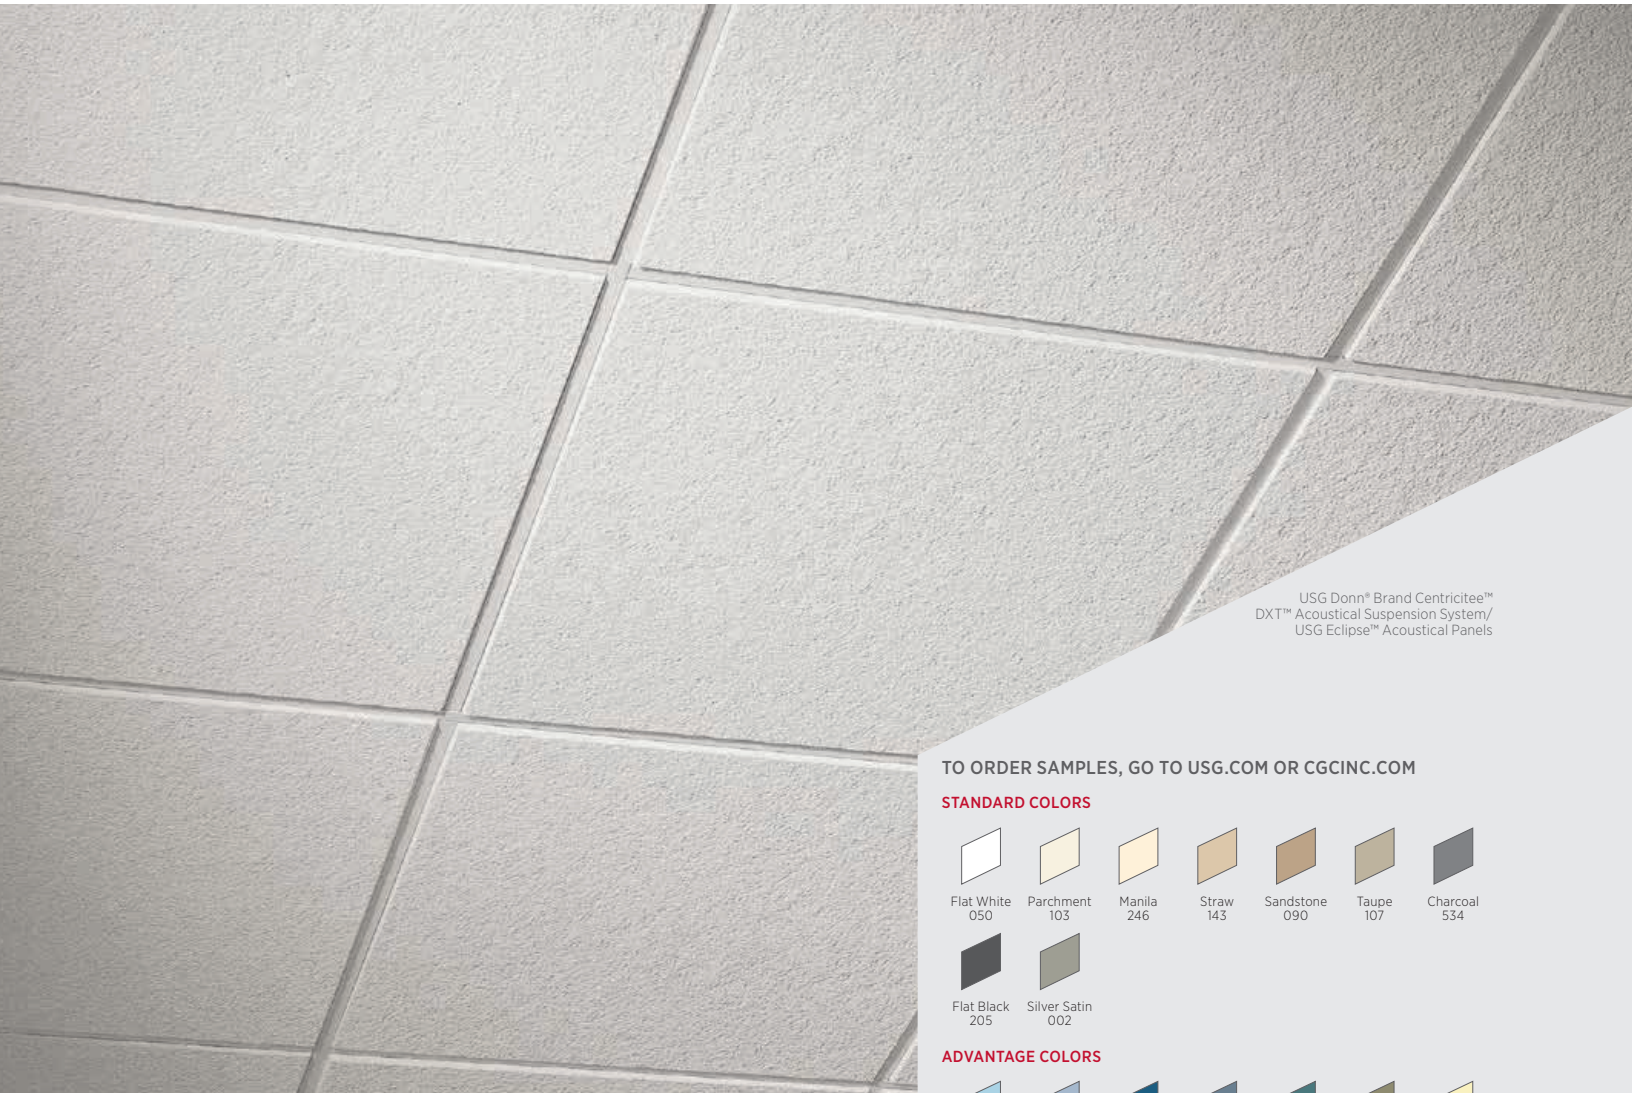


USG Donn® Brand Centricitee™
DXT™ Acoustical Suspension System/
USG Eclipse™ Acoustical Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS

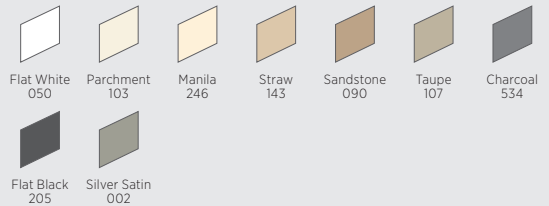

ADVANTAGE COLORS

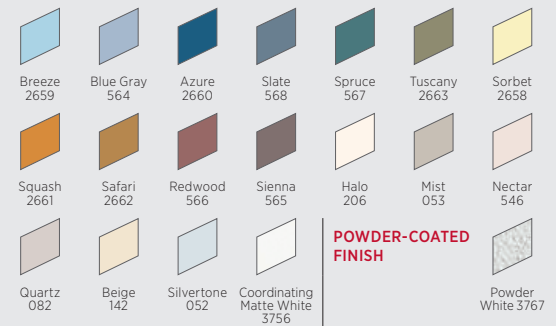

FEATURES AND BENEFITS

- 9/16" exposed grid provides a clean aesthetic.
- Compatible with USG Logix™ Integrated Ceiling Systems.
- Cross-tee override-ends resist twisting and ensure a finished look.
- Proprietary Quick-Release™ cross tees.
- High recycled content (HRC) available.
- Seismic installation designs validated in ICC-ES Evaluation Report ESR-1222.
- Premium and custom colors available.
- Some items available in metric sizes.




APPLICATIONS

- Interior general-use areas
- Fire-rated interior general-use areas
- USG Logix™ Integrated Ceiling Systems

PROFILE



EDGE DETAIL



USG DONN® BRAND CENTRICITEE™ DXT™/DXLT™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samp1it@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)


30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection

HRC HIGH RECYCLED CONTENT

9/16" TEE SYSTEM⁶ Main Tee



Cross Tee 1-1/2"⁶



MOLDING⁵



PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3040/rev. 12-18

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

ASTM Class	Length	Height	Item No. ²	Fire Rating	Color ^{3,4}	Seismic Design Category		Rated Load ¹	
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing
Intermediate Duty	10' 3000 mm	1-1/2" 38 mm	DXT24-10	Class A	Flat White	A, C	7/8" Molding ACM7 Clip	12 lb./LF	6.6 lb./LF
	12' 3600 mm	1-1/2" 38 mm	DXT24		Flat White Standard Advantage	A, C	7/8" Molding ACM7 Clip	12 lb./LF	6.6 lb./LF
			DXT24HRC	Flat White	A, C	7/8" Molding ACM7 Clip			
Heavy Duty	12' 3600 mm	1-5/8" 42 mm	DXT26		Class A	Flat White	A, F	7/8" Molding ACM7 Clip	16 lb./LF
			DXT26HRC						
	1'	1-1/2"	DXT122	Class A	Flat White				
	2' 600 mm	1-1/2" 38 mm	DXT222		Flat White Standard Advantage				
			DXT222HRC	Flat White					
			DXLT222						
	30"	1-1/2"	DXT3022	Class A	Flat White				
	5'	1-1/2"	DXT524	Class A	Flat White				
	6'	1-1/2"	DXT624	Class A	Flat White				
	8'	1-1/2"	DXT824	Class A	Flat White				
	4' 1200 mm	1-1/2" 38 mm	DXT422	Class A	Flat White				
			DXT424	Class A	Flat White Standard Advantage				
			DXT424HRC	Flat White					
			DXLT424						
DXT426	Class A	Flat White							

HRC High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®

Wall Angle	Length	Item No.	Color
	12' 3600 mm	M9 HRC	Flat White, Standard, Advantage
		M9HRC HRC	
	12'	MS174	Flat White, Standard, Advantage
	10'	MS274 HRC 2" shelf for seismic	Flat White

Product literature and samples

Data sheet: AC3040, USG Logix™ system guide: IS268
USG Logix™ architectural design guide: IS287, USG Logix™ critical system dimensions: IS609, Sample: 206564

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked on polyester paint or powder-coated finish.

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Air diffusers

Refer to: AC272

Limitations

Refer to specific ceiling panel for limitations with square edge panels.

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

USG Donn® Brand suspension systems manufactured by USG Interiors, LLC have been reviewed and are approved by listing in the following L.A. Research Report number: 25764. Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Notes

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- Metric available—contact customer service.
- Color options are for Class A imperial products.
- Custom color available. Upcharges apply to Standard, Advantage and custom colors.
- Panels must be specified to be field-cut to size and field-revealed to provide as wide a lay-on edge as possible.
- Metric sizes shown available with standard lead times. Other metric sizes available by RTQ.


Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DXLT, DXT, ECLIPSE, FIRECODE, LOGIX, QUICK-RELEASE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND DX®/DXL™ ACOUSTICAL SUSPENSION SYSTEM

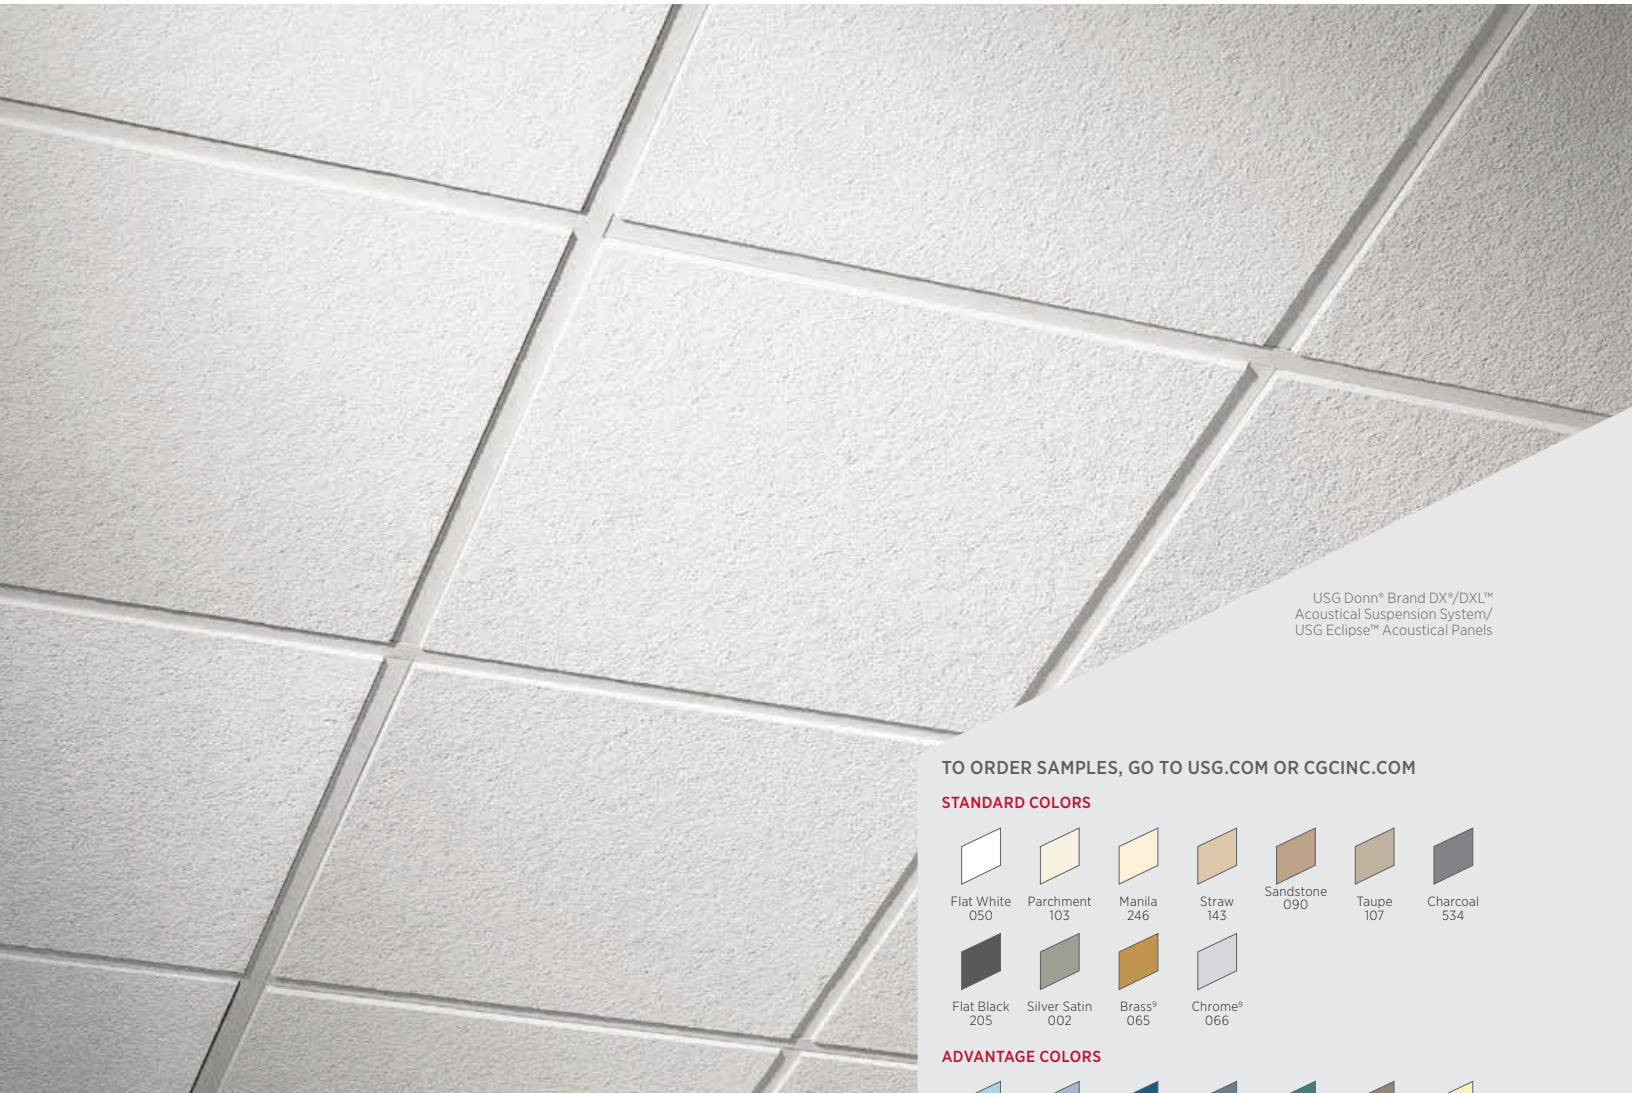

USG Donn® Brand DX®/DXL™
Acoustical Suspension System/
USG Eclipse™ Acoustical Panels

FEATURES AND BENEFITS


- 15/16" exposed tee system. Components for use in general and fire-rated applications.
- Maximum economy and design simplicity.
- Compatible with USG Logix™ Integrated Ceiling System.
- USG DXL™ system features more than 80 UL designs (up to three hours).
- Cross-tee override-ends resist twisting and give a professionally finished look.
- Meets or exceeds all national code requirements, including seismic.
- Proprietary Quick-Release™ cross tees.
- High recycled content (HRC) available.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).

APPLICATIONS


- Fire-rated interior general-use areas
- USG Logix™ Integrated System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM


STANDARD COLORS

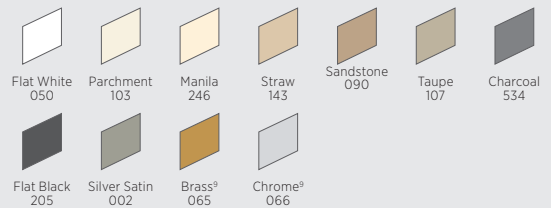

ADVANTAGE COLORS

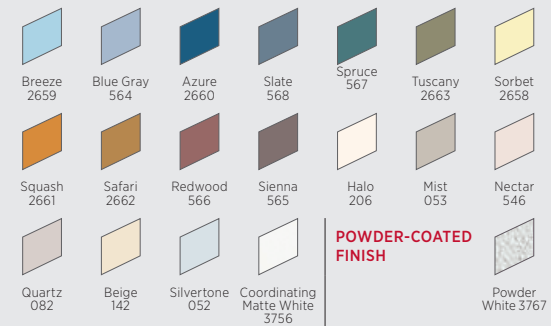


POWDER-COATED FINISH



PROFILE



EDGE DETAIL

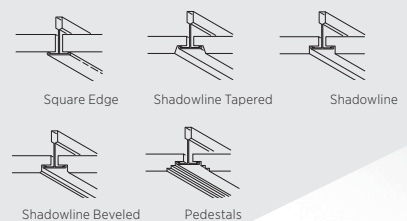


USG DONN® BRAND DX®/DXL™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)




15/16" TEE SYSTEM¹⁰


Main Tee



Cross Tee 1"



Cross Tee 1-1/2"



MOLDING^{6, 7, 8, 10}



Shadowline¹⁰



PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3167/rev. 9-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

ASTM Class	Length	Height	Item No.	Fire Rating ³	Color ^{4,9}	Seismic Design Category ¹			Rated Load ²	
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing ⁸
Intermediate Duty	12' 3600 mm	USG 1.64" (42 mm) CGC 1.5" (25 mm)	DX/DXL24		Flat White Standard Advantage	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.1 lb./LF	3.6 lb./LF
			DX/DXL24HRC							
Heavy Duty	12' 3600 mm	USG 1.64" (42 mm) CGC 1.5" (25 mm)	DX/DXL26 ⁷		Flat White Standard Advantage	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF
			DX/DXL26HRC							
	2' 600 mm	1" 25 mm	DX/DXL216		Flat White Standard and Advantage					
			DX/DXL216HRC							
			DX2016							
			DX3016							
	20" 30"	1" (25 mm)	DX2016	Class A	Flat White					
			DX3016							
			DX416							
			DX416							
	3' 4'	1-1/2" (38 mm)	DX324	Class A	Flat White Standard and Advantage					
			DX/DXL424							
	4' (1200 mm)	1-1/2" (38 mm)	DX/DXL424HRC		Flat White Standard and Advantage					
			DX422 ^{5,7,9}							
			DX422HRC ⁵							
	4' (1200 mm)	1-1/2" (38 mm)	DX426 HD	Class A	Flat White Standard					
			DX/DXL524							
	5' (1500 mm)	1-1/2" (38 mm)	DX426 HD	Class A	Flat White Standard					
			DX/DXL524							
	6'	1-1/2" (38 mm)	DX624	Class A	Flat White Standard					
DX824										
8'	1-1/2" (38 mm)	DX824	Class A	Flat White Standard						
		DX824								
Wall Angle	Length	Item No.		Color						
	10' 3000 mm	M20SM-2		Flat White						
	12' 3600 mm	M7		Flat White Standard and Advantage						
		M7HRC								
	10' 3000 mm	MS274 ⁵		Flat White Custom						
	10' 3000 mm	M20 ⁵		Flat White Custom						
		M20HD/Heavy Duty								
		M20SM/Seismic								

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



Product literature and samples

Data sheet: AC3167
USG Logix™ system guide: IS268
USG Logix™ architectural design guide: IS287
USG Logix™ critical system dimensions: IS609
Sample flat white—seismic: 271370, Sample flat white: 215673, Sample main tee: 206563, Sample flat black: 205100

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked on polyester paint or powder-coated finish.

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Notes

- All USG DX®/DXL™ main-tee and cross-tee connections meet IBC requirements for tension and compression strength.
- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit of L/360.
- UL fire-rated listing, labeling and follow-up applies only to fire-rated components.
- Color program for imperial only. Consult Customer Service for custom color and metric-tee colors. Upcharges apply to Standard and Advantage colors.
- Non-fire-rated only.
- Non-fire-rated applications may mix USG DX® and DXL™ parts.
- Panels must be specified to be field-cut and field-revealed and to provide widest possible lay-on edge.
- For USG DXL™, channel moldings are also acceptable in some designs. Check *UL Fire Resistance Directory* for molding options.
- Brass and chrome available on limited items.
- Metric sizes listed are available with standard lead times. Other metric sizes available by RTQ.

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, DONN, DX, DXL, ECLIPSE, FIRECODE, LOGIX, QUICK-RELEASE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND DX®/DXL™ CONCEALED ACOUSTICAL SUSPENSION SYSTEM




USG Donn® Brand DX®/
DXL™ Concealed Acoustical
Suspension System/
USG Radar™ Acoustical Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM




Flat White
050

PROFILE



EDGE DETAIL



FEATURES AND BENEFITS

- Supporting grid is completely concealed, providing a monolithic, uninterrupted ceiling plane with up to 50% access to the plenum.
- Fire-rated assemblies up to three hours.
- Min. G30 hot-dipped galvanized steel body.
- UL fire-rated assemblies available.

APPLICATIONS

- Interior general-use areas
- Fire-rated interior general-use areas
- Retail stores

USG DONN® BRAND DX®/DXL™ CONCEALED ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplite@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)


30 YEAR LIMITED SYSTEM WARRANTY

15/16" TEE SYSTEM


Main Tee



Cross Tee 1-1/2"



Tee Spline 1"



Access Spline


Closing Spline

Flat Spline

Spring Clip

Stabilizer Bar

MOLDING³



PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3035/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

ASTM Class	Length	Height	Item No. ²	Fire Rating	Color	Rated Load ¹		
						4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
Intermediate Duty	12'	USG 1.64"/CGC 1.5"	DX/DXL24		Flat White	12 lb./LF	6.1 lb./LF	3.6 lb./LF
Heavy Duty	12'	USG 1.64"/CGC 1.5"	DX/DXL26		Flat White	16 lb./LF	7.3 lb./LF	4.9 lb./LF
	4'	1-1/2"	DX/DXL424		Flat White			
	4'	1"	DT416	Class A				
	4'	1"	DE416	Class A				
	4'	1"	DEN416	Class A				
	4'	1-1/2"	BPA 424					
	11'	1"	BPC 116					
	23"	1-1/2"	BPC 234					
	11"	—	E10					
	—	—	C8					
	4'	—	SB48					
Wall Angle	Length	Item No.	Color					
	10'	US28	Flat White					

Note

Either DE416 or DT416 can be used for the same function of supporting the tile. DE416 is a roll-formed uncapped tee spline with the bulb offset to one side of the profile. It is supported on the ends by an integral tab cut from the web. DT416 is a typical suspension tee profile. It is supported on the ends by an extended offset face that rests on perpendicular tee flanges.



Product literature and samples

Data sheet: AC3035
Sample: 203537

Material

Min. G30 double-web, hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Notes

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- Some products are available in metric. Call Customer Service for details.
- For more information on moldings and complete section detail, see the Perimeter Interface selector.


Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, DONN, DX, DXL, FIRECODE, RADAR, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND DXLA™/DXACE™ ACOUSTICAL SUSPENSION SYSTEM

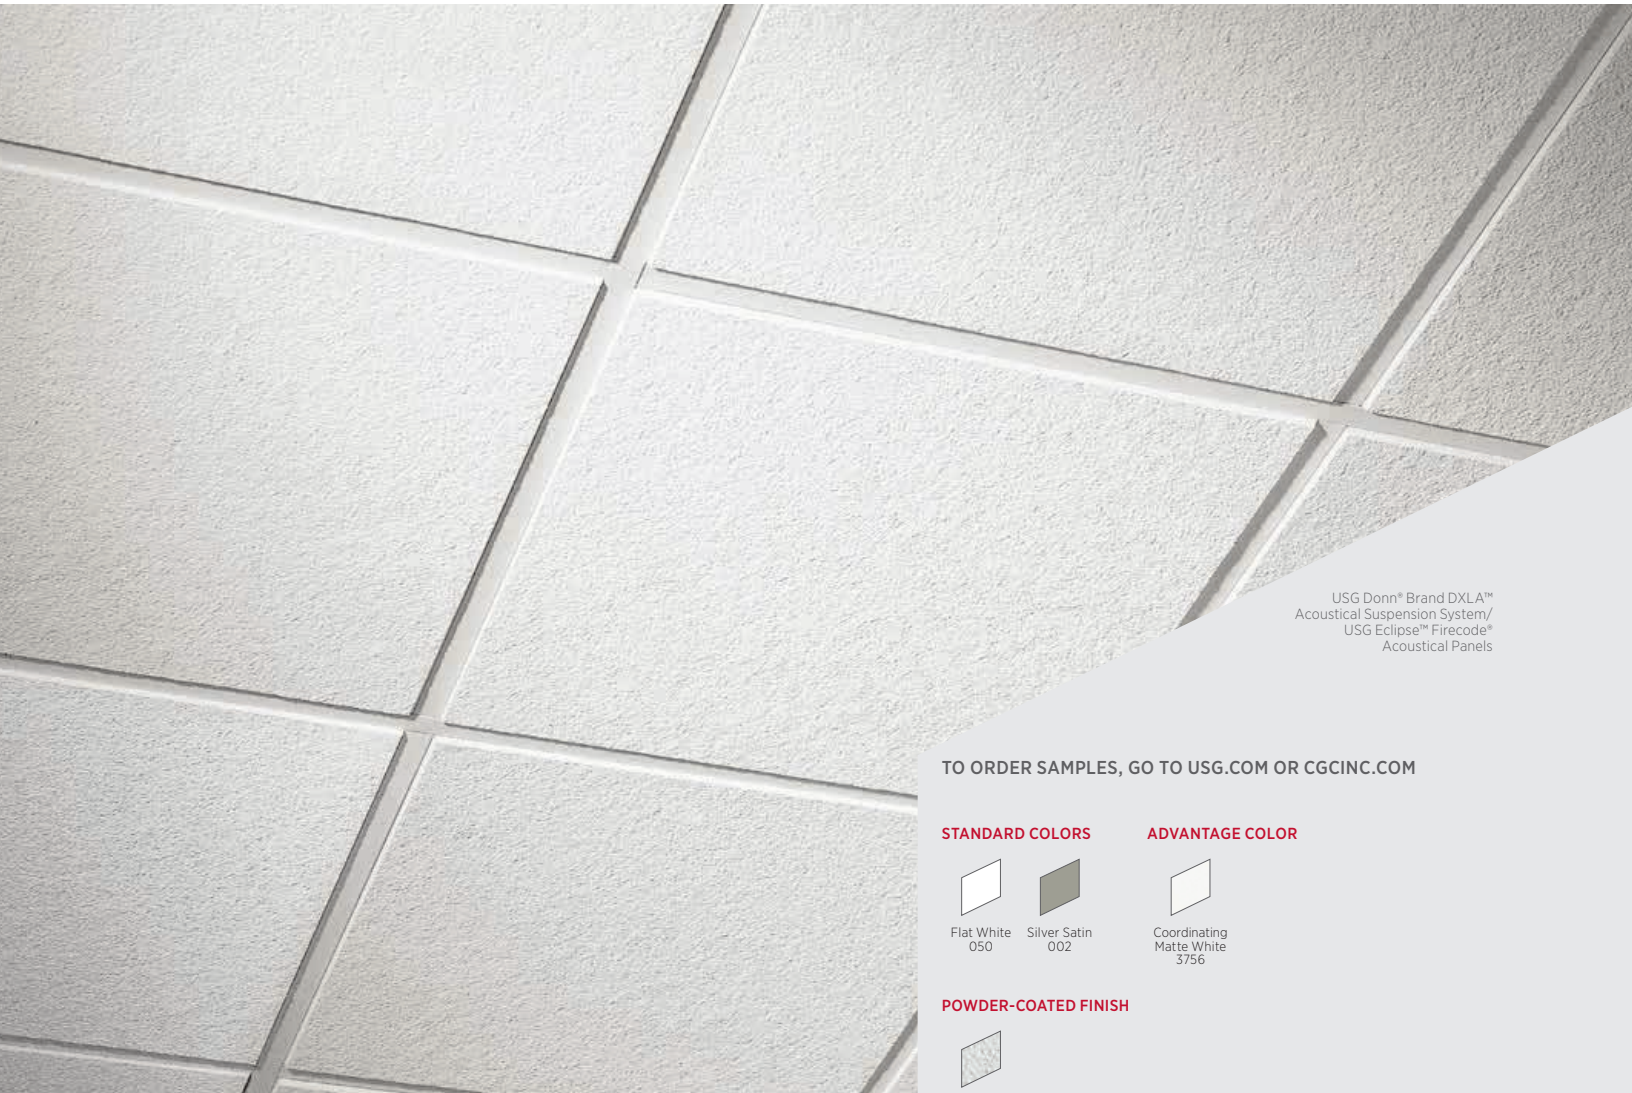

USG Donn® Brand DXLA™
Acoustical Suspension System/
USG Eclipse™ Firecode®
Acoustical Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



Flat White
050



Silver Satin
002

ADVANTAGE COLOR



Coordinating
Matte White
3756

POWDER-COATED FINISH



Powder
White 3767


FEATURES AND BENEFITS

- 15/16" exposed, fire-rated system with aluminum cap.
- Capable of withstanding cleaning and/or disinfecting chemicals as tested in accordance with ASTM D5402.
- Available with factory-applied white, closed-cell foam gasket for Clean Room applications.
- Suitable for use in food processing areas and meets USDA/FSIS requirements.
- Cross-tee override-ends resist twisting and give a professionally finished look.
- Proprietary Quick-Release™ cross tees.
- ICC-ES evaluated for seismic installations (ESR-1222).
- Custom colors available.


APPLICATIONS

- Healthcare facilities
- USG DXLA™ for use in UL fire-rated designs
- Food processing areas
- Certified to meet ISO 14644-1 Class 5 (Fed. Standard 209E Class 100)⁶

PROFILE




USG Donn® Brand
DXLA™




USG Donn® Brand
DXACE™


EDGE DETAIL




Square Edge




Shadowline Tapered



Shadowline



Shadowline Beveled




Square Edge w/
Gasket

USG DONN® BRAND DXLA™/DXACE™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



USG DONN® BRAND DXLA™ 15/16" TEE SYSTEM⁷



USG DONN® BRAND DXACE™ 15/16" TEE SYSTEM⁷



WALL ANGLE^{5,7}



PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3036/rev. 4-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

ASTM Class	Length	Height	Item No.	Fire Rating ³	Color ¹	Seismic Design Category		Rated Load ²	
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing
Intermediate Duty	12'	USG 1.64" 42 mm/ CGC 1.5" 25 mm	DXLA24 		Flat White Silver Satin	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.1 lb./LF
Heavy Duty	12'	USG 1.64" 42 mm/ CGC 1.5" 25 mm	DXLA26 		Flat White Silver Satin	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF
	2'	1-1/2" 38 mm	DXLA216		Flat White Silver Satin				
	4'	1-1/2" 38 mm	DXLA424 		Flat White Silver Satin				
Heavy Duty	12'	USG 1.64" 42 mm/ CGC 1.5" 25 mm	DXACE26 	Class A	Flat White ⁵	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF
	2'	1-1/2" 38 mm	DXACE224 	Class A	Flat White ⁵				
	4'	1-1/2" 38 mm	DXACE424 	Class A	Flat White ⁵				
Molding ⁴	Length	Item No.	Hold-Down Clips ⁶	Color	Wall Angle	Length	Item No.	Color	Hold-Down Clips ⁶
	10'	MCT1A25 (up to 52% recycled content)		Flat White		12'	M7Z (up to 65% recycled content)	Flat White Silver Satin	—
	12'	M7A (up to 90% recycled content)	—	Flat White		12'	M7ACE (up to 65% recycled content)	Flat White	L15
	10'	US28CE (up to 52% recycled content)	C-8						

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



Product literature and samples

Data sheet: AC3036
USG Donn® Brand DXLA™ sample: 215675

Material

Min. G30 hot-dipped galvanized steel body and aluminum cap. Baked-on polyester paint or powder-coated finish.

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Limitations

Interior applications only. Please refer to SC2561 for more information about exterior ceiling applications. The gasket face applied to USG Donn® Brand DXACE™ contains a protective strip that must be removed prior to panel installation. The standard gasket is not recommended for installations with metal panels. If metal panels are desired, a special gasket suitable for metal panels may be applied to the USG Donn® Brand DXACE™ suspension system through special order.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Healthcare facilities

— Capable of withstanding cleaning and/or disinfecting chemicals as tested in accordance with ASTM D5402-06.

Notes

- Some products available in custom colors. USG Donn® Brand DXACE™ available in flat white only.
- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- For fire-rated ceilings, must be installed as stated in UL designs.
- Channel moldings also acceptable in some UL designs.
- Panels must be field-cut to size at the perimeter. For Shadowline detail, field-cut edge must be at least as wide as the factory cut.
- US28CE molding and L15 and C-8 hold-down clips required for Clean Room ISO Class 5 (Fed. Standard 209E Class 100) applications.
- Metric sizes available by RTQ.

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, DONN, DXACE, DXLA, ECLIPSE, FIRECODE, QUICK-RELEASE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND DXSS™ ACOUSTICAL SUSPENSION SYSTEM


USG Donn® Brand DXSS™
Acoustical Suspension System/
USG Sheetrock® Brand Lay-In
Acoustical Ceiling Panels with
ClimaPlus™ Performance

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM




Stainless
Steel


PROFILE




EDGE DETAIL




Square Edge



Shadowline Tapered



Shadowline



Shadowline Beveled

FEATURES AND BENEFITS

- 15/16" stainless steel grid system with stainless steel cap.
- Resistant to direct and indirect contact with many corrosive agents.
- Stainless steel Quick-Release™ clips on cross tees.
- Nonmagnetic.
- Cross-tee override-ends resist twisting.
- Meets USDA/FSIS requirements.
- Cap material is protected with removable PVC film, reducing postconstruction cleaning.

APPLICATIONS

- Food processing areas
- Industrial applications
- Laboratories

USG DONN[®] BRAND DXSS[™] ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)


30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection

15/16" TEE SYSTEM


Main Tee 1-1/2"



Cross Tee 1-1/2"



MOLDING



PHYSICAL DATA/ FOOTNOTES

ASTM Class	Length	Height	Item No.	Fire Rating	Color	Recycled Content	Minimum Load Carrying Capabilities—Main tee ¹		
							2' Hanger Spacing	3' Hanger Spacing	4' Hanger Spacing
Light Duty	12'	1-1/2" 38 mm	DXSS24	Class A	Stainless Steel	up to 50%	70 lb./LF	23 lb./LF	10 lb./LF
	2'	1-1/2" 38 mm	DXSS224	Class A	Stainless Steel	up to 50%			
	4'	1-1/2" 38 mm	DXSS424	Class A	Stainless Steel	up to 50%			
Wall Angle	Length		Item No.		Color	Recycled Content			
	12'		M7SS		Stainless Steel	up to 50%			

Product literature and samples

Data sheet: AC3068
Sample: 215671

Material

Double-web Type 304 chromium-nickel austenitic alloy stainless steel body, cap and clip. This cap material is protected by PVC, which should be removed after installation.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Notes

1. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3068/rev. 11-16

© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, DONN, DXSS, QUICK-RELEASE, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND DXW™ ACOUSTICAL SUSPENSION SYSTEM

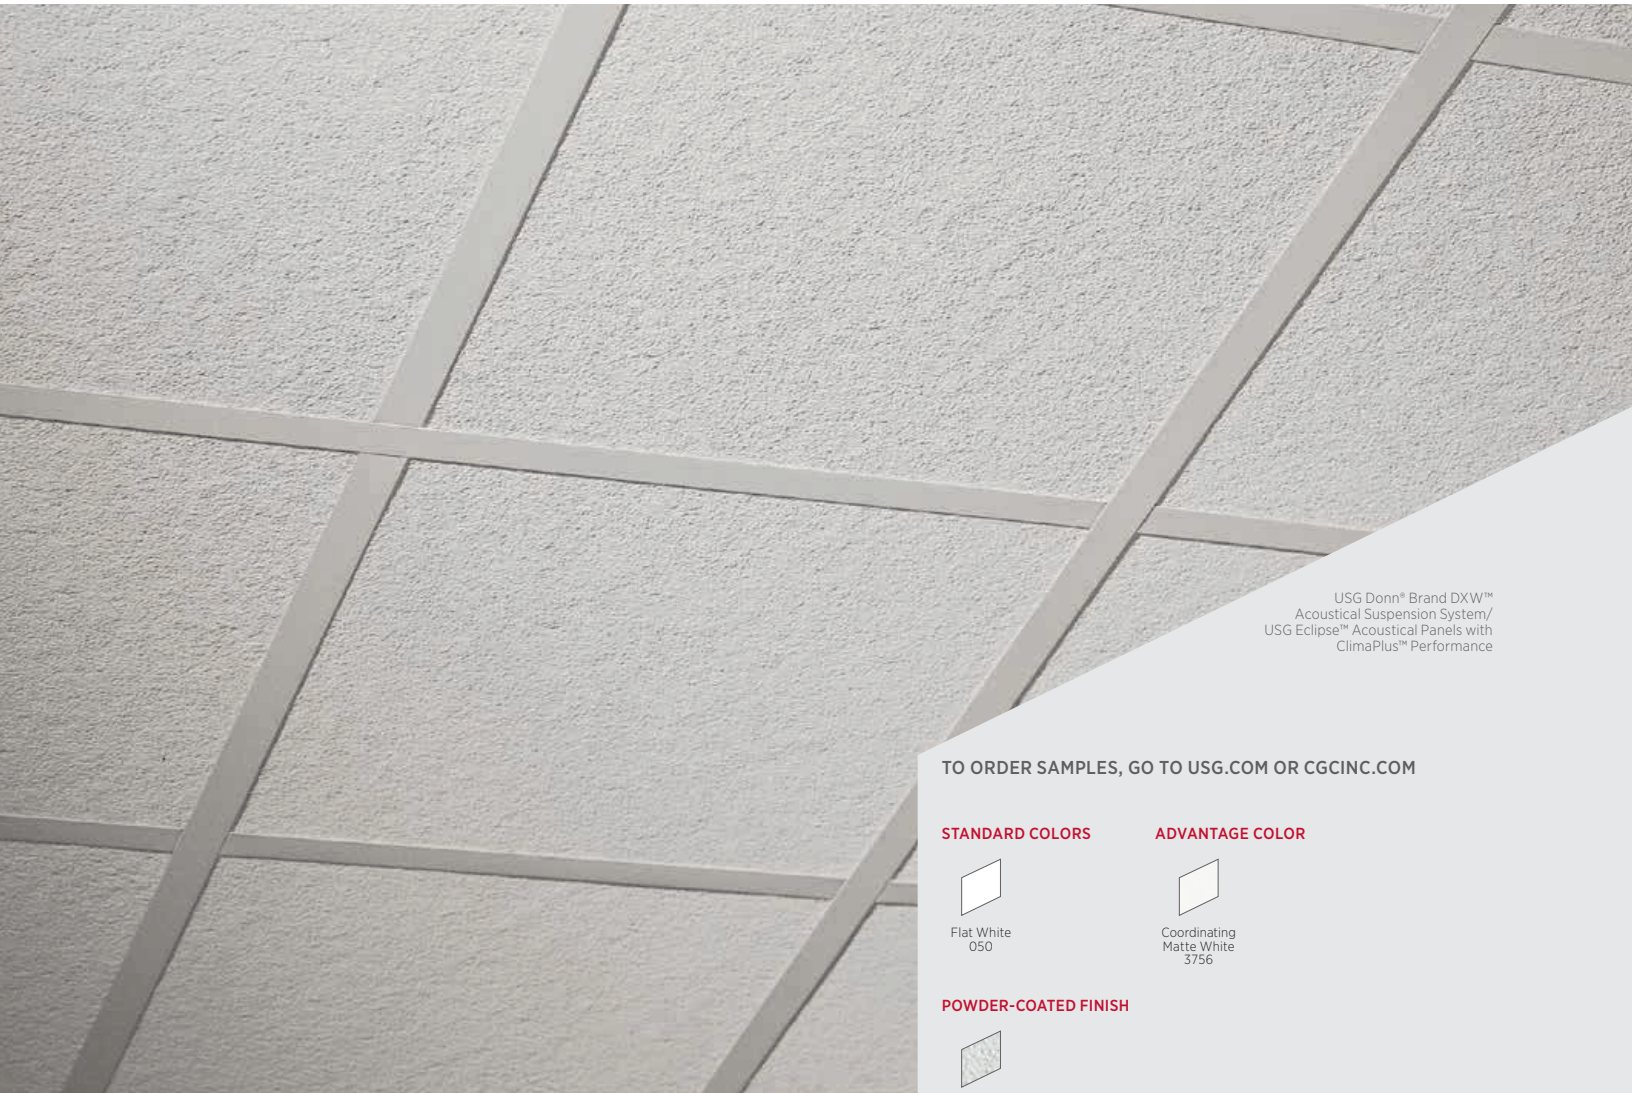

USG Donn® Brand DXW™
Acoustical Suspension System/
USG Eclipse™ Acoustical Panels with
ClimaPlus™ Performance

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



Flat White
050

ADVANTAGE COLOR




Coordinating
Matte White
3756

POWDER-COATED FINISH




Powder
White 3767

PROFILE



EDGE DETAIL



Square Edge

FEATURES AND BENEFITS

- 1-1/2" exposed grid system. Design alternative for high-bay areas and large panel modules.
- Cross-tee override-ends resist twisting.
- Complies with all national code requirements.
- Proprietary Quick-Release™ cross tees.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).

APPLICATIONS

- Interior general-use areas
- High-bay areas
- Large-module ceilings

USG DONN® BRAND DXW™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)




1-1/2" TEE SYSTEM


Main Tee



Cross Tee 1-1/2"



MOLDING^{3,4}



PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3037/rev. 8-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

ASTM Class	Length	Height	Item No.	Fire Rating	Color ²	Seismic Design Category		Rated Load ¹		
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
Heavy Duty	12'	1-1/2" 38 mm	DXW26 	Class A 	Flat White	A-F	7/8" Molding ACM7 Clip 	16 lb./LF	7.3 lb./LF	4.9 lb./LF
	2'	1-1/2" 38 mm	DXW224	Class A	Flat White	—	—	36.7 lb./LF	—	—
	4'	1-1/2" 38 mm	DXW424	Class A	Flat White	—	—	13.8 lb./LF	—	—
Wall Angle	Length	Item No.	Color	Wall Angle	Length	Item No.	Color			
	12'	M7 	Flat White		10' 3000 mm	M20	Flat White			
	12'	M12	Flat White							

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Product literature and samples

Data sheet: AC3037
Sample: 219168

Material

Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint or powder-coated finish.

Installation

Install according to ASTM C636, ASTM E580, Cisca and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

LA Research Report - RR 25764

Refer to usg.com for most current version.

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Notes

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- Custom colors available.
- For more information on moldings, see Perimeter Interface selector.
- Panels must be field-cut to size at the perimeter.


Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, DONN, DXW, ECLIPSE, QUICK-RELEASE, IT'S YOUR WORLD, BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND FINELINE® DXF™/DXLF™ ACOUSTICAL SUSPENSION SYSTEM

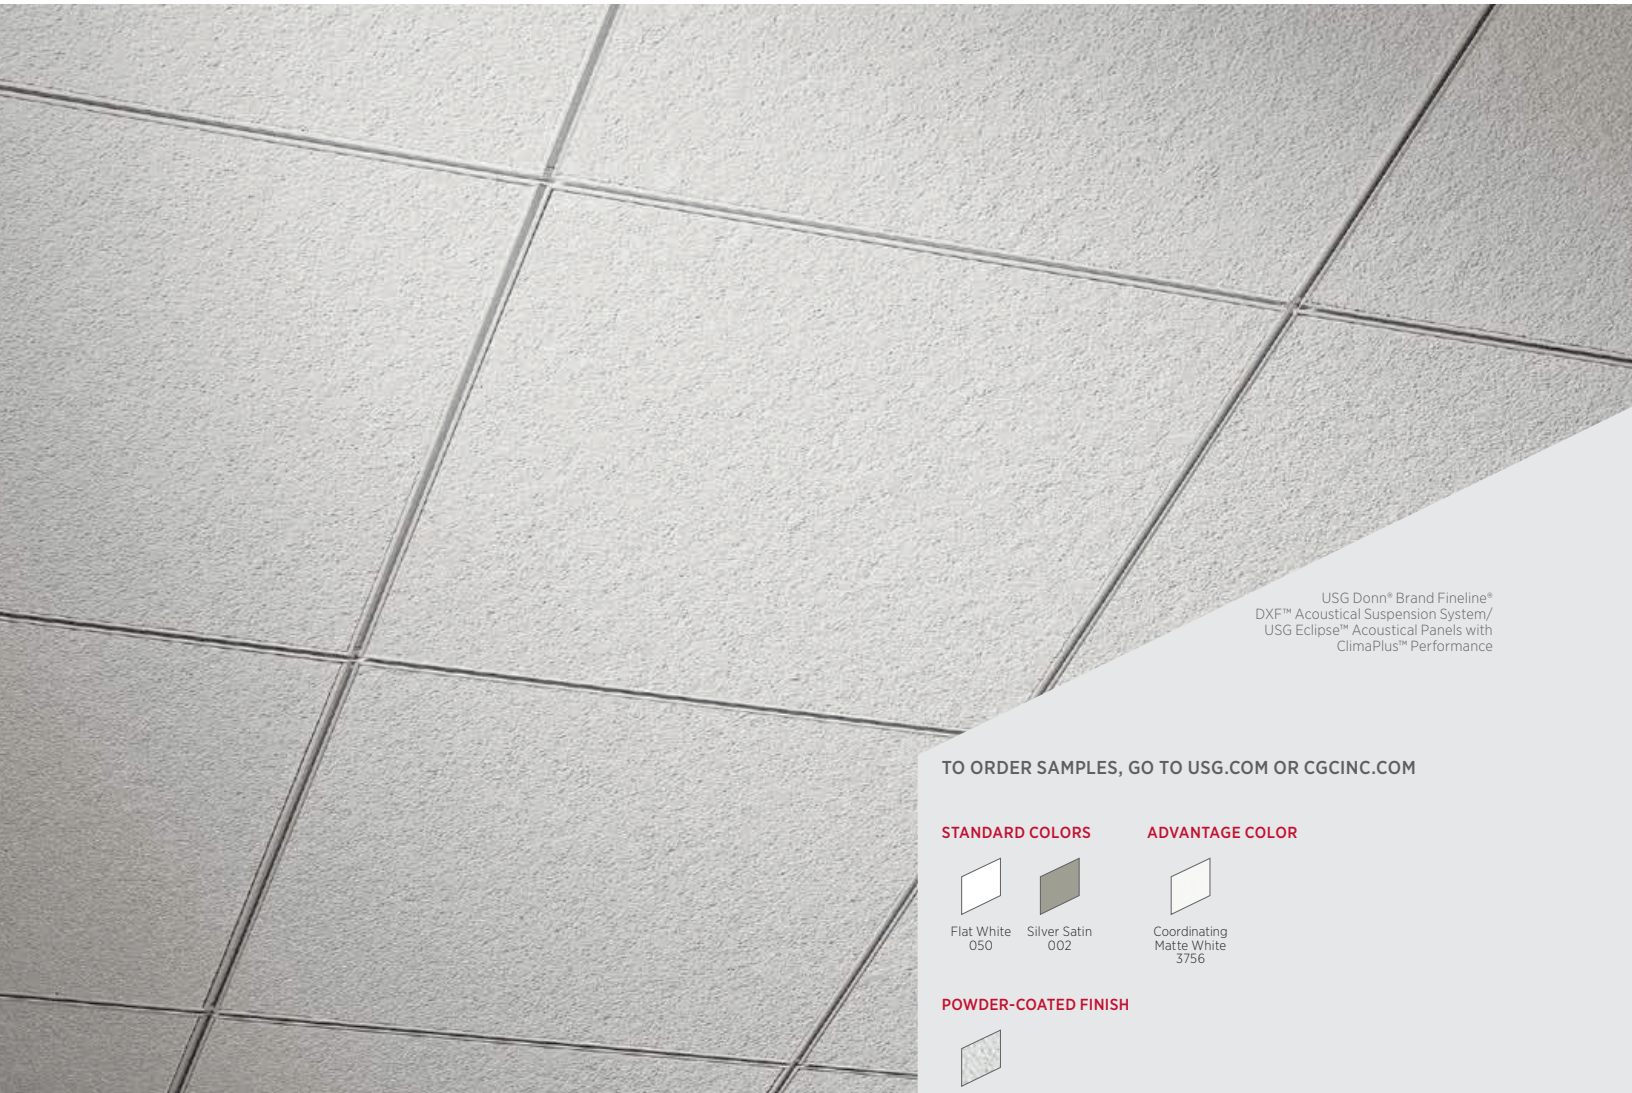

USG Donn® Brand Fineline®
DXF™ Acoustical Suspension System/
USG Eclipse™ Acoustical Panels with
ClimaPlus™ Performance

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



Flat White
050



Silver Satin
002

ADVANTAGE COLOR




Coordinating
Matte White
3756

POWDER-COATED FINISH




Powder
White 3767


PROFILE



EDGE DETAIL



USG Donn® Brand
Fineline®



USG Donn® Brand
Fineline® Bevel

FEATURES AND BENEFITS

- Narrow-profile, slotted grid system with 1/4" reveal provides streamlined appearance.
- Reveal accommodates partition attachments and pendant-mounted light fixtures.
- Mitered intersections offer a clean, tailored appearance.
- Complies with all national code requirements, including fire-rated assemblies up to one hour.
- Optional integrated air diffuser.
- Accepts USG Celebration™ Snap-In Ceiling Panels for ceiling-area accents without changing grid system.
- Custom colors available.
- High recycled content (HRC) available.
- ICC-ES evaluated for seismic installations (ESR-1222).

APPLICATIONS

- All interior general-use areas
- Fire-rated interior general-use areas

USG DONN® BRAND FINELINE® DXF™/DXLF™ ACOUSTICAL SUSPENSION SYSTEM


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative
TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection

HRC HIGH RECYCLED
CONTENT

9/16" TEE SYSTEM¹³ Main Tee



Cross Tee



ASTM Class	Length	Height	Item No. ^{3,6}	Fire Rating	Color ⁴	Seismic Design Category		Rated Load ^{1,2}				
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing		
Intermediate Duty	10'	1-25/32" 45 mm	DXF2924-10		Flat White	A-C		7/8" Molding ACM7 Clip	12 lb./LF	6.6 lb./LF	3.6 lb./LF	
			DXF2930 ¹¹		Flat White Silver Satin	A-C						7/8" Molding ACM7 Clip
			DXF2920 ¹²		Flat White Silver Satin	A-C						7/8" Molding ACM7 Clip
	12' 3600 mm	1-25/32" 45 mm	DXF2924 ⁵	Class A	Flat White	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.6 lb./LF	3.6 lb./LF		
			DXF2924HRC ⁵	Class A	Flat White	A-C	7/8" Molding ACM7 Clip					
	12' 3600 mm	1-25/32" 45 mm	DXF2948	Class A	Flat White	A-C	7/8" Molding ACM7 Clip					
DXLF2924 ⁵			Class A	Flat White	A-C	7/8" Molding ACM7 Clip						
Heavy Duty	12' 3600 mm	1-25/32" 45 mm	DXFH2924 ⁵	Class A	Flat White	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF		
	1'	1-25/32" 45 mm	DXF129	Class A	Flat White							
	2' 600 mm	1-25/32" 45 mm	DXF229	Class A	Flat White							
			DXF229HRC	Class A	Flat White							
			DXLF229	Class A	Flat White							
	30"	1-25/32" 45 mm	DXF30	Class A	Flat White							
	4' 1200 mm	1-25/32" 45 mm	DXF429	Class A	Flat White							
	4' 1200 mm	1-25/32" 45 mm	DXF429NHRC	Class A	Flat White							
			DXF429S ⁸	Class A	Flat White							
			DXF429N ⁷	Class A	Flat White Silver Satin							
			DXLF429N ⁷	Class A	Flat White							
	57"	1-25/32" 45 mm	DXF57	Class A	Flat White							
	5' 1500 mm	1-25/32" 45 mm	DXF529N ⁷	Class A	Flat White							
6'	1-25/32" 45 mm	DXF629	Class A	Flat White								
8'	1-25/32" 45 mm	DXF829	Class A	Flat White								

HRC High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®

USG DONN® BRAND FINELINE® DXF™/DXLF™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection

HRC HIGH RECYCLED
CONTENT


MOLDING^{9,10,13}



Wall Angle	Length	Item No.	Color
	12' 3600 mm	M7 HRC	Flat White, Silver Satin
		M7 HRC HRC	Flat White
	12' 3600 mm	M9 HRC	Flat White, Silver Satin
		M9 HRC HRC	Flat White, Silver Satin
	12'	MS174 HRC	Flat White, Silver Satin
		MS274 HRC	Flat White
2" shelf for seismic			

HRC High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Shadowline^{9,10}



USG DONN® BRAND FINELINE® DXF™/DXLF™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PHYSICAL DATA/ FOOTNOTES

Product literature and samples

Data sheet: AC3034
Technical data: AC272
Sample: 204105

Installation

Install according to ASTM C636, ASTM E580, Cisca and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Limitations

For exposed grids in non-fire-rated, high-humidity applications, use USG Donn® Brand Fineline® DXFEV™ G90 painted or USG Donn® Brand ZXLA™ painted suspension systems. For exterior applications, the suspension system should be reviewed by a structural engineer. Please refer to SC2561 for more information about USG Donn® Brand Fineline® DXFEV™ and exterior ceiling applications.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Material

Min. G30 hot-dipped galvanized steel body. Baked-on polyester paint or powder-coated finish.

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764

Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Air Diffusers

Refer to AC272.

Notes

1. Hanger wire spacing and locations must be per the UL design.
2. Load test data shows uniform load in lb./L/F based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
3. Some products are available in metric. Call Customer Service for details.
4. Custom color available.
5. Standard main tee is notched 24" o.c. but has cross-tee holes 12" o.c.
6. Cross-tee hole spacings available for a variety of modules except USG Donn® Brand Fineline® DXLF™.
7. N = Notch at midpoint.
8. Midpoint notch on one side only to accommodate light fixtures.
9. For more information about moldings, see Perimeter Interface selector.
10. Panels must be field-cut to size at the perimeter.
11. Notched 30" o.c.
12. Notched 20" o.c.
13. Metric sizes listed available with standard lead times. Other metric sizes available by RTQ.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3034/rev. 10-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA


Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CELEBRATION, CLIMAPLUS, DONN, DXF, DXFEV, DXLF, ECLIPSE, FINELINE, FIRECODE, LOGIX, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND FINELINE® 1/8 DXFF™ ACOUSTICAL SUSPENSION SYSTEM

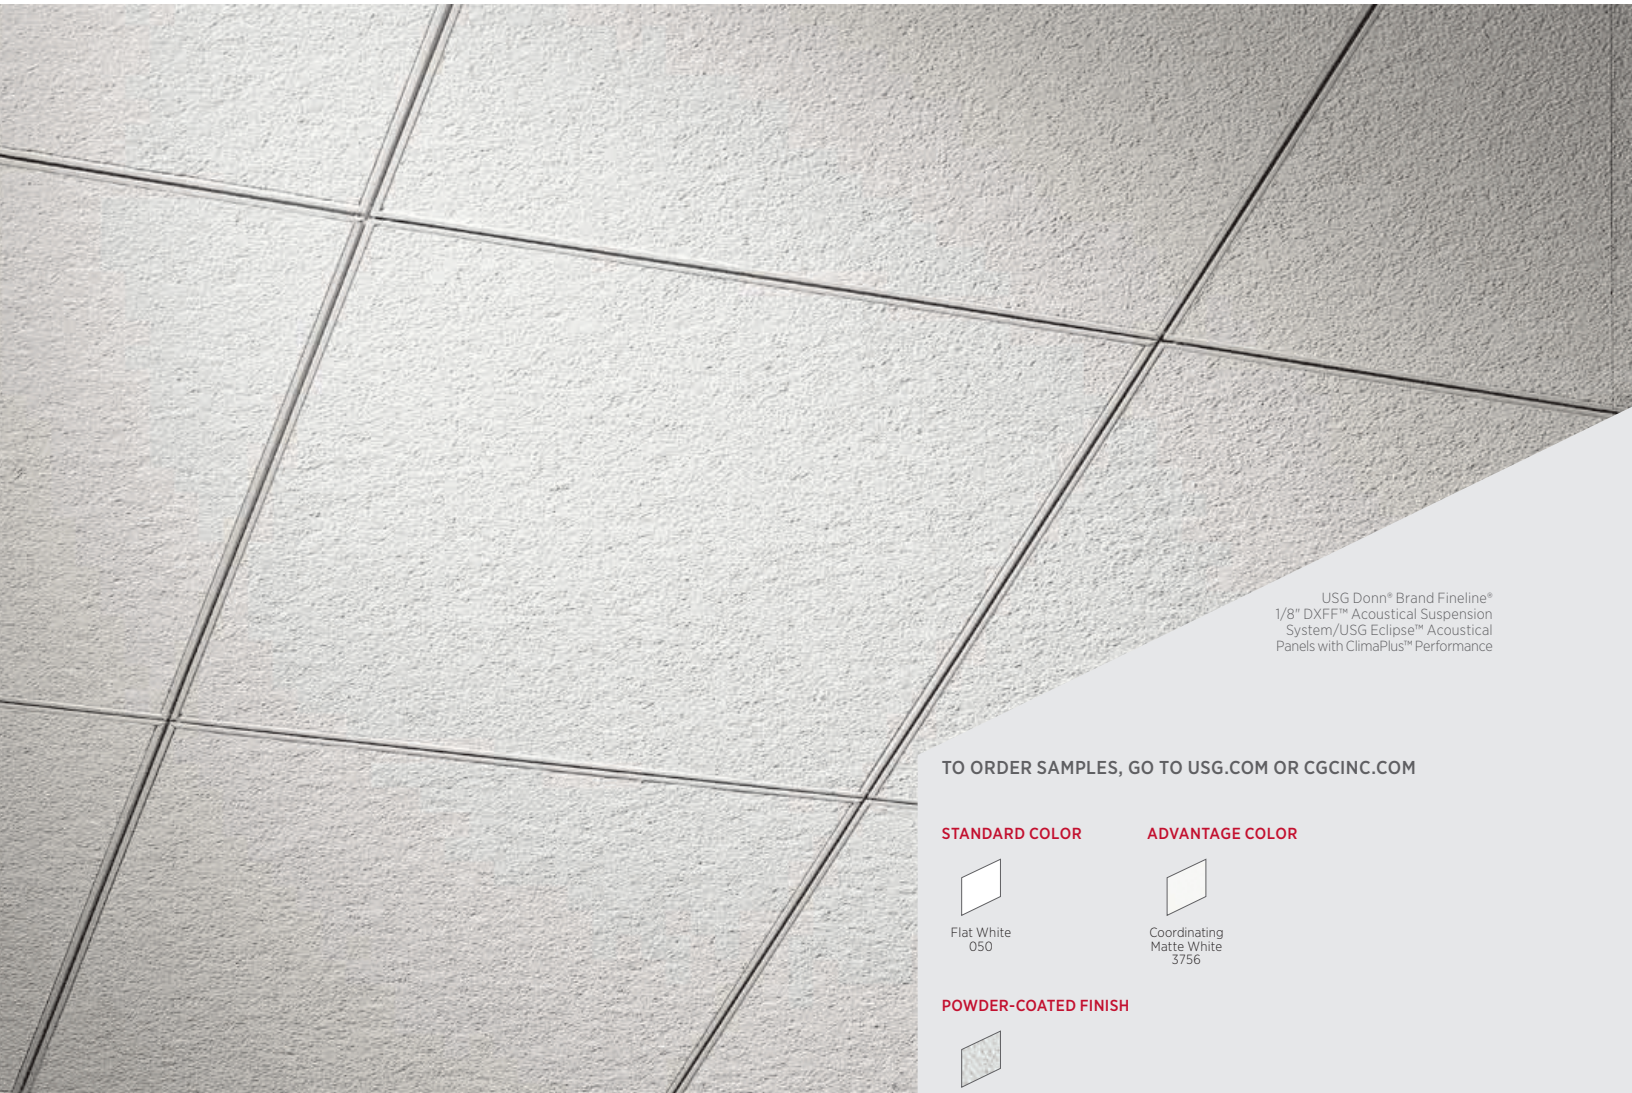

USG Donn® Brand Fineline®
1/8" DXFF™ Acoustical Suspension
System/USG Eclipse™ Acoustical
Panels with ClimaPlus™ Performance

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLOR



Flat White
050

ADVANTAGE COLOR



Coordinating
Matte White
3756

POWDER-COATED FINISH



Powder
White 3767


FEATURES AND BENEFITS

- Narrow-profile, slotted grid system with 1/8" reveal provides streamlined appearance.
- Reveal accommodates partition attachments and pendant-mounted light fixtures.
- Mitered intersections offer a clean, tailored appearance.
- Complies with all national code requirements.
- Optional integrated air diffuser.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).
- Standard components available in Imperial and Metric sizes.

APPLICATIONS

- All interior general-use areas

PROFILE



EDGE DETAIL



USG Donn® Brand
Fineline®




USG Donn® Brand
Fineline® Bevel

USG DONN® BRAND FINELINE® 1/8 DXFF™ ACOUSTICAL SUSPENSION SYSTEM


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


TECHNICAL SERVICES
800 USG.4YOU (874-4968)



9/16" TEE SYSTEM® Main Tee³



Cross Tee



MOLDING®



PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3033/rev. 8-17
© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

ASTM Class	Length	Height	Item No. ³	Fire Rating	Color ²	Seismic Design Category		Rated Load ¹			
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing	
Intermediate Duty	10'	1-25/32" 45 mm	DXFF2930 	Class A 	Flat White	A-C		7/8" Molding ACM7 Clip	12 lb./LF	6.5 lb./LF	3.6 lb./LF
	12'	1-25/32" 45 mm	DXFF2924 DXFF2948 								
	3600 mm	45 mm	MEDXFF3600 								
Heavy Duty	12'	1-25/32" 42 mm	DXFFH2924 	Class A	Flat White	A-F	7/8" Molding ACM7 Clip	16 lb./LF	8.3 lb./LF	4.9 lb./LF	
	3600 mm	45 mm	MEDXFFH3600 								
	1'	1-25/32"	DXFF129 	Class A	Flat White						
	2'	1-25/32"	DXFF229 								
	30"	1-25/32"	DXFF30 								
	4'	1-25/32"	DXFF429 DXFF429N ⁴ DXFF429S ⁵ 								
	5'	1-25/32"	DXFF529 DXFF529N ^{4,7} 								
	1200 mm	45 mm	MEDXFF1200 MEDXFF1200N ^{4,7} MEDXFF1200S ⁵ 								
	600 mm	45 mm	MEDXFF600 								

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Wall Angle	Length	Item No.	Color ²	Wall Angle	Length	Item No.	Color ²
	12' 3600 mm	M9 	Flat White		12' 3600 mm	MS174	Flat White

Product literature and samples

Data sheet: AC3033
Sample: 270308

Material

Min. G30 hot-dipped galvanized steel tee. Baked on polyester paint or powder-coated finish.

Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

LA Research Report - RR 25764

Refer to usg.com for most current version.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Air diffusers

Request AC272.

Notes

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- Custom color available.
- Cross-tee notches available in 24" and 30" modules. Standard is 24" o.c.
- N = Notch at midpoint.
- Midpoint notch on one side only to accommodate light fixtures.
- Panels must be field-cut to size at the perimeter.
- Notched 30" o.c.
- Metric sizes listed available with standard lead times. Other metric sizes available by RTQ.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, DONN, DXFF, ECLIPSE, FINELINE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND FINELINE® DXFEV™ ACOUSTICAL SUSPENSION SYSTEM



USG Celebration™ Snap-In
Metal Panels

Computer-Generated Image
© USG Corporation 2016.


TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLOR




Flat White
050

PROFILE



EDGE DETAIL - CELEBRATION METAL PANEL

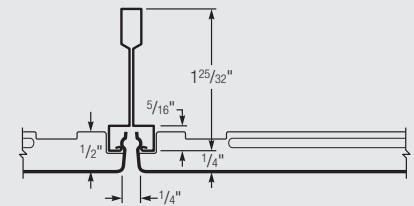

FEATURES AND BENEFITS

- Specially engineered suspension system to receive USG Celebration™ Metal Panels for a sleek, contemporary look.
- Wind load tested in accordance to: UL 580, UL 1897, and Miami Dade TAS 202 and 203.
- Narrow-profile, slotted grid system with G90 galvanization.
- Stainless steel Quick-Release™ clips on cross tees.
- Black reveal in the slot to create a clean and sharp aesthetic.
- Wind-uplift performance validated by Progressive Engineering Inc. in PEI Evaluation Report PER-12055.
- ICC-ES evaluated for seismic installations (ESR-1222).
- Accepts USG Celebration™ Metal Panel Ceiling System.

APPLICATIONS

- Exterior soffits/canopies
- Parking garages
- Covered entrances


USG DONN® BRAND FINELINE® DXFEV™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

9/16" TEE SYSTEM⁵ Main Tee⁴



Cross Tee



PERIMETER MOLDING^{3, 5}

ACCESSORIES

PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3304/rev. 9-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

ASTM Class	Length	Height	Item No.	Description	Fire Rating	Color	Rated Load ¹		
							4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
Intermediate Duty	12'	1-25/32" 45 mm	DXFEV2924	Narrow-profile, slotted grid system with G90 galvanization notched 24" o.c. cross tee hole 12" o.c.		Flat White, Black Reveal	12 lb./LF	6.6 lb./LF	3.6 lb./LF
Heavy Duty	12'	1-25/32" 45 mm	DXFEVH2924	Narrow-profile, slotted grid system with G90 galvanization notched 24" o.c. cross tee hole 12" o.c.	Class A	Flat White, Black Reveal	16 lb./LF	8.3 lb./LF	4.9 lb./LF
Intermediate Duty	12'	1-25/32" 45 mm	DXFEV2912	Narrow-profile, slotted grid system with G90 galvanization notched 12" o.c. cross tee hole 12" o.c.	Class A	Flat White, Black Reveal	12 lb./LF	6.6 lb./LF	3.6 lb./LF
Heavy Duty	12'	1-25/32" 45 mm	DXFEVH2912	Narrow-profile, slotted grid system with G90 galvanization notched 12" o.c. cross tee hole 12" o.c.	Class A	Flat White, Black Reveal	16 lb./LF	8.3 lb./LF	4.9 lb./LF
—	2'	1-25/32" 45 mm	DXFEV229	Narrow-profile, slotted grid system with G90 galvanization	Class A	Flat White, Black Reveal	—	—	—
—	4'	1-25/32" 45 mm	DXFEV429N	Narrow-profile, slotted grid system with G90 galvanization notched at midpoint both sides	Class A	Flat White, Black Reveal	—	—	—
—	6'	1-25/32" 45 mm	DXFEV629	Narrow-profile, slotted grid system with G90 galvanization	Class A	Flat White, Black Reveal	—	—	—
—	8'	1-25/32" 45 mm	DXFEV829	Narrow-profile, slotted grid system with G90 galvanization	Class A	Flat White, Black Reveal	—	—	—
Channel Molding	12'	2-3/32"	U-2 3/32	12" x 2-3/32" x 7/8" x 1-1/8" Aluminum U-Molding with G90 galvanization	—	Flat White	—	—	—
Hold-Down Clip	10"	2-3/32"	U-2 3/32HDC	10" x 11/32" x 2-3/32" x 3/4" Panel Hold-Down Clip with G90 galvanization	—	—	—	—	—
Reveal Spacer ⁴	100' roll	1/4"	CA1	Arrowhead reveal spacer (100' roll)	—	—	—	—	—

Firecode[®]

Product literature and samples

Data sheet: AC3304
System guide: SC2561

Material

Min. G90 hot-dipped galvanized steel body. Baked-on polyester paint.

Installation

Install according to ASTM C636, ASTM E580, Cisca and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

LA Research Report - RR 25764

Refer to usg.com for most current version.

Progressive Engineering Inc. Evaluation Report Compliance

Wind load tested and listed in PEI Evaluation Report PER-12055.

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Notes

1. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
2. Heavy duty main tees were used in the tested assemblies. If intermediate duty main tees are utilized, hanger wire spacing shall be reduced from 4 ft. o.c. to 3 ft o.c.
3. Panels must be field-cut to size at the perimeter.
4. CA1 Arrowhead Reveal Spacer available in black or white.
5. Metric sizes available by RTQ.

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, ASTRO, CELEBRATION, DONN, DXFEV, FINELINE, FIRECODE, QUICK-RELEASE, ZXLA, IT'S YOUR WORLD, BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DONN® BRAND IDENTITEE® DXI™ ACOUSTICAL SUSPENSION SYSTEM



USG Donn® Brand Identitee® DXI™
Acoustical Suspension System/USG
Halcyon™ Acoustical Panels

FEATURES AND BENEFITS


- Narrow-profile grid system with double 1/8" reveal.
- Seamless reveal at intersections.
- Meets or exceeds all national code requirements including seismic.
- Compatible with USG Logix™ Integrated System.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).
- G30 hot-dipped galvanized steel body and cap inhibits red rust.
- All USG Donn® Brand Identitee® DXI™ items have High Recycled Content (HRC).
- Metric sizes available.
- Proprietary cap lance allows a variety of color and coating options to meet unique project requirements.

APPLICATIONS


- All interior general-use areas
- USG Logix™ Integrated System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS

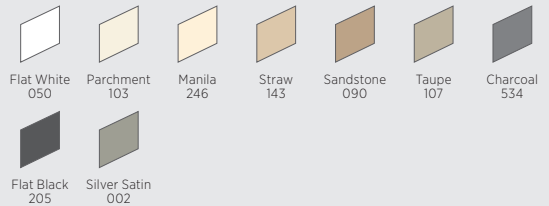


ADVANTAGE COLORS

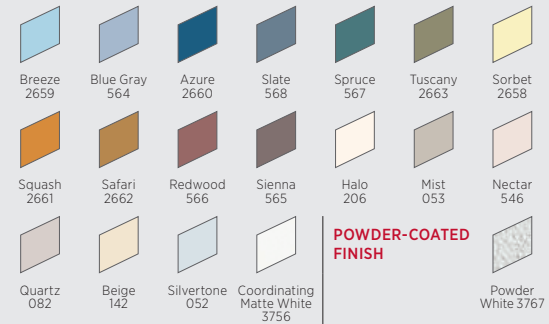


POWDER-COATED FINISH

PROFILE



EDGE DETAIL



USG DONN® BRAND IDENTITEE® DXI™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)


30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection

HRC HIGH RECYCLED CONTENT

9/16" TEE SYSTEM⁸ Main Tee



Cross Tee



ASTM Class	Length	Height	Item No. ^{3,6}	Fire Rating	Color ¹	Seismic Design Category			Rated Load ^{2,4}		
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing	
Intermediate Duty	12' 3600 mm	1-13/16" 46.5 mm	DXI24HRC 	Class A 	Flat White Standard Advantage	A-C	7/8" Molding ACM7 Clip 	12 lb./LF	7.3 lb./LF	4.2 lb./LF	
Heavy Duty	12' 3600 mm	1-13/16" 46.5 mm	DXI26HRC 	Class A	Flat White Standard Advantage	A-F	7/8" Molding ACM7 Clip	16 lb./LF	9.1 lb./LF	5.2 lb./LF	
Heavy Duty	USG Logix™	1-13/16" 46.5 mm	See USG Logix™ Guide IS268 	Class A	Flat White	A-F	7/8" Molding ACM7 Clip	16 lb./LF	9.1 lb./LF	5.2 lb./LF	
—	21"	1-13/16" 46.5 mm	DXI2124 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	27"	1-13/16" 46.5 mm	DXI2724 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	30"	1-13/16" 46.5 mm	DXI3024 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	42"	1-13/16" 46.5 mm	DXI4224 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	54"	1-13/16" 46.5 mm	DXI5424 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	57"	1-13/16" 46.5 mm	DXI5724 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	1'	1-13/16" 46.5 mm	DXI124 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	2' 600 mm	1-13/16" 46.5 mm	DXI224HRC 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	4' 1200 mm	1-13/16" 46.5 mm	DXI424HRC 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	5' 1500 mm	1-13/16" 46.5 mm	DXI524HRC 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	6'	1-13/16" 46.5 mm	DXI624 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	8'	1-13/16" 46.5 mm	DXI 824 	Class A	Flat White Standard Advantage	—	—	—	—	—	
—	USG Logix™	1-13/16" 46.5 mm	See USG Logix™ Guide IS268 	Class A	Flat White	—	—	—	—	—	

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG DONN® BRAND IDENTITEE® DXI™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection

HRC HIGH RECYCLED CONTENT

MOLDING®



Wall Angle	Length	Item No.	Color
	12' 3600 mm	M7	Flat White Standard Advantage
		M7HRC 	Flat White
	12' 3600 mm	M9	Flat White Standard Advantage
		M9HRC 	Flat White
	12'	MS174	Flat White Silver Satin
		MS174HRC 	Flat White
Face Sleeve	—	TFS-5 ⁶	—
	—	TFS-5 DXI FC ⁷	—

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG DONN® BRAND IDENTITEE® DXI™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: samplite@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PHYSICAL DATA/ FOOTNOTES

Product literature and samples

Data sheet: AC3281
USG Logix™ system guide: IS268
USG Logix™ architectural design guide: IS287
Sample: 216276

Material

G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint or powder-coated finish.

Installation

Install according to ASTM C636, ASTM E580, Cisca and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report

Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Limitations

Please refer to USG Donn® Brand AX™ or ZXLA™ for exposed suspension systems in non-fire-rated, high-humidity applications. Interior applications only. Please refer to SC2561 for more information about exterior ceiling applications.

LA Research Report - RR 25764

Refer to usg.com for most current version. ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Air diffusers

Request AC272-290.

Additional accessories

1. Load transfer bracket—use DXI/DXT26LTB.
2. Partition attachment—use PAC9-6.
3. Lift fixture clip—use LFC.

Notes

1. Custom color available. Upcharges apply to Standard and Advantage colors.
2. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit of L/360.
3. Available in metric.
4. Hanger wire spacing and location must be per the UL design.
5. Panels must be field-cut to size at the perimeter.
6. For seismic expansion joints.
7. For off-module intersections.
8. Metric items listed available with standard lead times. Other metric items available by RTQ.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3281/rev. 8-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, AX, DONN, DXI, FINELINE, HALCYON, IDENTITEE, LOGIX, ZXLA, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG INDEXED SUPPORT BAR


ISB109

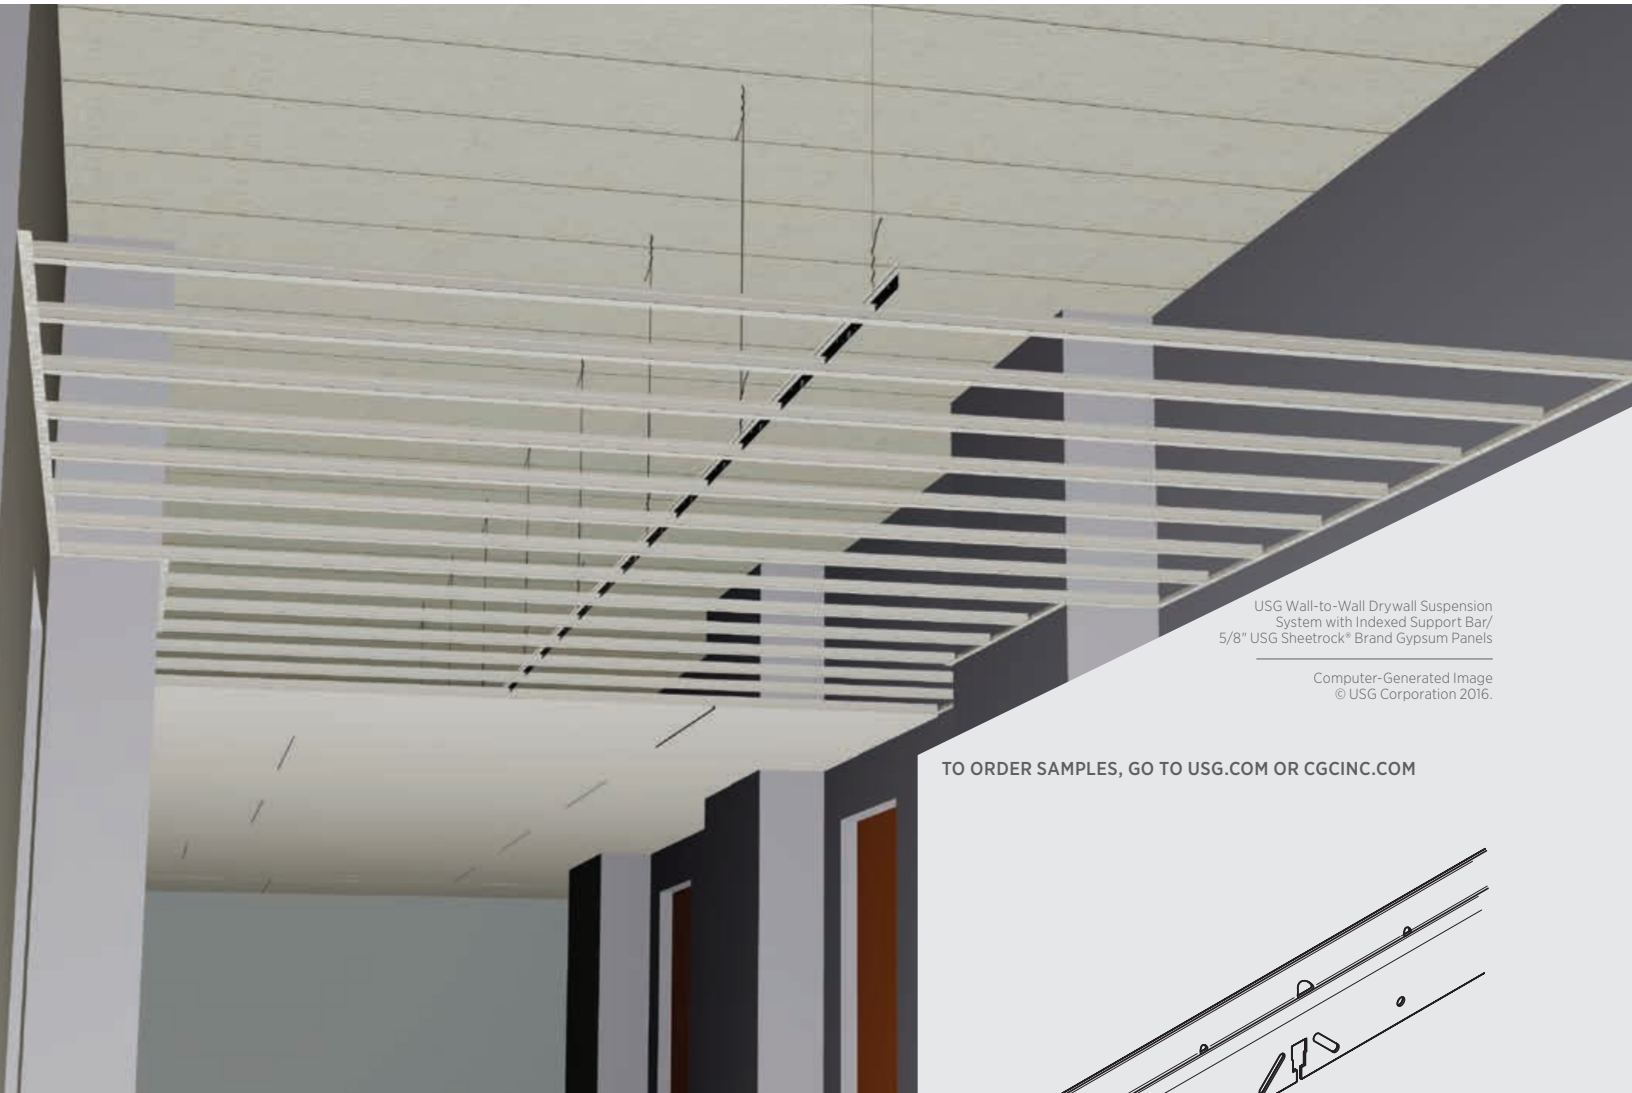

USG Wall-to-Wall Drywall Suspension System with Indexed Support Bar/
5/8" USG Sheetrock® Brand Gypsum Panels

Computer-Generated Image
© USG Corporation 2016.

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

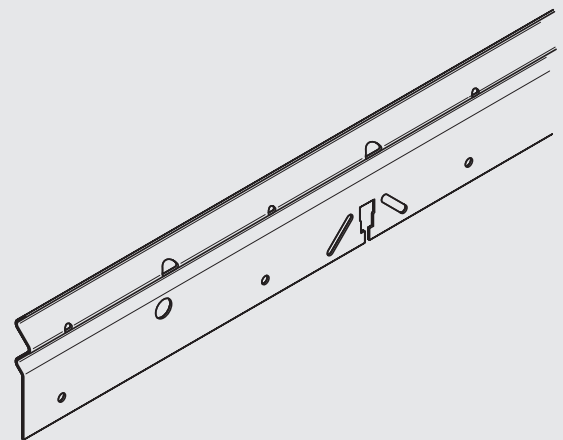

FEATURES AND BENEFITS

- For use with USG Drywall Suspension System Wall-to-Wall main tees where spans exceed 7'-6" for 5/8" and 8'-0" for 1/2" gypsum panels.
- Reduces hanger wires on longer spans that require intermediate support for main tees.
- Indexed notch design provides lateral stabilization during panel installation.
- Minimizes system uplift during panel installation when used with compression posts (can be studs, tees, etc).
- Unique, nesting design allows splicing before or after hanger wires are installed.
- Notch friction fits against main tee keeping ISB in place during installation.
- Cuts easily with snips.

APPLICATIONS

- Hospitals
- Dormitories
- Hotels
- Multifamily residential

USG INDEXED SUPPORT BAR

ISB109

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)




PROPERTIES


- Support spacing - 48" o.c. (hanger wires or other types such as steel studs or main tees).
- Main tee bulb notches spaced 8" o.c.
- Index notch to main tee pullout strength - 300 lb.
- Min. G40 hot-dipped galvanized steel.

PROFILE

ISB109

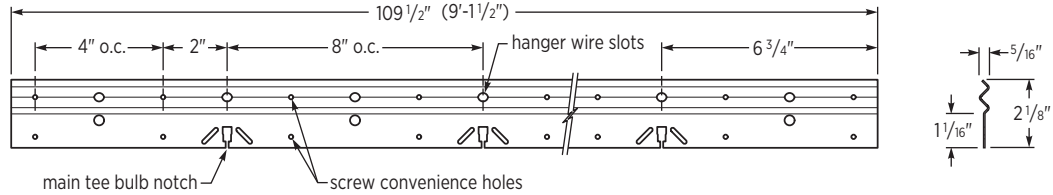


TYPICAL INSTALLATION



Use pliers to open tab on stabilizer bar, once in place close tab to lock in place.

RECOMMENDED SUPPORT METHOD



No blub means flush attachment when framing members are used for vertical support.


PHYSICAL DATA/ FOOTNOTES

Notice


The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3312/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Installation with Overlap

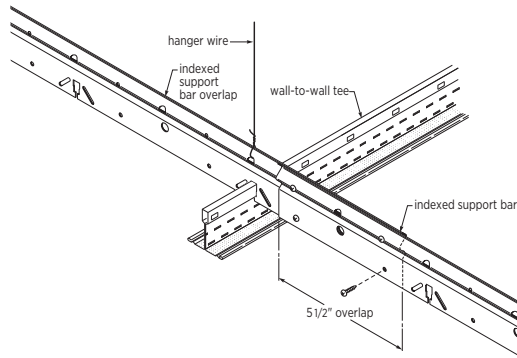


Hanger Wire Elevation

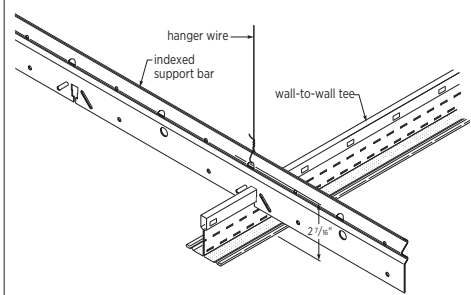

Note
Main tees must be supported at both ends when hanger wires are used


Vertical Support with Main Tees or Studs (Recommended)

- Bracing 48" o.c.
- Wall-to-wall tee 16" o.c. (typ.)

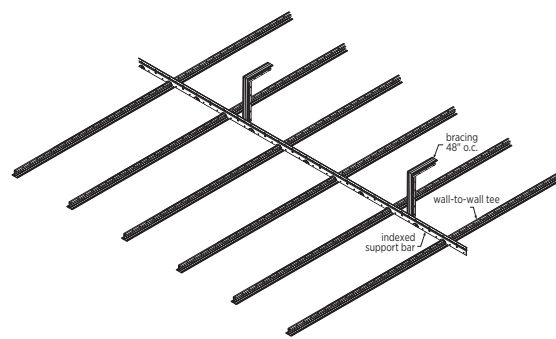

Vertical Support with Hanger Wires

- Hanger wire 48" o.c.
- Wall-to-wall tee 16" o.c. (typ.)
- Main tees must be supported at both ends when hanger wires are used.

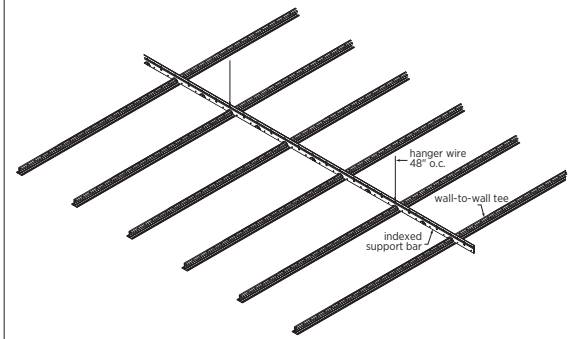

Product literature and samples

Data sheet: AC3312
System brochure: AC3152
Sample: 200075

Material

Min. G40 hot-dipped galvanized steel.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Recycled content

For details, see RC tables or the LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

Code compliance

The information presented is correct to the best of our knowledge at the date of issuance. Because codes continue to evolve, check with a local official prior to designing and installing a ceiling system. Other restrictions and exemptions may apply.

Limitations


- For use with DGW Wall-to-Wall main tees only.
- ISB109 must not be used to cantilever main tees.
- Main tees must be supported at each end when hanger wires are used.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG DONN® BRAND ZXLA™ ACOUSTICAL SUSPENSION SYSTEM

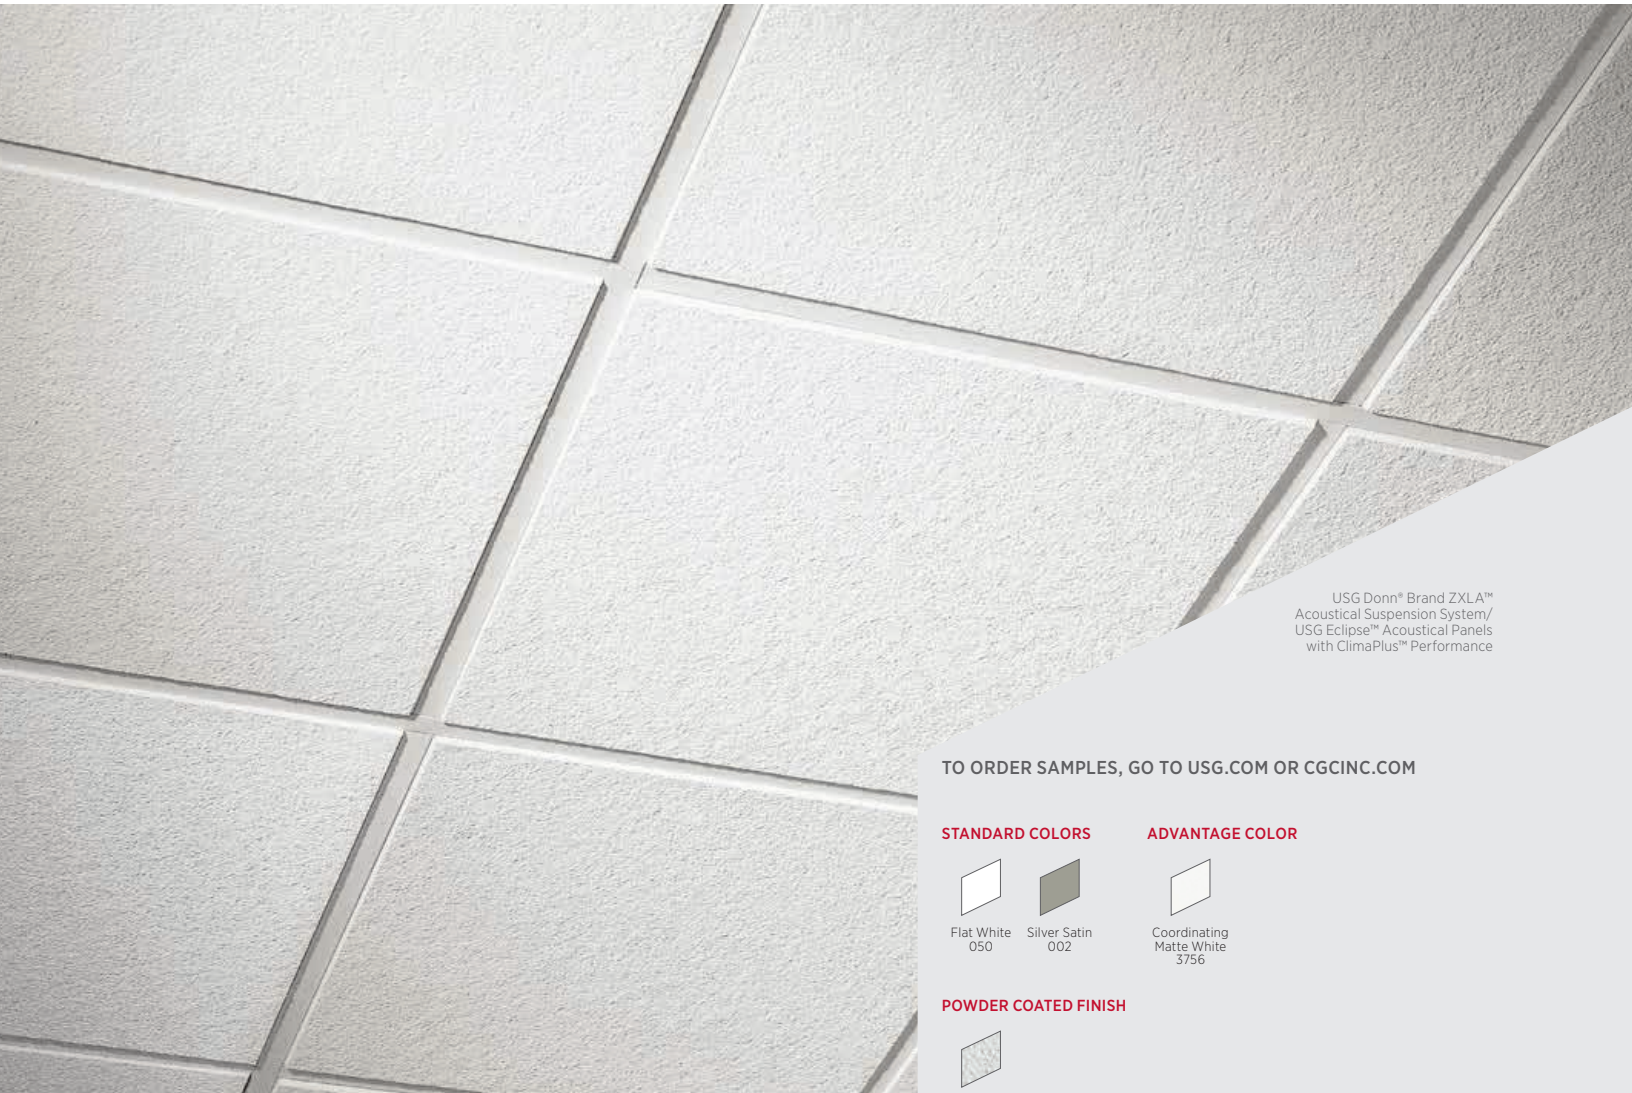

USG Donn® Brand ZXLA™
Acoustical Suspension System/
USG Eclipse™ Acoustical Panels
with ClimaPlus™ Performance

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



Flat White
050



Silver Satin
002

ADVANTAGE COLOR



Coordinating
Matte White
3756

POWDER COATED FINISH



Powder
White 3767


FEATURES AND BENEFITS

- G90 hot-dipped galvanized grid system with aluminum cap, conforms to ASTM C635.
- Polyester paint finish and stainless steel clip for increased corrosion protection.
- Complies with all national code requirements, including seismic and fire-rated assemblies up to two hours.
- Proprietary Quick-Release™ cross tees.
- Tested for exterior wind-uplift applications.


APPLICATIONS

- Exterior soffits
- Food processing
- Healthcare
- Industrial applications
- Laboratories
- Parking garages
- Locker rooms

PROFILE



EDGE DETAIL




USG DONN® BRAND ZXLA™ ACOUSTICAL SUSPENSION SYSTEM


ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


TECHNICAL SERVICES
800 USG.4YOU (874-4968)




15/16" TEE SYSTEM⁴ Main Tee



Cross Tee 1-1/2" (38 mm)



MOLDING^{3,4}



PHYSICAL DATA/ FOOTNOTES

ASTM Class	Length	Height	Item No.	Fire Rating	Color	Seismic Design Category		Rated Load ^{1,2}		
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
Intermediate Duty ²	12'	USG 1.64" 42 mm CGC 1.5" 25 mm	ZXLA24 HRC		Flat White	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.1 lb./LF	3.6 lb./LF
Heavy Duty	12'	USG 1.64" 42 mm CGC 1.5" 25 mm	ZXLA26 HRC		Flat White	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF
—	2'	1-1/2" 38 mm	ZXLA224 HRC		Flat White	—	—	—	—	—
—	4'	1-1/2" 38 mm	ZXLA424 HRC		Flat White	—	—	—	—	—

HRC High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



Wall Angle	Length	Item No.	Color
	12'	M7Z (up to 65% recycled content) HRC	Flat White

Product literature and samples

Data sheet: AC3029
Exterior systems guide: SC2561

Material

G90 hot-dipped galvanized steel tee and aluminum cap; stainless steel clip. Baked on polyester paint or powder coated finish.

Installation

Install according to ASTM C636, ASTM E580, Cisca and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

LA Research Report - RR 25764

Refer to usg.com for most current version.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Limitations

Finish is not UV-resistant; should not be installed where direct exposure to sun or weather will occur, such as fascias or facades. Not suitable for areas subject to high concentrations of acid rain. Indirect exposure to severe environmental conditions may shorten the life span of the product. The specific design of exterior ceiling installations requires the review and approval of the architect or engineer of record. Please refer to SC2561 for more information about exterior ceiling applications.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Notes

- Hanger wire spacing and locations must be per the UL design.
- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- Panels must be specified to be field-cut to size and field-revealed to provide as wide a lay-on edge as possible.
- Metric sizes available by RTQ.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3029/rev. 7-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661


The trademarks USG, CGC, CLIMAPLUS, DONN, ECLIPSE, FIRECODE, QUICK-RELEASE, ZXLA, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DRYWALL SUSPENSION SYSTEM


CURVED CEILINGS

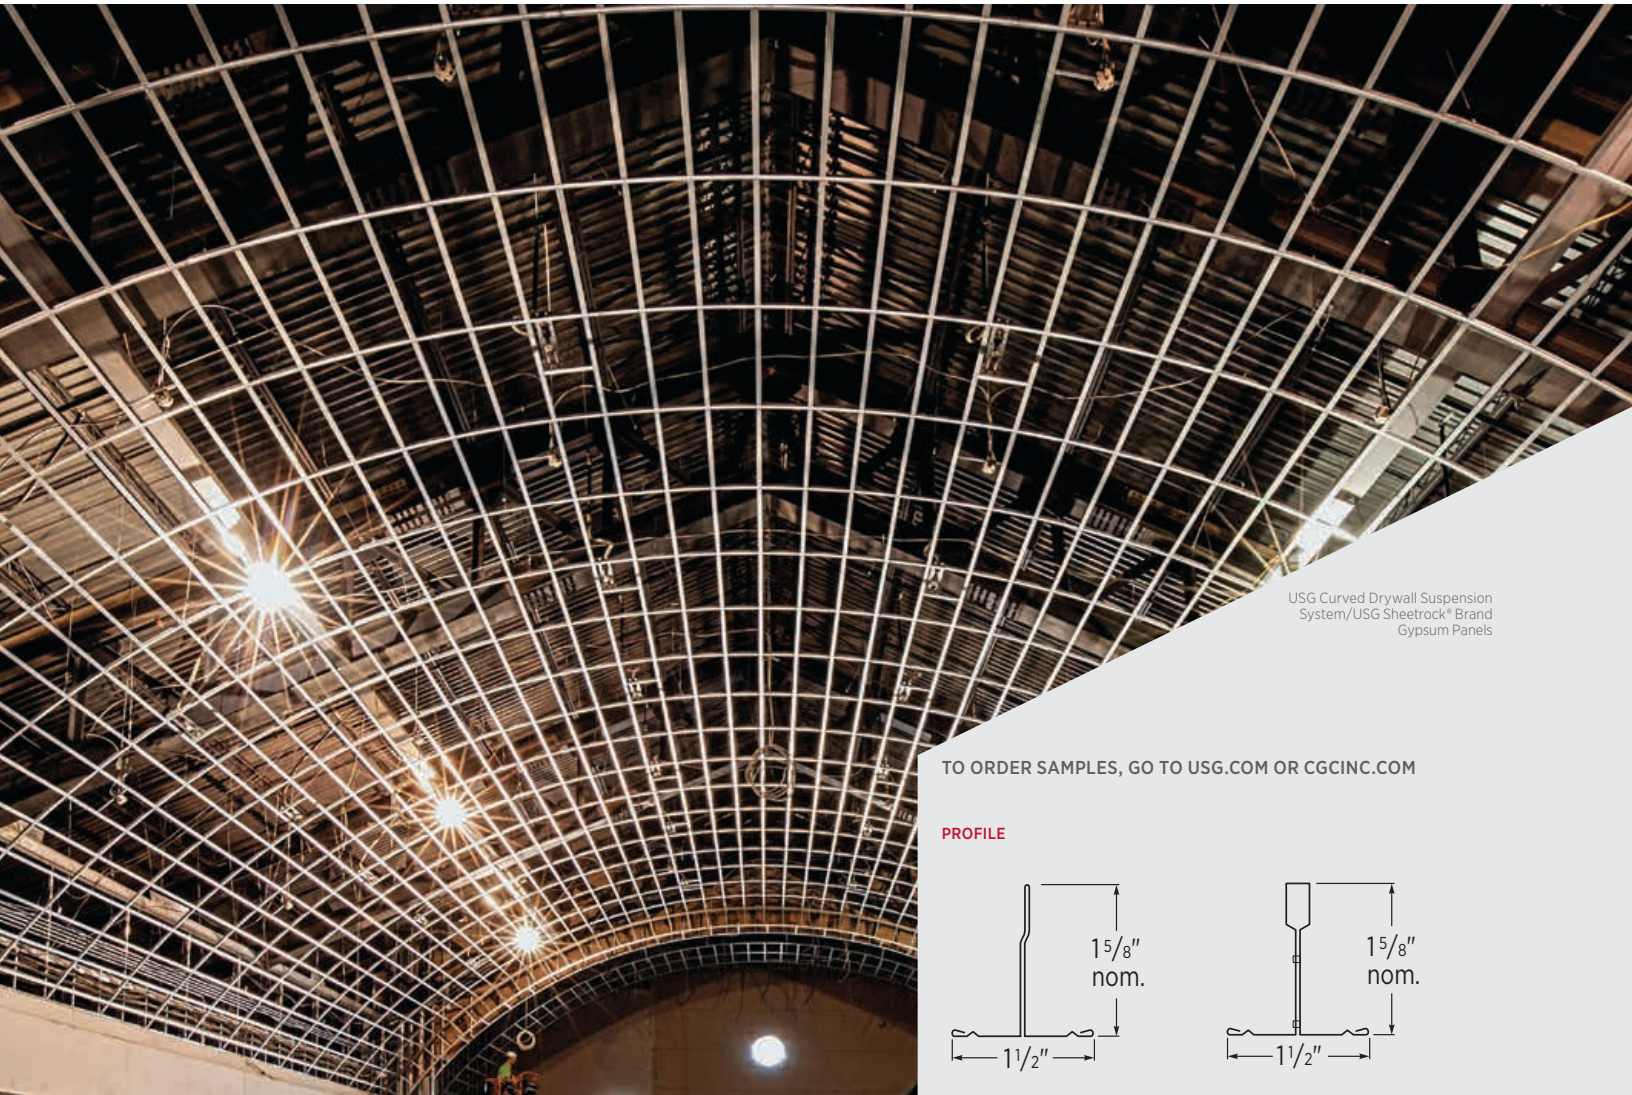

USG Curved Drywall Suspension System/USG Sheetrock® Brand Gypsum Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PROFILE

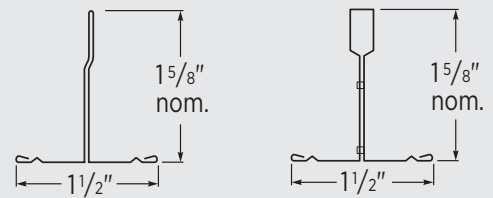

FEATURES AND BENEFITS

- USG Curved Drywall Suspension System simplifies the design and construction of curved drywall ceilings.
- Pre-engineered, factory curved main tees for consistent, uniform radii.
- G30 hot-dipped galvanized system suitable for most interior and exterior applications.

APPLICATIONS

- Domes, vaults and valleys
- Groin vaults
- Curved soffits

USG DRYWALL SUSPENSION SYSTEM

CURVED CEILINGS


ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

SYSTEM COMPONENTS



		ASTM Class per C635	Radius	Arc Length	Height	Item No. ²	Fire Rating	Rated Load ¹	
								2' Hanger Spacing	4' Hanger Spacing
Curved Main Tees	Vault 	16 lb. ³	31"-44"	6'	1-1/2"	DGW6VTxxx	Class A	—	16.0 lb./LF
		16 lb. ³	45"-60"	8'	1-1/2"	DGW8VTxxx	Class A	—	16.0 lb./LF
		16 lb. ³	61"-72"	10'	1-1/2"	DGW10VTxxx	Class A	—	16.0 lb./LF
		16 lb. ³	73"-91"	10'	1-1/2"	DGW10VTxxx	Class A	—	16.0 lb./LF
		16 lb. ³	92"-239"	10'	1-1/2"	DGW10VTxxx	Class A	—	16.0 lb./LF
		16 lb. ³	240"+	12'	1-1/2"	DGW12VTxxx	Class A	—	16.0 lb./LF
	Valley 	16 lb. ^{3,4}	31"-44"	6'	1-5/8"	DGW6VYxxx	Class A	16.0 lb./LF	—
		16 lb. ^{3,4}	45"-60"	8'	1-5/8"	DGW8VYxxx	Class A	16.0 lb./LF	—
		16 lb. ^{3,4}	61"-72"	10'	1-5/8"	DGW10VYxxx	Class A	16.0 lb./LF	—
		16 lb. ^{3,4}	73"-91"	10'	1-5/8"	DGW10VYxxx	Class A	16.0 lb./LF	—
		16 lb. ^{3,4}	92"-239"	10'	1-5/8"	DGW10VYxxx	Class A	16.0 lb./LF	—
		16 lb. ^{3,4}	240"+	12'	1-5/8"	DGW12VYxxx	Class A	16.0 lb./LF	—

See Flat Ceilings (AC3117) for information on straight cross tees, cross channels and moldings.

ACCESSORIES

Cross Tees

DGSC180 Splice Clip	DGTC90 Transition Clip	DGC4, DGC6, DGC8 USG Compasso™ Drywall Clip	DGWC Wall Attachment Clip	DGSP180 Splice Plate	DGHUB Dome Hub

TYPICAL ASSEMBLIES

8-Spoke Dome	16-Spoke Dome	Dome Vault

DESIGN SUPPORT

usgdesignstudio.com or cgcdesignstudio.com

- Online design and specification tools.
- Installation videos.
- Domes and barrel-vault estimator. Additional support available through USG Ceiling Solutions Group for design and estimation of nontypical applications.

PHYSICAL DATA/ FOOTNOTES

Product literature and samples
 Data sheet: AC3118
 System brochure: AC3152

Material
 Min. G40 hot-dipped galvanized steel body and cap.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Limitations
 For exterior applications, the suspension system should be reviewed by a structural engineer.

Installation
 Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Notes

1. For detailing and module loading, request AC3152.
2. "xxx" is a placeholder for a custom radius, in inches.
3. As tested per independent testing agency, both vault and valley main tees can carry 16 lb. per lineal foot.
4. As tested per independent testing agency, valleys require hanger wire spacing of 2' o.c.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3118/rev. 8-17
 © 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661


The trademarks USG, CGC, COMPASSO, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DRYWALL SUSPENSION SYSTEM


FLAT CEILINGS

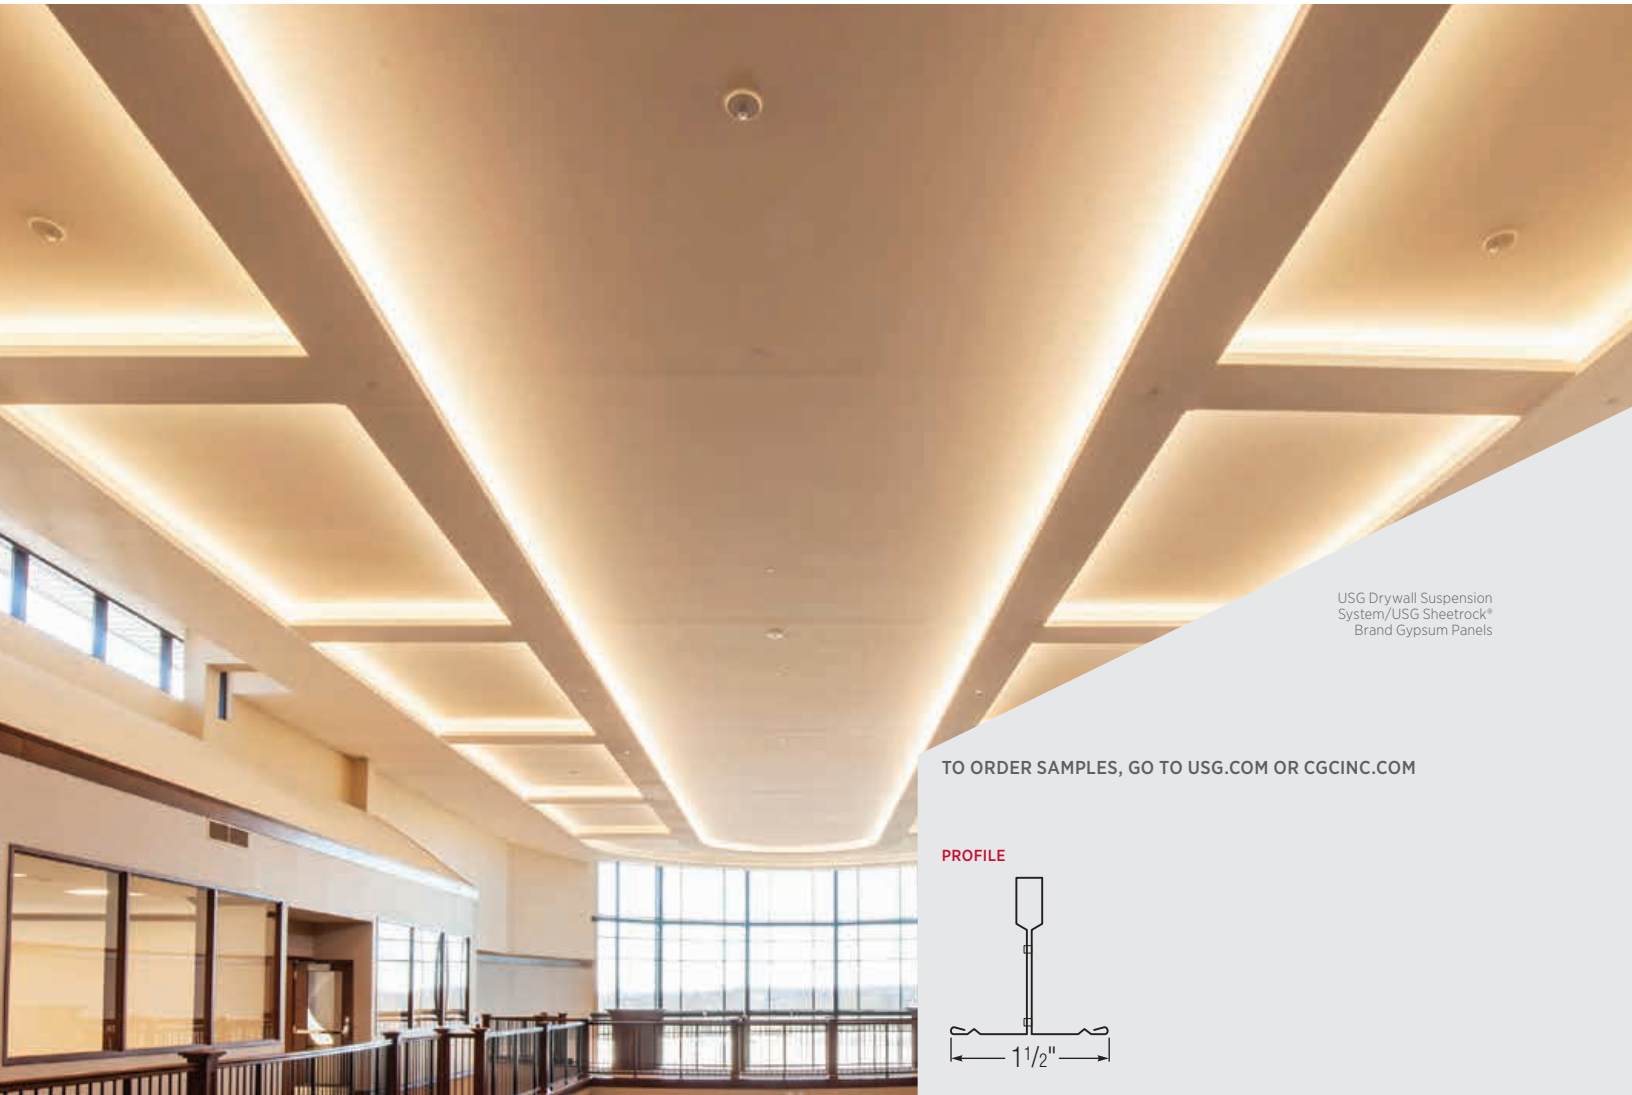

USG Drywall Suspension System/USG Sheetrock® Brand Gypsum Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PROFILE



FEATURES AND BENEFITS

- Installs faster than traditional framing methods.
- More than 60 UL fire-resistive designs.
- Assemblies available to meet STC and IIC requirements.
- Easily frames openings for Type F and Type G light fixtures.
- Evaluated for building code compliance according to ICC ESR-1222.
- G90 galvanization available for a variety of environmental conditions including exterior ceiling systems.
- Wind load tested and approved, including Miami-Dade NOA, for exterior applications with proper bracing and framing.

APPLICATIONS

- Exterior ceilings
- Fire-rated and non-fire-rated interior gypsum board ceilings

USG DRYWALL SUSPENSION SYSTEM

FLAT CEILINGS

ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative


FOR MOST UP-TO-DATE
**TECHNICAL INFORMATION
 AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)


30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

SYSTEM COMPONENTS


Straight Main Tees




Wall-to-Wall System Straight Tee**



Cross Tees



Moldings



Accessories

PHYSICAL DATA/ FOOTNOTES

Revit is the trademark of Autodesk Inc.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3117/rev. 3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

	ASTM Class	Length	Height	Item No.	Fire Rating	IBC Seismic Design	Rated Load ¹					
							Hanger Spacing-Ib./LF					
							24"		36"		48"	
		L/240	L/360	L/240	L/360	L/240	L/360					
DGLW 	Heavy Duty	12'	1.617"	DGLW26 ¹ DGLW26E(G90) ¹		A-F	129	86	57	38	24	16
DGW 	Heavy Duty	6' to 14'	1.617"	DGW26s	Class A	A-F	131	86	62	41	30	20

	ASTM Class	Length	Height	Item No.	Fire Rating	IBC Seismic Design	Span L/360 Ib./LF	
							Span	Value
							DGLW 	—
		26"	1-1/2"	DGLW2624 ¹		A-F	26"	93.1
		4'	1-1/2"	DGLW424 DGLW424E (G90)		A-F	48"	15.9
		50"	1-1/2"	DGLW50 ¹		—	50"	14.1
		72"	1-1/2"	DGLW624		—	72"	4.7
	—	12'	—	DGWM24	—	A-F	—	—
	—	12'	—	DGCM27	—	A-F	—	—

DGSC180 Splice Clip*	DGTC90 Transition Clip	DGC4, DGC6, DGC8 USG Compasso™ Drywall Clip	DGWC Wall Attachment Clip

* See AC3152 for alternative splice details ** See AC3230 for expanded wall-to-wall data



Product literature and samples
 Data sheet: AC3117
 Data sheet wall-to-wall: AC3230
 Samples: 257202

Material
 Min. G40 hot-dipped galvanized steel.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Installation
 Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Limitations
 For exterior applications, the suspension system should be reviewed by a structural engineer. Please refer to SC2561 for more information about exterior ceiling applications.

LA Research Report - RR 25764
 Refer to usg.com for most current version.

ICC Evaluation Services, LLC. Report Compliance
 For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Notes
 1. Manufactured and tested in accordance with ASTM C635.

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661


The trademarks USG, CGC, COMPASSO, FIRECODE, SHEETROCK, IT'S YOUR WORLD, BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



USG DRYWALL SUSPENSION SYSTEM


WALL-TO-WALL

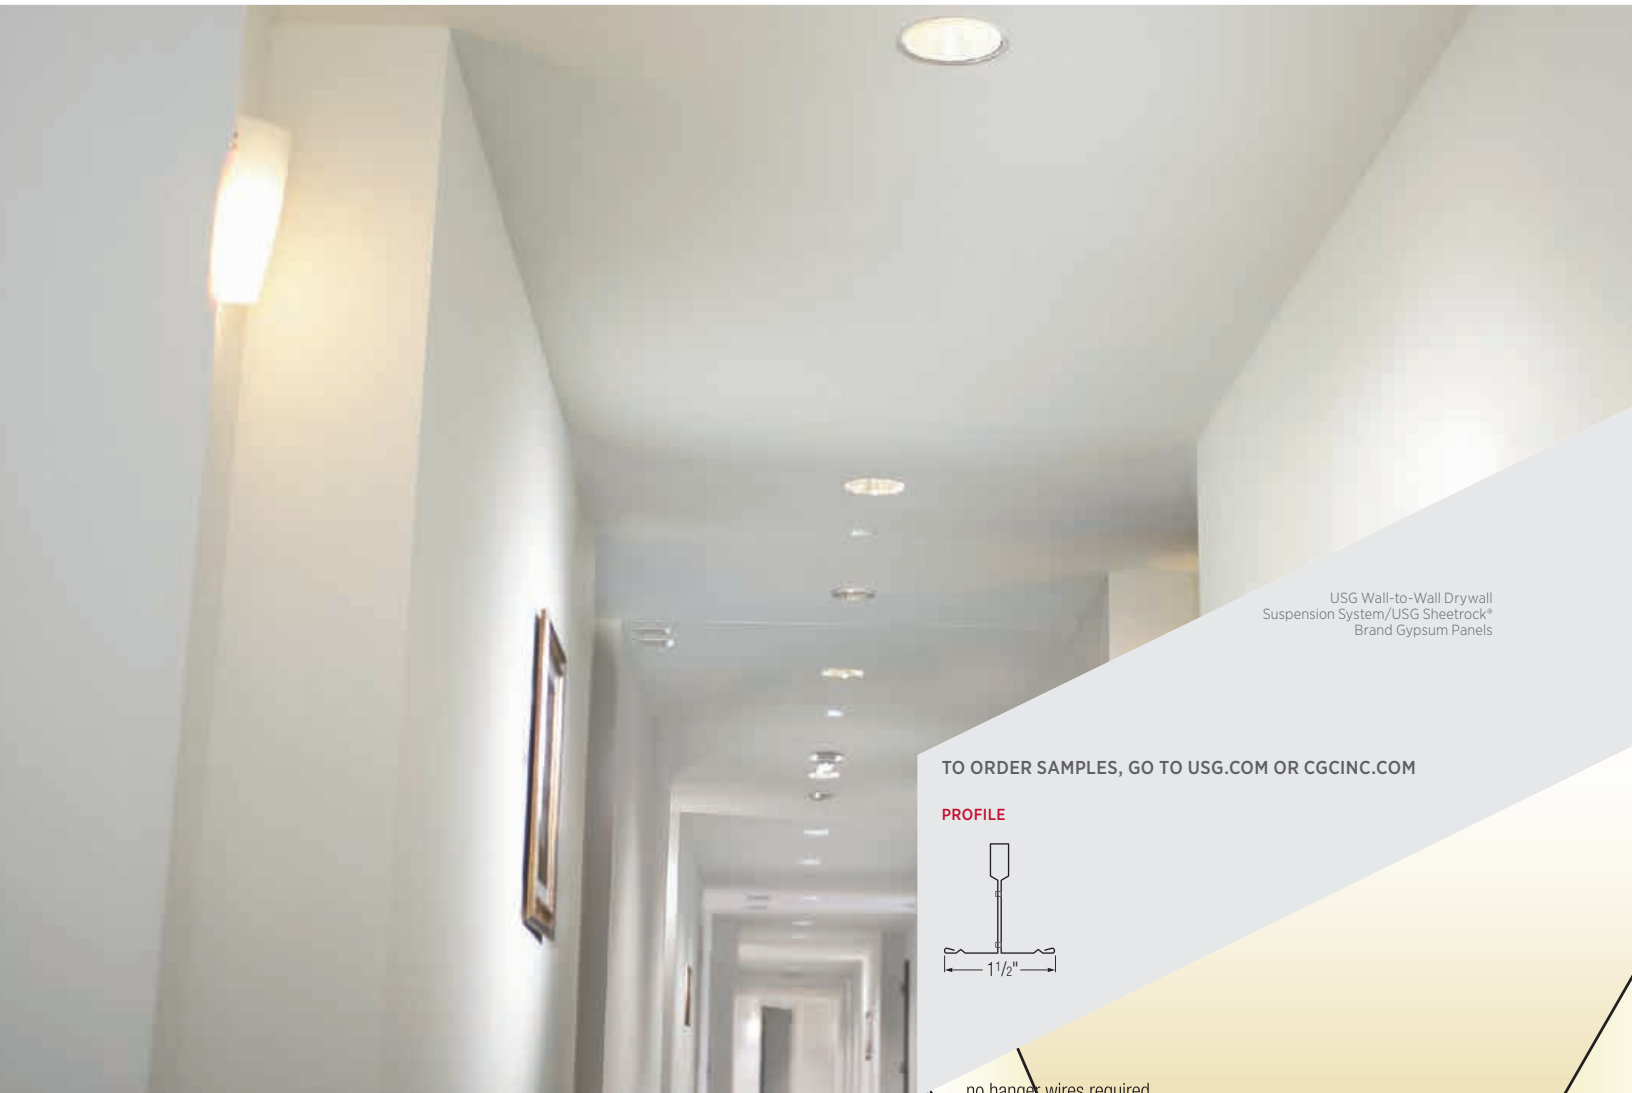

USG Wall-to-Wall Drywall
Suspension System/USG Sheetrock®
Brand Gypsum Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PROFILE




FEATURES AND BENEFITS

- Simplifies construction for corridors and small rooms.
- Eliminates hanger wires and cross tees for unsupported spans up to 8' with 1/2" drywall and 7'-6" with 5/8" drywall.
- Pre-engineered components allow easy transition between ceiling types and elevations.
- Min. G40 hot-dipped galvanized system, G90 available.
- Standard and custom lengths available.
- Manufactured in accordance with ASTM C635.

APPLICATIONS

- Condominiums and apartments
- Healthcare
- Education
- Hotels
- Dormitories
- Office

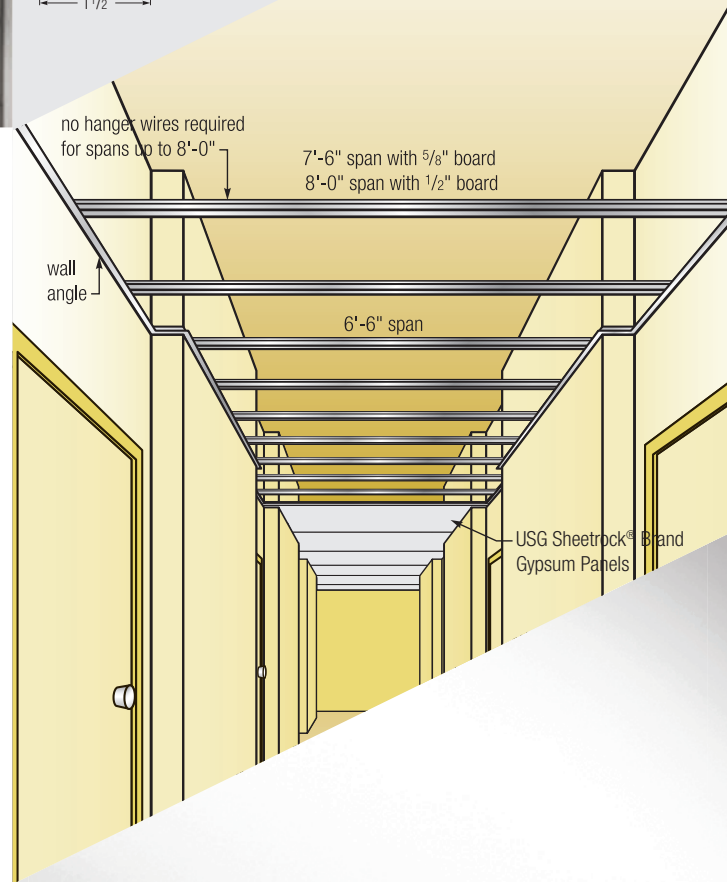

USG DRYWALL SUSPENSION SYSTEM

WALL-TO-WALL

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800.USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection

SYSTEM COMPONENTS

Straight Tee



Moldings³



ACCESSORY

DGSC180 Splice Clip



* See AC3152 for additional main tee splice options.

MEMBRANE LOADS

Span	O.C. Spacing (in.)	Maximum Load (lb./SF)
2'	16	179.04
	24	119.36
4'	16	22.38
	24	14.92
5'	16	11.46
	24	7.64
6'	16	6.63
	24	4.42
7'	16	4.18
	24	2.78
7'-6"	16	3.40
	24	2.26
8'	16	2.80
	24	1.86
	24	14.92*
10'	16	11.46*
	24	7.64*
12'	16	6.63*
	24	4.42*
16'	16	2.8*
	24	1.86*
	24	4.42**


VERTICAL SUPPORT

Tee Spacing	Drywall	Span	Support Requirement
16" o.c.	1/2"	up to 8'	None
		8'-1'-16"***	Midspan
		16'-1"-24"***	Two supports at 1/3 points
16" o.c.	5/8"	up to 7'-6"	None
		7'-7" to 15"***	Midspan
		15'-1" to 22'-6"***	Two supports at 1/3 points
24" o.c.	5/8"	up to 6'-6"	None
		6'-7" to 13'	Midspan
		13'-1" to 19'-6"***	Two supports at 1/3 points

Notes

- *Vertical support at midspan.
- **Two vertical supports at 1/3 point.
- ***Spans greater than 14' require main-tee splice. Use DGSC180 splice clip or alternative splicing options described in system brochure AC3152.

Typical ISB019 installation on DWG Main Tee.

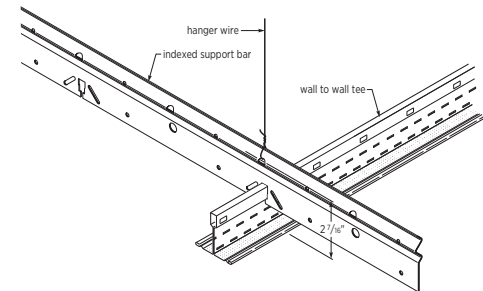

PHYSICAL DATA/ FOOTNOTES

Product literature and samples
Data sheet: AC3230, AC3112
System brochure: AC3152

Finishes
Galvanized.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Material
Min. G40 double-web tee, G40 hot-dipped galvanized steel.

Installation
Install according to ASTM C636, ASTM E580, CISCAs and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Notes

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM deflection limit on L/240.
- Attachment to wall structure is critical.
 - Members conform to performance standard C645.
 - Installation per ASTM C636.
 - Installation per ASTM C754.
 - ISB109 for use with USG Wall-to-Wall System only. Main tees must be supported on both ends.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3230/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, SHEETROCK, IT'S YOUR WORLD. BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.


USG DONN® BRAND M7 OVERLAPPING WALL ANGLE




USG Donn® Brand
M7 Overlapping Wall Angle

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS

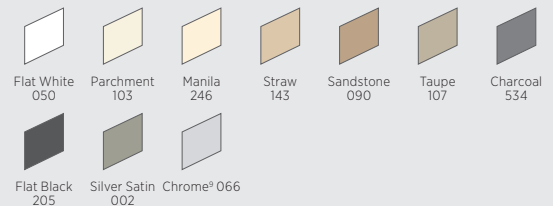

ADVANTAGE COLORS

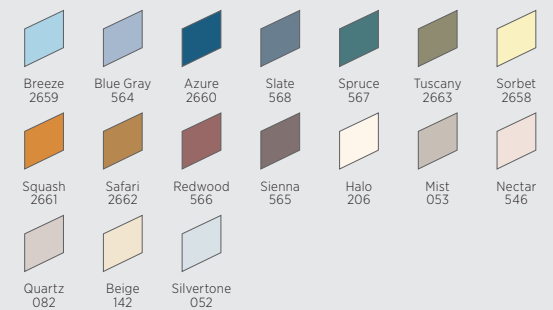

FEATURES AND BENEFITS

- Proprietary overlap detail provides an “extra hand” for easier, more accurate installation.
- Ensures that trim faces are level.
- Eliminates an unsightly gap at butt joints.
- Installs faster than standard perimeter trim.

APPLICATIONS

- All interior general-use areas


USG DONN® BRAND M7 OVERLAPPING WALL ANGLE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection


Wall Angle ²	Length	Item No.	Color
	12' 3600 mm	M7	Flat White Standard Advantage

MOLDING^{1,2}




PERFORMANCE COMPARISON

USG Donn® Brand M7 Overlapping Wall Angle

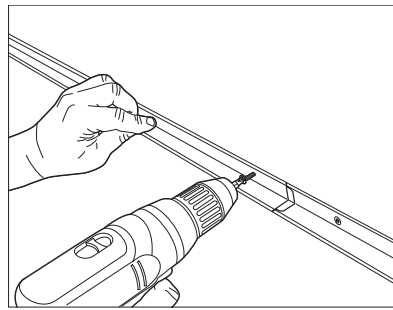

Overlap detail sits on adjacent trim, providing extra support for quicker, easier installation. The overlap ensures that trim faces are level, and it eliminates the unsightly gap created by traditional butt joints.

Traditional Wall Angle

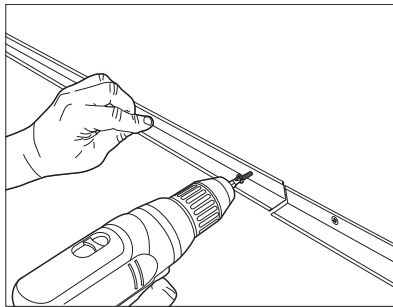

With no support between lengths of trim, traditional wall angle is more difficult to install. Butt-cut wall angle is also subject to misalignment of trim faces and gaps at joints.

PHYSICAL DATA/ FOOTNOTES

Product literature and samples
Data sheet: AC3270

Material
Hot-dipped galvanized steel body. Baked-on polyester paint.

Installation
Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance
For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764
Refer to usg.com for most current version.

Notes

- For more information about moldings, see the Perimeter Interface selector.
- Panels must be field-cut to size and field-revealed, where necessary, at the perimeter.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3270/rev. 2-17
© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, DONN, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG DONN® BRAND TRANSITION MOLDING

DRYWALL TO ACOUSTICAL CEILING TRANSITION MOLDING



USG Donn® Brand DXT™ Transition Molding with USG Mars™ Acoustical Panels/USG Donn® Brand Fineline® DXF™ Acoustical Suspension System


TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

USG DONN® BRAND TRANSITION MOLDING COLOR



Flat White
050

PROFILE

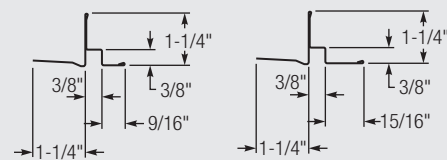

FEATURES AND BENEFITS

- Roll-formed, hot-dipped galvanized steel trims for creating transitions between drywall and acoustical ceilings.
- One-piece acoustical wall molding with an integrated drywall taping flange.
- Eliminates the need to construct drywall fascias for wall molding attachment.
- Taping flange is knurled and perforated to accept joint compound.
- Factory painted to match USG Donn® Brand acoustical suspension systems.
- Compatible with all USG Donn® Brand and USG Drywall suspension systems.

APPLICATIONS

- Contemporary offices
- Entertainment
- Hospitality
- Healthcare
- Retail
- Education

USG DONN® BRAND TRANSITION MOLDING

DRY WALL TO ACOUSTICAL CEILING TRANSITION MOLDING



ORDER SAMPLES/LITERATURE
 USG: samplitt@usg.com
 fax: 888 874-2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)


COMPONENTS

USG Donn® Brand SL DXT™

Profile	Item Number	Exposed Leg	Reveal	Length	Pieces/Carton	LF/Carton
	CPDWA9120	9/16"	3/8" x 3/8"	120"	12	120
	CPDWA15120	15/16"	3/8" x 3/8"	120"	12	120

INSTALLATION DETAILS

Shadowline USG Donn® Brand Transition Molding, Drywall to Acoustical Assembly Elevation

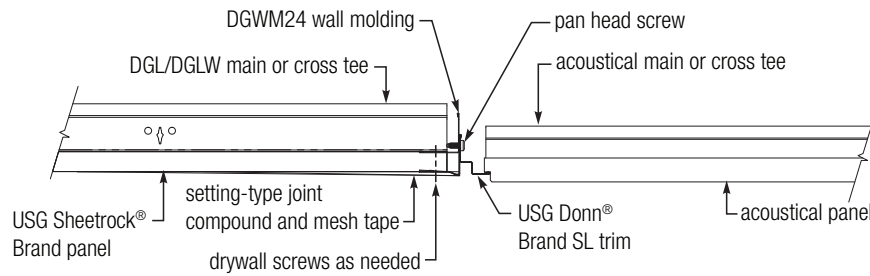

RECOMMENDED FINISHING INSTRUCTIONS

1. Embed mesh tape over flange with setting-type joint compound.
2. Apply second coat of setting-type or ready-mixed joint compound.
3. Apply third coat if needed.

Note:

For complete installation instructions, refer to installation guide AC3318.

PHYSICAL DATA/ FOOTNOTES

Product literature and samples
 Data sheet: AC3315
 Installation guide: AC3318
 Sample: 259401

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Material
 Min. G30 hot-dipped galvanized steel.
 Baked-on polyester paint.

Note
 For availability in Canada, please contact your local sales representative.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.




AC3315/rev. 11-16
 © 2016 USG Corporation and/or its affiliates. All rights reserved.
 Printed in USA




Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, DONN, DX, DXF, DXT, FINELINE, MARS, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG SUSPENSION SYSTEMS ACCESSORIES—MOLDINGS
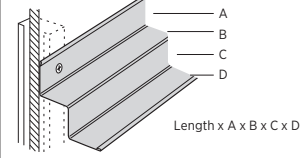
<p>Angle Molding</p> <p>Use for standard ceiling perimeters.</p> 	<p>Angle Molding w/Gasket M7CE</p> <p>Use in Clean Room applications with USG Donn® Brand CE™ Acoustical Suspension System.</p> 	<p>Shadow Molding</p> <p>For creating reveals at ceiling perimeters. Also helps to hide imperfections in drywall partitions and bulkheads.</p>  <p>Length x A x B x C x D</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------
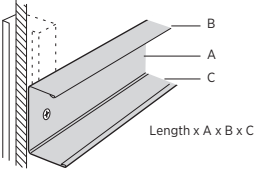
<p>US Channel Wall Molding</p> <p>Use with C-8 clip to hold down perimeter ceiling panels.</p>  <p>Length x A x B x C</p>	<p>US Channel Wall Molding w/Gasket US28CE</p> <p>Use with C-8 clip in Clean Room applications with USG Donn® Brand CE™ Acoustical Suspension System.</p> 	<p>F-Molding</p> <p>Use to create ceiling breaks, soffits and changes in elevation.</p> 
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Catalog Number	Description	Packaging/Ctn.		
		LF	Pcs.	Wt. (lb.)
M7 ¹	12'x7/8"x7/8" Wall Molding	480	40	63
M7OL	12'x7/8"x7/8" Overlapping Wall Molding	480	40	63
M7A	12'x7/8"x7/8" Aluminum Wall Molding	480	40	26
M7-10	10'x7/8"x7/8" Wall Molding	400	40	26
M7SS	12'x7/8"x7/8" Stainless Steel Wall Molding	240	20	31
M7Z	12'x7/8"x7/8" Hot-Dipped Galvanized Steel Wall Molding	480	40	58
M9 ¹	12'x9/16"x15/16" Wall Molding	480	40	55
M9-10	10'x9/16"x15/16" Wall Molding	400	40	23
M12	10'x1"x1-1/2" Wall Molding	250	25	63
M18	10'x7/8"x1-1/8" Wall Molding	200	20	23
MC11A25	10'x1"x1" Aluminum Cap Wall Molding	250	25	39
M7CE	12'x7/8"x7/8" Wall Molding w/gaskets	240	48	59
M20SM	10'x1"x2" Heavy Duty Wall Molding	250	25	80
M20SM-2	10'x2"x2" Wall Molding	200	20	76
M20 ²	10'x1"x2" Wall Molding	250	25	55
MS125	12'x15/16"x1/4"x1/4"x9/16" (Option 1)	300	25	46
	12'x9/16"x1/4"x1/4"x15/16" (Option 2)			
MS144	12'x3/4"x3/8"x1/2"x3/4" (Option 1)	300	25	48
	12'x3/4"x1/2"x3/8"x3/4" (Option 2)			
MS154 ³	12'x7/8"x3/4"x3/4"x7/8"	300	25	67
MS164	12'x3/4"x3/4"x3/4"x3/4"	300	25	62
MS174 ³	12'x7/8"x3/8"x3/8"x9/16" (Option 1)	300	25	43
	12'x9/16"x3/8"x3/8"x7/8" (Option 2)			
MS274	10'x7/8"x3/4"x9/32"x1-1/4"	200	20	54
US12	10'x3/4"x1/2"x1" U-Molding	500	50	44
US20	10'x1-1/4"x1/2"x1" U-Molding	300	30	57
US28	10'x1-1/16"x1/2"x1" U-Molding	300	30	63
US31	10' 1-15/16"x1/2"x1" U-Molding	300	30	70
UA25	10'x1-9/16"x1/2"x1" Aluminum U-Molding	300	30	33
U-2-3/32	12'x2-3/32"x7/8"x1-1/8" Aluminum U-Molding, Flat White	360	30	90
US28CE	10'x1-11/16"x1/2"x1" U-Molding w/gaskets, Flat White	300	30	63
MF8	10'x1/2" F-Molding (for 1/2" panels)	100	10	28
MF10	10'x5/8" F-Molding (for 5/8" panels)	100	10	29

Notes

- M7 and M9 available in standard and advantage colors in half carton quantities only, 240 LF per carton.
- Not all M20 moldings are available in all areas. Please contact your USG Sales Representative.
- MS154 and MS174 available with exposed horizontal leg painted a color.

ANGLE MOLDING

SHADOW MOLDING
Length x A x B x C x D
(See illustration above)







US CHANNEL WALL MOLDING

USG SUSPENSION SYSTEMS ACCESSORIES MOLDINGS

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800.USG.4YOU (874-4968)

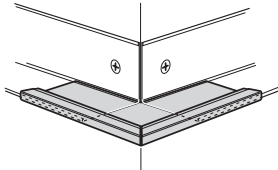
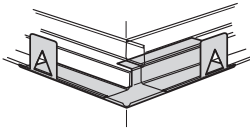
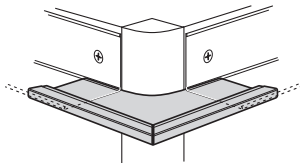
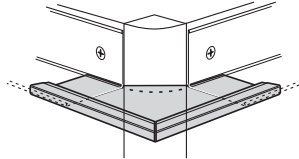
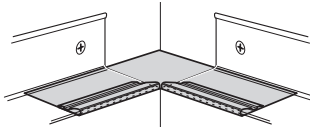
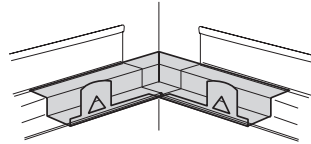
<p>Square Molding Corner Clip JS</p> <p>Use with angle molding.</p> 	<p>Outside Corner JS174</p> <p>Use with MS174 Shadow Molding. JS274 also available for MS274.</p> 	<p>Radius Molding Corner Clip JH, JB</p> <p>For radius or "bullnose" corners.</p> 
<p>Field-Modified Corner JM16</p> <p>Cut-out clip to fit field condition.</p> 	<p>Inside Corner Angle Mold A2</p> <p>Use with angle molding.</p> 	<p>Prefabricated Inside Corner A174</p> <p>Use with MS174 Shadow Molding. A274 also available for MS274.</p> 

Catalog Number	Description	Packaging/Ctn.	
		Pcs.	Wt. (lb.)
JS9	Square 90° Outside Corner Cap for 9/16" Molding	100	3.0
JS14	Square 90° Outside Corner Cap for 7/8" Molding	100	3.0
JS16	Square 90° Outside Corner Cap for 1" Molding	100	3.0
JS174	Square 90° Outside Corner Cap for MS174 Shadow Molding	50	1.5
JS274	Square 90° Outside Corner Cap for MS274 Shadow Molding	50	1.5
JH9	1" Radius 90° Outside Corner Cap for 9/16" Molding	100	3.0
JH12	1" Radius 90° Outside Corner Cap for 3/4" Molding	100	3.0
JH14	1" Radius 90° Outside Corner Cap for 7/8" Molding	100	3.0
JH15	1" Radius 90° Outside Corner Cap for 15/16" Molding	100	3.0
JH16	1" Radius 90° Outside Corner Cap for 1" Molding	100	3.0
JB14	3/4" Radius 90° Outside Corner Cap for 7/8" Molding	100	3.0
JB16	3/4" Radius 90° Outside Corner Cap for 1" Molding	100	3.0
JM16	Field-Modified Corner for 1" Molding	100	3.0
A2	Inside Corner Cap for 7/8" Molding	200	4.0
A174	Inside Corner Cap for MS174 Shadow Molding	50	1.5
A274	Inside Corner Cap for MS274 Shadow Molding	50	1.5

OUTSIDE CORNERS

INSIDE CORNERS

USG SUSPENSION SYSTEMS ACCESSORIES—GRID INSTALLATION
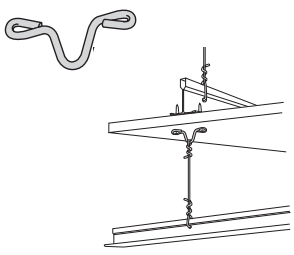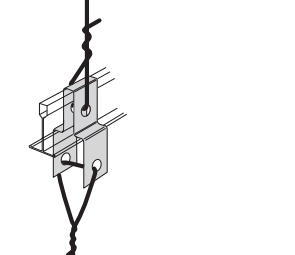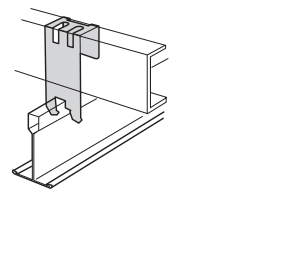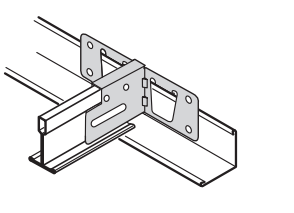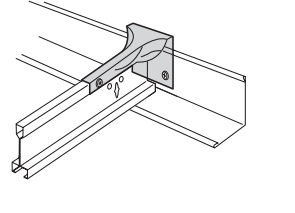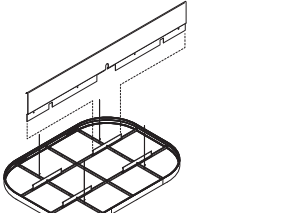
<p>Drywall Grid Hanger Clip A</p> <p>To suspend secondary ceiling.</p> 	<p>Grid Load Transfer Bracket B</p> <p>To suspend secondary ceiling.</p> 	<p>Furring Clip for Grid to Channel C</p> <p>Connect grid to 1-1/2" channel.</p> 
<p>Seismic Attachment Clip for Perimeter Conditions D</p> <p>Attach tee ends at the perimeter in seismic design categories C, D, E and F.</p> 	<p>Molding Attachment Clip E</p> <p>Attach tees to angle molding and shadow molding.</p> 	<p>Ceiling Cloud Suspension Brace G</p> <p>For moving hanger wires away from ceiling cloud perimeters.</p> 

Catalog Number	Description	Packaging/Ctn.		Detail Key
		Pcs.	Wt. (lb.)	
DGHC	Drywall Grid Hanger Clip	100	1.5	A
256860	Grid Load Transfer Bracket, 15/16" grid	250	13	B
256861	Grid Load Transfer Bracket, 9/16" grid	250	13	B
256862	Grid Load Transfer Bracket, 1-1/2" grid	250	13	B
V-14	Furring Clip for Grid to Channel	500	45	C
ACM7	Seismic Perimeter Attachment Clip	100	7	D
MAC2	Molding Attachment Clip	100	3	E
TSB-24	Bare Galvanized or Flat Black	10	12.5	G

Notes

1. Please refer to usg.com or cgcinc.com for more information about seismic applications with the ACM7 seismic clip.

**GRID TO PRIMARY
SUPPORT**

GRID TO MOLDING¹







**CEILING CLOUD
SUSPENSION BRACE**

USG SUSPENSION SYSTEMS ACCESSORIES GRID INSTALLATION

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800.USG.4YOU (874-4968)
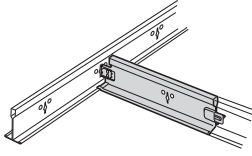
<p>MT/CT Converter F</p> <p>Changes main-tee direction 90° from adjacent main tee.</p> 	<p>Two-Way Seismic Separation Joint Clip G1</p> <p>For seismic separation joints in IBC Seismic Design Categories D, E and F.</p> 	<p>Three-Way Off-Module Connector G2</p> <p>Use with cross tees and main tees that are the same height.</p> 
<p>Four-Way Seismic Separation Joint Clip H</p> <p>For seismic separation joints in IBC Seismic Design Categories D, E and F.</p> 	<p>Paired Main Tee Clip I</p> <p>Use for linear air diffusers; use only with USG Donn® Brand DX®/DXL™ DXLA™ ZXLA™, Fineline® DXF™ and Fineline® 1/8 DXFF™</p> 	<p>Light-Fixture Clip J</p> <p>For USG Donn® Brand Centricitee™ DXT™/DXLT™ suspension system, use black clips with parabolic fixtures. Cross tee must be connected to main tee.</p> 

Catalog Number	Description	Packaging/Ctn.		Detail Key
		Pcs.	Wt. (lb.)	
DXMT/CT	9"x1-1/2" MT/CT Converter—changes MT direction for DX/DXL grid.	75	13	F
DH2 ¹	Two-Way Seismic Separation Joint Clip	100	2	G1
DH3	Three-Way Off-Module Connector	100	3	G2
DH4 ²	Four-Way Seismic Separation Joint Clip	100	4	H
V-32	Paired Main Tee Clip (2" separation center-to-center)	100	3	I
LFC	Light-Fixture Hold-Down Clip—for 9/16" grid	100	2	J

Notes

1. Please refer to Submittal Sheet AC3301 for more information about the DH2 two-way seismic separation joint clip.
2. Please refer to Submittal Sheet AC3271 for more information about the DH4 four-way seismic separation joint clip.

TEE TO TEE


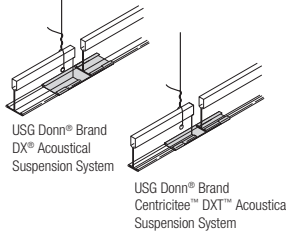

LIGHT-FIXTURE CLIP

USG SUSPENSION SYSTEMS ACCESSORIES GRID INSTALLATION

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800.USG.4YOU (874-4968)

<p>Compression Post Clips K</p> <p>Top clip and bottom end plug for 3/4" conduit. Conduit not included.</p> 	<p>Tee Face Sleeve L1</p> <p>To cut in tees to existing system and for separation joints.</p> 	<p>Tee Face Sleeve' L2</p> <p>To cut in tees to existing system and for separation joints.</p> 
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p>Accessory Hanger Hook² M</p> <p>Remove top clip for use with standard 1/4" USG Donn® Brand Finline® Acoustical Suspension System.</p> 	<p>Universal Partition Attachment Clip N1</p> <p>Reversible for use with all USG Donn® Brand grid types.</p> 	<p>Unopposed Tee Attachment Clip N2</p> <p>Used to securely attach unopposed cross tees to main tees. Seismic compliant. Requires pop rivet.</p> 
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Catalog Number	Description	Packaging/Ctn.		Detail Key
		Pcs.	Wt. (lb.)	
CPC34	25 Each Top Clip and Bottom Plug, Makes 25 Posts	50	2.0	K
TFS-1	Tee Face Sleeve (3" long) for 15/16" USG Donn® Brand DX®/DXL™ Acoustical Suspension System	100	10	L1
TFS-2	Tee Face Sleeve (3" long) for 9/16" USG Donn® Brand Centricitee™ DXT™ Acoustical Suspension System	100	3	L1
TFS-3	Tee Face Sleeve (3" long) for USG Donn® Brand Finline® DXF™ Acoustical Suspension System with 1/4" Reveal	250	4	L1
TFS-4	Tee Face Sleeve (3" long) for USG Donn® Brand Finline® 1/8 DXFF™ Acoustical Suspension System with 1/8" Reveal	250	4	L1
TFS-5	Tee Face Sleeve (3" long) for USG Donn® Brand Identitee® DXI™ Acoustical Suspension System with 1/8" Reveal	100	4	L2
TFS-5 DXI FC	Tee Face Intersection sleeve (3" long) for USG Donn® Brand Identitee® DXI™ Acoustical Suspension System with 1/8" Reveal	250	4	L2
AH1	Accessory Hanger Hook (white, injection molded)	50	1	M
UPAC-1	Universal Partition Attachment Clip for SQ and reveal edge panels	100	8	N1
UTAC-2	Unopposed Tee Attachment Clip	100	5	N2

Notes

- The USG Donn® Brand Identitee® DXI™ Tee-Face Intersection Sleeve (TFS-5 DXI FC) is used for off-module intersections to maintain the clean, uninterrupted aesthetic of the grid profile.
- Whenever possible the accessory hanger hook should be installed on a main tee. If an accessory hanger hook is installed on a main tee, the load should not exceed 10 lb. without installing a supplementary hanger wire support to the structure at the location of the hanger hook. If an accessory hanger hook is installed on a cross tee, the load should not exceed 4 lb. without installing a supplementary hanger wire support to the structure at the location of the hanger hook. The accessory hanger hook is not designed to support loads exceeding 30 lb.

**COMPRESSION POST
CLIPS**







TEE ACCESSORIES

USG SUSPENSION SYSTEMS ACCESSORIES GRID INSTALLATION

ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 fax: 888.874.2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

<p>Panel Retention Clip 20428' N3</p> <p>Attaches to 1-1/2" main tees and cross tees behind lay-in ceilings. The retention clips help prevent panel displacement from incidental contact. Recommended with USG Rock Face® Acoustical Panels for impact-resistant systems.</p> 	<p>Hold-Down Clip—Fire-Rated Grid O1</p> <p>Used when required in some fire-rated assemblies.</p> 	<p>Hold-Down Clip O2</p> <p>To maintain a Clean Room seal.</p> 
<p>Variable Locking Hold-Down Clip O3</p> <p>Use as a locking hold-down clip for various acoustical and metal panels.</p> 	<p>Accessible Hold-Down Clip P</p> <p>Use as a hold-down clip for 5/8" panels. Provides ready accessibility.</p> 	<p>Variable Hold-Down Clip Q</p> <p>For 5/8" to 3/4" panels.</p> 

Catalog Number	Description	Packaging/Ctn.		Detail Key
		Pcs.	Wt. (lb.)	
20428	Attaches to 1-1/2" main tees and cross tees behind lay-in ceilings. The retention clips help prevent panel displacement from incidental contact. Recommended with USG Rock Face® Acoustical Panels for impact-resistant systems.	100	17	N3
L15	Hold-Down Clip—for 5/8" fire-rated panels	1000	7	O1
L15CE	Hold-Down Clip—for panels in Clean Room applications (same clip as L15; smaller quantity)	500	3.5	O2
PZ	Variable Locking Hold-Down Clip	100	1	O3
L45	Accessible Hold-Down Clip for 5/8" panels	1000	15	P
V15	Variable Hold-Down Clip	1000	8	Q

Notes

1. For more information about the Keep Clip™ from American Retention Components, Inc., please visit www.retentionclip.com.

PANEL RETENTION CLIP







HOLD-DOWN CLIPS

USG SUSPENSION SYSTEMS ACCESSORIES GRID INSTALLATION

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com
fax: 888.874.2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800.USG.4YOU (874-4968)

<p>Wall Spring Clip R</p> <p>To hold down perimeter ceiling panels. Useful for maintaining Clean Room seal with US28CE molding.</p> 	<p>Miter Closure Clip for USG Donn® Brand Finesline® Acoustical Suspension System S</p> <p>For closing off unused miters.</p> 	<p>USG Celebration™ Hold-Down Channel Clip T</p> 
<p>Partition Attachment Clip U</p> <p>To screw-attach ceiling-height partitions.</p> 	<p>T-Bolt V</p> <p>To bolt-attach partitions, signage or pendant-mounted indirect lighting.</p> 	<p>USG Donn® Brand Finesline® Acoustical Suspension System Cut-Off Die W</p> <p>Use to field-cut USG Donn® Brand Finesline® tees.</p> 

Catalog Number	Description	Packaging/Ctn.		Detail Key
		Pcs.	Wt. (lb.)	
C-8	Wall Spring Clip	2000	29	R
C-8CE	Wall Spring Clip (same clip as C-8; smaller quantity)	500	8	R
MCC3	2" Miter Closure Clip for 1/8" USG Donn® Brand Finesline® Acoustical Suspension System	50	1	S
MCC2	2" Miter Closure Clip for standard USG Donn® Brand Finesline® Acoustical Suspension System	50	1	S
T15	10"x11/32"x1-9/16"x3/4" Panel Hold-Down Clip	500	30	T
U-2-3/32	10"x11/32"x2-3/32"x3/4" Panel Hold-Down Clip	500	30	T
PAC1	3" Partition Attachment Clip	50	1	U
TB1	1"x1/4"-20 T-Bolt	100	1	V
FC1	USG Donn® Brand Finesline® Acoustical Suspension System Cut-Off Die (scaffold mount)	1	10	W


Note

1. Please refer to *USG Exterior Ceiling Applications* (SC2561) for more information about exterior ceiling applications with the T15 and U-2-3/32 hold-down clips. Use T-15 hold-down clip with UA25 molding and use U-2-3/32 hold-down clip with U-2-3/32 molding.

HOLD-DOWN CLIPS¹

**USG DONN® BRAND
FINELINE® ACOUSTICAL
SUSPENSION SYSTEM
ACCESSORIES**

USG SUSPENSION SYSTEMS ACCESSORIES—STABILIZER BARS

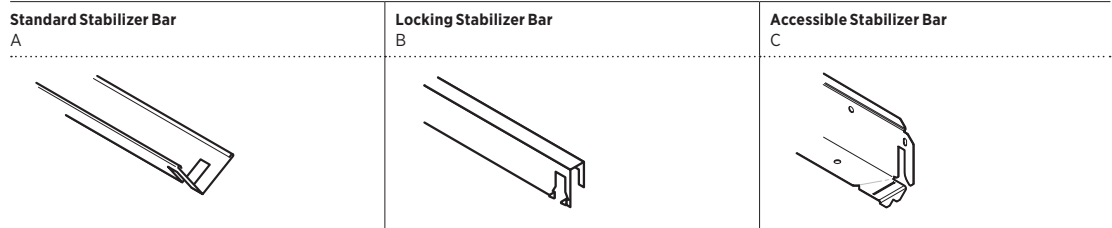

**STANDARD
STABILIZER BARS¹**

**LOCKING
STABILIZER BARS¹**







**ACCESSIBLE
STABILIZER BARS¹**

Catalog Number	Description	Packaging/Ctn.			Detail Key
		LF	Pcs.	Wt. (lb.)	
CC15-20	Standard 20" Stabilizer Bar	83.3	50	11	A
CC15-30	Standard 30" Stabilizer Bar	125	50	17	A
CC15-4-2	Standard 4' Stabilizer Bar Notched 2' o.c.	200	50	27	A
SB12	Locking 12" Stabilizer Bar	200	200	27	B
SB24	Locking 24" Stabilizer Bar	400	200	52	B
SB24-A	Locking 24" Stabilizer Bar Elongated for Ashlar Connection	400	200	52	B
SB36	Locking 36" Stabilizer Bar	300	100	40	B
SB48	Locking 48" Stabilizer Bar	400	100	50	B
SB48-24	Locking 24" Stabilizer Bar 24" Center-to-Center Notch	400	100	50	B
SB60	Locking 60" Stabilizer Bar	500	100	64	B
ASB24	Accessible 24" Stabilizer	50	25	17	C
ASB30	Accessible 30" Stabilizer Bar	62.5	25	25	C
ASB48	Accessible 48" Stabilizer	100	25	33	C
ASB600MM	Accessible 600 mm Stabilizer Bar	15(m)	25	17	C
ASB900MM	Accessible 900 mm	22.5(m)	25	25	C
ASB1200MM	Accessible 1200 mm	30(m)	25	33	C

Notes

1. Please refer to *Application Guide* (IC592) for more information about USG stabilizer bars in plank and large panel applications.

USG SUSPENSION SYSTEMS ACCESSORIES—MISCELLANEOUS
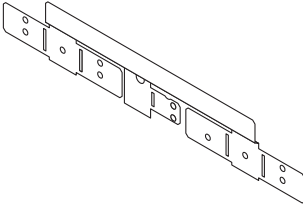
<p>Universal Field Cross Tee Hole Tool</p> <p>For all USG Donn® Brand Acoustical Suspension Systems.</p> 	<p>Handheld Field Cross Tee Hold Tool</p> <p>For all USG Donn® Brand Acoustical Suspension Systems.</p> 	<p>Air Diffuser</p> <p>Field-cut foil-backed ceiling panel to fit diffuser face. Use with USG Donn® Brand Finline® and Centricitee™ Acoustical Suspension Systems.</p> 
<p>SB2 Sloped Ceiling Bracket</p> 	<p>USG Logix™ Universal Yoke</p> 	<p>Utility Module Bracket</p> 

Catalog Number	Description	Packaging/Ctn.	
		Pcs.	Wt. (lb.)
215738	Universal Field Cross Tee Hole Tool	1	30
200308	Handheld Cross Tee Hole Tool	1	5
204755	Replacement Die Block for Universal Cross Tee Tool	1	1
276759	Replacement Die Block for Handheld Cross Tee Tool	1	1
214418	Replacement Punch for Universal Cross Tee Tool	1	1
276760	Replacement Punch for Handheld Cross Tee Tool	1	1
CROSS TEE HOLE PUNCHES³			
B15	Silver Satin (020)	6	7
B14	Flat Black Spray Paint (205) ¹	6	7
B13	Flat White Spray Paint (050) ¹	6	7
PC15 GAL	Standard Gallon ²	1	12
PC16 QT	Standard Quart ²	1	3
PC19 GAL	Custom Gallon	1	12
PC20 QT	Custom Quart	1	3
TOUCH-UP PAINT			
AD16	2'x2' 1 Slot with 6" Collar	1	7
AD18	2'x2' 1 Slot with 8" Collar	1	7
AD26	2'x2' 2 Slot with 6" Collar	1	8
AD28	2'x2' 2 Slot with 8" Collar	1	8
AD38	2'x2' 3 Slot with 8" Collar	1	8
AD310	2'x2' 3 Slot with 10" Collar	1	9
AD410	2'x2' 4 Slot with 10" Collar	1	10
AD412	2'x2' 4 Slot with 12" Collar	1	10
AIR DIFFUSERS Recommended for use with 9/16" systems			
LGXUNVYK	USG Logix™ Integrated System Universal Yoke 4, 6, 100 mm, 150 mm, HDG, 2-Part Yoke	10	4
UMB-4-6	4, 6, Utility Module Bracket (UMB)	8	1.9
UMB-100-150	100 mm, 150 mm, Utility Module Bracket (UMB)	8	1.9
USG LOGIX™ INTEGRATED SYSTEM			
SB2	SB2 Adjustable Wall Molding Bracket—used to secure standard wall molding at an angle to accommodate a sloped acoustical ceiling.	100	11
ADJUSTABLE WALL MOLDING BRACKET			

Notes

1. One carton contains six 12 oz. cans. Paints cannot be shipped air freight.
2. Specify color number from price list.
3. Punch tools are not covered under the USG Standard Product Warranty.

CROSS TEE HOLE PUNCHES³

TOUCH-UP PAINT










AIR DIFFUSERS
Recommended for use with 9/16" systems

USG LOGIX™ INTEGRATED SYSTEM

ADJUSTABLE WALL MOLDING BRACKET

USG SUSPENSION SYSTEMS ACCESSORIES—SEPARATION JOINTS

When a separation joint is required, USG offers several options that are practical, easy to install, and designed for minimal visibility. USG Donn® Brand separation joints represent the greatest range of options to satisfy the stringent requirements for separation joints.
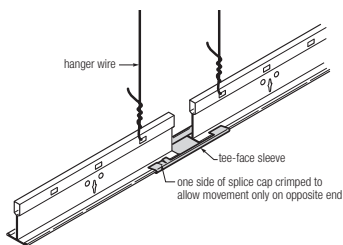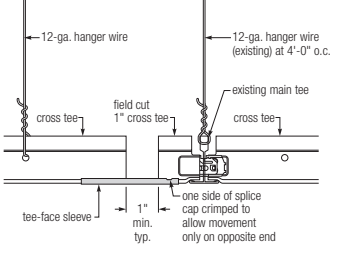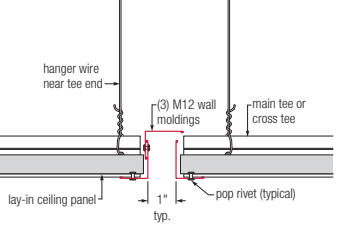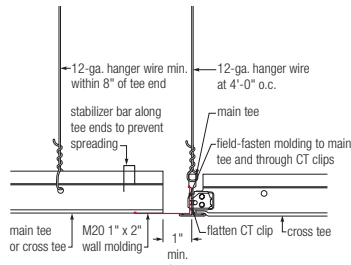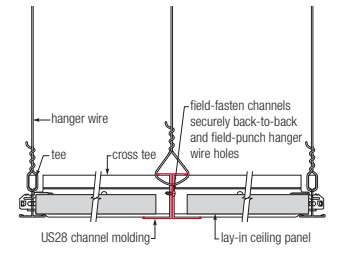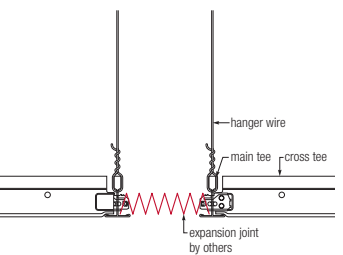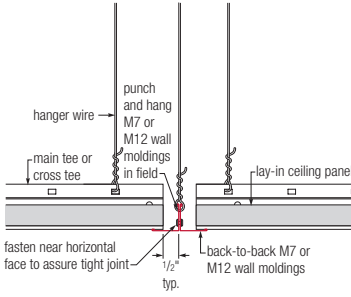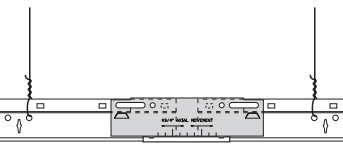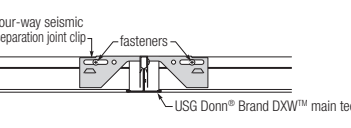
<p>Tee Face (Main Tee or Cross Tee) Sleeve</p> <p>Available for USG Donn® Brand DX™/DXL™, Identitee® DXI™, Centricitee™ DXT™/DXLT™ and Fineline® DXF™/DXFF™</p>  <p>hanger wire</p> <p>tee-face sleeve</p> <p>one side of splice cap crimped to allow movement only on opposite end</p>	<p>Tee Face (Cross Tee) Sleeve</p>  <p>12-ga. hanger wire</p> <p>12-ga. hanger wire (existing) at 4'-0" o.c.</p> <p>cross tee</p> <p>field cut 1" cross tee</p> <p>existing main tee</p> <p>tee-face sleeve</p> <p>1" min. typ.</p> <p>one side of splice cap crimped to allow movement only on opposite end</p>	<p>Expansion Joint—M12 Molding</p>  <p>hanger wire near tee end</p> <p>(3) M12 wall moldings</p> <p>main tee or cross tee</p> <p>lay-in ceiling panel</p> <p>1" typ.</p> <p>pop rivet (typical)</p>
<p>Expansion Joint—M20 Molding</p>  <p>12-ga. hanger wire min. within 8" of tee end</p> <p>12-ga. hanger wire at 4'-0" o.c.</p> <p>stabilizer bar along tee ends to prevent spreading</p> <p>main tee</p> <p>field-fasten molding to main tee and through CT clips</p> <p>main tee or cross tee</p> <p>M20 1" x 2" wall molding</p> <p>1" min. typ.</p> <p>flatten CT clip</p> <p>cross tee</p>	<p>Expansion Joint—US28 Molding</p>  <p>hanger wire</p> <p>tee</p> <p>cross tee</p> <p>field-fasten channels securely back-to-back and field-punch hanger wire holes</p> <p>US28 channel molding</p> <p>lay-in ceiling panel</p>	<p>Expansion Joint—Accordion Style</p>  <p>hanger wire</p> <p>main tee</p> <p>cross tee</p> <p>expansion joint by others</p>
<p>Expansion Joint—M7 Molding</p>  <p>hanger wire</p> <p>punch and hang M7 or M12 wall moldings in field</p> <p>main tee or cross tee</p> <p>lay-in ceiling panel</p> <p>fasten near horizontal face to assure tight joint</p> <p>1/2" typ.</p> <p>back-to-back M7 or M12 wall moldings</p>	<p>Expansion Joint DH2</p> 	<p>Slip Joint</p>  <p>four-way seismic separation joint clip</p> <p>fasteners</p> <p>USG Donn® Brand DXW™ main tee</p>

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC2396/rev. 7-18

© 2018 USG Corporation and/or its affiliates. All rights reserved. Printed in USA







Manufactured by USG Interiors, LLC 550 West Adams Street Chicago, IL 60661

The trademarks USG, CGC, CE, CELEBRATION, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXLA, DXLT, DXT, DXW, FINELINE, IDENTITEE, LOGIX, ROCK FACE, ZXLA, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.











Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

SYSTEM INTERFACE

15/16" Square and Flush Edge Details

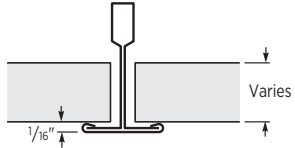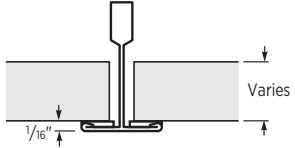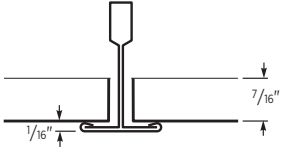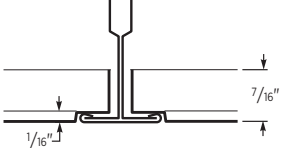
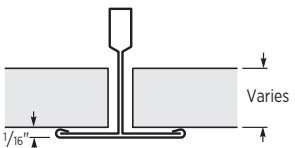
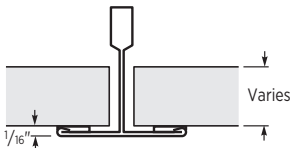
<p>Edge Type: SQ Edge Tile Type: All Tile Grid Type: USG DX® Wall Molding: All</p> 	<p>Edge Type: SQ Edge Tile Type: All Tile Grid Type: USG DXCE™ Wall Molding: M7CE, US28CE</p> 	<p>Edge Type: SQ Edge Tile Type: USG Panz® Grid Type: USG DX® Wall Molding: All, see IC364</p> 	<p>Edge Type: FM Edge Tile Type: USG Panz® Grid Type: USG DX® Wall Molding: All, see IC364</p> 
<p>Edge Type: SQ Edge Tile Type: All Tile Grid Type: USG DXW™ Wall Molding: All</p> 	<p>Edge Type: SQ Edge Tile Type: All Tile Grid Type: USG DXWCE™ Wall Molding: M7CE, US28CE</p> 		

15/16" Reveal Edge Details

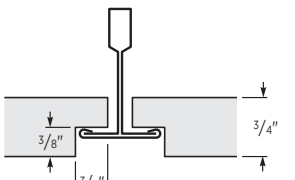
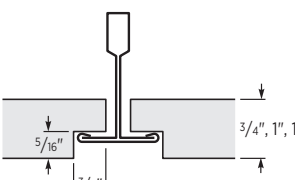
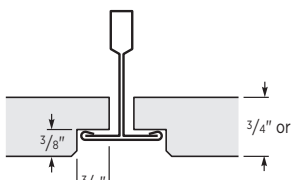
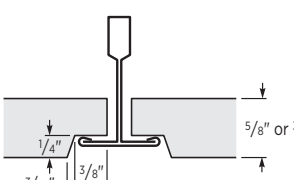
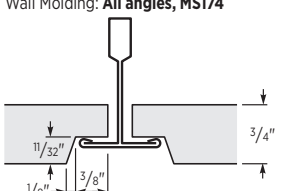
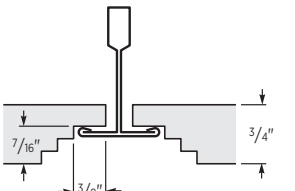
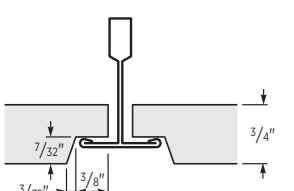
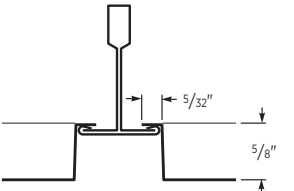
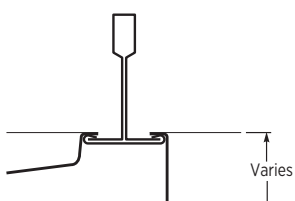
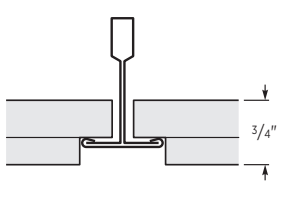
<p>Edge Type: SL Edge Tile Type: Cast Grid Type: USG DX® Wall Molding: All angles, MS144 opt 2, MS174</p> 	<p>Edge Type: SL Edge Tile Type: USG Halcyon™ Grid Type: USG DX® Wall Molding: All angles, MS135</p> 	<p>Edge Type: SLB Edge Tile Type: Cast Grid Type: USG DX® Wall Molding: All angles, MS144 opt 2, MS174</p> 	<p>Edge Type: SLT Edge Tile Type: Wet-Formed Grid Type: USG DX® Wall Molding: All angles, MS125</p> 
<p>Edge Type: SLT Edge Tile Type: USG Eclipse™, Mars™, Millennia® Grid Type: USG DX® Wall Molding: All angles, MS174</p> 	<p>Edge Type: SL Pedestals™ Edge Tile Type: USG Eclipse™ Grid Type: USG DX® Wall Molding: All angles, MS144 opt 1</p> 	<p>Edge Type: SLT Illusion™ Edge Tile Type: USG Eclipse™ & Millennia® Grid Type: USG DX® Wall Molding: All angles, MS125</p> 	<p>Edge Type: SL Edge Tile Type: USG Panz® Grid Type: USG DX® Wall Molding: See IC364</p> 
<p>Edge Type: Geometrix® Edge Tile Type: USG Geometrix® Grid Type: USG DX® Wall Molding: N/A</p> 	<p>Edge Type: WSL Edge Tile Type: USG True™ Wood Grid Type: USG DX® Wall Molding: See IC561</p> 		

SYSTEM INTERFACE

9/16" Square and Flush Edge Details





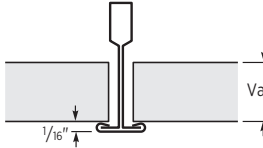
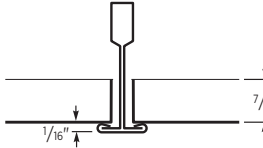
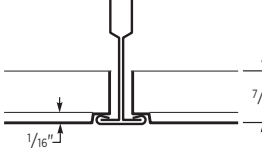
<p>Edge Type: SQ Edge Tile Type: All Tile Grid Type: USG DXT™ Wall Molding: All</p> 	<p>17</p> <p>Edge Type: SQ Edge Tile Type: USG Panz® Grid Type: USG DXT™ Wall Molding: All, see IC364</p> 	<p>18</p> <p>Edge Type: FM Edge Tile Type: USG Panz® Grid Type: USG DXT™ Wall Molding: All, see IC364</p> 	<p>19</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------

9/16" Reveal Edge Details with USG DXT™ Grid

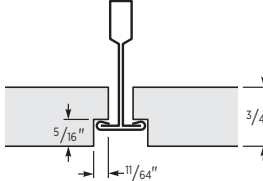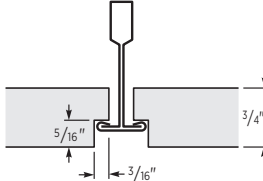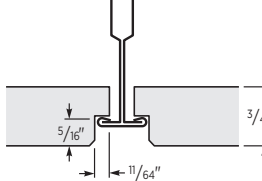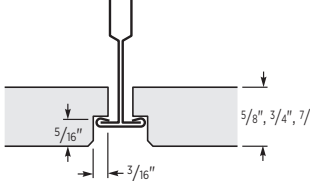
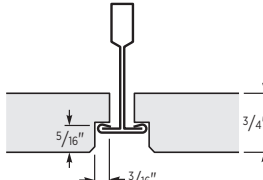
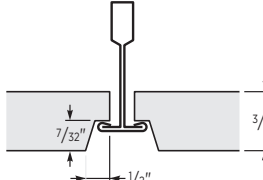
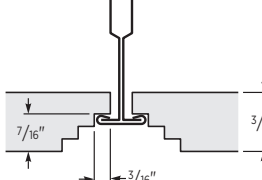
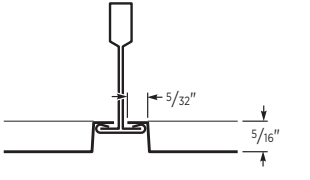
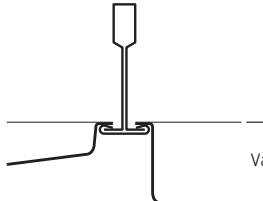
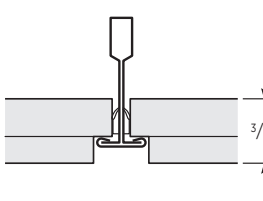
<p>Edge Type: FL Edge Tile Type: Cast Grid Type: USG DXT™ Wall Molding: All angles, MS135</p> 	<p>20</p> <p>Edge Type: FL Edge Tile Type: USG Eclipse™ & Halcyon™ Grid Type: USG DXT™ Wall Molding: All angles, MS135</p> 	<p>21</p> <p>Edge Type: FLB Edge Tile Type: Cast Grid Type: USG DXT™ Wall Molding: All angles, MS144 opt 2, MS174</p> 	<p>22</p> <p>Edge Type: FLB Edge Tile Type: Wet-Formed Grid Type: USG DXT™ Wall Molding: All angles, MS135</p> 
<p>Edge Type: FLB Edge Tile Type: USG Millennia® & Mars™ Grid Type: USG DXT™ Wall Molding: All angles, MS135</p> 	<p>24</p> <p>Edge Type: ILT Illusion™ Edge Tile Type: USG Eclipse™ & Millennia® Grid Type: USG DXT™ Wall Molding: All angles, MS125</p> 	<p>25</p> <p>Edge Type: PE Pedestals™ Edge Tile Type: USG Eclipse™ Grid Type: USG DXT™ Wall Molding: All angles, MS174</p> 	<p>26</p> <p>Edge Type: FL Edge Tile Type: USG Panz® Grid Type: USG DXT™ Wall Molding: See IC364</p> 
<p>Edge Type: Geometrix® Edge Tile Type: USG Geometrix® Grid Type: USG DXT™ Wall Molding: N/A</p> 	<p>28</p> <p>Edge Type: WDFL Edge Tile Type: USG True™ Wood Grid Type: USG DXT™ Wall Molding: See IC561</p> 	<p>29</p>	

SYSTEM INTERFACE

9/16" Reveal Edge Details with USG DXF™ Grid
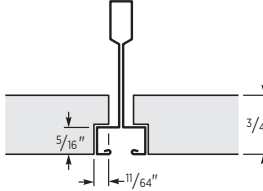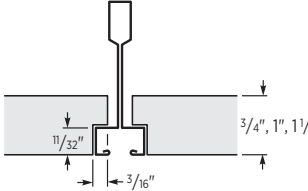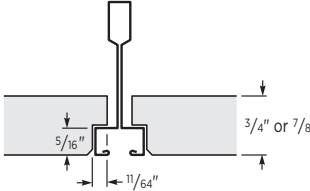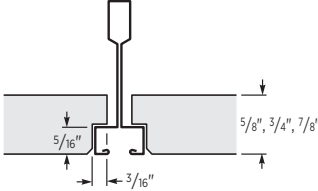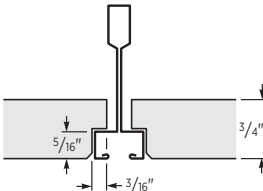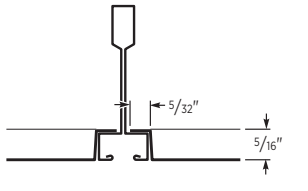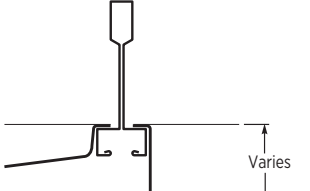
<p>Edge Type: FL Edge Tile Type: Cast Grid Type: USG DXF™ Wall Molding: All angles, MS135</p> 	<p>Edge Type: FL Edge Tile Type: USG Eclipse™ & Halcyon™ Grid Type: USG DXF™ Wall Molding: All angles, MS135</p> 	<p>Edge Type: FLB Edge Tile Type: Cast Grid Type: USG DXF™ Wall Molding: All angles, MS135</p> 	<p>Edge Type: FLB Edge Tile Type: Wet-Formed Grid Type: USG DXF™ Wall Molding: All angles, MS135</p> 
<p>Edge Type: FLB Edge Tile Type: USG Millennia® & Mars™ Grid Type: USG DXF™ Wall Molding: All angles, MS135</p> 	<p>Edge Type: FL Edge Tile Type: USG Panz® Grid Type: USG DXF™ Wall Molding: See IC364</p> 	<p>Edge Type: Geometrix® Edge Tile Type: USG Geometrix® Grid Type: USG DXF™ Wall Molding: N/A</p> 	

9/16" Reveal Edge Details with USG DXFF™ Grid
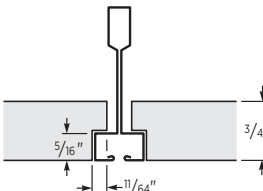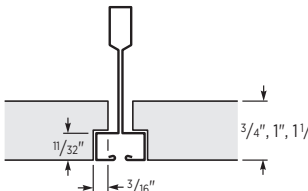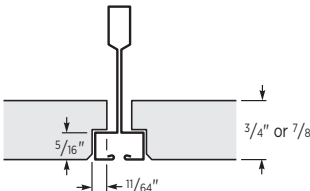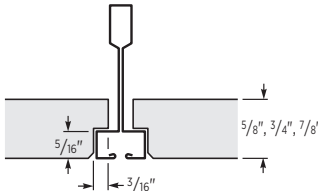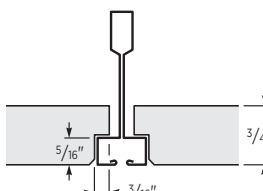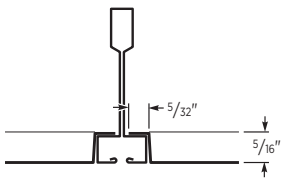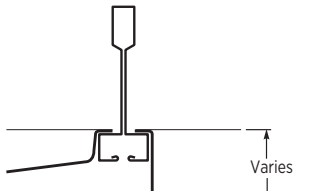
<p>Edge Type: FL Edge Tile Type: Cast Grid Type: USG DXFF™ Wall Molding: All angles, MS135</p> 	<p>Edge Type: FL Edge Tile Type: USG Eclipse™ & Halcyon™ Grid Type: USG DXFF™ Wall Molding: All angles, MS135</p> 	<p>Edge Type: FLB Edge Tile Type: Cast Grid Type: USG DXFF™ Wall Molding: All angles, MS135</p> 	<p>Edge Type: FLB Edge Tile Type: Wet-Formed Grid Type: USG DXFF™ Wall Molding: All angles, MS135</p> 
<p>Edge Type: FLB Edge Tile Type: USG Millennia® & Mars™ Grid Type: USG DXFF™ Wall Molding: All angles, MS135</p> 	<p>Edge Type: FL Edge Tile Type: USG Panz® Grid Type: USG DXFF™ Wall Molding: See IC364</p> 	<p>Edge Type: Geometrix® Edge Tile Type: USG Geometrix® Grid Type: USG DXFF™ Wall Molding: N/A</p> 	

SYSTEM INTERFACE

9/16" Reveal Edge Details with USG DX1™ Grid			
<p>Edge Type: FL Edge</p> <p>Tile Type: Cast</p> <p>Grid Type: USG DX1™</p> <p>Wall Molding: M7, M9, MS135</p>	<p>44</p>	<p>Edge Type: FL Edge</p> <p>Tile Type: USG Eclipse™ & Halcyon™</p> <p>Grid Type: USG DX1™</p> <p>Wall Molding: M7, M9, MS135</p>	<p>45</p>
<p>Edge Type: FLB Edge</p> <p>Tile Type: Cast</p> <p>Grid Type: USG DX1™</p> <p>Wall Molding: M7, M9, MS135</p>	<p>46</p>	<p>Edge Type: FLB Edge</p> <p>Tile Type: Wet-Formed</p> <p>Grid Type: USG DX1™</p> <p>Wall Molding: M7, M9, MS135</p>	<p>47</p>
<p>Edge Type: FLB Edge</p> <p>Tile Type: USG Millennia® & Mars™</p> <p>Grid Type: USG DX1™</p> <p>Wall Molding: M7, M9, MS135</p>	<p>48</p>	<p>Edge Type: ILT Illusion™ Edge</p> <p>Tile Type: USG Eclipse™ & Millennia®</p> <p>Grid Type: USG DX1™</p> <p>Wall Molding: M7, M9, MS174</p>	<p>49</p>
<p>Edge Type: PE Pedestals™ Edge</p> <p>Tile Type: USG Eclipse™</p> <p>Grid Type: USG DX1™</p> <p>Wall Molding: M7, M9, MS174</p>	<p>50</p>	<p>Edge Type: FL Edge</p> <p>Tile Type: USG Panz®</p> <p>Grid Type: USG DX1™</p> <p>Wall Molding: See IC364</p>	<p>51</p>

15/16" Kerf Edge Details			
<p>Edge Type: BESK Edge</p> <p>Tile Type: Cast</p> <p>Grid Type: USG DX®</p> <p>Wall Molding: All angles</p>	<p>52</p>	<p>Edge Type: BESK Edge</p> <p>Tile Type: Wet Formed</p> <p>Grid Type: USG DX®</p> <p>Wall Molding: All angles</p>	<p>53</p>
<p>Edge Type: SESK Edge</p> <p>Tile Type: Cast</p> <p>Grid Type: USG DX®</p> <p>Wall Molding: All angles</p>	<p>54</p>	<p>Edge Type: WDAR Edge</p> <p>Tile Type: USG True™ Wood</p> <p>Grid Type: USG DX®</p> <p>Wall Molding: See IC561</p>	<p>55</p>

Concealed Suspension Edge Details		Tounge and Groove Edge Details	
<p>Edge Type: Snap-in Edge</p> <p>Tile Type: USG Celebration™ Snap-in</p> <p>Grid Type: USG DXF™</p> <p>Wall Molding: See SC2561</p>	<p>56</p>	<p>Edge Type: Torsion Spring Edge</p> <p>Tile Type: USG Celebration™ Torsion Spring</p> <p>Grid Type: USG DX®</p> <p>Wall Molding: See IC367</p>	<p>57</p>
<p>Edge Type: SF Staple Flange</p> <p>Tile Type: Wet-Formed</p> <p>Grid Type: N/A</p> <p>Wall Molding: All angles</p>	<p>58</p>		

USG CEILING SOLUTIONS COLOR PROGRAM


STANDARD COLORS FOR CEILING PANELS AND SUSPENSION SYSTEMS^{1,4}

STANDARD COLORS




ADVANTAGE COLORS FOR CEILING PANELS AND SUSPENSION SYSTEMS^{1,4}

ADVANTAGE COLORS

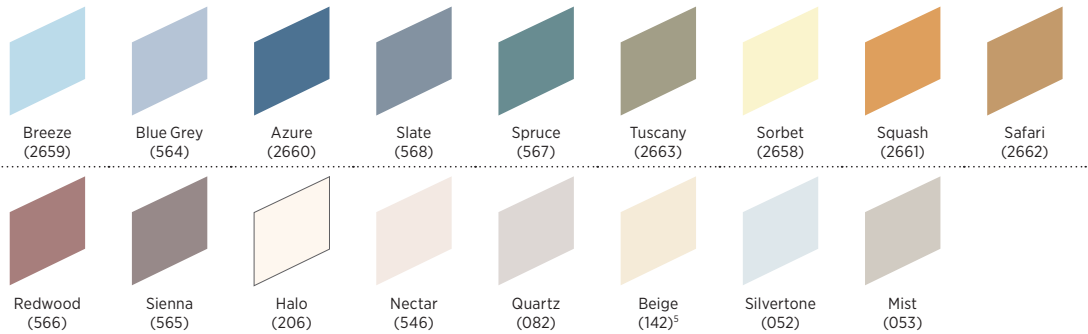


PREMIUM COLOR PALETTE⁷

PREMIUM COLORS

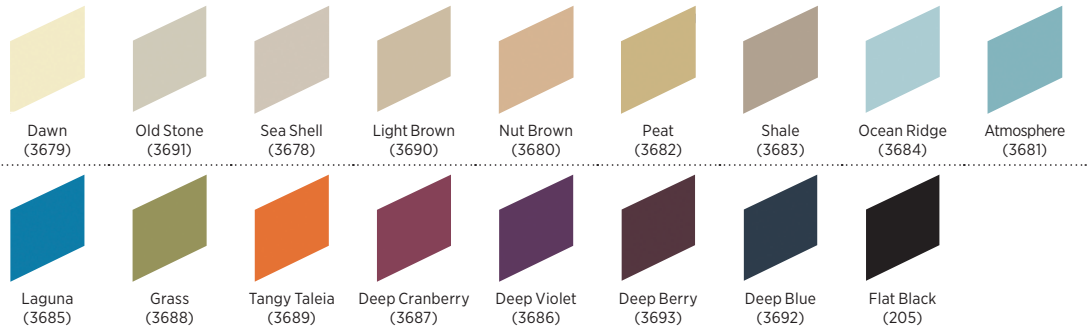


SUSPENSION SYSTEMS ONLY


STANDARD COLORS



ADVANTAGE COLORS



POWDER COATED FINISH



CUSTOM COLOR MATCHING



Note

Please consult your USG/CGC sales representative for custom colors. USG will match colors from most major paint manufacturers. Plant to review all colors not listed in color programs for manufacturing capability.

Notes

1. Samples shown are representative of colors for tile and grid only. Color may vary on specialty products.
2. Brass and Chrome available in USG Donn® Brand DX*/DXL™ Acoustical Suspension System only. All Brass and Chrome items are service level C. Brass and Chrome cross tees available only in DXD™-type butt-cut ends. Shadow moldings are not available in Brass and Chrome.
3. Galvanized steel with a clear coat can vary significantly in finish from lot to lot. This is due to the difference in finish inherent in the hot-dipped galvanization coating process. Galvanized steel with a clear coat available in USG Donn® Brand DX*/DXL™ Acoustical Suspension System only.
4. Grid colors applied to the visible cap only. For 360° painting, consult the Specialty Ceiling System price list. Moldings are painted on the exposed horizontal leg.
5. Beige is a Standard color for CGC Donn Brand Suspension Systems.
6. Manila and Charcoal are Advantage not Standard colors for CGC Donn® Brand Suspension Systems.
7. Premium colors available in Donn® Brand DXT/DXLT only.
8. To highlight the unique texture of USG Sandrift™ Acoustical Panels, choose light colors.
9. Standard colors: Available for quick delivery. Minimum quantities apply.
10. Advantage colors: Available within five weeks. Minimum quantities apply. Premium colors: Available within six weeks. Minimum quantities apply. Contact your USG/CGC sales representative for details. See USG Architectural Representative locator map at usgdesignstudio.com or cgcdesignstudio.com. Include color number with item number, size and edge condition. For colors, it is not recommended to mix date codes or lot numbers.
11. Powder coated finishes have extended lead times depending on quantity. Contact customer service for lead times on specific projects.

USG COLOR PROGRAM FOR ACOUSTICAL CEILING PANELS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative
usgdesignstudio.com
cgcdesignstudio.com

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
TECHNICAL SERVICES
800 USG.4YOU (874-4968)

AVAILABLE PANELS

Item No.	Size	Edge	Standard Colors ⁹		Advantage Colors ¹⁰		Premium Colors ¹⁰		Sq. Ft./ Carton	Color Options	
			Min. Sq. Ft.	Lead Time Days	Min. Sq. Ft.	Lead Time Days	Min. Sq. Ft.	Lead Time Days			
USG ECLIPSE™ CLIMAPLUS™ (SC1812)	76975	2'x2'x3/4"	FL	48	10	48	10	—	—	48	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
	76775	2'x2'x3/4"	SLT	48	10	48	10	—	—	48	
USG FROST™ (SC1968)	414	2'x2'x3/4"	SLB	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors. Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
	418	2'x2'x3/4"	FL	32	10	2,688	15	2,688	15	32	
	419	2'x2'x3/4"	FLB	32	10	2,688	15	2,688	15	32	
USG GLACIER™ BASIC (SC1819)	707	2'x2'x3/4"	SL	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors. Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
	708	2'x2'x3/4"	FL	32	10	2,688	15	2,688	15	32	
USG MARS™ HIGH-NRC/HIGH-CAC (SC2487)	88137	2'x2'x1"	SQ	32	30-45	32	30-45	32	30-45	32	Premium colors offered. Standard and Advantage colors are all considered "Custom" for pricing.
	88138	2'x2'x1"	SLT	32	30-45	32	30-45	32	30-45	32	
	88139	2'x2'x1"	FLB	32	30-45	32	30-45	32	30-45	32	
	88134	2'x2'x7/8"	SQ	40	30-45	40	30-45	40	30-45	40	
	88135	2'x2'x7/8"	SLT	40	30-45	40	30-45	40	30-45	40	
	88136	2'x2'x7/8"	FLB	40	30-45	40	30-45	40	30-45	40	
	86186	2'x2'x3/4"	SQ	48	30-45	48	30-45	48	30-45	48	
	86786	2'x2'x3/4"	SLT	48	30-45	48	30-45	48	30-45	48	
	86986	2'x2'x3/4"	FLB	48	30-45	48	30-45	48	30-45	48	
	USG PREMIER HI-LITE™ KAPOK (SC1838)	7054G	2'x2'x5/8"	SQ	128	20	—	—	—	—	
7055G		2'x4'x5/8"	SQ	128	20	—	—	—	—	128	
7056G		2'x2'x5/8"	SQ	128	20	—	—	—	—	128	
7057G		2'x4'x5/8"	SQ	128	20	—	—	—	—	128	
USG RADAR™ (SC2127)	2210	2'x2'x5/8"	SQ	64	10	64	10	—	—	64	Standard colors. Advantage: Beige, Mist, Silvertone only.
	2220	2'x2'x5/8"	SLT	64	10	64	10	—	—	64	
	2410	2'x4'x5/8"	SQ	64	10	64	10	—	—	64	
USG RADAR™ ILLUSION™ TWO/24 (SC2126)	2842	2'x4'x3/4"	SLT	48	10	48	10	—	—	48	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
USG RENDITIONS™ ANIMATIONS (IC327), USG RENDITIONS™ BOUNDARIES (IC332) AND USG RENDITIONS™ CUSTOM FROST™ PANEL (CLIMAPLUS™ NOT AVAILABLE) (IC356)	Various	2'x2'x3/4"	SLB, FL, FLB	32	15	2,688	20	2,688	20	32	White, Standard, Advantage and Premium colors. (Advantage are 2,688 min. sq. ft.) Note Custom colors are 25-day minimum lead time for USG Frost™.
USG SANDRIFT™ (SC1841)	808 ⁹	2'x2'x3/4"	SL	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors. Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
	809 ⁹	2'x2'x3/4"	FL	32	10	2,688	15	2,688	15	32	

Notes

- Samples shown are representative of colors for tile and grid only. Color may vary on specialty products.
- Brass and Chrome available in USG Donn® Brand DX®/DXL™ Acoustical Suspension System only. All Brass and Chrome items are service level C. Brass and Chrome cross tees available only in DXD™-type butt-cut ends. Shadow moldings are not available in Brass and Chrome.
- Galvanized steel with a clear coat can vary significantly in finish from lot to lot. This is due to the difference in finish inherent in the hot-dipped galvanization coating process. Galvanized steel with a clear coat available in USG Donn® Brand DX®/DXL™ Acoustical Suspension System only.
- Grid colors applied to the visible cap only. For 360° painting, consult the Specialty Ceiling System price list. Moldings are painted on the exposed horizontal leg.
- Beige is a Standard color for CGC Donn Brand Suspension Systems.
- Manila and Charcoal are Advantage not Standard colors for CGC Donn® Brand Suspension Systems.
- Premium colors available in Donn® Brand DXT/DXLT only.
- To highlight the unique texture of USG Sandrift™ Acoustical Panels, choose light colors.
- Standard colors: Available for quick delivery. Minimum quantities apply.
- Advantage colors: Available within five weeks. Minimum quantities apply. Premium colors: Available within six weeks. Minimum quantities apply. Contact your USG/CGC sales representative for details. See USG Architectural Representative locator map at usgdesignstudio.com or cgcdesignstudio.com. Include color number with item number, size and edge condition. For colors, it is not recommended to mix date codes or lot numbers.

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 fax: 888.874.2348 | usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

STANDARD COLORS

- Available within 15 days unless otherwise noted.
- One-carton minimum for suspension systems.
- Suspension systems have color caps only.
- For 360° painting, consult the Specialty Ceiling System price list.
- Moldings are painted on the exposed horizontal leg.
- All metric items are offered in Flat White, USG service level C and CGC service level B. MEDXF3600, MEDXF600 and MEDXF1200N also offered in Flat White with Black Reveal, USG service level C and CGC service level B.

ADVANTAGE AND PREMIUM COLORS

- Available within five weeks.
- One-carton minimum per component for suspension systems.
- Includes matching air diffusers.
- Premium colors available in USG DXT™ only.

CUSTOM COLORS

- Suspension systems and panels are also available in colors not listed in Standard, Advantage and Premium offerings.
- Colors other than Standard, Advantage and Premium offerings are subject to approval.
- A 3"x5" color chip is needed for matching.
- Suspension systems not included in the standard, advantage, and premium color program are available as custom colors.
- Lead time will be quoted via the Request-To-Quote (RTQ) and will start after acceptance of color match.
- Minimum order quantities may apply.

POWDER-COATED FINISHES

- Lead times will vary depending on suspension system type, accessory components, and quantity.
- Contact customer service for lead times on specific orders.
- Minimum quantities may apply.

SUSPENSION SYSTEM SERVICE LEVELS

Level	Lead time from order acceptance
Quick Ship	1-2 days
A	5-7 days
B	15 days
C	30 days
Advantage and Premium Colors	Typically 5 weeks from order.

EXCEPTIONS USG ONLY

- USG Donn® Brand Finline® DXF™/DXLF™ Acoustical Suspension System available in Flat White with Black Reveal for no additional charge. Service level B.
- USG Donn® Brand Finline® DXF™/DXLF™ Acoustical Suspension System available in Silver Satin 002. Service level B.
- USG Donn® Brand Finline® DXF™/DXLF™ and 1/8 DXFF™ and DXFEV™ Acoustical Suspension Systems also available in colors not listed in Standard, Advantage and Premium offerings.
- USG Donn® Brand Finline® DXFEV™ Acoustical Suspension System (environmental) available in Flat White with Black Reveal standard, service level C. Standard, Advantage and Premium colors available, service level C.
- USG Donn® Brand Finline® DXF™/DXLF™ Acoustical Suspension System and 1/8 DXFF™ not available in Plated Brass 065 or Plated Chrome 066.
- USG Logix™ Integrated Systems are available in Flat White, service level C.

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE
USG: samplite@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

SUSPENSION SYSTEM

USG DONN® BRAND AX™/AXCE™ (AC3041)

		Base Colors	Standard Colors	Silver Satin, Brass and Chrome Exceptions	Advantage Colors
	Service Level	Quick Ship	B	C	5 weeks
	Item No.				
Main Tee	AX26	Flat White	o	Silver Satin ⁶	o
	AXCE26	Flat White ⁶	o	Silver Satin ⁶	o
	AX224	Flat White	o	Silver Satin ⁶	o
Cross Tee	AX424	Flat White	o	Silver Satin ⁶	o
	AXCE224	Flat White ⁶	o	Silver Satin ⁶	o
	AXCE424	Flat White ⁶	o	Silver Satin ⁶	o

USG DONN® BRAND CENTRICITEE™ DXT™/DXLT™ (AC3040)

Main Tee	DXT-24-10	Flat White ⁶	o	o	o
	DXT24	Flat White ¹ , Flat Black ³	●	Silver Satin ⁶	●
	DXLT24	Flat White ³	o ³	o	o ⁵
	DXT26	Flat White, Flat Black ³	o ³	o	o ⁵
Cross Tee	DXT222	Flat White ¹ , Flat Black ³	●	Silver Satin ⁶	●
	DXLT222	Flat White ³	o ³	o	o ⁵
	DXT422	Flat White	o ³	o	o ⁵
	DXT424	Flat White ¹ , Flat Black ³	●	Silver Satin ⁶	●
	DXLT424	Flat White ³	o ³	o	o ⁵

USG DONN® BRAND CE™ (AC3129)

Main Tee	DXWCE26	Flat White ³	o	o	o
Cross Tee	DXWCE224	Flat White ³	o	o	o
	DXWCE424	Flat White ³	o	o	o

Main Tee	DXCE24	Flat White ³	o	o	o
	DXCE26	Flat White ⁶	o	o	o
Cross Tee	DXCE224	Flat White ³	o	o	o
	DXCE424	Flat White ³	o	o	o

USG DONN® BRAND DX®/DXL™ CONCEALED (AC3035)

Main Tee	DX/DXL24	Flat White	o	o	o
	DX/DXL26	Flat White	o	o	o
Cross Tee	DX/DXL424	Flat White ⁶	o	o	o
Molding	US28	Flat White ⁶	o	o	o

USG DONN® BRAND DX®/DXL™ (AC3167)

Main Tee	DX/DXL24	Flat White ¹ , Flat Black ²	●	Silver Satin ³ Brass, Chrome ⁶	●
	DX/DXL26	Flat White ¹ , Flat Black ³	●	Silver Satin ⁶	●
Cross Tee	DX/DXL216	Flat White ¹ , Flat Black ²	●	Silver Satin ³ Brass, Chrome	●
	DX/DXL424	Flat White ¹ , Flat Black ²	●	Silver Satin ⁶ Brass, Chrome ⁶	●
	DX422	Flat White ¹ , Flat Black ²	●	Silver Satin ³ Brass, Chrome ⁶	●
	DX/DXL524	Flat White	●	Silver Satin ⁶	●

Notes

Brass and Chrome cross tees limited to DXD™-type butt-cut ends only.

[●] Available in USG color program with established upcharge and lead times.

[o] Suspension systems not included in the standard, advantage, and premium color program are available as custom colors.

The custom color upcharge and lead time will apply.

CGC COLOR PROGRAM

CGC Color Program for Suspension System

- 1 - CGC Service Level Quick Ship
- 2 - CGC Service Level A
- 3 - CGC Service Level B
- 4 - CGC Service Level C
- 5 - CGC Five weeks
- 6 - CGC RTQ for Service Level

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 fax: 888.874.2348 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

SUSPENSION SYSTEM

USG DONN® BRAND IDENTITEE® DXI™ (AC3281)

		Base Colors	Standard Colors	Silver Satin, Brass and Chrome Exceptions	Advantage Colors
	Service Level	Quick Ship	B	C	5 weeks
	Item No.				
Main Tee	DXI24HRC	Flat White ⁶	● ⁶	Silver Satin ⁶	● ⁶
	DXI26HRC	Flat White ⁶	● ⁶	Silver Satin ⁶	● ⁶
Cross Tee	DXI424HRC	Flat White ⁶	● ⁶	Silver Satin ⁶	● ⁶
	DXI524HRC	Flat White ⁶	● ⁶	Silver Satin ⁶	● ⁶
	DXI224HRC	Flat White ⁶	● ⁶	Silver Satin ⁶	● ⁶

USG DONN® BRAND DXLA™/DXACE™ (AC3036)

Main Tee	DXLA24	Flat White ⁶	o	Silver Satin ⁶	o
	DXLA26	Flat White ⁶	o	o	o
Cross Tee	DXLA216	Flat White ⁶	o	Silver Satin ⁶	o
	DXLA424	Flat White ⁶	o	Silver Satin ⁶	o
Main Tee	DXACE26	Flat White ⁶	o	o	o
Cross Tee	DXACE224	Flat White ⁶	o	o	o
	DXACE424	Flat White ⁶	o	o	o

USG DONN® BRAND DXSS™ (AC3068)

Main Tee	DXSS24	Stainless Steel ⁶	o	o	o
Cross Tee	DXSS224	Stainless Steel ⁶	o	o	o
	DXSS424	Stainless Steel ⁶	o	o	o

USG DONN® BRAND DXW™ (AC3037)

Molding	M7SS	Natural ⁶	o	o	o
Main Tee	DXW26	Flat White ²	o	o	o
	Cross Tee	DXW224	Flat White ²	o	o
		DXW424	Flat White ²	o	o

USG DONN® BRAND FINELINE® 1/8 DXFF™⁷ (AC3033)

Main Tee	DXFF2930	Flat White ⁴	o	o	o
	DXFF2924	Flat White ⁴	o	o	o
	DXFF2948	Flat White ⁶	o	o	o
	DXFFH2924	Flat White ⁴	o	o	o
Cross Tee	DXFF229	Flat White ²	o	o	o
	DXFF429	Flat White ⁴	o	o	o
	DXFF429N	Flat White ⁶	o	o	o
	DXFF429S	Flat White ⁶	o	o	o

*HRC not available with quick ship lead time in Flat Black, not available in Brass or Chrome.

USG DONN® BRAND FINELINE® DXF™/DXLF™ 8, 9, 10 (AC3034)

Main Tee	DXF2924-10	Flat White ⁶	o	o	o
	DXF2924	Flat White	o	Silver Satin Service Level B ^{6,11}	o
	DXF2948	Flat White ²	o	o	o
	DXLF2924	Flat White ⁴	o	o	o
	DXFH2924	Flat White ²	o	o	o
	DXF429	Flat White ⁴	o	o	o
Cross Tee	DXF229	Flat White ⁴	● ⁶	Silver Satin Service Level B ^{6,11}	● ⁶
	DXLF229	Flat White ⁴	● ⁶	o	● ⁶
	DXF429	Flat White	● ⁶	o	● ⁶
	DXF429S	Flat White ⁴	● ⁶	o	● ⁶
	DXLF429N	Flat White ⁴	● ⁶	o	● ⁶
	DXF529N	Flat White ⁴	● ⁶	o	● ⁶

Notes

- [●] Available in USG color program with established upcharge and lead times.
- [o] Suspension systems not included in the standard, advantage, and premium color program are available as custom colors. The custom color upcharge and lead time will apply.

CGC COLOR PROGRAM

CGC Color Program for Suspension System

- | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> 1 - CGC Service Level Quick Ship 2 - CGC Service Level A 3 - CGC Service Level B 4 - CGC Service Level C 5 - CGC Five weeks 6 - CGC RTQ for Service Level | <p>Notes</p> <ol style="list-style-type: none"> 7. USG Donn® Brand Fineline® 1/8 DXFF™ also available in colors not in Standard, Advantage or Premium color programs. 8. Available in Flat White with Black Reveal. Service level B. 9. USG Donn® Brand Fineline® DXF™/DXLF™ also available in colors not in Standard, Advantage or Premium color programs. 10. USG Donn® Brand Fineline® DXFEW™ (environmental) available in Flat White with Black Reveal standard, service level C. Standard and Advantage colors available, service level C. Colors not in Standard, Advantage or Premium programs are available. 11. USG Donn® Brand Fineline® DXF™/DXLF™ available in Silver Satin 002. Service level B. 12. M7 and M9 color program available in half cartons only (M720, M920). |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

SUSPENSION SYSTEM

USG DONN®
BRAND ZXLA™
(AC3029)

WALL MOLDING (AC2396)

	Base Colors	Standard Colors	Silver Satin, Brass and Chrome Exceptions	Advantage Colors
Service Level	Quick Ship	B	C	5 weeks
Item No.				
Main Tee	ZXLA24	Flat White ⁵	o	Silver Satin ⁶
	ZXLA26	Flat White ⁶	o	Silver Satin ⁶
Cross Tee	ZXLA224	Flat White ⁵	o	Silver Satin ⁶
	ZXLA424	Flat White ⁵	o	Silver Satin ⁶
Angle Molding	M7¹²	Flat White, Flat Black ²	●	Silver Satin
	M7OL	Flat White ⁶	o	o
	M7A	Flat White	o	o
	M7Z	Flat White ⁶	o	Silver Satin ⁶
	M9¹²	Flat White, Flat Black	● ⁶	Silver Satin ⁶
	M12	Flat White level C ³	o	o
	MC11A25	Flat White ⁶	o	Brass, Chrome ⁶
	M7CE	Flat White level B ³	o	o
	M7ACE	Flat White level B ⁶	o	o
	M20	Flat White, Flat Black level C ⁶	o	o
	M20SM	Flat White ⁶	o	o
	M20SM-2	Flat White ⁶	o	o
Shadow Molding	MS174	Flat White	●	Silver Satin ⁶
	MS274	Flat White ⁶	● ⁶	o
Channel Molding	US28	Flat White ⁶	o	o
	US31	Flat White ⁵	● ⁶	o
	UA25	Flat White ⁵	o	Silver Satin ⁶
	UA24CE	Flat White level B ⁶	o	Silver Satin ⁶
	US28CE	Flat White level B ⁶	o	o

CGC Color Program for Suspension System

- 1 - CGC Service Level Quick Ship
- 2 - CGC Service Level A
- 3 - CGC Service Level B
- 4 - CGC Service Level C
- 5 - CGC Five weeks
- 6 - CGC RTQ for Service Level

Notes

7. USG Donn® Brand Fineline® 1/8 DXFF™ also available in colors not in Standard, Advantage or Premium color programs.
8. Available in Flat White with Black Reveal. Service level B.
9. USG Donn® Brand Fineline® DXF™/DXLF™ also available in colors not in Standard, Advantage or Premium color programs.
10. USG Donn® Brand Fineline® DXFEV™ (environmental) available in Flat White with Black Reveal standard, service level C. Standard and Advantage colors available, service level C. Colors not in Standard, Advantage or Premium programs are available.
11. USG Donn® Brand Fineline® DXF™/DXLF™ available in Silver Satin 002. Service level B.
12. M7 and M9 color program available in half cartons only (M720, M920).

[●] Available in USG color program with established upcharge and lead times.

[o] Suspension systems not included in the standard, advantage, and premium color program are available as custom colors. The custom color upcharge and lead time will apply.

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1859/rev. 8-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in USA





























































































The trademarks USG, CGC, AX, AXCE, CE, CENTRICITEE, CLIMAPLUS, DONN, DX, DXACE, DXD, DXF, DXFF, DXI, DXL, DXLA, DXLF, DXLT, DXSS, DXT, DXW, ECLIPSE, FINELINE, FROST, GLACIER, IDENTITEE, LOGIX, MARS, PREMIER HI-LITE, RADAR, RENDITIONS, SANDRIFT, ZXLA, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.


Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.




METAL FINISHES

USG offers metal ceiling panels in several distinctive finishes: Premium Metal, Anodized Metal—Brushed or Polished, Plated Steel Painted Metal and Wood Tones. These color reproductions are shown to represent available finishes and colors. A sample should be reviewed before placing an order.

Availability	Premium Metals	Anodized Metals	Plated Steel	Painted Metals						Diamondflex™ Expanded Metals	Wood Tones ⁵	
				Flat White	Silver Satin	Matte White	Metallic Copper	Metallic Gold	Metallic Oyster			Custom Color ³
USG CELEBRATION™ SNAP-IN METAL PANELS			-								-	
USG CELEBRATION™ TORSION SPRING METAL CEILING PANELS	-		-								-	
USG CELEBRATION™ CANOPIES	-		-								-	
USG COMPASSO™ STANDARD USG COMPASSO™ ELITE USG COMPASSO™ SLIM PERIMETER TRIMS	-	-				-	-	-	-		-	
USG C ² PAIRED COMPASSO™ CHANNELS	-	-				-	-	-	-		-	
USG CURVATURA™ 3-DIMENSIONAL SUSPENSION SYSTEM— 2'X2' PANELS	-	-	-			-						
USG CURVATURA™ ONE-DIRECTIONAL SYSTEM—2'X6' PANELS	-	-	-			-					-	
USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS	-	-	-			-	-	-	-		-	-
USG GRIDWARE™ OPEN CELL DECORATIVE SUSPENSION SYSTEM ¹	-	-	-			-	-	-	-		-	-
USG LIBRETTO® GRIDLESS METAL SYSTEM	-	-	-				-	-	-		-	-
USG PANZ® METAL PANELS ²			-									
USG PARALINE® LINEAR METAL SYSTEM	-		-			-					-	-
USG PARALINE® PLUS LINEAR METAL SYSTEM	-		-			-					-	
USG PIXELS®	-	-	-			-	-	-	-		-	-

 Suspension, trim and panel available in same painted color.


 Suspension and trim available in coordinating painted colors only.

METAL FINISHES


PREMIUM METALS

2'x2' panels only


Aged Copper (1017)



Etched Ice Dark (1016)



Etched Ice Light (1015)



ANODIZED METAL PANELS³

USG Celebration™ and Panz®, 2'x2' and 2'x4' panels only

Brushed Aluminum (058)



Polished Brass (PM21)



Polished Chrome (PM61)




Satin Chrome (PM614)



PLATED METAL (STEEL)³

USG Compàsso™—2-1/4", 4", 6" and 8" trim only

Plated Chrome (066)



Notes

1. Also available in Flat Black.
2. Two-foot maximum panel width for painted metallic finishes.
3. Anodized finish subject to "rainbowing"—multicolor patterns exaggerated by critical lighting.

METAL FINISHES


PAINTED METALS

Metallic finishes shown


Metallic Copper (1690)



Metallic Gold (1691)




Metallic Oyster (1652)



Silver Satin (002)



Flat White (050)



Matte White (3708)



ANODIZED METALS LINEAR SYSTEMS³

USG Paraline® only; PII—
Black Reveal not available
with these finishes

Brushed Aluminum (PIA12)




Polished Aluminum (O86)




DIAMONDFLEX™

Expanded Metals 2'x2'
panels only


Louvered Bright White




Louvered Bright Silver



Sheer Bright White



Sheer Bright Silver



Notes

1. Also available in Flat Black.
2. Two-foot maximum panel width for painted metallic finishes.
3. Anodized finish subject to "rainbowing"—multicolor patterns exaggerated by critical lighting.

METAL PERFORATIONS

Presenting a complete line of perforation options for:

- USG Celebration™ Metal Panels
- USG Curvatura™ 3-Dimensional System
- USG Geometrix® 3-Dimensional Metal Panels
- USG Panz® Metal Panels


Standard Perforations

Pattern Number	Perforation Pattern	Open Area % ⁵
A062	Round 1/16" Perforations, 0.25" o.c. (without border)	5%
A062A	Round 1/16" Perforations, 0.25" o.c.	5%
A062D (Micro perf.)	Round .062" Perforations, 0.124" o.c.	19%
A116	Round 15/128" Perforations, 0.354" o.c.	17%
A188	Round 3/16" Perforations, 1" o.c.	3%
A250	Round 1/4" Perforations, 0.5" o.c.	39%
A500 ^{1,5}	Round 1/2" Perforations, 0.848" o.c.	55%
B079	Round 5/64" Perforations, 0.312" o.c.	6%
B125	Round 1/8" Perforations, 0.375" o.c.	10%
B188A	Round 3/16" Perforations, 0.312" o.c.	33%
B197	Round 13/64" Perforations, 0.316" o.c.	35%
B250	Round 1/4" Perforations, 0.437" o.c.	30%
B250H (Formerly H250) ⁵	Round 1/4" Perforations, 0.32" o.c.	58%
B312	Round 5/16" Perforations, 0.437" o.c.	46%
B500 ^{1,5}	Round 1/2" Perforations, 0.600" o.c.	63%
C030 ⁶	Round 1/32" Perforations, 0.197" o.c.	1.8%
C040	Round 5/128" Perforations, 0.197" o.c.	3.2%
C062 ²	Round 1/16" Perforations, 0.351" o.c.	2%
C062A ²	Round 1/16" Perforations, 0.175" o.c.	10%
C116	Round 15/128" Perforations, 0.344" o.c.	8%
C188 ¹	Round 3/16" Perforations, 1.414" o.c.	1%
C250A	Round 1/4" Perforations, 0.65" o.c.	12%
C375 ²	Round 3/8" Perforations, 1.125" o.c.	9%
C500	Round 1/2" Perforations, 1.5" o.c.	9%
D250 ²	Square 1/4" Perforations, 0.75" o.c.	11%
D375 ²	Square 3/8" Perforations, 1.125" o.c.	11%
D500	Square 1/2" Perforations, 1.5" o.c.	17%
D500D ⁵	Square 1/2" Perforations, 0.595" o.c.	70%
EC25D ³	Round 1/4" dia. x 1/16" Embossing, 1.18" o.c.; No Perforation	0%
EC25U3	Round 1/4" dia. x 1/16" Embossing, 1.18" o.c.; No Perforation	0%
EM25D3	Round 1/4" dia. x 1/16" Embossing, 1/4" Perforations, 1.14" o.c.	2%
EM25U3	Round 1/4" dia. x 1/16" Embossing, 1/4" Perforations, 1.14" o.c.	2%

METAL PERFORATIONS


STANDARD PERFORATIONS⁴

Pattern No. A062/A062A




Round—1/16" perforations
0.25" o.c., 5% open area

Pattern No. A062D




Round—0.062" perforations
0.124" o.c., 19% open area
Micro perf.

Pattern No. A116




Round—15/128" perforations
0.354" o.c., 17% open area

Pattern No. A188




Round—3/16" perforations
1" o.c., 3% open area

Pattern No. A250




Round—1/4" perforations
0.5" o.c., 39% open area

Pattern No. A500




Round—1/2" perforations
0.848" o.c., 55% open area not to
be used with the USG Curvatura™
One-Directional Ceiling System

Pattern No. B079




Round—5/64" perforations
0.312" o.c., 6% open area

Pattern No. B125




Round—1/8" perforations
0.375" o.c., 10% open area

Pattern No. B188A




Round—3/16" perforations
0.312" o.c., 33% open area

Pattern No. B197




Round—13/64" perforations
0.316" o.c., 35% open area

Pattern No. B250



Round—1/4" perforations
0.437" o.c., 30% open area

Pattern No. B250H (formerly H250)




Round—1/4" perforations
0.32" o.c., 58% open area

METAL PERFORATIONS


STANDARD PERFORATIONS⁴

Pattern No. B312




Round—5/16" perforations
0.437" o.c., 46% open area

Pattern No. B500




Round—1/2" perforations
0.600" o.c., 63% open area not to be used with the USG Curvatura™ One-Directional Ceiling System

Pattern No. C030




Round—1/32" perforations
0.197" o.c., 1.8% open area

Pattern No. C040




Round - 5/128" perforations
0.197" o.c., 3.2% open area

Pattern No. C062




Round—1/16" perforations
0.351" o.c., 2% open area

Pattern No. C062A




Round—1/16" perforations
0.175" o.c., 10% open area

Pattern No. C116




Round—15/128" perforations
0.344" o.c., 8% open area

Pattern No. C188




Round—3/16" perforations
1.414" o.c., 1% open area

Pattern No. C250A




Round—1/4" perforations
0.65" o.c., 12% open area

Pattern No. C375




Round—3/8" perforations
1.125" o.c., 9% open area

Pattern No. C500



Round—1/2" perforations
1.5" o.c., 9% open area

Pattern No. D250




Square—1/4" perforations
0.75" o.c., 11% open area

METAL PERFORATIONS


STANDARD PERFORATIONS⁴

Pattern No. D375




Square— $3/8$ " perforations
1.125" o.c., 11% open area

Pattern No. D500



Square— $1/2$ " perforations
1.5" o.c., 17% open area


Pattern No. D500D



Square— $1/2$ " perforations
0.595" o.c., 70% open area
(70% open area required for
sprinklers above ceiling)

EMBOSSING ONLY⁴

Pattern No. EM25D




Round— $1/4$ " dia. x $1/16$ " embossing
1.18" o.c., no perforation



Face side

Pattern No. EM25U




Round— $1/4$ " dia. x $1/16$ " embossing
1.18" o.c., no perforation



Face side

EMBOSSING AND PERFORATIONS⁴

Pattern No. EC25D




Round— $1/4$ " perforations 1.41" o.c.,
2% open area Black Acoustibond™
backer standard



Face side

Pattern No. EC25U



Round— $1/4$ " perforation 1.41" o.c.,
2% open area Acoustibond™
backer not available



Face side

Notes


1. Do not use with USG Curvatura™ One-Directional Ceiling System.
2. Standard for USG Geometrix® panels.
3. 2'x2' USG Celebration™ and Panz® panels only.
4. USG Perforation patterns shown at 75% of actual size. When ordering, please refer to the pattern number for perforation samples (for example, "A062"). (All samples are 6"x6".)
5. Panels with an open area \geq 50% offered in 2'x2' only.
6. 2" wide USG Celebration™ Snap In, Celebration Torsion Spring, Panz® and Curvatura™ panels up to 6' long only.

WOOD FINISHES

WOOD TONES FAUX FINISHES^{1,3}

USG Celebration™ and
Coordinating suspension
and/or trim color
available.

Beech (3467)



Dark Bamboo (3465)




Dark Cherry (3468)



Light Bamboo (3466)



Light Cherry (3469)




Maple (3470)



Red Oak (3471)



Walnut (3472)



USG TRUE™ WOOD VENEERS^{1,2}

Coordinating suspension
and/or trim color
available.


Beech



Dark Bamboo




Dark Cherry



Light Bamboo



Light Cherry



Maple



Red Oak



Walnut



Notes


1. Color Disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.
2. Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats.
3. Wood Tone Disclaimer: Faux wood finishes exhibit variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look from one item to another.

USG TRANSLUCENTS™ FINISHES

USG offers luminous ceiling panels in several distinctive styles and finishes. These color reproductions are shown to represent available finishes and colors. Décors are not to scale. A sample should be reviewed before placing an order.

COLOR GALLERY

For USG Billo™, Topo™, Translucents™ Panels and Translucents™ Canopies

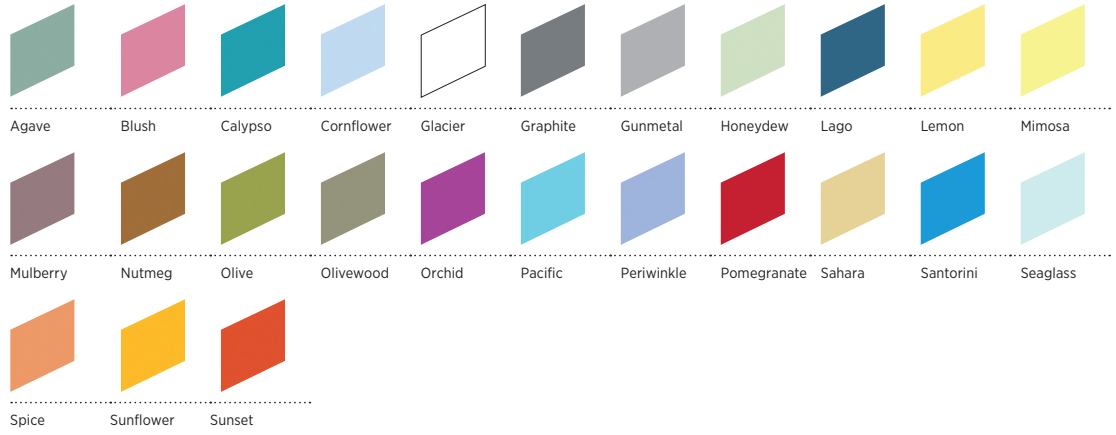

DÉCORS

Shown with Coordinating Suspension Color




USG TRANSLUCENTS™ FINISHES

DÉCORS CONT.

Shown with Coordinating
Suspension Color

Clear Matte™



White Mesh™



White Fiberoptic™



Tape™



White Haven™



Kauri™




Aqua Twilight™



Silver Twilight™



Silver Spun™



Rain™



AN UNWAVERING COMMITMENT TO SUSTAINABILITY

As a leading manufacturer of building materials the world over, we have a responsibility to produce products that not only perform for the owner, but also perform with the planet. That is why USG is strongly committed to practicing sustainable building methods and to ensuring all of our processes are in line with creating healthier environments.

Our commitment to sustainability focuses on five main areas: transparency, healthy buildings, The 2030 Challenge, LEED®/USGBC/ CaGBC and recycling. Each one focuses on a different aspect of sustainability, but when brought together, deliver a clear path for USG to create greater sustainability today, tomorrow and well into the future.

COMMITMENT TO TRANSPARENCY

Product Attribute Report (PAR):
The PAR is a comprehensive sustainability document developed by USG to serve as a quick reference on environmental and health-related attributes associated with the final product. Through the use of the PAR, building professionals can obtain a complete understanding of a product's entire life cycle impact.



PRODUCT ATTRIBUTE REPORT
Transparency Declaration

USG Acoustic Panels REC0002

ENVIRONMENTAL DATA


Attribute	Value
Low VOC Content	GREENGUARD Gold (2009) v1300 Compliant
Low VOC Content (100% Recycled)	GREENGUARD Gold (2009) v1300 Compliant
Low VOC Content (100% Recycled) (100% Recycled)	GREENGUARD Gold (2009) v1300 Compliant
Low VOC Content (100% Recycled) (100% Recycled) (100% Recycled)	GREENGUARD Gold (2009) v1300 Compliant

HEALTH PRODUCT DECLARATION (HPD):

Ingredient	Chemical Name	Category	Health Hazard	Environmental Hazard
Acrylic	Acrylic	Resin	None	None
Acrylic	Acrylic	Resin	None	None
Acrylic	Acrylic	Resin	None	None

Environmental Product Declaration (EPD):
Sustainability is becoming increasingly important in the world of building design. For architects and designers, EPDs help maximize a design's sustainability, and earn industry certifications and LEED credits. Delivering on USG's commitment to increase product transparency, EPDs help us do just that.

Health Product Declaration (HPD):
The HPD was created by the Health Product Declaration Collaborative (HPDC) to encourage the disclosure of product ingredients. The HPD is a document that discloses product ingredients and associated human and environmental hazards. Potential hazards are identified by using various hazard lists published by several government and scientific organizations. The HPD gives architects, contractors, specifiers and others involved in material evaluation the information needed to make an informed decision.



COMMITMENT TO HEALTHY BUILDINGS

Whether in a home, workplace, school or office, people are spending less time outside. According to the United States Environmental Protection Agency (U.S. EPA), exposure to indoor air pollutants may be two to five times higher than the outdoor air. Exposure to indoor air pollutants can adversely affect occupant health and productivity. Fortunately, there are things we can do to address some of the more common indoor air pollutants.

At USG, we're proud to be GREENGUARD Gold Certified on more than 200 of our wallboard, ceilings, joint treatment and plaster products. The GREENGUARD Certification program, a unit of Underwriters Laboratories Inc. (UL), certifies compliance to California Department of Public Health's stringent emissions limit for building materials.



COMMITMENT TO THE 2030 CHALLENGE

The 2030 Challenge was introduced to make renewable energy and sustainability the new standard for buildings. It challenges architects to design buildings and developments to be carbon-neutral in an effort to slow the growth rate of greenhouse gases produced by buildings.

It's an extremely important initiative, and we're taking it very seriously. Our dedicated team of engineers and designers are already making great progress by reducing the amount of water, energy and greenhouse gas emissions in the manufacturing process. We're excited to lead the charge toward a brighter and more sustainable future.



COMMITMENT TO LEED AND THE U.S. & CANADA GREEN BUILDING COUNCILS

Leadership in Energy and Environmental Design (LEED):

LEED is the most widely used third-party verification for green buildings, with 1.85 million square feet being LEED certified daily. LEED certification is available for all buildings, from homes to corporate headquarters. Projects pursuing LEED certification earn points across several areas that address sustainability issues. Based on the number of points achieved, a project then receives one of four LEED rating levels: Certified, Silver, Gold and Platinum. LEED is changing the way the industry thinks about how buildings and communities are planned, constructed, maintained and operated.

United States Green Building Council (USGBC):

The USGBC is an organization dedicated to improving the way buildings are designed, constructed and operated through LEED—the top third-party verification system for sustainable structures around the world. At USG, we have been proud members of the USGBC since January 15, 1997. Our commitment to sustainability and making sure our products and processes work in greater harmony with the environment gives USG and the USGBC a solid partnership as we work to improve the world of building today, for the natural world of tomorrow.

Canada Green Building Council (CaGBC):

The CaGBC is a not-for-profit, national organization that has been working since 2002 to advance green building and sustainable community development practices in Canada.



MATERIALS: Focuses on materials to get a better understanding of what's in them and the effect those components have on human health and the environment.



PERFORMANCE-BASED: Takes a more performance-based approach to indoor environment quality to ensure improved occupant comfort.



SMART GRID: Brings the benefit of smart grid thinking to the forefront with a credit that rewards projects for participating in demand response programs.



WATER EFFICIENCY: Provides a transparent picture of water efficiency by evaluating total building water use.

COMMITMENT TO RECYCLING

The USG Ceilings Recycling Program helps preserve natural resources by taking back approved ceiling panels from any manufacturer and recycling them into new building materials. With the goal of preventing job site recyclable materials from being discarded into landfills, this program is yet another way for USG to advance its strong commitment to safeguarding our environment.

TO LEARN MORE, GO TO
USG.COM OR CGCINC.COM

ENABLING YOU TO CREATE HIGH- PERFORMANCE SPACES THAT FUNCTION BEAUTIFULLY

Our ceiling solutions deliver peace of mind knowing that your building and its occupants are prepared for whatever comes their way.

THIS PAGE
USG Eclipse™
Acoustical Panels

NEXT PAGE
USG "F" Fissured™ Acoustical Panels

CLEAN ROOMS

In the building industry, Clean Rooms are defined as enclosed spaces that utilize air pressure and filters to control the amount of particulate matter in the air. A Clean Room has a controlled level of contamination that is specified by the number of particles per cubic meter for a given particulate size. Federal Standard 209E classifies Clean Rooms from Class 1 to Class 100,000, whereas ISO 14644-1 classifies them from Class 1 to Class 9, as shown in the table below.

Clean Room Classification	
FED-STND-209E	ISO 14644-1
No Comparable STND	Class 1
No Comparable STND	Class 2
Class 1	Class 3
Class 10	Class 4
Class 100	Class 5
Class 1000	Class 6
Class 10,000	Class 7
Class 100,000	Class 8
No Comparable STND	Class 9



Our commitment to Clean Room technologies has enabled us to create a variety of ceiling systems that deliver the ultimate control in air quality. USG Clean Room™ Ceiling Systems feature a gasketed grid, hold-down clips, specific lighting fixtures and HEPA filters that are Clean Room-certified. Plus, USG Clean Room Ceiling Systems have been tested and certified by Acorn Industries, Inc.—the world's experts in contamination control engineering. USG Clean Room Ceiling Systems enable you to create a room with superb air quality from floor to ceiling.



USG offers a range of ISO Class 5 ceiling solutions.

To learn more about USG Clean Room Ceiling Systems, go to pages 64-65 or visit usg.com or cgcinc.com

EXTERIOR CEILING SYSTEMS


From parking lots to sheltered walkways to carports, exterior ceilings are an essential part of the way we design and build today. They must be functional and aesthetic, complimenting the design of a structure while performing in a wide range of wind, temperature and moisture conditions.

For decades, USG Exterior Ceiling Systems have been utilized in a wide variety of exterior applications. From satisfying stringent performance requirements and design criteria to providing beauty and durability, USG exterior ceiling systems ensure you have a complete system that's built to last, while also delivering a lasting impression.

USG offers numerous systems for use in exterior environments that are not directly exposed to the weather, such as under a soffit, parking garage, covered entrance or drive-through.

Each ceiling system combines a specially engineered suspension system with either traditional modules, elegant linear pans or metal panels creating a dynamic ceiling with clean, contemporary planes and, most importantly, performance at the highest level.

To learn more about USG Exterior Ceiling Systems, visit usg.com or cgcinc.com

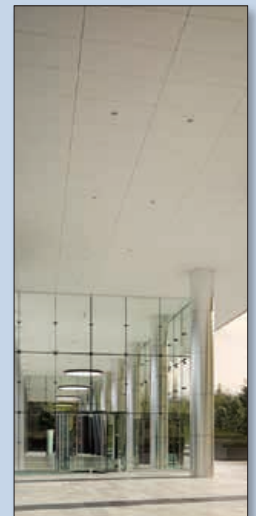

SEISMIC SOLUTIONS

Seismic compliance is the use of approved systems and designs that meet the seismic requirements of a building project, delivering safety to occupants while maintaining the building's function during and after seismic activity, such as an earthquake. Within those approved systems and designs are nonstructural components, which represent a high percentage of a project's capital investment. The basic objectives of seismic design for nonstructural components are to provide life safety, minimize property loss and prevent functional loss. Failure of these components in an earthquake has the potential to cause harm, block exits, impede rescue efforts and disrupt the building's function.

Since 1957, USG Donn® Brand Suspension Systems have set the standard, with the optimal combination of shape, size, steel gauge and connection details to produce the tightest systems available, with the greatest lateral and torsional stiffness. To this day, suspension systems from USG are proven to greatly exceed the lateral forces experienced in a seismic event.

To learn more about seismic design category, go to usg.com or cginc.com



FIRE RESISTANCE

In the building industry, fire resistance refers to a variety of factors that all play a role in how well materials prevent the starting and spreading of fire within a space or spaces. The universal fire-safety properties are described in terms of fire resistance, surface-burning characteristics and noncombustibility.

Fire Resistance, Fire Endurance Rating or Fire-Rated: Fire-resistance ratings have long been used by UL/ULC, ASTM and building codes to measure the performance of various construction types for passive fire protection purposes. As applied to elements of buildings, the fire-resistance rating classifies the ability of an assembly to confine and isolate fire within a zone comprised of fire-resistant rated wall, ceiling and floor assemblies. The rating relates to the period of time the assembly will serve as a barrier to the spread of excessive heat and fire from one compartment to the next and how long the assembly will remain structurally stable under a standard fire exposure as defined by ASTM E119 or CAN/ULC-S101.

Flame Spread: The measure of a material's relative surface-burning behavior. Both the flame spread and smoke developed are measured in accordance with ASTM E84 or CAN/ULC-S102.

Noncombustible Material Class A Designation: This is a material that will not burn or contribute considerable fuel to a fire, as determined through ASTM E136 or CAN/ULC-S114. This includes materials that may ignite but will not sustain a flame. In addition, Class A products will not produce excessive smoke that obscures visibility—an important factor in designing safe exits for building occupants. Class A though is not a fire-resistance designation.

At USG, we are proud to be the leader among building material manufacturers in providing products and systems designed to keep people safe from fire. Our patented Firecode® products are designed to meet the life-safety codes of your build.

To learn more about USG fire safety and fire-rated assemblies, see the right column of this page, visit usgdesignstudio.com or cgdesignstudio.com

HOLDING OUR PRODUCTS TO THE HIGHEST INDUSTRY STANDARDS

At USG, we are proud to achieve UL certification in both our USG Donn® Brand Suspension Systems, as well as our acoustical tiles.


USG Donn® Brand Suspension Systems	
PRODUCT	UL Type Designation
USG DXL™ USG DXL™ Concealed—15/16" wide	DXL
USG DXLA™ Aluminum Cap—15/16" wide	DXLA
USG ZXLA™ Aluminum Cap Environmental—15/16" wide	ZXLA
USG Centricitee™ DXLT™ 9/16" wide	DXLT
USG Fineline™ DXLF™ 9/16" wide, 1/4" bolt slot	DXLF
USG Drywall Suspension System, DGL—15/16"	DGL
USG Drywall Suspension System, DGLW—1-1/2" wide	DGLW
USG Paraline® Linear Metal System	DXLP

Acoustical Tiles	
Product	UL Type
USG Astro®	Astro-FR
USG Clean Room™	M
USG Eclipse™	FR-X1
USG Fissured™ Basic	FR-83
USG Frost™ Basic	AP*
USG Glacier™ Basic	AP*
USG Radar™ Basic	FR-83
USG Radar™ Ceramic	FR-4
USG Radar™	FR-83
USG Radar™ High-NRC/High-CAC	FR-83
USG Radar™ Illusion™	FR-83
USG Radar™ Education	FR-83
USG Rock Face®	FR-83
USG Sandrift™ Basic	AP*
USG Sheetrock® Brand Lay-In Panels	FC-CB
USG Touchstone™	FR-83

*AP = AP, AP-1, AP-2, AP-3



To learn more about USG fire safety and fire-rated assemblies, visit usgdesignstudio.com or cgdesignstudio.com

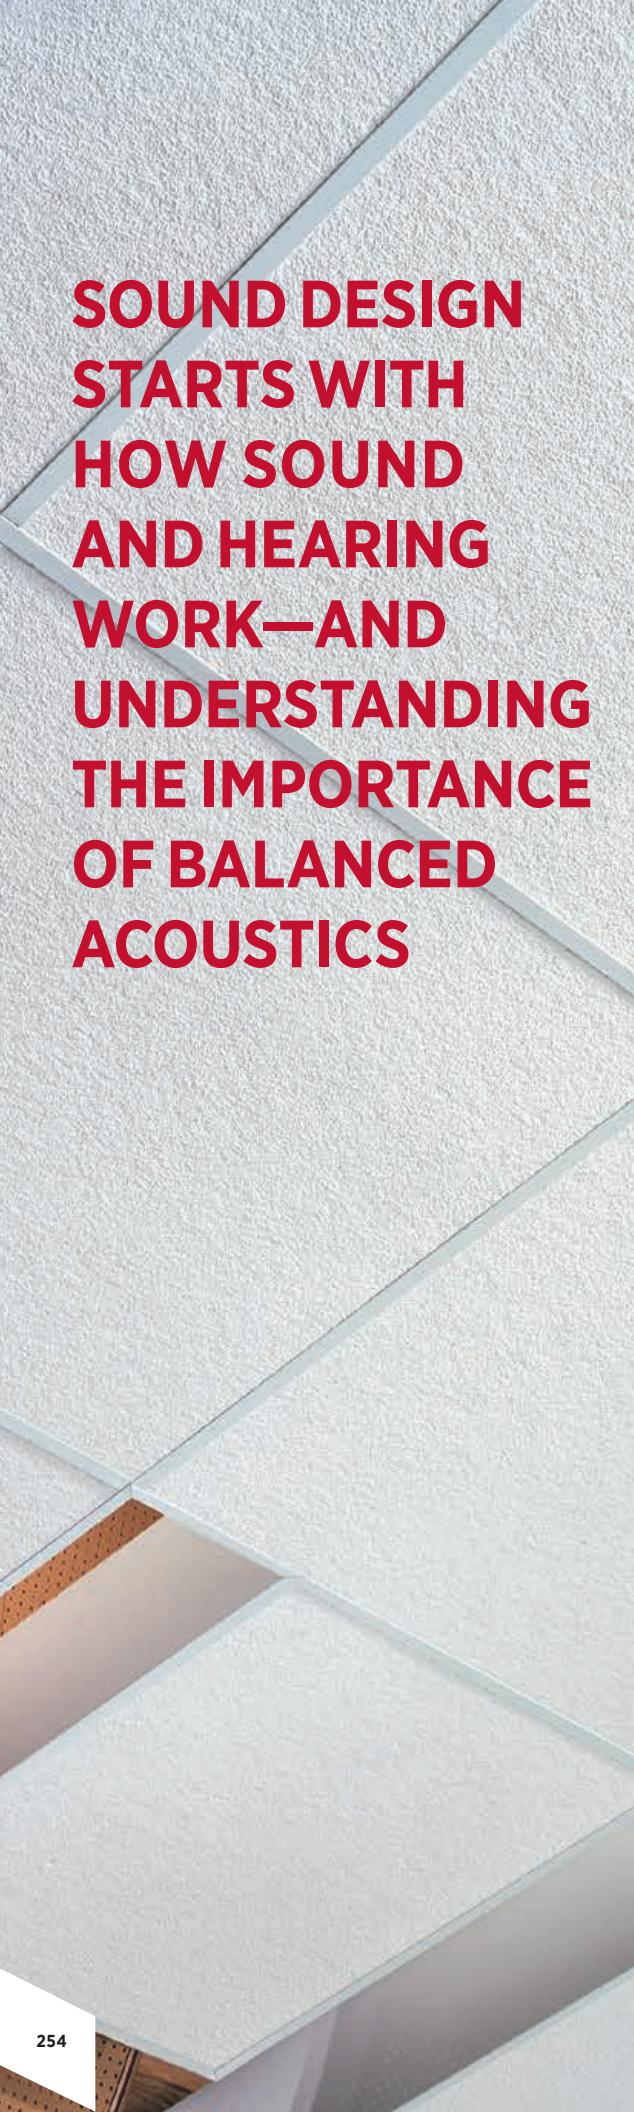

SOUND DESIGN STARTS WITH HOW SOUND AND HEARING WORK—AND UNDERSTANDING THE IMPORTANCE OF BALANCED ACOUSTICS

THE WAY SOUND TRAVELS THROUGH SPACES

Sound moves in a wave motion as an elastic medium produced by a vibrating object. These vibrations move the particles of the medium (such as air) adjacent to it, back and forth, creating an alternate compression and rarefaction of the medium. These disturbances move away from the source in a wave motion, much as a ripple moves along the surface of water when a stone is dropped in. The more elastic a substance, the better it can conduct sound. For example, steel is highly elastic, making it an excellent conductor of sound.

Moreover, sound not only travels in a straight path from its source, but also bounces off partitions, bends around barriers and squeezes through small openings, all of which can allow noise to reach surprisingly far beyond its point of origin.

HOW SOUND CAN BE CONTROLLED WITHIN SPACES

The basic mechanisms involved in noise control for buildings are sound absorption and sound transmission.

SOUND ABSORPTION: Necessary to reduce the reverberation, or echo, in a space to help improve clarity of speech and reduce excessive noise within a room. Acoustically absorbent material absorbs the majority of the incident sound waves and reverberations.

SOUND TRANSMISSION: Either airborne or structural, sound transmission must be reduced to prevent sound from traveling between two spaces. Airborne sound transmission is when sound travels through the air, such as partitions and openings. Impact sound transmission originates by contact with a structure and then travels through the structure.

BALANCED ACOUSTICS = NRC + CAC

EVALUATING CEILINGS: NRC, CAC & AC

Noise Reduction Coefficient (NRC)

NRC: A measure of sound absorption.

A 0.70 means the material absorbs 70% of sound waves. This is an important consideration for controlling acoustics within a confined area. Tests are conducted according to **ASTM C423**.

ASTM C423: Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.




Ceiling Attenuation Class (CAC)

CAC: Applies to the sound attenuation of acoustical ceilings with a shared plenum between horizontally adjacent spaces.

A value of under 25 is considered poor, while a value of 35 and over is exceptional. Tests are conducted per **ASTM E1414** and classified per **ASTM E413**.

ASTM E1414: Standard Test Method for Airborne Sound Attenuation Between Rooms Sharing a Common Ceiling Plenum.

ASTM E413: Classification for Rating Sound Insulation.

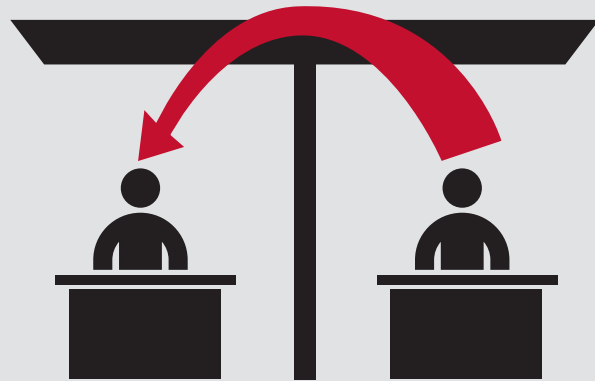

EVALUATING CEILINGS: NRC, CAC & AC

Articulation Class (AC)

AC: A single-number rating, for speech privacy purposes, of a ceiling system in an open plan space. A rating of 170 or higher is considered acceptable. The higher the AC rating, the better the performance.

ASTM 1111: Standard Test Method for Measuring the Interzone Attenuation of Open Office Components.

ASTM 1110: Standard Classification for Determination of Articulation Class.




EVALUATING WALLS

Sound Transmission Class (STC)

STC: A widely used rating of sound attenuation performance of wall and floor systems. Laboratory tests are conducted per **ASTM E90** and classified per **ASTM E413**.

ASTM E90: Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.

ASTM E413: Classification for Rating Sound Insulation.

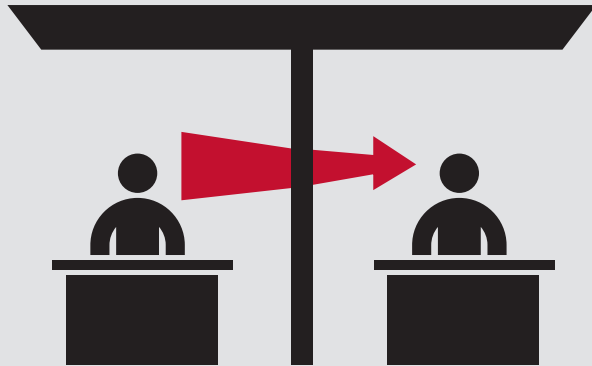

FOR MORE DETAILED ACOUSTICAL DATA, SEE PAGES 256-257

USG ACOUSTICAL DATA

All sound testing is conducted at the USG Corporate Innovation Center Acoustical Test Facility, which is accredited under the National Voluntary Laboratory Accreditation Program (NVLAP Lab Code: 200132-0). Testing of acoustical materials is conducted under the UL Client Data Test Program. All acoustical data are representative of each product family listed.

Acoustical Panel Product Name	NRC	CAC	AC	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
USG ASPEN™ BASIC 3/4"	0.55	35	—	0.48	0.39	0.57	0.77	0.67	0.59
USG ASTRO® 5/8"	0.55	35	—	0.51	0.35	0.47	0.65	0.69	0.68
USG CLEAN ROOM® (PERFORATED) 5/8"	0.55	35	—	0.43	0.38	0.57	0.87	0.76	0.60
USG ECLIPSE™ 3/4"	0.70	35	—	0.35	0.40	0.62	0.87	0.89	0.85
USG ECLIPSE™ HIGH-NRC 7/8"	0.75	35	—	0.39	0.39	0.73	0.93	0.95	0.91
USG "F" FISSURED™ BASIC 3/4"	0.70	35	—	0.73	0.30	0.63	1.00	0.97	0.97
USG FISSURED™ BASIC 5/8"	0.55	35	—	0.45	0.30	0.41	0.72	0.73	0.60
USG FISSURED™ BASIC FIRECODE™ 5/8"	0.55	35	—	0.38	0.32	0.47	0.75	0.71	0.61
USG FROST™ 3/4"	0.70	36	—	0.33	0.33	0.71	0.89	0.83	0.73
USG FROST™ BASIC 7/8"	0.70	40	—	0.38	0.46	0.82	0.95	0.88	0.87
USG FROST™ HIGH-NRC/HIGH-CAC 7/8"	0.80	38	—	0.43	0.38	0.77	0.92	0.88	0.83
USG GLACIER™ BASIC 3/4"	0.65	35	—	0.36	0.26	0.55	0.99	1.02	1.02
USG HALCYON™ 3/4"	0.90	20	170	0.72	0.90	0.82	0.97	1.03	1.01
USG HALCYON™ 1"	0.95	20	200	0.72	0.92	0.88	1.04	1.06	1.09
USG HALCYON™ 1-1/2"	1.00	25	210	0.73	0.92	0.96	1.08	1.07	1.06
USG HALCYON™ (FOIL BACKED) 1"	0.90	30	—	0.45	0.64	0.87	1.07	1.09	1.00
USG HALCYON™ FOIL BACKED 1-1/2"	0.95	30	190	0.48	0.77	0.94	1.12	1.10	1.04
USG HALCYON™ HEALTHCARE 1"	0.95	20	180	0.93	0.83	0.77	1.03	1.08	1.04
USG HALCYON™ HEALTHCARE 1-1/2"	1.00	25	—	1.04	0.90	0.85	1.10	1.07	1.00
USG MARS™ 3/4"	0.75	35	180	0.42	0.39	0.60	0.90	0.99	1.01
USG MARS™ HIGH-NRC 80 7/8"	0.80	35	170	0.44	0.40	0.74	0.99	0.98	0.99
USG MARS™ HIGH-NRC/HIGH-CAC 80/40 1"	0.80	40	—	0.33	0.40	0.80	1.03	1.03	1.02
USG MARS™ HIGH-CAC	0.60	40	—	0.39	0.30	0.59	0.80	0.88	0.96
USG MARS™ HIGH-NRC 85 7/8"	0.85	35	180	0.76	0.65	0.77	1.00	1.04	0.99
USG MARS™ HIGH-NRC 90 1"	0.90	30	—	0.53	0.55	0.86	1.06	1.06	1.02
USG MARS™ HEALTHCARE CLEAN ROOM 3/4"	0.75	35	—	0.38	0.39	0.63	0.96	1.03	0.96
USG MARS™ HEALTHCARE WITH AIRCARE™ 3/4"	0.75	35	—	0.42	0.39	0.60	0.90	0.99	1.01
USG MARS™ HEALTHCARE HIGH-NRC 80 7/8"	0.80	35	—	0.44	0.40	0.74	0.99	0.98	0.99
USG MARS™ HEALTHCARE HIGH-NRC/HIGH-CAC 80/40 1"	0.80	40	—	0.33	0.40	0.80	1.03	1.03	1.02
USG MILLENNIA® 3/4"	0.70	35	—	0.48	0.41	0.61	0.85	0.89	0.89
USG MILLENNIA® HIGH-NRC 3/4"	0.75	30	—	0.59	0.59	0.63	0.85	0.91	0.86

USG ACOUSTICAL DATA

Acoustical Panel Product Name	NRC	CAC	AC	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
USG OLYMPIA™ MICRO™ 5/8"	0.50	35	—	0.40	0.37	0.60	0.65	0.51	0.35
USG OLYMPIA™ MICRO™ 60 NRC 3/4"	0.60	35	—	0.40	0.44	0.66	0.71	0.52	0.37
USG ORION™ 60 1/2"	0.60	23	—	0.82	0.68	0.71	0.85	0.97	1.05
USG ORION™ 75 5/8"	0.75	24	—	0.60	0.65	0.71	0.90	1.01	1.04
USG ORION™ 85 5/8"	0.85	24	—	0.73	0.77	0.76	0.94	1.03	1.10
USG PEBBLED™ 5/8"	0.55	35	—	0.33	0.32	0.50	0.77	0.67	0.50
USG PREMIER HI-LITE™ Twill (PERFORATED) 5/8"	0.70	20	—	0.72	0.75	0.63	0.84	0.79	0.72
USG PREMIER HI-LITE™ (PERFORATED) KAPOK 5/8"	0.70	20	—	0.53	0.76	0.65	0.81	0.74	0.55
USG PREMIER NUBBY™ (FOIL BACKED) 1"	0.90	25	—	0.44	0.60	0.88	1.03	1.11	1.15
USG RADAR™ 5/8"	0.55	33	—	0.46	0.29	0.39	0.66	0.77	0.72
USG RADAR™ FIRECODE™ 5/8"	0.55	35	—	0.43	0.40	0.48	0.84	0.84	0.73
USG RADAR™ ILLUSION™ 3/4"	0.55	35	—	0.40	0.38	0.54	0.72	0.72	0.66
USG RADAR™ CERAMIC 5/8"	0.50	40	—	0.35	0.28	0.38	0.60	0.76	0.77
USG RADAR™ HIGH DURABILITY 5/8"	0.55	35	—	0.39	0.28	0.42	0.71	0.79	0.70
USG RADAR™ HIGH-NRC 3/4"	0.70	35	160	0.37	0.35	0.61	0.93	0.88	0.79
USG ROCK FACE™ 5/8"	0.55	35	—	0.37	0.28	0.57	0.82	0.57	0.40
USG TOUCHSTONE™ 5/8"	0.55	35	—	0.40	0.26	0.58	0.85	0.61	0.44

Notes

- All acoustical data are representative of each product family listed. For the most recent test results on a specific product, please contact your local USG representative or visit usgdesignstudio.com.
- CAC data obtained and tested according to E1414 using type CE mounting (Continuous at partitions, Exposed suspension system).
- NRC data obtained and tested according to ASTM C423. All material was tested in type E400 mounting, as specified in ASTM E795.
- AC data obtained and tested according to ASTM 1111.

ACOUSTICAL PANEL PACKAGING DATA

USG ASPEN™ BASIC ACOUSTICAL PANELS

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
650	54	12	48	20
651	54	6	48	20
652	54	6	48	20

USG ASTRO® ACOUSTICAL PANELS

8122	60	12	48	20
8221	60	16	64	16
8241	60	8	64	18
8223	60	16	64	16
8243	60	8	64	18
8227	60	16	64	16
8247	60	8	64	18
8322	60	12	48	16
8722	60	12	48	16

USG ASTRO® ILLUSION™ ACOUSTICAL PANELS

8742	60	6	48	20
8744	60	6	48	20

USG CLEAN ROOM™ ACOUSTICAL PANELS

56099	72	16	64	16
56091	72	8	64	18
56060	72	16	64	16
56090	72	8	64	18

USG ECLIPSE™ ACOUSTICAL PANELS

70073	45	40	40	18
76575	49	12	48	20
76775	49	12	48	20
ME76775	49	12	46.5	20
76779	57	12	48	20
76975	49	12	48	20
ME76975	49	12	46.5	20
76979	57	12	48	20
78575	49	6	48	20
78775	49	6	48	20
78975	49	6	48	20

USG ECLIPSE™ HIGH-NRC ACOUSTICAL PANELS

76520	59	10	40	20
76521	59	6	48	16
76522	59	10	40	20
76523	59	6	48	16
76524	59	10	40	20
76525	59	6	48	16

USG ECLIPSE™ HRC ACOUSTICAL PANELS

76575HRC	49	12	48	20
76775HRC	49	12	48	20
76975HRC	49	12	48	20
78575HRC	49	6	48	20
78775HRC	49	6	48	20
78975HRC	49	6	48	20

ACOUSTICAL PANEL PACKAGING DATA

USG ECLIPSE™ ILLUSION™ & PEDESTALS™ ACOUSTICAL PANELS

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
72015	55	12	48	20
72215	55	12	48	20
72715	55	12	48	20
72716	55	12	48	20
78011	49	6	48	20
78085	49	6	48	20
78711	49	6	48	20
78785	49	6	48	20

USG "F" FISSURED™ BASIC ACOUSTICAL PANELS

101	69	48	48	32
102	69	48	48	32
131	50	8	32	28
132	49	8	32	28
133	49	8	32	28
135	72	6	48	28
136	72	6	48	28

USG FISSURED™ BASIC ACOUSTICAL PANELS

506	43	16	64	20
507	43	8	64	20
560	42	16	64	20
562	42	8	64	20
585	65	16	74	20
586	74	8	64	20

USG FROST™ BASIC ACOUSTICAL PANELS

415	49	8	32	28
440	56	8	32	28
450	71	6	48	16
460	71	6	48	16

USG FROST™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

484	56	8	32	24
488	57	8	32	24
489	57	8	32	24

USG FROST™/ USG FROST™ HIGH-LR ACOUSTICAL PANELS

414	48	8	32	28
418	49	8	32	28
419	49	8	32	28
490	48	8	32	28
491	48	8	32	28

USG GLACIER™ BASIC ACOUSTICAL PANELS

701	64	44	44	32
707	42	8	32	28
708	43	8	32	28
711	66	6	48	16
715	44	8	32	28

USG HALCYON™ ACOUSTICAL PANELS

88221	24	12	48	28
88223	47	12	96	14
88224	46	8	64	14
88225	24	12	48	28
88226	47	12	96	14

ACOUSTICAL PANEL PACKAGING DATA

USG HALCYON™ ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
88227	24	12	48	28
97221	25	16	64	28
97241	49	16	128	14
97266	76	12	150	7
97356	24	8	32	28
97357	24	8	32	28
97358	48	8	64	14
97368	46	12	96	14
97359	24	8	32	28
98221	23	12	48	28
98223	23	12	48	28
98225	23	12	48	28
98241	45	12	96	14
98243	45	12	96	14
98245	45	12	96	14
98331	35	12	75	14
98333	35	12	75	14
98335	35	12	75	14
98336	76	12	150	7
99221	22	8	32	28
99223	22	8	32	28
99225	22	8	32	28
99241	44	8	64	14
99270	76	12	150	7

USG HALCYON™ CANOPIES

99131	15	2	—	Varies
99132	23	2	—	Varies
99133	28	2	—	Varies
99134	12	2	—	Varies
99135	17	2	—	Varies
99136	18	2	—	Varies
99137	26	2	—	Varies
99138	18	2	—	Varies
99139	12	2	—	Varies
99140	15	2	—	Varies
99150	15	2	—	Varies
99151	15	2	—	Varies
99152	15	2	—	Varies
99153	15	2	—	Varies
99154	15	2	—	Varies
99155	15	2	—	Varies
99156	15	2	—	Varies
99157	15	2	—	Varies
99158	15	2	—	Varies
99159	15	2	—	Varies
99160	13	2	—	Varies

USG HALCYON™ PLANKS AND LARGE SIZE ACOUSTICAL PANELS

97262	56	16	192	14
97263	100	16	256	14
97360	73	12	144	14
97361	97	12	192	14

ACOUSTICAL PANEL PACKAGING DATA

USG HALCYON™ PLANKS AND LARGE SIZE ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
97362	73	12	144	14
97363	97	12	192	4
97364	65	4	128	4
97365	97	12	192	7
97366	97	12	192	7
97367	97	12	192	14
98197	92	12	192	14
98348	69	12	144	14
98441	90	12	192	7
98443	90	12	192	7
98445	90	12	192	7
98481	60	4	128	20
99268	69	12	144	14
99269	92	12	192	14
99282	81	16	160	14

USG HALCYON™ HEALTHCARE ACOUSTICAL PANELS

98217	48	8	32	28
98218	16	8	64	14
98232	32	12	48	28
98233	24	12	96	14
98234	48	8	32	28
98235	24	8	64	14
98236	48	12	48	28
98237	16	12	96	14
98238	32	12	48	28
98239	24	12	96	14

USG HALCYON™ LOGIX™ FIELD AND CHANNEL ACOUSTICAL PANELS

97227	49	48	96	14
97228	61	48	120	14
97266	76	12	150	7
97277	43	12	84	14
97402	49	72	96	14
97403	61	72	120	14
97404	72	72	144	14
97405	73	48	144	14
97406	25	8	48	14
97407	46	12	90	14
97408	48	12	93	14
97411	22	12	42	28
97412	43	12	84	14
97413	23	12	44	28
97414	45	12	88	14
97416	45	12	88	14
97417	35	12	68	14
97418	69	12	135	7
97419	36	12	70	14
97420	71	12	140	7
97422	69	12	135	7
97423	71	12	140	7
97424	85	12	168	7
97425	89	12	176	7

ACOUSTICAL PANEL PACKAGING DATA

USG HALCYON™ LOGIX™
FIELD AND CHANNEL
ACOUSTICAL PANELS
CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
97426	91	12	180	7
97427	93	12	184	7
97428	110	12	216	7
97430	49	72	96	14
97431	61	72	120	14
97432	72	72	144	14
97433	73	48	144	14
97434	21	24	120	14
97435	25	24	144	14
97436	46	12	90	14
97437	48	12	93	14
97439	43	12	84	14
97440	23	12	44	28
97441	45	12	88	14
97443	43	12	84	14
97444	45	12	88	14
97446	123	12	240	14
97447	35	12	68	14
97448	69	12	135	7
97449	36	12	70	14
97450	71	12	140	7
97453	71	12	140	7
97454	85	12	168	7
97455	89	12	176	7
97456	91	12	180	7
97457	93	12	184	7
97458	110	12	216	7
97491	17	8	96	14
97492	21	8	40	14
97571	17	24	96	14
98220	22	12	42	28
98223	25	12	48	28
98243	49	12	96	14
98333	38	12	75	14
98337	69	12	135	7
98443	97	12	192	7
98483	65	4	128	4
99263	25	24	48	—
99267	51	12	100	14
99268	73	12	144	14
99269	97	12	192	14
99270	76	12	150	7
99271	49	48	96	14
99272	61	48	120	14
96271	61	12	120	14
97333	35	12	68	14
97335	36	12	70	14
97466	43	12	84	14
97467	23	12	44	28
97468	45	12	88	14
97470	45	12	88	14

ACOUSTICAL PANEL PACKAGING DATA

USG HALCYON™ LOGIX™ FIELD AND CHANNEL ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
97473	72	12	140	7
97475	89	12	176	7
97476	91	12	180	7
97477	93	12	184	4
97460	49	72	96	14
97461	61	72	120	14
97462	72	72	144	14
97463	25	24	144	14
97464	48	12	93	14
97574	73	48	144	14
97576	21	24	120	14
98131	55	48	108	14
98191	25	24	48	—
98192	17	24	96	14
98194	51	12	100	14
98195	22	12	42	28
98196	43	12	84	14
98197	97	12	192	14
98198	49	48	96	14
98199	61	48	120	14
98216	97	48	192	—
98225	25	12	48	28
98245	49	12	96	14
98335	38	12	75	7
98336	76	12	150	7
98341	58	12	114	14
98343	85	12	168	7
98344	110	12	216	14
98348	73	12	144	14
98359	69	12	135	7
98360	46	12	90	14
98440	69	12	135	7
98445	97	12	192	7
99197	42	48	84	14
99213	122	12	240	14
99265	97	24	192	—

USG MARS™/USG MARS™ HRC ACOUSTICAL PANELS

86185	51	12	48	20
86185HRC	51	12	48	20
86185CR	51	12	48	20
86288	51	24	48	18
86785	51	12	48	20
86785HRC	51	12	48	20
86830	40	6	37.5	20
86875	40	6	37.5	20
86985	51	12	48	20
86985HRC	51	12	48	20
88185	51	6	48	20
88185HRC	51	6	48	20
88185CR	51	6	48	20
88785	51	6	48	20

ACOUSTICAL PANEL PACKAGING DATA

**USG MARS™/USG MARS™
HRC ACOUSTICAL PANELS
CONT.**

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
88785HRC	51	6	48	20
88985	51	6	48	20
88985HRC	51	6	48	20

**USG MARS™/USG MARS™
HIGH-NRC PLANKS AND
ACOUSTICAL PANELS**

86161	63	6	60	20
86166	75	6	72	16
86166HRC	75	6	72	16
86221	63	6	60	20
86223	75	6	72	20
86350	73	6	60	16
86360	88	6	72	16
88984	63	6	60	20
88996	75	6	72	16
88996HRC	75	6	72	16
89550	73	6	60	16
89650	73	6	60	16
89660	88	6	72	16
89662	66	6	60	16
89663	79	6	72	16
89664	66	6	60	16
89665	79	6	72	16
89667	66	6	60	16
89668	79	6	72	16
89670	88	6	72	16
89673	49	4	40	20
89674	59	4	48	20
89675	49	4	40	20
89676	59	4	48	20
89677	49	4	40	20
89678	59	4	48	20

**USG MARS™
HEALTHCARE HIGH-NRC
ACOUSTICAL PANELS**

86152	59	10	40	20
86340	59	6	48	16
86470	59	10	40	20
86750	59	10	40	20

**USG MARS™
HEALTHCARE 80/40**

86115	53	8	32	20
88115	53	4	32	20
86343	53	8	32	20
88343	53	4	32	20
86344	53	8	32	20
88343	53	4	32	20

**USG MARS™
HIGH-NRC/HIGH-CAC
ACOUSTICAL PANELS**

80113	42	6	38	16
80139	42	6	38	16
80165	42	6	38	16
80213	31	4	25	20
80239	31	4	25	20
80265	31	4	25	20
86100	59	10	40	20
86186	63	12	48	20

ACOUSTICAL PANEL PACKAGING DATA

USG MARS™
HIGH-NRC/HIGH-CAC
ACOUSTICAL PANELS
CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
86300	59	6	48	16
86400	45	6	37.5	18
86426	42	6	38	18
86429	86	6	75	8
86345	53	8	32	20
88345	53	4	32	20
86346	53	8	32	20
88346	53	4	32	20
86347	53	8	32	20
88347	53	4	32	20
86466	42	6	38	8
86497	86	6	75	8
86500	45	6	37.5	20
86786	63	12	48	20
86986	63	12	48	20
87100	59	10	40	20
87187	63	6	48	16
87200	49	10	40	20
88134	44	10	40	20
88135	53	10	40	20
88136	53	10	40	20
88137	39	8	32	20
88138	39	8	32	20
88139	39	8	32	20
88786	63	6	48	16
88986	63	6	48	20
89134	53	6	48	16
89135	53	6	48	16
89136	53	6	48	16
89137	39	4	32	16
89138	39	4	32	16
89139	39	4	32	16
89140	83	6	75	9
89141	83	6	75	9
89142	83	6	75	9
89143	61	4	50	10
89144	61	4	50	10
89145	61	4	50	10
89500	59	6	48	20
89600	59	6	48	20

USG MARS™ HEALTHCARE
ACOUSTICAL PANELS

86169	51	12	48	20
86169AIR	51	12	48	20
86256	44	10	40	20
86257	44	10	40	20
86258	44	10	40	20
86270	63	12	48	—
86272	63	12	48	—
86273	63	12	48	—
86684	51	12	48	20
86684AIR	51	12	48	20

ACOUSTICAL PANEL PACKAGING DATA

USG MARS™ HEALTHCARE ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
86984	51	12	48	20
86984AIR	51	12	48	20
88189	51	6	48	20
88189AIR	51	6	48	20
88256	53	6	48	16
88271	63	6	48	16
88273	63	6	48	16
86169CR	51	12	48	20
88189CR	51	6	48	20
86684CR	51	12	48	20
88683CR	51	6	48	20
88683	51	6	48	20
88683AIR	51	6	48	20
88983	51	6	48	20
88983AIR	51	6	48	20

USG MARS™ LOGIX™ ACOUSTICAL PANELS

86134	43	40	40	—
86135	43	40	40	—
86136	43	40	40	—
86160	53	6	50	20
86164	53	6	50	20
86166	76	6	72	16
86185	51	12	48	20
86223	76	6	72	16
86267	76	6	75	10
86289	43	20	40	18
86245	43	20	40	18
86242	43	20	40	18
86321	26	6	24	20
86325	26	12	24	20
86503	71	6	68	10
86507	32	12	30	20
86514	26	18	24	20
86515	32	18	30	20
86516	25	6	24	20
86517	32	6	30	20
86518	38	6	36	20
86519	48	6	45	20
86520	49	6	47	20
86522	45	12	42	20
86523	45	6	42	20
86524	47	12	44	20
86525	47	6	44	20
86527	45	6	42	20
86528	47	6	44	20
86530	36	6	34	20
86531	71	6	68	10
86532	37	6	35	20
86533	74	6	70	10
86535	74	6	70	10
86536	76	6	75	10

ACOUSTICAL PANEL PACKAGING DATA

USG MARS™ LOGIX™
ACOUSTICAL PANELS
CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
86537	37	18	36	20
86538	38	12	36	20
86540	26	18	24	20
86541	32	18	30	20
86542	26	12	24	20
86543	32	12	30	20
86544	25	6	24	20
86545	32	6	30	20
86546	38	6	36	20
86547	48	6	45	20
86548	49	6	47	20
86550	45	12	42	20
86551	45	6	42	20
86552	47	12	44	20
86553	47	6	44	20
86555	45	6	42	20
86556	47	6	44	20
86557	36	6	34	20
86558	71	6	68	10
86559	37	6	35	20
86560	74	6	70	10
86563	74	6	70	10
86564	76	6	75	10
86565	37	18	36	20
86566	38	12	36	20
86567	38	12	36	20
86568	26	18	24	20
86569	32	18	30	20
86570	38	6	36	20
86571	50	6	47	20
86573	45	6	42	20
86574	47	12	44	20
86575	47	6	44	20
86577	45	6	42	20
86578	47	6	44	20
86579	71	6	68	10
86580	74	6	70	10
86583	74	6	70	10
86584	37	18	36	20
86785	51	12	48	20
86815	40	6	38	20
86830	40	6	38	20
86831	71	6	68	10
86834	37	6	35	20
86835	32	12	30	20
86850	36	6	34	20
86875	40	6	38	20
86905	53	6	50	20
86985	51	12	48	20
88185	51	6	48	20
88840	42	12	42	20

ACOUSTICAL PANEL PACKAGING DATA

**USG MARS™ LOGIX™
ACOUSTICAL PANELS
CONT.**

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
88845	48	6	45	20
88686	71	6	68	10
88785	51	6	48	20
88885	31	6	30	20
88887	25	12	24	20
88985	51	6	48	20
88996	76	6	72	16

**USG MARS™ HIGH-NRC
LOGIX™ ACOUSTICAL
PANELS**

80100	50	6	45	18
80101	52	6	47	18
80102	55	6	50	18
80103	39	10	35	20
80104	46	6	42	20
80105	41	10	37	20
80106	48	6	44	20
80107	46	6	42	20
80108	48	6	44	20
80109	37	6	34	18
80110	50	6	45	6
80111	39	6	35	18
80112	52	6	47	6
80113	42	6	38	18
80114	50	6	45	10
80115	52	6	47	10
80116	18	18	16	36
80117	22	18	20	32
80118	26	18	24	32
80119	18	12	16	36
80120	22	12	20	32
80121	26	12	24	32
80122	32	32	28	18
80123	26	6	24	36
80124	33	6	30	36
80125	40	6	36	32
80126	50	6	45	18
80127	52	6	47	18
80128	55	6	50	18
80129	36	10	35	20
80130	46	6	42	20
80131	41	10	37	16
80132	48	6	44	20
80133	46	6	42	20
80134	48	6	44	20
80135	37	6	34	18
80136	50	6	45	6
80137	39	6	35	18
80138	52	6	47	6
80139	42	6	38	18
80140	50	6	45	6
80141	52	6	47	6
80142	18	18	16	24

ACOUSTICAL PANEL PACKAGING DATA

USG MARS™
HIGH-NRC LOGIX™
ACOUSTICAL PANELS
CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
80143	22	18	20	24
80144	26	18	24	24
80145	18	12	16	24
80146	22	12	20	24
80147	26	12	24	32
80148	31	28	28	15
80149	26	6	24	36
80150	33	6	30	36
80151	40	6	36	32
80152	50	6	45	18
80153	52	6	47	18
80154	55	6	50	18
80155	39	10	35	20
80156	46	6	42	20
80157	41	10	37	20
80158	48	6	44	20
80159	46	6	42	20
80160	48	6	44	20
80161	37	6	34	18
80162	50	6	45	6
80163	39	6	35	18
80164	52	6	47	6
80165	42	6	38	16
80166	50	6	45	6
80167	52	6	47	6
80168	18	18	16	24
80169	22	18	20	24
80170	26	18	24	32
80171	18	12	16	24
80172	22	12	20	24
80173	26	12	24	32
80174	31	32	28	18
80175	26	6	24	36
80176	33	6	30	32
80177	40	6	36	32
80200	37	4	30	20
80201	38	4	31	20
80202	40	4	33	20
80203	34	8	28	20
80204	34	4	28	20
80205	35	8	29	20
80206	35	4	29	20
80207	34	4	28	20
80208	35	4	29	20
80209	41	4	34	20
80210	55	4	45	10
80211	43	4	35	20
80212	46	4	47	10
80213	46	6	38	20
80214	55	4	45	10
80215	57	4	47	10

ACOUSTICAL PANEL PACKAGING DATA

USG MARS™
HIGH-NRC LOGIX™
ACOUSTICAL PANELS
CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
80216	20	12	16	40
80217	24	12	20	40
80218	29	12	24	36
80219	20	8	16	40
80220	24	8	20	40
80221	29	8	24	36
80222	34	28	28	18
80223	20	4	16	40
80224	24	4	20	40
80225	29	4	24	36
80226	37	4	30	20
80227	38	4	31	20
80228	40	4	33	20
80229	34	8	28	20
80230	34	4	28	20
80231	35	8	29	20
80232	35	4	29	20
80233	34	4	28	20
80234	35	4	29	20
80235	41	4	34	20
80236	55	4	45	10
80237	43	4	35	20
80238	57	4	47	10
80239	46	4	38	20
80240	55	4	45	10
80241	57	4	47	10
80242	20	12	16	40
80243	24	12	20	40
80244	29	12	24	36
80245	20	8	16	40
80246	24	8	20	40
80247	29	8	24	36
80248	34	28	28	18
80249	20	4	16	40
80250	24	4	20	40
80251	29	4	24	36
80252	37	4	30	20
80253	38	4	31	20
80254	40	4	33	20
80255	34	8	28	20
80256	34	4	28	20
80257	35	8	29	20
80258	35	4	29	20
80259	34	4	28	20
80260	35	4	29	20
80261	41	4	34	20
80262	55	4	45	10
80263	43	4	35	20
80264	57	4	47	10
80265	46	4	38	20

ACOUSTICAL PANEL PACKAGING DATA

USG MARS™
HIGH-NRC LOGIX™
ACOUSTICAL PANELS
CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
80267	57	4	47	10
80268	20	12	16	40
80269	24	12	20	40
80270	29	12	24	36
80271	20	8	16	40
80272	24	8	20	40
80273	29	8	24	36
80274	34	28	28	18
80275	20	4	16	40
80276	24	4	20	40
80277	29	4	24	36
86100	59	10	40	20
88134	53	10	40	20
86137	34	14	28	18
86138	34	14	28	18
86139	34	14	28	18
86145	37	12	30	16
86331	30	12	24	16
86333	33	12	30	16
86400	45	6	38	18
86402	30	18	24	16
86403	37	18	30	16
86404	30	12	24	16
86405	44	18	36	16
86406	44	12	36	16
86407	30	6	24	16
86408	37	6	30	16
86409	44	6	36	16
86410	55	6	45	18
86411	57	6	47	18
86414	43	10	35	20
86415	52	5	42	18
86416	45	10	37	20
86417	54	6	44	18
86419	52	6	42	16
86420	54	6	44	16
86421	41	6	34	18
86422	83	6	68	8
86423	43	6	35	18
86424	86	6	70	8
86426	46	6	38	18
86427	83	6	68	8
86428	86	6	70	8
86429	92	6	75	8
86440	30	18	24	16
86441	37	18	30	16
86442	30	12	24	16
86443	37	12	30	16
86444	30	6	24	16
86445	37	6	30	16

ACOUSTICAL PANEL PACKAGING DATA

USG MARS™
HIGH-NRC LOGIX™
ACOUSTICAL PANELS
CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
86446	44	6	36	16
86447	55	6	45	18
86448	57	6	46	18
86449	61	6	50	18
86451	43	10	35	20
86452	52	6	42	18
86453	45	10	37	20
86454	54	6	44	18
86456	52	6	42	16
86457	54	6	44	16
86458	41	6	34	18
86459	43	6	35	18
86460	83	6	68	8
86461	86	6	70	8
86464	83	6	68	8
86465	86	6	70	8
86466	92	6	75	8
86467	44	18	36	16
86468	44	12	36	16
86473	44	18	36	16
86474	44	12	36	16
86475	30	18	24	16
86476	37	18	30	16
86477	37	6	30	16
86478	44	6	36	16
86479	55	6	45	18
86480	57	6	47	18
86481	61	6	50	18
86483	43	10	35	20
86484	52	6	42	18
86485	45	10	36	20
86486	54	6	44	18
86488	52	6	42	16
86489	54	6	44	16
86490	41	6	34	18
86491	83	6	68	8
86492	43	6	35	18
86493	86	6	70	8
86496	86	6	70	8
86497	92	6	75	8
86500	45	6	38	20
86501	83	6	68	8
86505	30	6	24	16
86663	31	16	32	18
86664	31	16	32	18
86665	31	16	32	18
87100	59	10	40	20
87200	49	10	40	20
88135	53	10	40	20
88137	39	8	32	20
89134	53	6	48	16

ACOUSTICAL PANEL PACKAGING DATA

**USG MARS™
HIGH-NRC LOGIX™
ACOUSTICAL PANELS
CONT.**

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
89135	53	6	48	16
89140	83	6	75	9
89141	83	6	75	9
89142	83	6	75	9
89143	61	4	50	10
89144	61	4	50	10
89145	61	4	50	10
89500	58	6	48	16
89600	58	6	48	20
89660	89	6	50	10
89663	79	6	72	16
89665	79	6	72	10
89668	79	6	72	10
89670	88	6	72	10
89674	59	4	48	20
89675	59	4	48	20
89676	59	4	48	20
89678	59	4	48	20

**USG MILLENNIA®
ACOUSTICAL PANELS**

70003	51	40	40	18
76505	51	12	48	20
76705	51	12	48	20
76901	51	6	48	20
76907	51	12	48	20
78080	48	6	48	20
78505	51	6	48	20
78705	51	6	48	20
78780	49	6	48	20

**USG MILLENNIA®
HIGH-NRC ACOUSTICAL
PANELS**

76201	51	12	48	20
76302	51	12	48	20
78501	51	6	48	20

**USG OLYMPIA™ MICRO™
ACOUSTICAL PANELS**

4210	64	16	64	20
4211	64	16	64	20
4221	64	16	64	16/20
4221HRC	64	16	64	16/20
4231	64	16	64	16/20
4231HRC	64	16	64	16/20
4411	64	8	64	20
4411HRC	64	8	64	20
4421	64	8	64	20
4421HRC	64	8	64	20
4431	64	8	64	20
4742	48	6	48	20
4744	48	6	48	20
4750	53	12	48	20
4751	53	6	48	20
4752	53	12	48	20
4753	53	6	48	20
4754	53	12	48	20

ACOUSTICAL PANEL PACKAGING DATA

USG OLYMPIA™ MICRO™ ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
4755	53	6	48	20
4913	64	8	64	20

USG ORION™ ACOUSTICAL PANELS

62150	46	16	64	20
62151	46	8	64	20
62152	46	16	64	20
62153	46	8	64	20
62154	46	16	64	20
62155	46	8	64	20
62156	48	20	80	20
62157	48	10	80	20
62162	46	16	64	20
62163	46	8	64	20
62164	46	16	64	20
62165	46	8	64	20
62166	46	16	64	20
62167	46	8	64	20

USG PEBBLED™ ACOUSTICAL PANELS

4800	56	8	64	20
4801	56	16	64	20
4805	56	16	64	20
4850	77	8	64	20
4851	77	16	64	20
4867	56	16	64	20

USG PREMIER HI-LITE™ ACOUSTICAL PANELS

7050G	35	32	128	18
7051G	35	16	128	18
7052G	35	32	128	18
7053G	35	16	128	18
7054G	35	32	128	18
7055G	35	16	128	18
7056G	35	32	128	18
7057G	35	16	128	18
7187G	38	12	96	18

USG PREMIER NUBBY™ ACOUSTICAL PANELS

7000G	35	32	128	14
7002G	35	24	96	14
7003G	35	12	96	14
7012G	37	24	96	14
7013G	37	12	96	14
7087G	68	8	80	14

USG RADAR™ BASIC ACOUSTICAL PANELS

2110	42	16	64	20
ME2110	42	16	62	16
2115	74	16	64	16
2120	46	16	64	16
ME2120	46	16	62	20
2125	74	16	64	16
2130	46	16	64	16
2135	74	16	64	16
2310	42	8	64	20

ACOUSTICAL PANEL PACKAGING DATA

**USG RADAR™ BASIC
ACOUSTICAL PANELS
CONT.**

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
ME2310	42	8	62	18
2315	74	8	64	18
2320	42	8	64	20
2617	43	8	67	16
2618	85	6	75	10
2619	53	8	80	20
2627	46	8	67	20
2742	46	6	48	20
2990	54	48	48	18
2991	56	40	40	18

**USG RADAR™ HIGH-NRC/
HIGH-CAC ACOUSTICAL
PANELS**

22111	58	12	48	20
22121	58	12	48	20
22122	58	6	48	20
22127	58	12	48	20
22310	75	8	64	18
22311	58	6	48	20
22350	49	12	48	20
22360	49	6	48	20
22370	49	12	48	20
22421	49	12	48	20
22441	49	6	48	20
22521	58	12	48	20
22523	58	12	48	20
22527	58	12	48	20
22541	58	6	48	20

**USG RADAR™ OPEN PLAN
ACOUSTICAL PANELS**

22320	58	12	48	16
22325	58	6	48	18
22330	58	12	48	16
22335	58	6	48	18
22340	58	12	48	16
22345	58	6	48	18

**USG RADAR™ CERAMIC
ACOUSTICAL PANELS**

56644	79	12	48	20
56645	79	6	48	20

**USG RADAR™
ACOUSTICAL PANELS**

2207	48	16	64	16
2210	46	16	64	20
2215	74	16	64	16
2220	48	16	64	20
ME2220	48	16	62	16
2225	74	16	64	18
2227	48	16	64	16
2230	46	16	64	20
2232	46	8	64	20
2235	74	16	64	16
2407	48	8	64	18
2410	46	8	64	20
ME2410	46	8	62	18
2410P	46	8	64	20

ACOUSTICAL PANEL PACKAGING DATA

USG RADAR™ ACOUSTICAL PANELS CONT.

Item Number	Wt./Ctn.	Pcs./Ctn.	Sq. Ft./Ctn.	Ctn./Pallet
2415	74	8	64	18
2420	46	8	64	18
2425	74	8	64	18
2570	57	48	48	18
2888	46	12	48	20
2890	46	6	48	20

USG RADAR™ ILLUSION™ ACOUSTICAL PANELS

2842	46	6	48	20
2844	46	6	48	20
2846	46	6	48	20
2852	46	6	48	20
2854	46	6	48	20
2862	46	6	48	20
2864	46	6	48	20
2882	46	6	48	20
2884	46	6	48	20

USG RADAR™ EDUCATION ACOUSTICAL PANELS

2207	48	16	64	16
2211	58	12	48	20
22121	58	12	48	20
22122	58	6	48	20
22127	58	12	48	20
2227	48	16	64	16
22350	49	12	48	16
22360	49	6	48	18
22370	49	12	48	16
22421	49	12	48	16
22441	49	6	48	18
22523	58	12	48	20
22541	58	6	48	20
2407	48	8	64	18

USG ROCK FACE® ACOUSTICAL PANELS

56335	82	12	48	20
56380	82	6	48	20
55483	71	12	48	20

USG SANDRIFT™ ACOUSTICAL PANELS

808	48	8	32	28
809	48	8	32	28
815	49	8	32	28

USG SHEETROCK® BRAND LAY-IN ACOUSTICAL CEILING PANELS

3200	67	4	32	32
3260	33	4	16	92
3270	67	4	32	46

USG KITCHEN LAY-IN PANEL

3210	45	16	64	20
3410	45	8	64	20

USG TOUCHSTONE™ ACOUSTICAL PANELS

5893	65	12	48	20
5894	65	6	48	20
5896	65	12	48	20
5899	65	12	48	20

SUSPENSION SYSTEM PACKAGING DATA

	Westlake & Cartersville						Stockton		
	Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
USG DX®/DXL™									
Main Tees									
DX/DXL24	20	240	60	30	7,200	1,950	30	7,200	1,950
DX/DXL24HRC	20	240	60	30	7,200	1,950	30	7,200	1,950
DX/DXL26	20	240	73	30	7,200	2,252	30	7,200	2,190
DX/DXL26HRC	20	240	73	60	7,200	1,140	30	7,200	2,190
Cross Tees									
DX/DXL216	60	120	19	60	7,200	1,178	60	7,200	1,140
DX/DXL216HRC	60	120	19	30	7,200	2,370	60	7,200	1,140
DX316	60	180	32	30	5,400	908	30	5,400	900
DX2016	60	100	17	60	6,000	960	60	6,000	2,280
DX3016	60	150	22	30	4,500	810	n/a	n/a	n/a
DXL324	60	180	50	30	5,400	1,388	30	5,400	1,500
DX416	60	240	43	30	7,200	1,178	30	7,200	1,290
DX426	60	240	73	30	7,200	1,950	30	7,200	2,370
DX422	60	240	45	30	7,200	1,208	60	14,400	2,640
DX422HRC	60	240	45	30	7,200	1,320	30	7,200	1,080
DX/DXL424	60	240	65	30	7,200	1,778	30	7,200	1,950
DX/DXL424HRC	60	240	65	30	7,200	1,950	30	7,200	1,920
DXL524	60	300	79	30	9,000	2,408	30	9,000	3,270
DX624	20	120	30	n/a	n/a	n/a	n/a	n/a	n/a
DX824	20	160	39	30	4,800	1,292	30	4,800	1,170
USG DXLA™									
Main Tees									
DXLA24	20	240	59	30	7,200	2,132	30	7,200	1,740
DXLA26	20	240	78	30	7,200	1,950	30	7,200	2,188
Cross Tees									
DXLA216	60	120	16	60	7,200	1,358	60	7,200	960
DXLA424	60	240	58	609	14,400	3,185	30	7,200	1,740
USG DXACE™									
Main Tees									
DXACE26	20	240	30	30	7,200	1,950	30	7,200	1,950
Cross Tees									
DXACE224	60	120	12	60	7,200	960	60	7,200	960
DXACE424	60	240	23	30	7,200	1,958	30	7,200	1,740
USG CENTRICITEE™ DXT™									
Main Tees									
DXT24	20	240	60	30	7,200	1,802	30	7,200	1,800
DXT24HRC	20	240	60	30	7,200	1,800	30	7,200	1,800
DXT24-10	20	200	50	30	6,000	1,500	30	6,000	n/a
DXT26	20	240	67	30	7,200	2,012	30	7,200	2,010
DXT26HRC	20	240	67	30	7,200	2,010	30	7,200	2,010
Cross Tees									
DXT122	60	60	12	n/a	n/a	n/a	n/a	n/a	n/a
DXT222	60	120	20	60	7,200	1,238	60	7,200	1,200
DXT222HRC	60	120	20	30	3,600	600	30	3,600	600
DXT422	60	240	37	30	7,200	1,118	30	7,200	1,110
DXT424	60	240	60	30	7,200	1,808	30	7,200	1,800
DXT424HRC	60	240	60	30	7,200	1,800	n/a	n/a	n/a

SUSPENSION SYSTEM PACKAGING DATA

USG CENTRICITEE™ DXT™ CONT.

	Westlake & Cartersville						Stockton		
	Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
Cross Tees									
DXT426	60	240	70	30	7,200	2,100	30	7,200	2,100
DXT524	60	300	75	n/a	n/a	n/a	n/a	n/a	n/a
DXT624	20	120	30	30	3,600	900	30	3,600	900
DXT824	20	160	40	30	4,800	1,200	30	4,800	1,200
DXLT24	20	240	60	30	7,200	1,802	24	7,200	2,208
DXLT222	60	120	20	60	7,200	1,238	30	3,600	600
DXLT424	60	240	60	30	7,200	1,808	30	7,200	1,800

USG FINELINE® DXF™/DXLF™

Main Tees									
DXF2930	20	200	52	n/a	n/a	n/a	n/a	n/a	n/a
DXF2924	20	240	62	30	7,200	1,890	30	7,200	1,980
DXF2924HRC	20	240	62	30	7,200	1,890	30	7,200	1,980
DXF2924-10	20	200	52	30	6,000	1,590	30	6,000	1,590
DXF2948	20	240	62	30	7,200	1,920	30	7,200	1,980
DXF2920	20	200	52	n/a	n/a	n/a	n/a	n/a	n/a
DXFH2924	20	240	71	30	7,200	2,190	30	7,200	2,310
DXLF2924	20	240	62	30	7,200	1,860	30	7,200	1,860

Cross Tees									
DXF129	50	50	14	120	6,000	1,838	120	6,000	1,800
DXF229	50	100	26	60	6,000	1,658	60	6,000	1,620
DXLF229	50	100	26	60	6,000	1,440	60	6,000	1,620
DXF229HRC	50	100	26	60	6,000	1,620	60	6,000	1,620
DXF30	50	125	32	60	7,500	2,078	60	7,500	2,040
DXF429	50	200	52	30	6,000	1,590	30	6,000	1,590
DXF429S	50	200	52	30	6,000	1,590	30	6,000	1,590
DXF429N	50	200	52	30	6,000	1,628	30	6,000	1,590
DXF429NHRC	50	200	52	30	6,000	1,590	30	6,000	1,590
DXLF429N	50	200	52	60	6,000	1,440	30	6,000	1,590
DXF529	50	250	65	30	7,500	2,018	30	7,500	1,980
DXF529N	50	200	52	30	7,500	1,980	30	7,500	1,980
DXF57	50	210	64	n/a	n/a	n/a	n/a	n/a	n/a
DXF629	20	120	34	75	9,000	2,550	75	9,000	2,550
DXF829	20	160	44	30	4,800	1,320	30	4,800	1,320

USG FINELINE® DXFEV™

Main Tees									
DXFEV2912	20	240	62	30	7,200	1,920	30	7,200	n/a
DXFEV2924	20	240	62	30	7,200	2,040	30	7,200	2,040
DXFEVH2912	20	240	62	30	7,200	2,310	30	7,200	2,310
DXFEVH2924	20	240	62	30	7,200	2,310	30	7,200	2,310
DXFEVH2930	20	240	62	30	7,200	2,310	30	7,200	2,310

Cross Tees									
DXFEV229	50	100	26	60	6,000	1,680	60	6,000	1,680
DXFEV429N	50	200	52	30	6,000	1,740	30	6,000	1,740
DXFEV629	20	120	34	75	9,000	2,550	75	9,000	n/a
DXFEV829	20	160	44	30	4,800	1,320	30	4,800	n/a

SUSPENSION SYSTEM PACKAGING DATA

USG FINELINE® 1/8 DXFF™

Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Westlake & Cartersville			Stockton			
			Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet	
Main Tees									
DXFF2924	20	240	68	30	7,200	1,950	30	7,200	1,950
DXFF2930	20	200	54	n/a	n/a	n/a	n/a	n/a	n/a
DXFF2948	20	240	68	30	7,200	1,980	30	7,200	1,980
DXFFH2924	20	240	72	30	7,200	2,220	30	7,200	2,220
Cross Tees									
DXFF129	50	50	14	120	6,000	1,598	120	6,000	1,560
DXFF229	50	100	27	60	6,000	1,718	60	6,000	1,680
DXFF429	50	200	54	30	6,000	1,650	30	6,000	1,590
DXFF429N	50	200	54	30	6,000	1,688	30	6,000	1,650
DXFF429S	50	200	54	30	6,000	1,650	30	6,000	1,590
DXFF529N	50	250	67	30	7,500	2,078	30	7,500	2,040

USG IDENTITEE® DXI™

Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Westlake & Cartersville			Stockton			
			Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet	
Main Tees									
DXI24HRC	20	240	60	18	4,320	1,184	30	7,200	1,920
DXI26HRC	20	240	60	18	4,320	1,346	30	7,200	2,190
Cross Tees									
DXIH120HRC	20	200	50	18	3,600	1,127	n/a	n/a	n/a
DXIH120/27HRC	20	200	50	18	3,600	1,127	n/a	n/a	n/a
DXIH2412/20HRC	20	200	50	n/a	n/a	n/a	n/a	n/a	n/a
DXIH96/21HRC	20	160	40	18	2,880	908	30	4,800	1,470
DXI124HRC	60	60	12	96	5,760	1,574	60	3,600	960
DXI2124HRC	60	105	18	48	5,040	1,372	n/a	n/a	n/a
DXI224HRC	60	120	20	48	5,760	1,574	60	7,200	1,920
DXI2724HRC	60	120	20	30	4,050	1,080	n/a	n/a	n/a
DXI3024HRC	60	150	30	32	4,800	1,318	n/a	n/a	n/a
DXI4224HRC	60	210	50	28	5,880	1,606	n/a	n/a	n/a
DXI424HRC	60	240	60	28	6,720	1,830	30	7,200	1,920
DXI5424HRC	60	270	68	28	7,560	2,054	n/a	n/a	n/a
DXI524HRC	60	300	75	28	8,400	2,278	30	9,000	2,400
DXI5724HRC	60	300	75	30	8,550	2,280	n/a	n/a	n/a
DXI624HRC	20	120	30	18	2,160	608	30	3,600	960
DXI824HRC	20	160	40	18	2,880	800	30	4,775	1,350

USG ZXLA™

Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Westlake & Cartersville			Stockton			
			Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet	
Main Tees									
ZXLA24	20	240	56	30	7,200	1,740	30	7,200	1,740
ZXLA26	20	240	74	30	7,200	2,040	30	7,200	2,040
Cross Tees									
ZXLA224	60	120	28	60	7,200	1,800	60	7,200	1,800
ZXLA424	60	240	56	30	7,200	1,740	30	7,200	1,740

USG AX™/AXCE™

Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Westlake & Cartersville			Stockton			
			Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet	
Main Tees									
AX26	20	240	30	20	4,800	600	20	4,800	600
AXCE26	20	240	30	20	4,800	600	20	4,800	600
Cross Tees									
AX224	60	120	12	120	14,400	1,440	120	14,400	1,440
AX424	60	240	23	60	14,400	1,440	60	14,400	1,440
AXCE224	60	120	12	120	14,400	1,440	120	14,400	1,440
AXCE424	60	240	23	60	14,400	1,440	60	14,400	1,440

SUSPENSION SYSTEM PACKAGING DATA

USG DXW™

DXW26

Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Westlake & Cartersville			Stockton		
			Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
Main Tees								
16	192	70	24	4,608	1,680	24	4,608	1,680
Cross Tees								
48	96	25	24	2,304	744	24	2,304	744
48	192	61	48	9,216	2,928	48	9,216	2,916

USG CE™

DXCE 24

DXCE 26

DXWCE 26

DXCE 224

DXCE 424

DXWCE 224

DXWCE 424

Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Westlake & Cartersville			Stockton		
			Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
Main Tees								
20	240	60	30	7,200	1,950	30	7,200	1,950
20	240	73	30	7,200	2,190	30	7,200	2,190
16	192	12	24	4,608	1,680	24	4,608	1,680
Cross Tees								
60	120	19	60	7,200	1,980	60	7,200	1,980
60	240	65	30	7,200	1,950	30	7,200	1,950
48	96	30	—	—	—	—	—	—
48	192	59	—	—	—	—	—	—

USG DXSS™

DXSS24

DXSS224

DXSS424

Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Westlake & Cartersville			Stockton		
			Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
Main Tees								
20	240	66	30	7,200	2,010	30	7,200	2,010
Cross Tees								
60	120	24	60	7,200	1,920	60	7,200	1,920
60	240	48	30	7,200	1,950	30	7,200	1,950

WALL MOLDING

M7

M7HRC

M7OL

M720

M7A

M7Z

M7-10

M9

M9HRC

M920

M9-10

M12

M18

MC11A25

M7CE

M7ACE

M20

M20SM

M20SM-2

40	480	63	40	19,200	2,520	40	19,200	2,320
40	480	63	40	19,200	2,520	40	19,200	2,520
40	480	64	40	19,200	2,560	40	19,200	2,560
20	240	31	40	19,200	2,520	40	19,200	2,320
40	480	26	40	19,200	1,040	40	19,200	1,040
40	480	58	40	19,200	2,520	40	19,200	2,600
40	400	26	40	16,000	1,920	40	16,000	1,920
40	480	55	40	19,200	2,200	40	19,200	2,000
40	480	55	42	20,160	1,302	42	20,160	1,302
20	240	27	40	19,200	2,200	40	19,200	2,000
40	400	23	40	16,000	1,840	40	16,000	1,840
25	250	63	40	9,600	1,600	40	9,600	1,600
20	240	33	—	—	—	—	—	—
25	250	39	—	—	—	—	—	—
20	240	40	—	—	—	—	—	—
20	240	40	—	—	—	—	—	—
25	250	25	—	—	—	—	—	—
25	250	80	—	—	—	—	—	—
20	200	80	—	—	—	—	—	—

SHADOW MOLDING

MS125

MS144

MS154

MS164

25	300	46	—	—	—	—	—	—
25	300	48	—	—	—	—	—	—
25	300	67	—	—	—	—	—	—
25	300	62	—	—	—	—	—	—

SUSPENSION SYSTEM PACKAGING DATA

SHADOW MOLDING CONT.

	Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Westlake & Cartersville			Stockton		
				Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
MS174	25	300	43	—	—	—	—	—	—
MS174HRC	25	300	43	—	—	—	—	—	—
MS274	20	200	54	—	—	—	—	—	—

CHANNEL MOLDING

US8	10	100	8	—	—	—	—	—	—
US12	50	500	44	—	—	—	—	—	—
US20	30	300	57	—	—	—	—	—	—
US28	30	300	63	—	—	—	—	—	—
US31	30	300	70	—	—	—	—	—	—
UA25	30	300	33	—	—	—	—	—	—
U-2-3/32	30	360	90	—	—	—	—	—	—
UA25CE	30	300	33	—	—	—	—	—	—
UA31	30	300	34	—	—	—	—	—	—
US28CE	30	300	63	—	—	—	—	—	—

TRANSITION MOLDING

CPDWA15120	12	120	41	—	—	—	—	—	—
CPDWA9120	12	120	39	—	—	—	—	—	—

F-MOLDING

MF8	10	100	28	—	—	—	—	—	—
MF10	10	100	29	—	—	—	—	—	—

USG DGLW DRYWALL SUSPENSION SYSTEM

	Pcs./Ctn.	LF/Ctn.	Wt./Ctn.	Ctns./Pallet	LF/Pallet	Wt./Pallet	Ctns./Pallet	LF/Pallet	Wt./Pallet
DGLW-26, 26E	16	192	68	24	4,608	1,512	24	4,608	1,512
Main Tees									
DGLW224	48	—	—	24	2,304	648	24	2,304	648
DGLW2624	48	—	—	24	2,472	720	24	2,472	720
DGLW424, 424E	48	—	—	24	4,608	1,344	24	4,608	1,320
DGLW50	48	—	—	24	4,800	1,368	24	4,800	1,368
DGLW624	24	—	—	—	—	—	—	—	—
Wall Molding									
CGWM24	20	—	—	—	—	—	—	—	—
DGCM27	30	—	—	17	6,120	1,479	17	6,120	1,479

ITEM NUMBER INDEX

Item Number	Pattern	Page Number
US20	1-1/4" x 1/2" x 1" U Molding	220
US28	1-11/16" x 1/2" x 1" U Molding	187, 220
US28CE	1-11/16" x 1/2" x 1" U Molding with Gasket	181, 189, 220
US31	1-15/16" x 1/2" x 1" U Molding	220
UA25	1-9/16" x 1/2" x 1" Aluminum U Wall Molding	179, 220
UA25CE	1-9/16" x 1/2" x 1" Aluminum U Wall Molding with Gasket	179
M12	1" x 1-1/2" Wall Molding	193, 220
M18	7/8" x 1-1/8" Wall Molding	220
MC11A25	1" x 1" Aluminum Cap Wall Molding	189, 220
M20SM	1" x 2" Heavy-Duty Wall Molding	185, 220
M20	1" x 2" Wall Molding	19, 185, 193, 220
MS174HRC	1" x 3/8" x 3/8" x 9/16" Shadow Molding High Recycled Content Steel	204
MS125	15/16" x 1/4" x 1/4" x 9/16" Shadow Molding	220
MS135	15/16" x 5/16" x 5/16" x 9/16" Shadow Molding	230
U-2-3/32	2-3/32" x 7/8" x 1-1/8" Aluminum U Molding	220
M20SM-2	2" x 2" Heavy-Duty Wall Molding	185, 220
US12	3/4" x 1/2" x 1" U Molding	220
MS164	3/4" x 3/4" x 3/4" x 3/4" Shadow Molding	220
MS144	3/4" x 3/8" x 1/2" x 3/4" Shadow Molding	220
MS274	7/8" x 3/4" x 1/4" x 1-1/4" Seismic Shadow Molding	183, 185, 196, 220
MS154	7/8" x 3/4" x 3/4" x 7/8" Shadow Molding	220
MS174	7/8" x 3/8" x 3/8" x 9/16" Shadow Molding	183, 196, 199, 204, 220
M7A	7/8" x 7/8" Aluminum Wall Molding	179, 189, 220
M7ACE	7/8" x 7/8" Aluminum Wall Molding with Gasket	179, 189
M7Z	7/8" x 7/8" G60 Galvanized Steel Wall Molding	189, 209, 220
M7OL	7/8" x 7/8" Overlapping Wall Molding	220
M7	7/8" x 7/8" Wall Molding	19, 185, 193, 196, 204, 217, 220
M7-10	7/8" x 7/8" Wall Molding	220
M7SS	7/8" x 7/8" Stainless Steel Wall Molding	191, 220
M7HRC	7/8" x 7/8" Wall Molding High Recycled Content Steel	185, 204
M7CE	7/8" x 7/8" Wall Molding with Gasket	181, 220
M9	9/16" x 15/16" Wall Molding	183, 196, 199, 204, 220
M9-10	9/16" x 15/16" Wall Molding	220
M9HRC	9/16" x 15/16" Wall Molding High Recycled Content Steel	183, 204
MF8	F-Molding (for 1/2" panels)	220
MF10	F-Molding (for 5/8" panels)	220
131	USG "F" Fissured™ Basic Acoustical Panels	71
132	USG "F" Fissured™ Basic Acoustical Panels	71
133	USG "F" Fissured™ Basic Acoustical Panels	71
135	USG "F" Fissured™ Basic Acoustical Panels	71
136	USG "F" Fissured™ Basic Acoustical Panels	71
101	USG "F" Fissured™ Basic Acoustical Tile	71

Item Number	Pattern	Page Number
102	USG "F" Fissured™ Basic Acoustical Tile	71
650	USG Aspen™ Basic Acoustical Panels	61
651	USG Aspen™ Basic Acoustical Panels	61
652	USG Aspen™ Basic Illusion™ Two/24 Acoustical Panels	61
8742	USG Astro™ Illusion™ Two/24 Acoustical Panels	63
8744	USG Astro™ Illusion™ Two/24 Acoustical Panels	63
8122	USG Astro® Acoustical Panels	63
8221	USG Astro® Acoustical Panels	63
8223	USG Astro® Acoustical Panels	63
8227	USG Astro® Acoustical Panels	63
8241	USG Astro® Acoustical Panels	63
8243	USG Astro® Acoustical Panels	63
8247	USG Astro® Acoustical Panels	63
8322	USG Astro® Acoustical Panels	63
8722	USG Astro® Acoustical Panels	63
56091	USG Clean Room™ Class 100 (ISO 5) Acoustical Panels	65
56099	USG Clean Room™ Class 100 (ISO 5) Acoustical Panels	65
56060	USG Clean Room™ Class 10m-100M (ISO 7) Acoustical Panels	65
56090	USG Clean Room™ Class 10m-100M (ISO 7) Acoustical Panels	65
DXFF129	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	199
DXFF229	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	199
DXFF429	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	199
DXFF429N	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	199
DXFF429S	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	199
DXFF529N	USG Donn® Brand 1/8" DXFF™ - 9/16" Cross Tee	199
DXFF2924	USG Donn® Brand 1/8" DXFF™ - 9/16" Main Tee	199
DXFF2930	USG Donn® Brand 1/8" DXFF™ - 9/16" Main Tee	199
DXFF2948	USG Donn® Brand 1/8" DXFF™ - 9/16" Main Tee	199
DXFFH2924	USG Donn® Brand 1/8" DXFF™ - 9/16" Main Tee	199
AXCE224	USG Donn® Brand AXCE™ - 15/16" Cross Tee	179
AXCE26	USG Donn® Brand AX™	179
AXCE424	USG Donn® Brand AX™	179
AX224	USG Donn® Brand AX™ - 15/16" Cross Tee	179
AX424	USG Donn® Brand AX™ - 15/16" Cross Tee	179
AX26	USG Donn® Brand AX™ - 15/16" Main Tee	179
DXLT222	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	183
DXLT424	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	183
DXT122	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	183
DXT222	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	167, 183
DXT222HRC	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	183
DXT422	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	183
DXT424	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	167, 183
DXT424HRC	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	183
DXT524	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	167, 183
DXT624	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	167, 183

ITEM NUMBER INDEX

Item Number	Pattern	Page Number
DXT824	USG Donn® Brand Centricitee™ DXT™ - 9/16" Cross Tee	167, 183
DXLT24	USG Donn® Brand Centricitee™ DXT™ - 9/16" Main Tee	183
DXT24	USG Donn® Brand Centricitee™ DXT™ - 9/16" Main Tee	167, 183
DXT24-10	USG Donn® Brand Centricitee™ DXT™ - 9/16" Main Tee	183
DXT24HRC	USG Donn® Brand Centricitee™ DXT™ - 9/16" Main Tee	183
DXT26	USG Donn® Brand Centricitee™ DXT™ - 9/16" Main Tee	183
DXT26HRC	USG Donn® Brand Centricitee™ DXT™ - 9/16" Main Tee	183
DX/DXL24	USG Donn® Brand DX® - 15/16 Main Tee	19, 167, 185, 187
DX2016	USG Donn® Brand DX® - 15/16" Cross Tee	185
DX3016	USG Donn® Brand DX® - 15/16" Cross Tee	167, 185
DX416	USG Donn® Brand DX® - 15/16" Cross Tee	185
DX422	USG Donn® Brand DX® - 15/16" Cross Tee	167, 185
DX422HRC	USG Donn® Brand DX® - 15/16" Cross Tee	185
DX624	USG Donn® Brand DX® - 15/16" Cross Tee	167, 185
DX824	USG Donn® Brand DX® - 15/16" Cross Tee	167, 185
DX/DXL24HRC	USG Donn® Brand DX® - HRC 15/16 Main Tee	185
DX/DXL216HRC	USG Donn® Brand DX®/DXL™ - 15/16" Cross Tee	185
DX/DXL424	USG Donn® Brand DX®/DXL™ - 15/16" Cross Tee	31, 185, 187
DX/DXL424HRC	USG Donn® Brand DX®/DXL™ - 15/16" Cross Tee	185
DX/DXL216	USG Donn® Brand DX®/DXL™ - 15/16" Main Tee	185
DX/DXL26	USG Donn® Brand DX®/DXL™ - 15/16" Main Tee	19, 31, 185, 187
DX/DXL26HRC	USG Donn® Brand DX®/DXL™ - 15/16" Main Tee	185
DX/DXL24	USG Donn® Brand DX®/DXL™ Concealed - 15/16" Main Tee	19, 167, 185, 187
DX/DXL26	USG Donn® Brand DX®/DXL™ Concealed - 15/16" Main Tee	19, 31, 185, 187
DXACE224	USG Donn® Brand DXACE™ - 15/16" Cross Tee	189
DXACE424	USG Donn® Brand DXACE™ - 15/16" Cross Tee	189
DXACE26	USG Donn® Brand DXACE™ - 15/16" Main Tee	189
DXLA216	USG Donn® Brand DXLA™ - 15/16" Cross Tee	189
DXLA424	USG Donn® Brand DXLA™ - 15/16" Cross Tee	189
DXLA26	USG Donn® Brand DXLA™ - 15/16" Main Tee	189
DXLA24	USG Donn® Brand DXLA™ - 15/16" Main Tee	189
DXSS224	USG Donn® Brand DXSS™ - 15/16" Cross Tee	191
DXSS424	USG Donn® Brand DXSS™ - 15/16" Cross Tee	191
DXSS24	USG Donn® Brand DXSS™ - 15/16" Main Tee	191
DXW224	USG Donn® Brand DXW™ - 1-1/2" Cross Tee	193
DXW424	USG Donn® Brand DXW™ - 1-1/2" Cross Tee	193
DXW26	USG Donn® Brand DXW™ - 1-1/2" Main Tee	193
DXFEV229	USG Donn® Brand Finline® DXFEV™ - 9/16" Cross Tee	201
DXFEV429N	USG Donn® Brand Finline® DXFEV™ - 9/16" Cross Tee	201
DXFEV629	USG Donn® Brand Finline® DXFEV™ - 9/16" Cross Tee	201
DXFEV829	USG Donn® Brand Finline® DXFEV™ - 9/16" Cross Tee	201
DXFEV2912	USG Donn® Brand Finline® DXFEV™ - 9/16" Main Tee	201
DXFEV2924	USG Donn® Brand Finline® DXFEV™ - 9/16" Main Tee	201
DXFEVH2912	USG Donn® Brand Finline® DXFEV™ - 9/16" Main Tee	201

Item Number	Pattern	Page Number
DXFEVH2924	USG Donn® Brand Finline® DXFEV™ - 9/16" Main Tee	201
DXF129	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF229	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF229HRC	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF30	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF429	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF429N	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF429NHRC	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF429S	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF529	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF529N	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF57	USG Donn® Brand Finline® DXF™ - 9/16" Cross Tee	195
DXF2920	USG Donn® Brand Finline® DXF™ - 9/16" Main Tee	195
DXF2924	USG Donn® Brand Finline® DXF™ - 9/16" Main Tee	195
DXF2924-10	USG Donn® Brand Finline® DXF™ - 9/16" Main Tee	195
DXF2924HRC	USG Donn® Brand Finline® DXF™ - 9/16" Main Tee	195
DXF2930	USG Donn® Brand Finline® DXF™ - 9/16" Main Tee	195
DXF2948	USG Donn® Brand Finline® DXF™ - 9/16" Main Tee	195
DXFH2924	USG Donn® Brand Finline® DXF™ - 9/16" Main Tee	195
DXLF229	USG Donn® Brand Finline® DXLF™ - 9/16" Cross Tee	195
DXLF429N	USG Donn® Brand Finline® DXLF™ - 9/16" Cross Tee	195
DXLF2924	USG Donn® Brand Finline® DXLF™ - 9/16" Main Tee	195
DXI224HRC	USG Donn® Brand Identitee® DXI™ - 9/16" Cross Tee	203
DXI424HRC	USG Donn® Brand Identitee® DXI™ - 9/16" Cross Tee	203
DXI524HRC	USG Donn® Brand Identitee® DXI™ - 9/16" Cross Tee	203
DXI24HRC	USG Donn® Brand Identitee® DXI™ - 9/16" Main Tee	203
DXI26HRC	USG Donn® Brand Identitee® DXI™ - 9/16" Main Tee	203
CPDWA15120	USG Donn® Brand SL DX® Transition Molding	219
CPDWA9120	USG Donn® Brand SL DXT® Transition Molding	219
ZXLA424	USG Donn® Brand ZXLA™ - 15/16" Cross Tee	209
ZXLA224	USG Donn® Brand ZXLA™ - 15/16" Cross Tee	209
ZXLA24	USG Donn® Brand ZXLA™ - 15/16" Main Tee	209
ZXLA26	USG Donn® Brand ZXLA™ - 15/16" Main Tee	209
DGLW224	USG Drywall Suspension System - DGLW Cross Tee	213
DGCM27	USG Drywall Suspension System - DGLW Molding	213, 215
DGLW2624	USG Drywall Suspension System - DGLW Cross Tee	213
DGLW424, 424E	USG Drywall Suspension System - DGLW Cross Tee	213
DGLW50	USG Drywall Suspension System - DGLW Cross Tee	213
DGLW624	USG Drywall Suspension System - DGLW Cross Tee	213
78011	USG Eclipse™ Illusion™ Four/48 Acoustical Panels	69
78711	USG Eclipse™ Illusion™ Four/48 Acoustical Panels	69
78085	USG Eclipse™ Illusion™ Two/24 Acoustical Panels	69
78785	USG Eclipse™ Illusion™ Two/24 Acoustical Panels	69
72015	USG Eclipse™ Pedestals™ I Acoustical Panels	69
72715	USG Eclipse™ Pedestals™ I Acoustical Panels	69
72215	USG Eclipse™ Pedestals™ IV Acoustical Panels	69

ITEM NUMBER INDEX

Item Number	Pattern	Page Number
72716	USG Eclipse™ Pedestals™ IV Acoustical Panels	69
76575	USG Eclipse™ Acoustical Panels	67
76775	USG Eclipse™ Acoustical Panels	67
76779	USG Eclipse™ Acoustical Panels	67
76975	USG Eclipse™ Acoustical Panels	67
76979	USG Eclipse™ Acoustical Panels	67
78575	USG Eclipse™ Acoustical Panels	67
78775	USG Eclipse™ Acoustical Panels	67
78975	USG Eclipse™ Acoustical Panels	67
ME76775	USG Eclipse™ Acoustical Panels	67
ME76975	USG Eclipse™ Acoustical Panels	67
70073	USG Eclipse™ Acoustical Tile	67
76520	USG Eclipse™ High-NRC Acoustical Panels	67
76521	USG Eclipse™ High-NRC Acoustical Panels	67
76522	USG Eclipse™ High-NRC Acoustical Panels	67
76523	USG Eclipse™ High-NRC Acoustical Panels	67
76524	USG Eclipse™ High-NRC Acoustical Panels	67
76525	USG Eclipse™ High-NRC Acoustical Panels	67
76575HRC	USG Eclipse™ HRC Acoustical Panels	67
76775HRC	USG Eclipse™ HRC Acoustical Panels	67
76975HRC	USG Eclipse™ HRC Acoustical Panels	67
78575HRC	USG Eclipse™ HRC Acoustical Panels	67
78775HRC	USG Eclipse™ HRC Acoustical Panels	67
78975HRC	USG Eclipse™ HRC Acoustical Panels	67
506	USG Fissured™ Basic Acoustical Panels	73
507	USG Fissured™ Basic Acoustical Panels	73
560	USG Fissured™ Basic Acoustical Panels	73
562	USG Fissured™ Basic Acoustical Panels	73
585	USG Fissured™ Basic Acoustical Panels	73
586	USG Fissured™ Basic Acoustical Panels	73
414	USG Frost™ Acoustical Panels	77
418	USG Frost™ Acoustical Panels	77
419	USG Frost™ Acoustical Panels	77
415	USG Frost™ Basic Acoustical Panels	75
440	USG Frost™ Basic Acoustical Panels	75
450	USG Frost™ Basic Acoustical Panels	75
460	USG Frost™ Basic Acoustical Panels	75
490	USG Frost™ High-LR Acoustical Panels	77
491	USG Frost™ High-LR Acoustical Panels	77
484	USG Frost™ High-NRC/High-CAC Acoustical Panels	77
488	USG Frost™ High-NRC/High-CAC Acoustical Panels	77
489	USG Frost™ High-NRC/High-CAC Acoustical Panels	77
707	USG Glacier™ Basic Acoustical Panels	79
708	USG Glacier™ Basic Acoustical Panels	79
711	USG Glacier™ Basic Acoustical Panels	79
715	USG Glacier™ Basic Acoustical Panels	79

Item Number	Pattern	Page Number
701	USG Glacier™ Basic Acoustical Tile	79
97266	USG Halcyon™ Acoustical Panels	81, 149
97356	USG Halcyon™ Acoustical Panels	81
97357	USG Halcyon™ Acoustical Panels	82
97358	USG Halcyon™ Acoustical Panels	82
97359	USG Halcyon™ Acoustical Panels	83
97368	USG Halcyon™ Acoustical Panels	83
98336	USG Halcyon™ Acoustical Panels	83, 151
99270	USG Halcyon™ Acoustical Panels	82, 150
88221	USG Halcyon™ Acoustical Panels	81
88223	USG Halcyon™ Acoustical Panels	81
88224	USG Halcyon™ Acoustical Panels	81
88225	USG Halcyon™ Acoustical Panels	82
88226	USG Halcyon™ Acoustical Panels	82
88227	USG Halcyon™ Acoustical Panels	83
97221	USG Halcyon™ Acoustical Panels	81
97241	USG Halcyon™ Acoustical Panels	81
98221	USG Halcyon™ Acoustical Panels	81, 149
98223	USG Halcyon™ Acoustical Panels	82, 150
98225	USG Halcyon™ Acoustical Panels	83, 151
98241	USG Halcyon™ Acoustical Panels	81, 149
98243	USG Halcyon™ Acoustical Panels	82, 150
98245	USG Halcyon™ Acoustical Panels	83, 151
98331	USG Halcyon™ Acoustical Panels	81, 149
98333	USG Halcyon™ Acoustical Panels	82, 150
98335	USG Halcyon™ Acoustical Panels	83, 151
99221	USG Halcyon™ Acoustical Panels	81
99223	USG Halcyon™ Acoustical Panels	82
99225	USG Halcyon™ Acoustical Panels	83
99241	USG Halcyon™ Acoustical Panels	81
99131	USG Halcyon™ Canopies	89
99132	USG Halcyon™ Canopies	89
99133	USG Halcyon™ Canopies	89
99134	USG Halcyon™ Canopies	89
99135	USG Halcyon™ Canopies	89
99136	USG Halcyon™ Canopies	89
99137	USG Halcyon™ Canopies	89
99138	USG Halcyon™ Canopies	89
99139	USG Halcyon™ Canopies	89
99140	USG Halcyon™ Canopies	89
99150	USG Halcyon™ Canopies	89
99151	USG Halcyon™ Canopies	89
99152	USG Halcyon™ Canopies	89
99153	USG Halcyon™ Canopies	89
99154	USG Halcyon™ Canopies	89
99155	USG Halcyon™ Canopies	89

ITEM NUMBER INDEX

Item Number	Pattern	Page Number
99156	USG Halcyon™ Canopies	89
99157	USG Halcyon™ Canopies	89
99158	USG Halcyon™ Canopies	89
99159	USG Halcyon™ Canopies	89
99160	USG Halcyon™ Canopies	89
HCA522	USG Halcyon™ Canopies	89
98217	USG Halcyon™ Healthcare Acoustical Panels	85
98218	USG Halcyon™ Healthcare Acoustical Panels	85
98232	USG Halcyon™ Healthcare Acoustical Panels	85
98233	USG Halcyon™ Healthcare Acoustical Panels	85
98234	USG Halcyon™ Healthcare Acoustical Panels	85
98235	USG Halcyon™ Healthcare Acoustical Panels	85
98236	USG Halcyon™ Healthcare Acoustical Panels	85
98237	USG Halcyon™ Healthcare Acoustical Panels	85
98238	USG Halcyon™ Healthcare Acoustical Panels	85
98239	USG Halcyon™ Healthcare Acoustical Panels	85
97363	USG Halcyon™ Large Size Acoustical Panels	87
97364	USG Halcyon™ Large Size Acoustical Panels	87
97365	USG Halcyon™ Large Size Acoustical Panels	87
97366	USG Halcyon™ Large Size Acoustical Panels	87
98441	USG Halcyon™ Large Size Acoustical Panels	87, 149
98443	USG Halcyon™ Large Size Acoustical Panels	87, 150
98445	USG Halcyon™ Large Size Acoustical Panels	87, 151
98481	USG Halcyon™ Large Size Acoustical Panels	87, 149
98131	USG Halcyon™ Logix™ Channel Panels	151
98191	USG Halcyon™ Logix™ Channel Panels	151
98216	USG Halcyon™ Logix™ Channel Panels	151
99197	USG Halcyon™ Logix™ Channel Panels	151
99263	USG Halcyon™ Logix™ Channel Panels	150
99265	USG Halcyon™ Logix™ Channel Panels	151
97227	USG Halcyon™ Logix™ Channel Panels	149
97228	USG Halcyon™ Logix™ Channel Panels	149
97402	USG Halcyon™ Logix™ Channel Panels	149
97403	USG Halcyon™ Logix™ Channel Panels	149
97404	USG Halcyon™ Logix™ Channel Panels	149
97405	USG Halcyon™ Logix™ Channel Panels	149
97406	USG Halcyon™ Logix™ Channel Panels	149
97430	USG Halcyon™ Logix™ Channel Panels	150
97431	USG Halcyon™ Logix™ Channel Panels	150
97432	USG Halcyon™ Logix™ Channel Panels	150
97433	USG Halcyon™ Logix™ Channel Panels	150
97434	USG Halcyon™ Logix™ Channel Panels	150
97435	USG Halcyon™ Logix™ Channel Panels	150
97460	USG Halcyon™ Logix™ Channel Panels	151
97461	USG Halcyon™ Logix™ Channel Panels	151
97462	USG Halcyon™ Logix™ Channel Panels	151

Item Number	Pattern	Page Number
97463	USG Halcyon™ Logix™ Channel Panels	151
97491	USG Halcyon™ Logix™ Channel Panels	149
97492	USG Halcyon™ Logix™ Channel Panels	149
97571	USG Halcyon™ Logix™ Channel Panels	150
97574	USG Halcyon™ Logix™ Channel Panels	151
97576	USG Halcyon™ Logix™ Channel Panels	151
98192	USG Halcyon™ Logix™ Channel Panels	151
98198	USG Halcyon™ Logix™ Channel Panels	151
98199	USG Halcyon™ Logix™ Channel Panels	151
99271	USG Halcyon™ Logix™ Channel Panels	150
99272	USG Halcyon™ Logix™ Channel Panels	150
96271	USG Halcyon™ Logix™ Field Panels	151
97266	USG Halcyon™ Logix™ Field Panels	81, 149
97277	USG Halcyon™ Logix™ Field Panels	149
97333	USG Halcyon™ Logix™ Field Panels	151
97335	USG Halcyon™ Logix™ Field Panels	151
97407	USG Halcyon™ Logix™ Field Panels	149
97408	USG Halcyon™ Logix™ Field Panels	149
97411	USG Halcyon™ Logix™ Field Panels	149
97412	USG Halcyon™ Logix™ Field Panels	149
97413	USG Halcyon™ Logix™ Field Panels	148
97414	USG Halcyon™ Logix™ Field Panels	149
97416	USG Halcyon™ Logix™ Field Panels	149
97417	USG Halcyon™ Logix™ Field Panels	149
97418	USG Halcyon™ Logix™ Field Panels	149
97419	USG Halcyon™ Logix™ Field Panels	149
97420	USG Halcyon™ Logix™ Field Panels	149
97422	USG Halcyon™ Logix™ Field Panels	149
97423	USG Halcyon™ Logix™ Field Panels	149
97424	USG Halcyon™ Logix™ Field Panels	149
97425	USG Halcyon™ Logix™ Field Panels	149
97426	USG Halcyon™ Logix™ Field Panels	149
97427	USG Halcyon™ Logix™ Field Panels	149
97428	USG Halcyon™ Logix™ Field Panels	149
97436	USG Halcyon™ Logix™ Field Panels	149
97437	USG Halcyon™ Logix™ Field Panels	149
97439	USG Halcyon™ Logix™ Field Panels	150
97440	USG Halcyon™ Logix™ Field Panels	150
97441	USG Halcyon™ Logix™ Field Panels	150
97443	USG Halcyon™ Logix™ Field Panels	150
97444	USG Halcyon™ Logix™ Field Panels	150
97446	USG Halcyon™ Logix™ Field Panels	150
97447	USG Halcyon™ Logix™ Field Panels	150
97448	USG Halcyon™ Logix™ Field Panels	150
97449	USG Halcyon™ Logix™ Field Panels	150
97450	USG Halcyon™ Logix™ Field Panels	150

ITEM NUMBER INDEX

Item Number	Pattern	Page Number
97453	USG Halcyon™ Logix™ Field Panels	150
97454	USG Halcyon™ Logix™ Field Panels	150
97455	USG Halcyon™ Logix™ Field Panels	150
97456	USG Halcyon™ Logix™ Field Panels	150
97457	USG Halcyon™ Logix™ Field Panels	150
97458	USG Halcyon™ Logix™ Field Panels	150
97464	USG Halcyon™ Logix™ Field Panels	150
97466	USG Halcyon™ Logix™ Field Panels	150
97467	USG Halcyon™ Logix™ Field Panels	151
97468	USG Halcyon™ Logix™ Field Panels	151
97470	USG Halcyon™ Logix™ Field Panels	151
97473	USG Halcyon™ Logix™ Field Panels	151
97475	USG Halcyon™ Logix™ Field Panels	151
97476	USG Halcyon™ Logix™ Field Panels	151
97477	USG Halcyon™ Logix™ Field Panels	151
98194	USG Halcyon™ Logix™ Field Panels	150
98195	USG Halcyon™ Logix™ Field Panels	150
98196	USG Halcyon™ Logix™ Field Panels	151
98197	USG Halcyon™ Logix™ Field Panels	87, 151
98220	USG Halcyon™ Logix™ Field Panels	150
98223	USG Halcyon™ Logix™ Field Panels	82, 150
98225	USG Halcyon™ Logix™ Field Panels	83, 151
98243	USG Halcyon™ Logix™ Field Panels	82, 150
98245	USG Halcyon™ Logix™ Field Panels	83, 151
98333	USG Halcyon™ Logix™ Field Panels	82, 150
98335	USG Halcyon™ Logix™ Field Panels	83, 151
98336	USG Halcyon™ Logix™ Field Panels	83, 151
98337	USG Halcyon™ Logix™ Field Panels	150
98341	USG Halcyon™ Logix™ Field Panels	151
98343	USG Halcyon™ Logix™ Field Panels	151
98344	USG Halcyon™ Logix™ Field Panels	151
98348	USG Halcyon™ Logix™ Field Panels	87, 151
98359	USG Halcyon™ Logix™ Field Panels	151
98360	USG Halcyon™ Logix™ Field Panels	150
98440	USG Halcyon™ Logix™ Field Panels	151
98443	USG Halcyon™ Logix™ Field Panels	87, 150
98445	USG Halcyon™ Logix™ Field Panels	87, 151
98483	USG Halcyon™ Logix™ Field Panels	150
99213	USG Halcyon™ Logix™ Field Panels	151
99267	USG Halcyon™ Logix™ Field Panels	149
99268	USG Halcyon™ Logix™ Field Panels	87, 150
99269	USG Halcyon™ Logix™ Field Panels	87, 150
99270	USG Halcyon™ Logix™ Field Panels	82, 150
97360	USG Halcyon™ Planks Acoustical Panels	87
97361	USG Halcyon™ Planks Acoustical Panels	87
97362	USG Halcyon™ Planks Acoustical Panels	87

Item Number	Pattern	Page Number
97367	USG Halcyon™ Planks Acoustical Panels	87
99282	USG Halcyon™ Planks Acoustical Panels	87
97262	USG Halcyon™ Planks Acoustical Panels	87
97263	USG Halcyon™ Planks Acoustical Panels	87
98197	USG Halcyon™ Planks Acoustical Panels	87, 151
98348	USG Halcyon™ Planks Acoustical Panels	87, 151
99268	USG Halcyon™ Planks Acoustical Panels	87, 150
99269	USG Halcyon™ Planks Acoustical Panels	87, 150
86785	USG Mars™ Acoustical Panels	91, 154
86785HRC	USG Mars™ Acoustical Panels	91, 154
86830	USG Mars™ Acoustical Panels	91, 155
86875	USG Mars™ Acoustical Panels	91, 154
86985	USG Mars™ Acoustical Panels	91, 155
88185	USG Mars™ Acoustical Panels	91, 153
88785	USG Mars™ Acoustical Panels	91, 154
88985	USG Mars™ Acoustical Panels	91, 155
86185	USG Mars™ Acoustical Panels/USG Mars™ Logix™ Field Panels	91, 153
86169CR	USG Mars™ Clean Room Acoustical Panels	94
88189CR	USG Mars™ Clean Room Acoustical Panels	94
86684CR	USG Mars™ Clean Room Acoustical Panels	94
88684CR	USG Mars™ Clean Room Acoustical Panels	94
86169	USG Mars™ Healthcare Acoustical Panels 75/35	93
86684	USG Mars™ Healthcare Acoustical Panels 75/35	93
86984	USG Mars™ Healthcare Acoustical Panels 75/35	93
88189	USG Mars™ Healthcare Acoustical Panels 75/35	93
88683	USG Mars™ Healthcare Acoustical Panels 75/35	93
88983	USG Mars™ Healthcare Acoustical Panels 75/35	93
86169AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
86684AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
86984AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
88189AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
88683AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
88983AIR	USG Mars™ Healthcare Acoustical Panels with Aircare™ Coating	94
86270	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
86272	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
86273	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
88271	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
88273	USG Mars™ Healthcare High-CAC Acoustical Panels 60/40	93
86152	USG Mars™ Healthcare High-NRC Acoustical Panels 80/35	93

ITEM NUMBER INDEX

Item Number	Pattern	Page Number
86518	USG Mars™ Logix™ Channel Panels 75/35	153
86537	USG Mars™ Logix™ Channel Panels 75/35	153
86538	USG Mars™ Logix™ Channel Panels 75/35	153
86540	USG Mars™ Logix™ Channel Panels 75/35	154
86541	USG Mars™ Logix™ Channel Panels 75/35	154
86542	USG Mars™ Logix™ Channel Panels 75/35	154
86543	USG Mars™ Logix™ Channel Panels 75/35	154
86544	USG Mars™ Logix™ Channel Panels 75/35	154
86545	USG Mars™ Logix™ Channel Panels 75/35	154
86546	USG Mars™ Logix™ Channel Panels 75/35	154
86565	USG Mars™ Logix™ Channel Panels 75/35	154
86566	USG Mars™ Logix™ Channel Panels 75/35	154
86567	USG Mars™ Logix™ Channel Panels 75/35	155
86568	USG Mars™ Logix™ Channel Panels 75/35	155
86569	USG Mars™ Logix™ Channel Panels 75/35	155
86570	USG Mars™ Logix™ Channel Panels 75/35	155
86584	USG Mars™ Logix™ Channel Panels 75/35	155
86850	USG Mars™ Logix™ Channel Panels 75/35	155
88885	USG Mars™ Logix™ Channel Panels 75/35	155
88887	USG Mars™ Logix™ Channel Panels 75/35	155
86160	USG Mars™ Logix™ Field Panels 75/35	153
86164	USG Mars™ Logix™ Field Panels 75/35	155
86166	USG Mars™ Logix™ Field Panels 75/35	101, 154
86185	USG Mars™ Logix™ Field Panels 75/35	91, 153
86223	USG Mars™ Logix™ Field Panels 75/35	101, 153
86267	USG Mars™ Logix™ Field Panels 75/35	155
86503	USG Mars™ Logix™ Field Panels 75/35	153
86519	USG Mars™ Logix™ Field Panels 75/35	153
86520	USG Mars™ Logix™ Field Panels 75/35	153
86522	USG Mars™ Logix™ Field Panels 75/35	153
86523	USG Mars™ Logix™ Field Panels 75/35	153
86524	USG Mars™ Logix™ Field Panels 75/35	153
86525	USG Mars™ Logix™ Field Panels 75/35	153
86527	USG Mars™ Logix™ Field Panels 75/35	153
86528	USG Mars™ Logix™ Field Panels 75/35	153
86530	USG Mars™ Logix™ Field Panels 75/35	153
86531	USG Mars™ Logix™ Field Panels 75/35	153
86532	USG Mars™ Logix™ Field Panels 75/35	153
86533	USG Mars™ Logix™ Field Panels 75/35	153
86535	USG Mars™ Logix™ Field Panels 75/35	153
86536	USG Mars™ Logix™ Field Panels 75/35	153
86547	USG Mars™ Logix™ Field Panels 75/35	154
86548	USG Mars™ Logix™ Field Panels 75/35	154
86550	USG Mars™ Logix™ Field Panels 75/35	154
86551	USG Mars™ Logix™ Field Panels 75/35	154
86552	USG Mars™ Logix™ Field Panels 75/35	154

Item Number	Pattern	Page Number
86553	USG Mars™ Logix™ Field Panels 75/35	154
86555	USG Mars™ Logix™ Field Panels 75/35	154
86556	USG Mars™ Logix™ Field Panels 75/35	154
86557	USG Mars™ Logix™ Field Panels 75/35	154
86558	USG Mars™ Logix™ Field Panels 75/35	154
86559	USG Mars™ Logix™ Field Panels 75/35	154
86560	USG Mars™ Logix™ Field Panels 75/35	154
86563	USG Mars™ Logix™ Field Panels 75/35	154
86564	USG Mars™ Logix™ Field Panels 75/35	154
86571	USG Mars™ Logix™ Field Panels 75/35	155
86573	USG Mars™ Logix™ Field Panels 75/35	155
86574	USG Mars™ Logix™ Field Panels 75/35	155
86575	USG Mars™ Logix™ Field Panels 75/35	155
86577	USG Mars™ Logix™ Field Panels 75/35	155
86578	USG Mars™ Logix™ Field Panels 75/35	155
86579	USG Mars™ Logix™ Field Panels 75/35	155
86580	USG Mars™ Logix™ Field Panels 75/35	155
86583	USG Mars™ Logix™ Field Panels 75/35	155
86785	USG Mars™ Logix™ Field Panels 75/35	91, 154
86815	USG Mars™ Logix™ Field Panels 75/35	153
86830	USG Mars™ Logix™ Field Panels 75/35	91, 155
86831	USG Mars™ Logix™ Field Panels 75/35	155
86834	USG Mars™ Logix™ Field Panels 75/35	155
86835	USG Mars™ Logix™ Field Panels 75/35	155
86875	USG Mars™ Logix™ Field Panels 75/35	91, 154
86905	USG Mars™ Logix™ Field Panels 75/35	154
86985	USG Mars™ Logix™ Field Panels 75/35	91, 155
88185	USG Mars™ Logix™ Field Panels 75/35	91, 153
88686	USG Mars™ Logix™ Field Panels 75/35	154
88785	USG Mars™ Logix™ Field Panels 75/35	91, 154
88840	USG Mars™ Logix™ Field Panels 75/35	155
88845	USG Mars™ Logix™ Field Panels 75/35	155
88985	USG Mars™ Logix™ Field Panels 75/35	91, 155
88996	USG Mars™ Logix™ Field Panels 75/35	101, 155
86161	USG Mars™ Planks	101
86166	USG Mars™ Planks	101, 154
86221	USG Mars™ Planks	101
86223	USG Mars™ Planks	101, 153
88984	USG Mars™ Planks	101
88996	USG Mars™ Planks	101, 155
76505	USG Millennia® Acoustical Panels	105
76705	USG Millennia® Acoustical Panels	105
76901	USG Millennia® Acoustical Panels	105
76907	USG Millennia® Acoustical Panels	105
78505	USG Millennia® Acoustical Panels	105
78705	USG Millennia® Acoustical Panels	105

ITEM NUMBER INDEX

Item Number	Pattern	Page Number
70003	USG Millennia® Acoustical Tile	105
76201	USG Millennia® High-NRC Acoustical Panels	105
76302	USG Millennia® High-NRC Acoustical Panels	105
78080	USG Millennia® Illusion™ Two/24 Acoustical Panels	105
78780	USG Millennia® Illusion™ Two/24 Acoustical Panels	105
4211	USG Olympia™ Micro™ Acoustical Panels	107
4221	USG Olympia™ Micro™ Acoustical Panels	107
4231	USG Olympia™ Micro™ Acoustical Panels	107
4411	USG Olympia™ Micro™ Acoustical Panels	107
4421	USG Olympia™ Micro™ Acoustical Panels	107
4431	USG Olympia™ Micro™ Acoustical Panels	107
4750	USG Olympia™ Micro™ Acoustical Panels	107
4210	USG Olympia™ Micro™ Acoustical Panels Unperforated	107
4913	USG Olympia™ Micro™ Acoustical Panels Unperforated	107
4221HRC	USG Olympia™ Micro™ HRC Acoustical Panels	107
4231HRC	USG Olympia™ Micro™ HRC Acoustical Panels	107
4411HRC	USG Olympia™ Micro™ HRC Acoustical Panels	107
4421HRC	USG Olympia™ Micro™ HRC Acoustical Panels	107
4751	USG Olympia™ Micro™ HRC Acoustical Panels	107
4752	USG Olympia™ Micro™ HRC Acoustical Panels	107
4753	USG Olympia™ Micro™ HRC Acoustical Panels	107
4754	USG Olympia™ Micro™ HRC Acoustical Panels	107
4755	USG Olympia™ Micro™ HRC Acoustical Panels	107
4742	USG Olympia™ Micro™ Illusion™ Two/24 Acoustical Panels	107
4744	USG Olympia™ Micro™ Illusion™ Two/24 Acoustical Panels	107
62156	USG Orion™ 60 Acoustical Panels	109
62157	USG Orion™ 60 Acoustical Panels	109
62150	USG Orion™ 75 Acoustical Panels	109
62151	USG Orion™ 75 Acoustical Panels	109
62152	USG Orion™ 75 Acoustical Panels	109
62153	USG Orion™ 75 Acoustical Panels	109
62154	USG Orion™ 75 Acoustical Panels	109
62155	USG Orion™ 75 Acoustical Panels	109
62162	USG Orion™ 85 Acoustical Panels	109
62163	USG Orion™ 85 Acoustical Panels	109
62164	USG Orion™ 85 Acoustical Panels	109
62165	USG Orion™ 85 Acoustical Panels	109
62166	USG Orion™ 85 Acoustical Panels	109
62167	USG Orion™ 85 Acoustical Panels	109
4800	USG Pebbled™ Acoustical Panels	111
4801	USG Pebbled™ Acoustical Panels	111
4805	USG Pebbled™ Acoustical Panels	111
4867	USG Pebbled™ Acoustical Panels	111
7054G	USG Premier Hi-Lite™ Kapok Acoustical Panels	113

Item Number	Pattern	Page Number
7055G	USG Premier Hi-Lite™ Kapok Acoustical Panels	113
7056G	USG Premier Hi-Lite™ Kapok Acoustical Panels	113
7057G	USG Premier Hi-Lite™ Kapok Acoustical Panels	113
7050G	USG Premier Hi-Lite™ Twill Acoustical Panels	113
7051G	USG Premier Hi-Lite™ Twill Acoustical Panels	113
7052G	USG Premier Hi-Lite™ Twill Acoustical Panels	113
7053G	USG Premier Hi-Lite™ Twill Acoustical Panels	113
7000G	USG Premier Nubby™ Acoustical Panels	115
7002G	USG Premier Nubby™ Acoustical Panels	115
7003G	USG Premier Nubby™ Acoustical Panels	115
7012G	USG Premier Nubby™ Acoustical Panels	115
7013G	USG Premier Nubby™ Acoustical Panels	115
2210	USG Radar™ Acoustical Panels	121
2215	USG Radar™ Acoustical Panels	121
2220	USG Radar™ Acoustical Panels	121
2225	USG Radar™ Acoustical Panels	121
2230	USG Radar™ Acoustical Panels	121
2235	USG Radar™ Acoustical Panels	121
2410	USG Radar™ Acoustical Panels	121
2410P	USG Radar™ Acoustical Panels	121
2415	USG Radar™ Acoustical Panels	121
ME2220	USG Radar™ Acoustical Panels	121
ME2410	USG Radar™ Acoustical Panels	121
2570	USG Radar™ Acoustical Tile	121
ME2617	USG Radar™ Basic Acoustical Panels	117
2110	USG Radar™ Basic Acoustical Panels	117
2115	USG Radar™ Basic Acoustical Panels	117
2120	USG Radar™ Basic Acoustical Panels	117
2125	USG Radar™ Basic Acoustical Panels	117
2130	USG Radar™ Basic Acoustical Panels	117
2310	USG Radar™ Basic Acoustical Panels	117
2315	USG Radar™ Basic Acoustical Panels	117
2320	USG Radar™ Basic Acoustical Panels	117
2617	USG Radar™ Basic Acoustical Panels	117
2618	USG Radar™ Basic Acoustical Panels	117
2619	USG Radar™ Basic Acoustical Panels	117
2627	USG Radar™ Basic Acoustical Panels	117
2742	USG Radar™ Basic Acoustical Panels	117
2990	USG Radar™ Basic Acoustical Panels	117
ME2110	USG Radar™ Basic Acoustical Panels	117
ME2120	USG Radar™ Basic Acoustical Panels	117
ME2310	USG Radar™ Basic Acoustical Panels	117
56644	USG Radar™ Ceramic Acoustical Panels	119
56645	USG Radar™ Ceramic Acoustical Panels	119
2207	USG Radar™ Education High-Durability Acoustical Panels	121, 127

ITEM NUMBER INDEX

Item Number	Pattern	Page Number
2227	USG Radar™ Education High-Durability Acoustical Panels	121, 127
2407	USG Radar™ Education High-Durability Acoustical Panels	121, 127
22111	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22121	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22122	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22127	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22350	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22370	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22421	USG Radar™ Education High-NRC Acoustical Panels	123, 127
22360	USG Radar™ Education High-NRC/High-CAC Acoustical Panels	123, 127
22441	USG Radar™ Education High-NRC/High-CAC Acoustical Panels	123, 127
22523	USG Radar™ Education High-NRC/High-CAC Acoustical Panels	123, 127
22541	USG Radar™ Education High-NRC/High-CAC Acoustical Panels	123, 127
22310	USG Radar™ High-CAC Acoustical Panels	123
2207	USG Radar™ High-Durability Acoustical Panels	121, 127
2227	USG Radar™ High-Durability Acoustical Panels	121, 127
2407	USG Radar™ High-Durability Acoustical Panels	121, 127
2420	USG Radar™ High-Durability Acoustical Panels	121
2425	USG Radar™ High-Durability Acoustical Panels	121
22111	USG Radar™ High-NRC Acoustical Panels	123, 127
22121	USG Radar™ High-NRC Acoustical Panels	123, 127
22122	USG Radar™ High-NRC Acoustical Panels	123, 127
22127	USG Radar™ High-NRC Acoustical Panels	123, 127
22311	USG Radar™ High-NRC Acoustical Panels	123
22350	USG Radar™ High-NRC Acoustical Panels	123, 127
22370	USG Radar™ High-NRC Acoustical Panels	123, 127
22421	USG Radar™ High-NRC Acoustical Panels	123, 127
22360	USG Radar™ High-NRC/High-CAC Acoustical Panels	123, 127
22441	USG Radar™ High-NRC/High-CAC Acoustical Panels	123, 127
22521	USG Radar™ High-NRC/High-CAC Acoustical Panels	123
22523	USG Radar™ High-NRC/High-CAC Acoustical Panels	123, 127
22527	USG Radar™ High-NRC/High-CAC Acoustical Panels	123
22541	USG Radar™ High-NRC/High-CAC Acoustical Panels	123, 127
2862	USG Radar™ Illusion™ 32/6 Acoustical Panels	125
2864	USG Radar™ Illusion™ 32/6 Acoustical Panels	125
2852	USG Radar™ Illusion™ Eight/12 Acoustical Panels	125
2854	USG Radar™ Illusion™ Eight/12 Acoustical Panels	125
2882	USG Radar™ Illusion™ Four/48 Acoustical Panels	125
2884	USG Radar™ Illusion™ Four/48 Acoustical Panels	125
2842	USG Radar™ Illusion™ Two/24 Acoustical Panels	125
2844	USG Radar™ Illusion™ Two/24 Acoustical Panels	125
2846	USG Radar™ Illusion™ Two/24 Acoustical Panels	125
22320	USG Radar™ Open Plan Acoustical Panels	129

Item Number	Pattern	Page Number
22325	USG Radar™ Open Plan Acoustical Panels	129
22330	USG Radar™ Open Plan Acoustical Panels	129
22335	USG Radar™ Open Plan Acoustical Panels	129
22340	USG Radar™ Open Plan Acoustical Panels	129
22345	USG Radar™ Open Plan Acoustical Panels	129
55483	USG Rock Face® Acoustical Panels	137
56335	USG Rock Face® Acoustical Panels	137
56380	USG Rock Face® Acoustical Panels	137
808	USG Sandrift™ Acoustical Panels	139
809	USG Sandrift™ Acoustical Panels	139
815	USG Sandrift™ Basic Acoustical Panels	139
3260	USG Sheetrock® Brand Lay-In Gypsum Ceiling Panel	141
3270	USG Sheetrock® Brand Lay-In Gypsum Ceiling Panel	141
3200	USG Sheetrock® Brand Lay-In Gypsum Ceiling Panel Clean Room™	141
3210	USG Ceilings® Kitchen Lay-In Panel	143
3410	USG Ceilings® Kitchen Lay-In Panel	143
5893	USG Touchstone™ Acoustical Panels	145
5894	USG Touchstone™ Acoustical Panels	145
5896	USG Touchstone™ Acoustical Panels	145
5899	USG Touchstone™ Acoustical Panels	145

HISTORY OF INNOVATION

The innovations brought to market by USG since 1902 have helped millions of people realize the American Dream.

From USG Sheetrock® Brand Gypsum Panels and USG Donn® Brand Ceiling Grid Systems in the 1900s to more recent USG Logix™ Integrated Ceiling Systems and USG Sheetrock® Brand UltraLight Panels, we have a history of innovation and of finding new solutions designed to revolutionize the way the construction industry designs and builds the spaces in which we live, work and play.

1920

- Sheetrock® Brand GYP-LAP® Gypsum Sheathing Panels
- Rocklath Gypsum Lath
- ▶ Acoustone® Ceiling Panels
- ▶ Auratone® Ceiling Panels
- Perf-A-Tape® Joint Reinforcement

1900

- Sheetrock® Brand Gypsum Panels
- Pyrobar Gypsum Partition Tile

1940

- Structo-Gauge® Gauging Plaster
- Pyrofill® Poured Gypsum Roof Deck
- Water Repellent Wallboard
- Structo-Lite® Perlited Plaster
- Sheetrock® Brand Firecode® Core (Type X)
- Tapered Edge Panels
- Ready-Mix Joint Compound
- 2" Solid Gypsum Wall Board System

1960

- Structocore™ Wall System
- First Metal Stud Drywall System
- RC-1 Channel
- Sheetrock® Brand WR Gypsum Panels
- Blendtex Gypsum Panels
- ▶ USG Panz® Metal Ceiling Panels
- ▶ Exterior Ceiling Board
- ▶ Donn® Exposed Tee Grid System
- Ultrawall® Relocatable Wall System
- USG Shaft Wall System
- Textone SW Gypsum Panels
- Area Separation Wall System
- Light Steel Framing

2000

- Levelrock™ Floor Underlayment System
- USG Decorative Interior Finish System
- Securock® Roof Board
- Sheetrock® Brand All Purpose Joint Compound with Dust Control
- Sheetrock® Brand Mold Tough® Panels
- Securock® Glass-Mat Sheathing Panels
- ▶ **Astro® ClimaPlus™ Ceiling Panels**
- ▶ **Zero-Emitting Ceiling Tiles**
- ▶ **True™ Wood Ceiling Panels**
- ▶ **Topo™ 3-Dimensional Ceiling Panels**
- ▶ **Geometrix® 3-Dimensional Metal Panels**
- ▶ **Libretto® Gridless Metal System**
- ▶ **Pixels® Metal Wall & Ceiling System**
- ▶ **Logix™ Integrated Ceiling System**

1980

- Durock® Cement Board
- Sheetrock® Brand Plus 3® Lightweight All Purpose Joint Compound
- 3/4" Ultracode® Core Gypsum Panels
- ▶ **X-Technology Ceiling Panels**
- ▶ **Compäso® Suspension Trim**
- ▶ **Quick-Release™ II Clip**
- ▶ **Cuvatura™ 3-Dimensional System**
- ▶ **Radar™ ClimaPlus™ Ceiling Panels**
- ▶ **USG Drywall Suspension System**
- ▶ **Fiberock® Panels**
- ▶ **Celebration™ Metal Snap-In System**

2010 TO DATE

- Sheetrock® Brand UltraLight Panels
- ▶ **Mars™ High-NRC Ceiling Panels**
- ▶ **Orion™ Acoustical Panels**
- ▶ **Donn® AdvanceSpan Suspension Systems**
- ▶ **Halcyon™ Canopies**
- ▶ **True™ Wood Renditions™ Panels**

NOTES

THIS PAGE

USG Libretto® Gridless
Metal System

RIGHT PAGE TOP

USG Drywall Suspension
System and Translucents™
Canopies-Wave in
Artichoke Green

RIGHT PAGE BOTTOM

USG Pixels® Wall Mounted
Panels

USG Mars™ High-NRC/
High-CAC Acoustical Panels

TRADEMARKS

The trademarks USG, CGC, ACOUSTIBOND, ASPEN, ASTRO, AX, AXCE, BILLO, CE, CELEBRATION, CENTRICITEE, CLEAN ROOM, CLIMAPLUS, COMPASSO, COMPOSITIONS, CURVATURA, DIAMONDFLEX, DONN, DX, DXACE, DXF, DXFEV, DXFF, DXI, DXL, DXLA, DXLF, DXLT, DXSS, DXT, DXW, ECLIPSE, FINELINE, FIRECODE, "F" FISSURED, FISSURED, FROST, GEOMETRIX, GLACIER, GRIDWARE, HALCYON, IDENTITEE, ILLUSION, LIBRETTO, LOGIX, MARS, MICRO, MILLENNIA, OLYMPIA, ORION, PANZ, PARALINE, PARALOCK, PEBBLED, PEDESTALS, PIXELS, PREMIER HI-LITE, PREMIER NUBBY, QUICK-RELEASE, RADAR, RENDITIONS, ROCK FACE, SANDRIFT, SHEETROCK, TOPO, TOUCHSTONE, TRANSLUCENTS, TRUE, WIREWORKS, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

AutoCAD and Revit are registered trademarks of Autodesk, Inc.

LEED and LEED Green Building Rating System are registered trademarks of the U.S. Green Building Council.

NOTE

Products described here may not be available in all geographic markets. Consult your USG Company sales office or representative for information.


NOTICE

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

SAFETY FIRST!

Follow good safety and industrial hygiene practices during handling and installation of all products and systems. Take necessary precautions and wear the appropriate personal protective equipment as needed. Read SDS and related literature on products before specification and/or installation on usg.com, usgdesignstudio.com, cgccinc.com and cgcdesignstudio.com



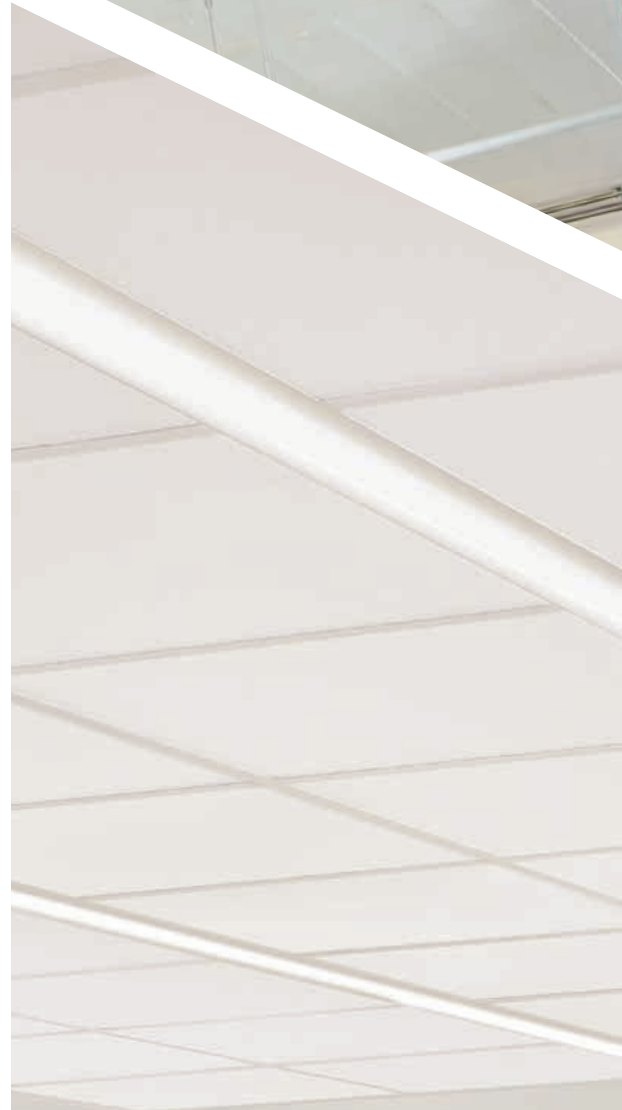



PRODUCT INFORMATION

For the most up-to-date technical information, visit usgdesignstudio.com or cgcdesignstudio.com

CUSTOMER SERVICE

USG: 800 950-3839
CGC: 800 387-2690

TECHNICAL SERVICE

800 USG.4YOU (874-4968)

WEBSITES

usg.com
cgcinc.com
usgdesignstudio.com
cgcdesignstudio.com

SAMPLES/LITERATURE/FAX

USG: 866 528-7089
CGC: Contact Local Sales Rep



SEE US ON YOUTUBE

USG Corporation
CGC Inc. Videos



FIND US ON FACEBOOK

USGBuild or USGCreate
CGCInc



FOLLOW US ON TWITTER

USGBuild or USGCreate
CGC_Inc



SEE US ON PINTEREST

pinterest.com/USGCorporation
pinterest.com/CGCBuildit