

Top Caps

Tools Required

- None

Hardware Required

- None

Installation

Important: Handle with care. 2 people are required for lengths greater than 72", in order to eliminate bending of Top Cap preventing proper installation.

1. When U-Leg Frame and Tiles have been fully assembled, Top Cap should be carefully lifted over U-Leg Frame. U Brackets at end of each Top Cap should be lowered into Stanchion at each end simultaneous. (Figure A)
2. Top Caps ends are to be flush with outside-edge of Stanchion, but will have small amount of adjustment in long direction ($< 1"$). Center Top Cap in lengthwise direction, then slightly lift and peel backing off of tape on underside of Top Cap.

Important: Tape on underside of Top Caps has a powerful adhesive which permanently bonds to Tile.

Tips

1. When using mid-support U-Legs, 2 Top Caps share Stanchion, with seam being over center of Stanchion.

Figure A

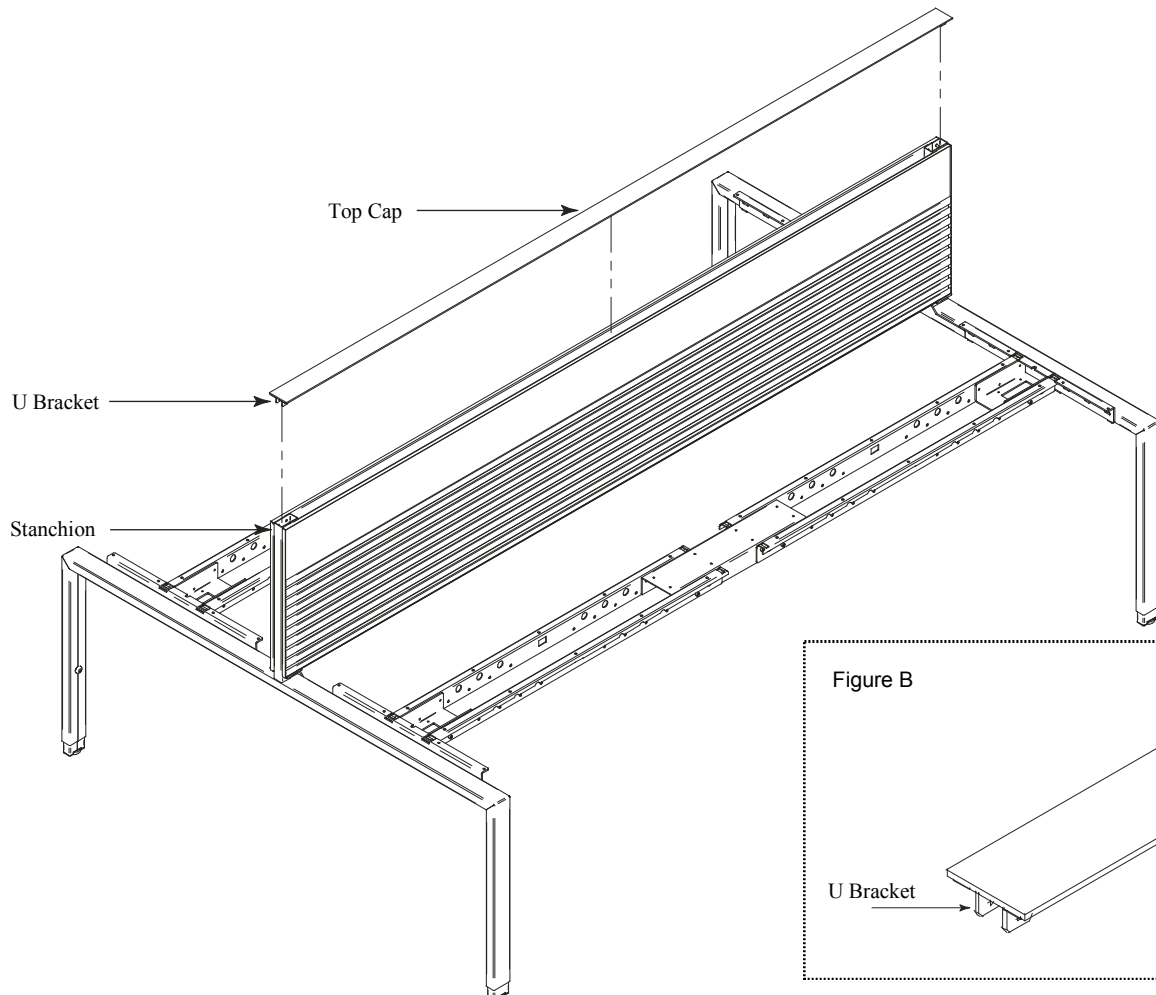


Figure B

