


# USG FISSURED™ BASIC ACOUSTICAL PANELS



USG Fissured™ Basic Acoustical  
Panels/USG Donn® Brand DX®  
Acoustical Suspension System

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)

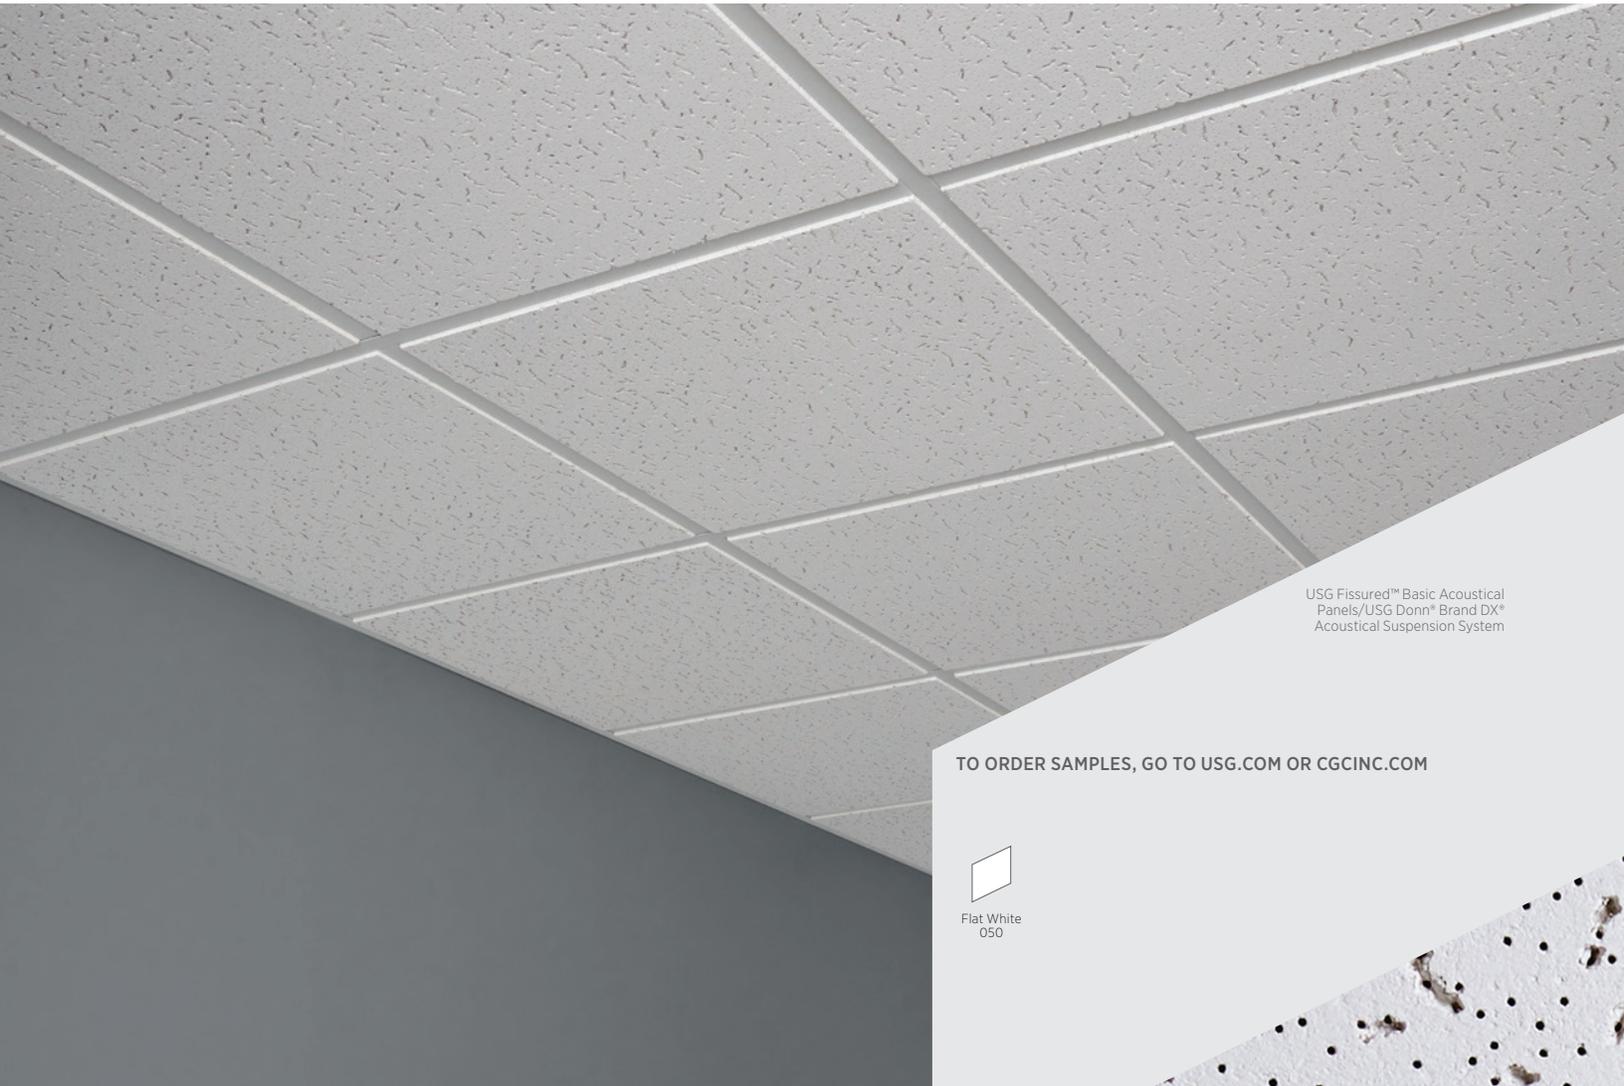

Flat White  
050

## FEATURES AND BENEFITS

- Economical, all-purpose ceiling pattern available in various panel sizes.
- Optional Firecode® product designed to meet life-safety codes.

## APPLICATIONS

- Administrative offices
- Corridors
- Mass merchandisers
- Convenience stores

## SUBSTRATE

- Wet-formed mineral fiber

Medium-Textured Panel



# USG FISSURED™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE  
 USG: usg.com or samplitt@usg.com  
 CGC: contact Sales Representative

TECHNICAL SERVICES  
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
 TECHNICAL INFORMATION  
 AND LEED REPORT TOOL  
 usgdesignstudio.com  
 cgcdesignstudio.com



PRODUCT CERTIFIED  
 FOR LOW CHEMICAL  
 EMISSIONS:  
 UL/COM/GG  
 UL 2818



HIGH RECYCLED  
 CONTENT



Edge	Panel Size	Fire Rating <sup>2</sup>	Item No.	NRC	CAC Min.	LR <sup>3</sup>	Color	Grid Options	VOC Emissions	Recycled Content <sup>1</sup>	Panel Cost
	2'x2'x5/8"		560	0.55	33	0.81	White	A,C,D	Low	24-25%	\$
	2'x2'x5/8"		585	0.55	35	0.81	White	B,E	Low	48-49%	\$
	2'x4'x5/8"	Class A	562	0.55	35	0.81	White	A,C	Low	24-25%	\$
	2'x4'x5/8"		586	0.55	35	0.81	White	B	Low	48-49%	\$
	2'x2'x5/8"	Class A	506	0.55	33	0.81	White	F	Low	24-25%	\$
	2'x4'x5/8"	Class A	507	0.55	35	0.81	White	F	Low	24-25%	\$

### Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

### High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



## GRID PROFILE OPTIONS

A USG DX*	B USG DXL™	C USG DXW™	D <sup>4</sup> USG Centricitee™ DXT™	E <sup>4</sup> USG Centricitee™ DXLT™	F USG DX*

## PHYSICAL DATA/ FOOTNOTES

**Product literature**  
 Data sheet: SC1815

**ASTM E1264 classification**  
 Type III, Form 2, Pattern CD

**ASTM E84 and CAN/ULC S102 surface-burning characteristics**  
 Class A  
 Flame spread: 25 or less  
 Smoke developed: 50 or less

**UL Type**  
 FR-2  
 FR-83

**Online tools**  
 usgdesignstudio.com or cgcdesignstudio.com

**Weight**  
 0.62-0.64 lb./sq. ft. (Class A)  
 1.09-1.11 lb./sq. ft. (Firecode\*)

**Thermal resistance**  
 R-1.4 (Class A)  
 R-1.6 (Firecode\*)

**Maximum backloading**  
 See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum.

**Metric sizes available**  
 Contact sales for minimum quantities and lead times.

- Notes**
- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
  - Fire-rated items: see UL design details.
  - LR values are shown as averages.
  - Maximum 2'x2' with SQ edge panels.

### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1815/rev. 2-23  
 © 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC  
 550 West Adams Street  
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXL, DXLT, DXT, DXW, FIRECODE, FISSURED, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

