

## Features

- Washout urinal
- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use
- 3/4" (19 mm) top spud
- 1 pint or 0.125 gpf (0.47 lpf)
- Includes inlet and outlet spuds and hangers
- Includes anti-backsplash wall
- 14-3/4" (375 mm) extended rim

## Material

- Vitreous china



**ADA**

## Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
IAPMO Certification

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



|   |       |
|---|-------|
| 0 | White |
|---|-------|

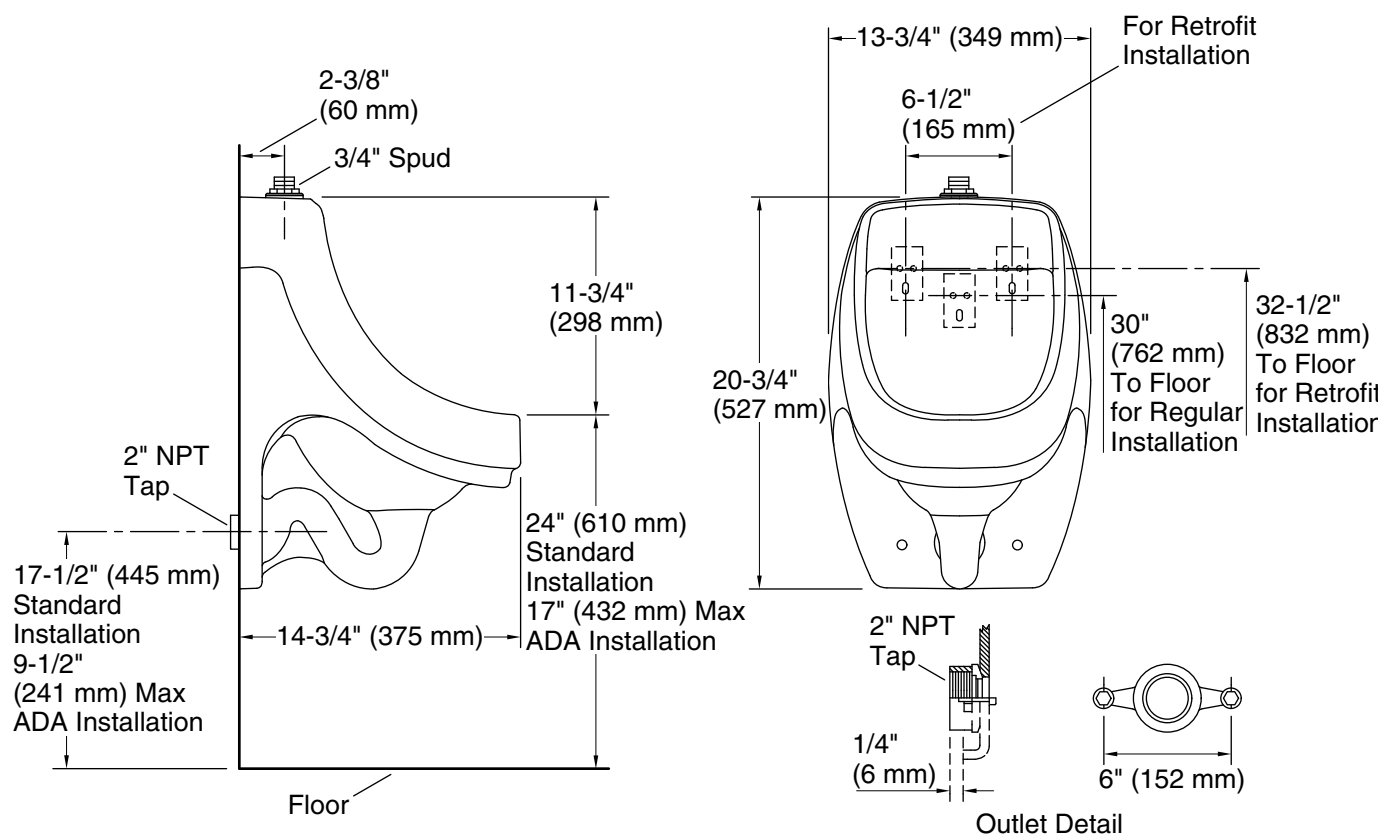

## Technical Information

All product dimensions are nominal.

Spud size: 3/4", Inlet, Top  
Max. Water per Flush: 0.125 gal (0.5 L)

## Pressure and Supply Requirements

Fixture pressure min (static): 25 psi (172.4 kPa)  
Fixture pressure max (static): 80 psi (551.6 kPa)

## Notes

Install this product according to the installation instructions.

Refer to manufacturer's instructions and local codes for flushometer requirements.

Recommended ADA outlet spud height will account for normal product variation.

For ADA compliance, measurement must be 17" (432 mm) or less from the floor to the top of the lip.

ADA compliant when installed to the specific requirements of these regulations.