


Errors as well as misprints and changes reserved. No guarantee is given for the accuracy and completeness of the information. The product images in this document may differ from the original. This document is not a contractual offer and only serves to provide non-binding information.

The nora brand and all other registered trademarks used in this document are registered to nora systems GmbH or its affiliates or subsidiaries. Other labels used here are trademarks of their respective owners.

nora systems, Inc.
9 Northeastern Blvd.
Salem, NH 03079
T: 800.332.NORA
T: 603.894.1021
info-us@nora.com
www.nora.com

11/2023

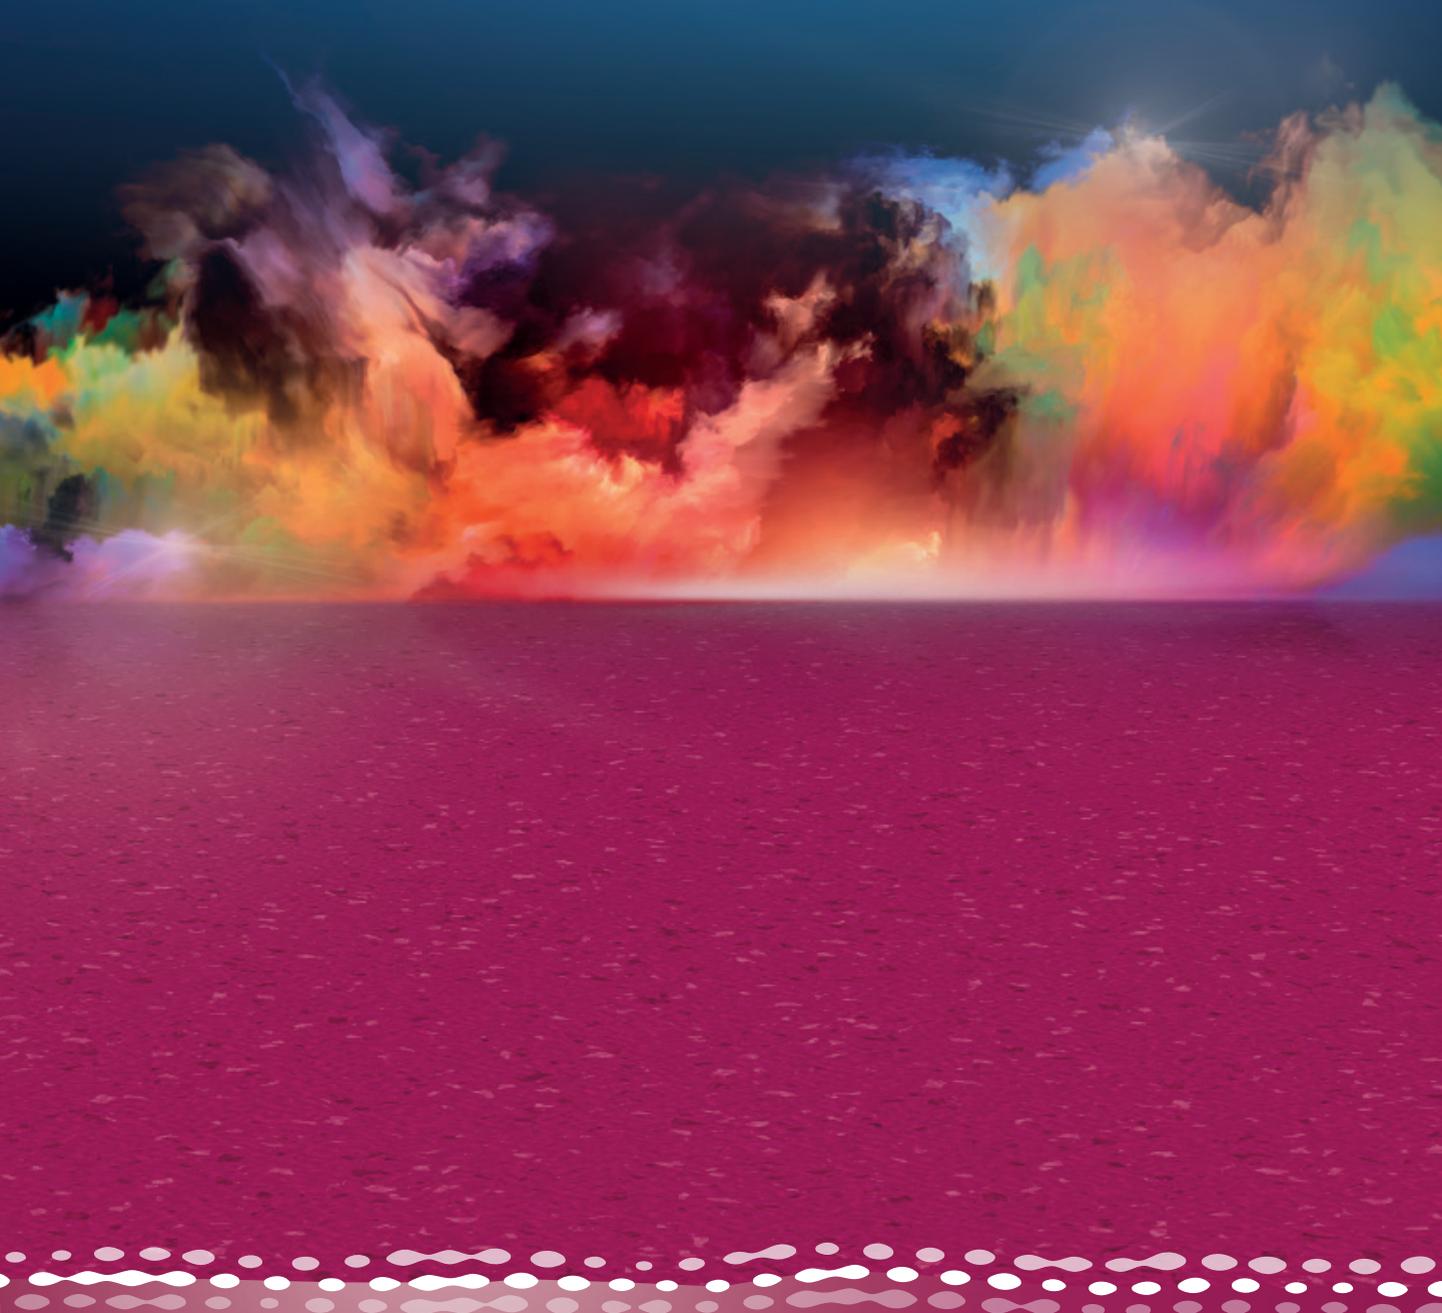

norament satura

nora[®]
by **Interface**[®]



Visionary range, enduring impact.

Whether your design concept is dramatic or subtle, bring your spaces to life with the rich color of norament® satura™. With the top quality and functionality of norament® rubber floorings, norament satura offers durability, reliability and an extended life cycle for a high-performance surface that leaves a lasting impression.

Distinctly colorful

With an understated tone-on-tone design and hammered surface, norament satura has subtle depth and interest while appearing almost solid on the floor. Install a single color or combine complimentary hues for vivid, purposeful designs.





Endless possibilities

Built on a palette of timeless neutrals to vibrant accents, norament satura is defined by its color range and saturation. With its extended options, you can play with color to customize a high-performance floor that meets the many design challenges of your space.

Rubber tile flooring with a tone-on-tone granular design and a hammered surface for use in extremely heavy traffic areas.

norament satura
Art. 1880  32
 1004 mm x 1004 mm (~39.53 in x 39.53 in)

norament satura nTx
Art. 3111  10
 1004 mm x 1004 mm (~39.53 in x 39.53 in)

 ~3.5 mm

Product Construction	Homogeneous Rubber Tile
Class/ASTM F1344	Type IB and Grade 2
Surface Type	Hammered
Indoor Air Quality	GREENGUARD Gold
	CDPH 01350 Compliant
Full Life Cycle Carbon Emissions	Carbon Neutral Floors™
LEED v4	Contributes to multiple IEQ and MR credits

 Contact your sales representative or visit nora.com for QuickShip options

 Available as norament® satura™ nTx™. Contact your sales representative for details and lead times.

Multiple installation options, including high-moisture solutions.

View details and the full product specification at nora.com.



Installation Method



DIRECTIONAL

norament® satura™ stairtreads

 10
Art. 479 - width 1285 mm (~50.59 in)
Art. 468 - width 1614 mm (~63.54 in)
Art. 469 - width 2004 mm (~78.89 in)

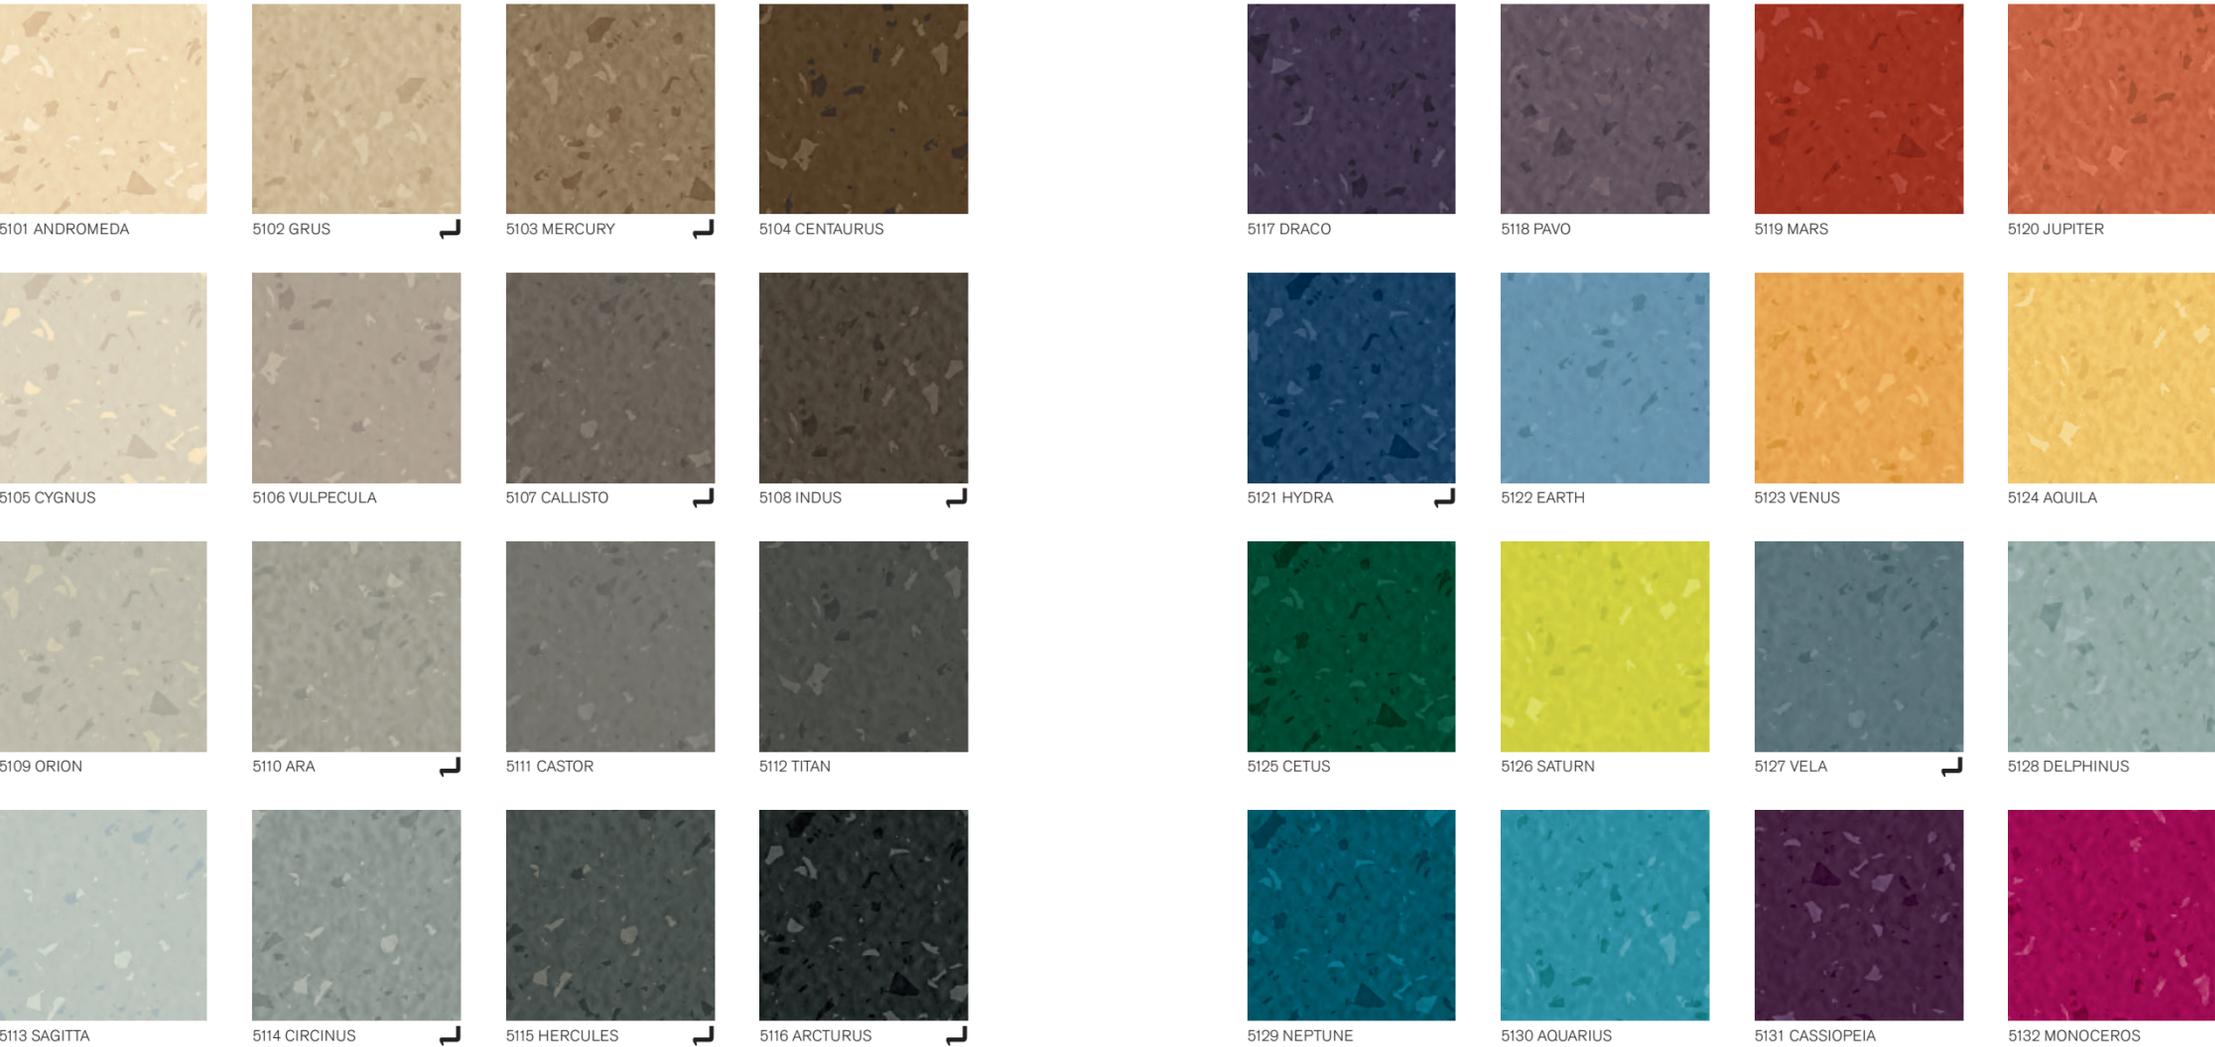

Welding is not required unless specified. View weld recommendations at nora.com.



nora.com

STAIR PRODUCT NORAMENT SATURA STAIRTREADS COLOR 5114 CIRGINUS
 FLOORING PRODUCT NORAMENT SATURA COLOR 5114 CIRGINUS INSTALLED DIRECTIONAL

© Gerry O'Leary

Why nora® rubber flooring?



Reduced Maintenance
 Little more than water needed - no finishes, coatings or harsh chemicals necessary.



Quiet Acoustical Performance
 Attenuate noise pollution.



Durable Surface
 Withstand extreme stress from heavy rolling loads and wheeled traffic.



Ergonomic Design
 Add comfort underfoot, reducing foot and leg pain.



Superior Slip Resistance
 Help to create safer spaces.



Supports Infection Control
 Disinfect completely due to a dense, non-porous surface.



Cradle to Cradle Certified® Silver
 Certification of whether a product is safe, circular and responsibly made. Applies to nora 926 and 913 recipe flooring and stair treads.



Carbon Neutral Floors™
 Third party verified carbon neutral throughout its entire life cycle as part of Interface's Carbon Neutral Floors program. Learn more at interface.com/carbonneutral



GREENGUARD Gold
 Certified low VOC emissions.

Limited warranty

We will be happy to supply specific test results on all nora systems, Inc. products.

nora® by Interface® Limited Warranty – Americas (Excerpt)

nora systems, Inc. (nora) warrants the following nora® brand products (collectively, the "Warranted nora Brand Flooring Products") as set forth below: norament® and noraplan® rubber flooring, norament rubber stairtread (excluding visually impaired strips), nora® nTx™ Q20 bond enhancer and adhesives, and the conductivity of its Electrostatic Dissipative ("ESD") flooring system (norament ed and noraplan ed flooring and adhesive).

This limited warranty and the applicable Installation Instructions and Maintenance Guidelines are subject to change at nora's discretion and without notice. Please contact nora or visit the nora.com website for the latest versions. For additional information regarding usage in recommended applications, please refer to www.nora.com or call 1-800-332-NORA. Warranty periods commence on the date of invoice of the product to the original end-use customer.

Integrated system

nora and Interface cover every area of your building – all from a single source. Create harmonious, space-specific design with our system of soft and resilient floor coverings, including special floorings, stair treads and accessories.

Outstanding service

From design to post-installation, we have the experts to support your project at every step and can even be a valued resource for your organization's sustainability mission.

For additional information regarding usage in recommended applications, contact us or visit nora.com.

ORDER SAMPLES
 Online at www.nora.com
 Call 1.800.332.NORA
 Email your sales rep or customer support specialist

BROWSE NORA.COM

- Design your floor with the nora Room Designer
- Find technical and environmental documents
- Access BIM/Revit Files