

PAVIMENTI
LUNAR

STONESOURCE

V4
Substantial




Milk
60x120/24"x48" Soft R
60x60/24"x24" R
60x60/24"x24" Soft R



Moon
60x120/24"x48" Soft R
60x60/24"x24" R
60x60/24"x24" Soft R





Nebula
60x120/24"x48" Soft R
60x60/24"x24" R
60x60/24"x24" Soft R

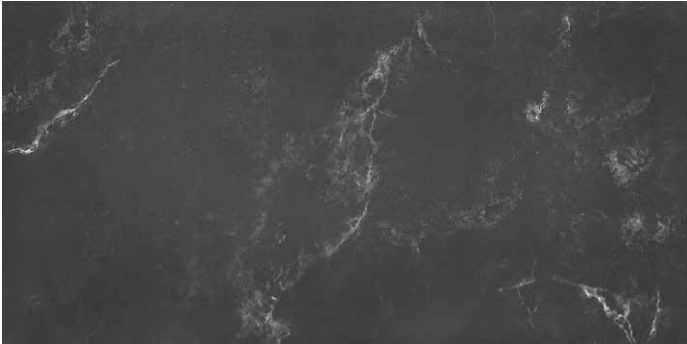


Deep
60x120/24"x48" Soft R
60x60/24"x24" R
60x60/24"x24" Soft R




V4
Substantial

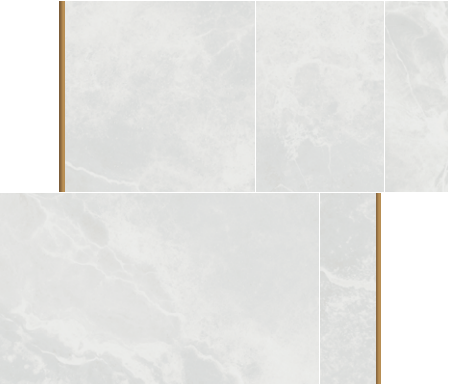


Milk Mosaico 37,5x37,5/15"x15" Soft R NA46

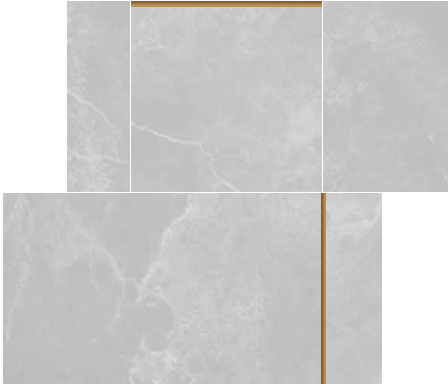

Moon Mosaico 37,5x37,5/15"x15" Soft R NA47

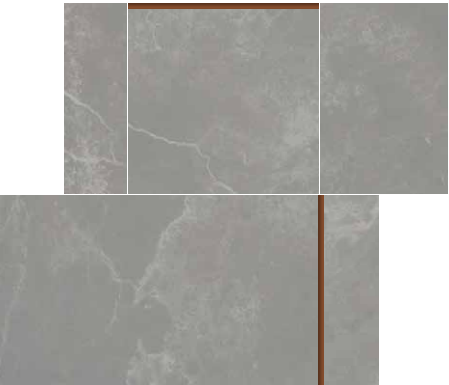

Nebula Mosaico 37,5x37,5/15"x15" Soft R NA48

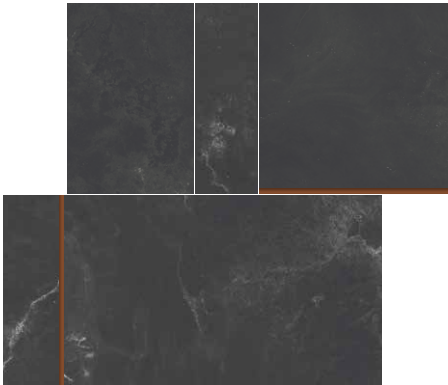

Deep Mosaico 37,5x37,5/15"x15" Soft R NA45

Bacchetta Oro 0,5x18,5/1/4"x7^{1/4}" NB39

Bacchetta Bronzo 0,5x18,5/1/4"x7^{1/4}" NB38

Bacchetta Argento 0,5x18,5/1/4"x7^{1/4}" NI80

Elemento necessario per il completamento del Mosaico disponibile nei colori Bronzo e Oro./Element necessary for the completion of the Mosaico available in Bronze (Bronze) and Oro (Gold) colours./ Élémt nécsaire pour compléter la Mosaïque disponible dans les coloris Bronzo (Bronze) et Or (Oro)./Dieses Element ist in Bronze und Gold erhältlich und dient für die vervollständigung des Mosaiks./Element dat nodig is ter vervollediging van het mozaiek, leverbaar in de kleuren Bronzo en Oro./Elemento necesario para completar el Mosaico disponible en colores Bronzo (Bronce) y Oro (Oro).

1 box Mosaico = 1 box Bacchetta

Bacchetta Oro 0,5x75/1/4"x30" NB37

Bacchetta Bronzo 0,5x75/1/4"x30" NB36

Bacchetta Argento 0,5x75/1/4"x30" NL39

Listello decorativo opzionale per rivestimenti (non utilizzabile come terminale)./Optional decorative strip for claddings (cannot be used as an end piece)./Listel décoratif en option pour revêtements (non utilisable comme profilé de finition)./Optionaler Zierriemen für die Wand (kann nicht als Abschluss verwendet werden)./ Optionele sierlijst voor wandtegels (niet bruikbaar als eindstuk)./Franja decorativa opcional para revestimientos (no utilizable como remate).

Milk Mosaico 37,5x37,5/15"x15" Soft R — Bacchetta Bronzo 0,5x18,5/1/4"x7^{1/4}"



Trim Tiles




	7x75/2 ⁷ / ₈ "x30" R		7x60/2 ⁷ / ₈ "x24" R	
	Deep	MK38	Deep	NC66
	Milk	MK40	Milk	NC67
	Moon	MK41	Moon	NC68
	Nebula	MK39	Nebula	NC69

Packing

	pcs x box	m ² / m x box	kg x box	box x pallet	m ² x pallet	kg x pallet
60x120/24"x48"	2	1,4400	31,50	35	50,40	1102,50
60x60/24"x24"	3	1,0800	21,35	40	43,20	854,00
37,5x37,5/15"x30" Mosaico	6	0,8437	11,40	24	20,25	273,60
0,5x75/1/4"x30" Bacchetta	10	7,5000	1,03	506		
0,5x18,5/1/4"x7 ¹ / ₄ " Bacchetta	12	2,2200	0,31	720		
7x75/2 ⁷ / ₈ "x30" Battiscopa	10	7,5000	11,00	54	405,00	594,00
7x60/2 ⁷ / ₈ "x24" Battiscopa	10	6,0000	9,00	70	420,00	630,00

The MATT and SOFT finishes are recommended for interior floors, walls, and exterior walls in both residential and commercial applications. is not recommended for exterior horizontal surfaces or exterior paving, and they are not recommended for ramps application. The SOFT finish is not recommended for interior floors in entrance areas if joined to outdoor in commercial applications.

Color Shading



The marked chromatic variation and the veining of the product is an intrinsic feature to re-create the randomness and richness of the colour shading of natural stones to which the collection is inspired. For these reasons, we recommend installing the product choosing tiles from different boxes in order to guarantee a variable and natural random effect of the finished surface. Due to these intrinsic features of the product, the colours represented in this catalogue must only be considered an example of the many possible colour shades.

SOFT Features

		
UNI EN ISO 10545/14	B.C.R.A. Rep. CEC/81	ANSI A137.1-2012 (BOT3000)
Classe 5 / Class 5	Asciutto > 0,40 / Bagnato > 0,40	> 0,42 Wet

MATT Features

				
UNI EN ISO 10545/14	DIN 51130	BS 7976-2:2002 (CEN/TS 16165, Annex C) Pendulum Friction Test	B.C.R.A. Rep. CEC/81	ANSI A137.1-2012 (BOT3000)
Classe 5 / Class 5	R10	> 36 Wet	Asciutto > 0,40 / Bagnato > 0,40	> 0,42 Wet

Legend

Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

	Regulation	Required standards	Value
	Dimensioni/Sizes/Dimensions/ Abmessungen/Afmetingen/ Dimensiones	UNI EN ISO 10545/2	Non rettificato Not rectified
		Lunghezza e larghezza/Length and width/Longueur et largeur/Länge und Breite/Lengte en breedte/Longitud y anchura	± 0,6 % max 2mm
		Spessore/Thickness/Épaisseur/ Stärke/Dikte/Grosor	± 5 % max 0,5mm
		Rettilinearità spigoli/Linearity/Rectitude des arêtes/ Kantengeradheit/Rechtheid kanten/Rectitud de los lados	± 0,5 % max 1,5mm
		* Ortogonalità/Wedging/Orthogonalité/ Rechtwinkligkei/Haaksheid hoeken/Ortogonalidad	± 0,5 % max 2mm
		Planarità/Warpage/Planéité/Ebenflächigkeit/ Vlakheid/Planitud	± 0,5 % max 2mm
	* According to ISO 13006.		
	Assorbimento acqua/Water absorption/Absorption d'eau/ Wasseraufnahme/Waterabsorptie/ Absorción de agua	UNI EN ISO 10545/3	≤ 0,5 %
	Resistenza alla flessione/Flexual Strenght/Résistance à la flexion/ Biegefestigkeit/Buigvastheid/ Resistencia a la flexión	UNI EN ISO 10545/4	≥ 35 N/mm²
			S ≥ 1300 N (thickness ≥ 7,5 mm)
	Coefficiente di restituzione (COR)/ Coefficient of restitution (COR)/ Coefficient de restitution (COR)/ Schlagfestigkeit (COR)/ Restitutiecoëfficiënt (COR)/ Coeficiente de restitución (COR)	UNI EN ISO 10545/5	Valore consigliato ≥ 0,55/ Recommended value ≥ 0,55/ Valeur recommandée ≥ 0,55/ Empfohlener Wert ≥ 0,55/ Aanbevolen waarde ≥ 0,55/ Ralor recomendado ≥ 0,55
	Resistenza all'abrasione profonda/ Deep abrasion resistance/ Resistance à l'abrasion/ Widerstand gegen Tiefenverschleiß/ Weerstand tegen afschuren/ Resistencia a la abrasión profunda	UNI EN ISO 10545/6	≤ 175 mm³
	Coefficiente di dilatazione termica lineare/Coefficient of thermal linear expansion/Coefficient de dilatation thermique linear/Linearer Wärmeausdehnungskoeffizient/ Lineaire thermische uitzetting/ Coeficiente de dilatación termica lineal	UNI EN ISO 10545/8	Metodo di prova disponibile/Tests method available/ Methode d'essai disponible/Verfügbares/Prüfverfahren/ Testmethode beschikbaar/Método de prueba disponible
	Resistenza agli sbalzi termici/ Thermal shock resistance/ Resistance aux écarts de temperature/ Temperaturwechselbeständigkeit/ Temperatuurswisselingen/ Resistencia al choque térmico	UNI EN ISO 10545/9	Nessun campione deve presentare difetti visibili/ No sample must show visible defects/ Aucun échantillon ne doit présenter des défauts visibles/ Kein Exemplar darf sichtbare Schäden aufweisen/ Geen enkel monster mag zichtbare gebreken vertonen/ Ninguna muestra debe presentar defectos visibles
	Dilatazione all'umidità/Moisture expansion/Dilatation à l'humidité/ Feuchtigkeitsausdehnung/ Uitzetting door vocht/Dilatación por la humedad	UNI EN ISO 10545/10	Metodo di prova disponibile/Tests method available/ Methode d'essai disponible/Verfügbares/Prüfverfahren/ Testmethode beschikbaar/Método de prueba disponible
	Resistenza al fuoco/ Fire resistance/ Résistance au feu/ Brandverhalten/ Brand weerstand/ Resistencia al fuego	UNI EN ISO 13501-1	Dichiarare un valore / Declare a value
			Classe A1 oppure A _{1n} / Class A1 or A _{1n}
	Resistenza al gelo/Frost resistance/Résistance au gel/Frostbeständigkeit/ Vorstbestandheid/ Resistencia a la helada	UNI EN ISO 10545/12	Resistenti/Resistant/Resistants/ Widerstandsfähig/ Weerbaarstig/Resistentes

• Per piastrelle rettangolari, che abbiano il lato maggiore L≥ 60 cm, e rapporto tra i lati ≥ 3, la misurazione della ortogonalità deve venire condotta solo sul lato corto.
For oblong tiles with L≥ 60 cm and ratio length/width L/W≥3, measurement of rectangularity only on short edges

Legend

Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

	Regulation	Required standards	Value
	Resistenza all'attacco chimico/ Chemical resistance/Resistance à l'attaque chimique/Beständigkei gegen Chemikalien/Chemische bestandheid/Resistencia al ataque químico	UNI EN ISO 10545/13	
		Resistenza ai prodotti chimici di uso domestico ed agli additivi per piscina / Resistance to household chemicals and swimming pool salts	Classe minima B (GB per piastrelle smaltate) / Minimum class B (GB for glazed tiles)
			Classe minima B (UB per piastrelle non smaltate) / Minimum class B (UB for unglazed tiles)
		Resistenza a basse concentrazioni di acidi e alcali / Resistance to low concentrations of acids and alkalis	Dichiarare una classe / Declare a class
			Metodo di prova disponibile / Tests method available
			LA
		Resistenza ad alte concentrazioni di acidi e alcali / Resistance to high concentrations of acids and alkalis	Dichiarare una classe / Declare a class
			Metodo di prova disponibile / Tests method available
			HA
	Resistenza alle macchie/Stain resistance/Insensibilité aux taches/Beständigkeit gegen Fleckenbildner/Substanzen/ Weerstand tegen vlekken/ Resistencia a las manchas	UNI EN ISO 10545/14	UGL Dichiarare un valore / UGL Declare a value
			Vedere interno See inside
	Indicazione di resistenza allo scivolamento/Assessment of slip resistance/Indication de la résistance au glissement/ Bestimmung der Trittsicherheit/ Indicatie voor de slipvastheid/ Indicación de resistencia al deslizamiento	DIN 51130	Dichiarare un valore (R) / Declare a value (R)
		DIN 51097	Dichiarare un valore (A+B+C) / Declare a value (A+B+C)
			Vedere interno See inside
		BS 7976-2:2002 (CEN/TS 16165, Annex C) Pendulum Friction Test	Dichiarare un valore / Declare a value
			Vedere interno See inside
	Coefficiente di attrito dinamico/ Measurement of dynamic coefficient of friction/ Mesure du coefficient de frottement dynamique/ Messung des dynamischen Reibungskoeffizienten/ Meting van de dynamische wrijvingscoefficient/Coefficiente de rozamiento dinámico	B.C.R.A. Rep. CEC/81	Asciutto > 0,40 / Bagnato > 0,40
		ANSI A137.1- 2012 (BOT3000)	> 0,42 Wet
			Vedere interno See inside



STONESOURCE